


BIDIRECTIONAL FLOW CONTROL VALVES

CB2C




CB2V

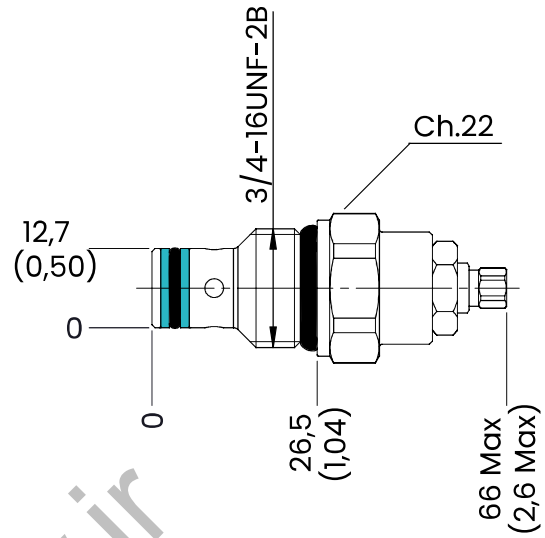


mm
[Inches]

HYDRAULIC CIRCUIT



PERFORMANCES

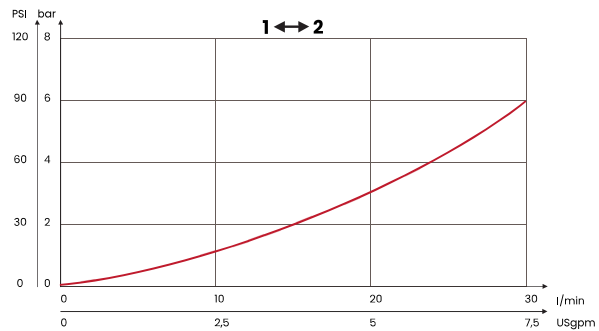

ORDERING CODE

ORDERING CODE	CAVITY	MAX FLOW l/min USgpm	MAX PRESSURE bar PSI	TIGHTENING TORQUE Nm lbt ft	WEIGHT kg lbt
CB2C	SAE8/2	40 [10,6]	350 [5075]	30 [22]	0,1 [0,22]
CB2V					0,12 [0,26]

Mineral oil: DIN 51524 ISO 6743/4 | Oil viscosity: 15 to 250 cSt 15-250 mm²/s | Oil temperature: -4°F + 176°F -20°C +80°C | Ambient temperature: -4°F + 122°F -20°C +50°C | Max contamination index with filter: 5 to 250 cSt 15-250 mm²/s | It is necessary a filter use to protect the valve (advised filtration 15 µm)