

# HYDRAULIC FILTRATION PRODUCTS



[www.sumy.ir](http://www.sumy.ir)

PASSION TO PERFORM



[www.sumy.ir](http://www.sumy.ir)



## A WORLDWIDE LEADER IN THE FIELD OF HYDRAULIC FILTRATION EQUIPMENT.

Our company started life in 1964, when Bruno Pasotto decided to attempt to cater for the requests of a market still to be fully explored, with the study, design, development, production and marketing of a vast range of filters for hydraulic equipment, capable of satisfying the needs of manufacturers in all sectors. The quality of our products, our extreme competitiveness compared with major international producers and our constant activities of research, design and development has made us a worldwide leader in the field of hydraulic circuit filtering. Present for over 50 years in the market, we have played a truly decisive role in defining our sector, and by now we are a group capable of controlling our entire chain of production, monitoring all manufacturing processes to guarantee superior quality standards and to provide concrete solutions for the rapidly evolving needs of customers and the market.

## MARKET LEADER



Our work is based on a skillful interaction between advanced technology and fine workmanship, **customizing products according to specific market requests**, focusing strongly on innovation and quality, and following every step in the manufacturing of both standard and special products, fully respecting customer expectations.

[www.sumy.ir](http://www.sumy.ir)

Our customer-oriented philosophy, which enables us to satisfy all customer requests **rapidly and with personalized products**, makes us a **dynamic and flexible enterprise**. The possibility of constantly controlling and monitoring the entire production process is essential to allow us to guarantee the quality of our products.

## WORLDWIDE PRESENCE

Our foreign Branches enable us to offer a diversified range of products that allow us to successfully face the aggressive challenge of international competition, and also to maintain a stable presence at a local level.

The Group boasts **9** business branches



## TECHNOLOGY

Our constant **quest for excellence in quality and technological innovation** allows us to offer only the best solutions and services for applications in many fields, including general industry, test rigs, lubrication, heavy engineering, renewable energies, naval engineering, offshore engineering, aviation systems, emerging technologies and mobile plant (i.e. tractors, excavators, concrete pumps, platforms).



## AND PRODUCTION

Our high level of technological expertise means **we can rely entirely on our own resources, without resorting to external providers.** This in turn enables us to satisfy a growing number of customer requests, also exploiting our constantly updated range of machines and equipment, featuring **fully-automated workstations** capable of **24-hour production.**





**SUCTION FILTERS**

Flow rates up to 875 l/min

- Mounting:
- Tank immersed
  - In-Line
  - In tank with shut off valve
  - In tank with flooded suction

**RETURN FILTERS**

Flow rates up to 3000 l/min

- Pressure up to 20 bar
- Mounting:
- In-Line
  - Tank top
  - In single and duplex designs

**RETURN SUCTION FILTERS**

Flow rates up to 300 l/min

- Pressure up to 80 bar
- Mounting:
- In-Line
  - Tank top

**SPIN-ON FILTERS**

Flow rates up to 365 l/min

- Pressure up to 35 bar
- Mounting:
- In-Line
  - Tank top

**LOW & MEDIUM PRESSURE FILTERS**

Flow rates up to 3000 l/min

- Pressure up to 80 bar
- Mounting:
- In-Line
  - Parallel manifold version
  - In single and duplex designs

**HIGH PRESSURE FILTERS**

Flow rates up to 750 l/min

- Pressure from 110 bar up to 560 bar
- Mounting:
- In-Line
  - Manifold
  - In single and duplex designs



## PRODUCT RANGE

MP Filtri can offer a vast and articulated range of products for the global market, suitable for all industrial sectors using hydraulic equipment.

This includes filters (suction, return, return/suction, spin-on, pressure, stainless steel pressure) and structural components (motor/pump bell-housings, transmission couplings, damping rings, foot brackets, aluminium tanks, cleaning covers).

We can provide all the skills and solutions required by the modern hydraulics industry to monitor contamination levels and other fluid conditions.

Mobile filtration units and a full range of accessories allow us to supply everything necessary for a complete service in the hydraulic circuits.



### STAINLESS STEEL HIGH PRESSURE FILTERS

Flow rates  
up to 125 l/min

Pressure from 320 bar  
up to 1000 bar

Mounting:

- In-Line
- Manifold
- In single  
and duplex designs

### CONTAMINATION MONITORING PRODUCTS

- Online, in-line particle counters
- Off-line bottle sampling  
products
- Fully calibrated using relevant  
ISO standards
- A wide range of variants to  
support fluid types and  
communication protocols

### MOBILE FILTRATION UNITS

Flow rates from 15 l/min  
up to 200 l/min

### POWER TRANSMISSION PRODUCTS

- Aluminium bell-housings  
for motors  
from 0.12 kW to 400 kW
- Couplings in Aluminium  
Cast Iron - Steel
- Damping rings
- Foot bracket
- Aluminium tanks
- Cleaning covers

### TANK ACCESSORIES

- Oil filler and  
air breather plugs
- Optical and electrical  
level gauges
- Pressure gauge valve  
selectors
- Pipe fixing brackets
- Pressure gauges

# HYDRAULIC FILTRATION PRODUCTS

|          |             |                          |
|----------|-------------|--------------------------|
| <b>1</b> | <b>page</b> | <b>INTRODUCTION</b>      |
| 1        |             | COMPANY                  |
| 6        |             | PRODUCT RANGE            |
| 11       |             | CONTAMINATION MANAGEMENT |
| 22       |             | FILTER SIZING            |
| 24       |             | CORRECTIVE FACTOR        |

|           |                 |   |  |  |                                   |
|-----------|-----------------|---|--|--|-----------------------------------|
| <b>28</b> | <b>page</b>     | <b>SUCTION FILTERS</b>                                      |  |  | <b>up to <math>Q_{max}</math></b> |
|           |                 |   |  |  | <b>l/min</b>   <b>gpm</b>         |
| 31        | STR & MPA - MPM | Submerged suction filter, with bypass or magnetic filter    |  |  | 1000   264                        |
| 39        | SF2 250 - 350   | Semi-submerged positive head suction filter, low flow rate  |  |  | 160   42                          |
| 47        | SF2 500         | Semi-submerged positive head suction filter, high flow rate |  |  | 700   185                         |
| 57        |                 | CLOGGING INDICATORS   |  |  |                                   |

|           |             |   |                         |                                   |                                   |
|-----------|-------------|---|-------------------------|-----------------------------------|-----------------------------------|
| <b>60</b> | <b>page</b> | <b>RETURN FILTERS</b>   |                         | <b>up to <math>P_{max}</math></b> | <b>up to <math>Q_{max}</math></b> |
|           |             |   | <b>bar</b>   <b>psi</b> | <b>l/min</b>   <b>gpm</b>         |                                   |
| 63        | MPFX        | Tank top semi-immersed filter, standard filter element disassembly                                    | 8   116                 | 900                               | 238                               |
| 91        | MPLX        | Tank top semi-immersed filter, standard filter element disassembly                                    | 10   145                | 1800                              | 476                               |
| 99        | MPTX        | Tank top semi-immersed filter, easy filter element disassembly  | 8   116                 | 300                               | 79                                |
| 117       | MFBX        | Bowl assembly   | 8   116                 | 700                               | 185                               |
| 125       | MPF         | Tank top semi-immersed filter, standard filter element disassembly                                    | 8   116                 | 900                               | 238                               |
| 153       | MPT         | Tank top semi-immersed filter, easy filter element disassembly  | 8   116                 | 300                               | 79                                |
| 171       | MFB         | Bowl assembly   | 8   116                 | 700                               | 185                               |
| 179       | MPH         | Tank top semi-immersed filter, standard filter element disassembly                                    | 10   145                | 3500                              | 925                               |
| 203       | MPI         | Tank top semi-immersed filter, standard filter element disassembly                                    | 10   145                | 3500                              | 925                               |
| 215       | FRI         | Tank top semi-immersed filter, easy filter element disassembly, it can be used also as in-line filter | 20   290                | 2500                              | 660                               |
| 231       | RF2         | Semi-immersed under-head filter, easy filter element disassembly                                      | 20   290                | 615                               | 162                               |
| 238       |             | CLOGGING INDICATORS   |                         |                                   |                                   |
| 248       |             | ACCESSORIES   |                         |                                   |                                   |

|            |                   |   |                         |                                   |                                   |
|------------|-------------------|---|-------------------------|-----------------------------------|-----------------------------------|
| <b>250</b> | <b>page</b>       | <b>RETURN / SUCTION FILTERS</b>   |                         | <b>up to <math>P_{max}</math></b> | <b>up to <math>Q_{max}</math></b> |
|            |                   |   | <b>bar</b>   <b>psi</b> | <b>l/min</b>   <b>gpm</b>         |                                   |
| 253        | MRSX              | Unique TANK TOP filter for mobile machinery, with combined filtration on return and suction to the inlet at the hydrostatic transmissions in closed circuit | 10   145                | 250                               | 66                                |
| 265        | LMP 124 MULTIPORT | Unique IN-LINE filter for mobile machinery, with combined filtration on return and suction to the inlet at the hydrostatic transmissions in closed circuit  | 80   1160               | 120                               | 32                                |
| 273        |                   | CLOGGING INDICATORS   |                         |                                   |                                   |

|            |             |   |                         |                                   |                                   |
|------------|-------------|---|-------------------------|-----------------------------------|-----------------------------------|
| <b>286</b> | <b>page</b> | <b>SPIN-ON FILTERS</b>  |                         | <b>up to <math>P_{max}</math></b> | <b>up to <math>Q_{max}</math></b> |
|            |             |   | <b>bar</b>   <b>psi</b> | <b>l/min</b>   <b>gpm</b>         |                                   |
| 289        | MPS         | Low pressure filter, available with single cartridge (CS) for in-line or flange mounting or with two cartridge on the same axis on the opposite sides | 12   174                | 365                               | 96                                |
| 305        | MSH         | In-line low and medium pressure filter available with single cartridge (CH)   | 35   508                | 195                               | 52                                |
| 311        |             | CLOGGING INDICATORS   |                         |                                   |                                   |

| page | LOW & MEDIUM PRESSURE FILTERS                   | up to P <sub>max</sub>  |     | up to Q <sub>max</sub> |      |      |
|------|---|---|-----|------------------------|------|------|
|      |   | bar   | psi | l/min                  | gpm  |      |
| 325  | LMP 110 - 120 - 123 MULTIPORT                   | In-line filter with Multiport design for multiple choice connection       | 80  | 1160                   | 175  | 46   |
| 341  | LMP 210 - 211                                   | In-line low & medium pressure filter, low flow rate                       | 60  | 870                    | 365  | 96   |
| 351  | LMP 400 - 401 & 430 - 431                       | In-line low & medium pressure filter, high flow rate                      | 60  | 870                    | 780  | 206  |
| 363  | LMP 950 - 951                                   | In-line filter, available with 2 and up to 6 different heads              | 30  | 435                    | 2400 | 634  |
| 371  | LMP 952 - 953 - 954                             | In-line low pressure filter specifically designed to be mounted in series | 25  | 363                    | 4500 | 1189 |
| 383  | LMD 211   | In-line duplex medium pressure filter                                     | 60  | 870                    | 200  | 53   |
| 391  | LMD 400 - 401 & 431                             | In-line duplex low pressure filter  | 16  | 232                    | 600  | 159  |
| 407  | LMD 951   | In-line duplex filter, available with 2 up to 6 different heads           | 16  | 232                    | 1200 | 317  |
| 415  | Filter elements designed according to DIN 24550 |   |     |                        |      |      |
| 417  | LDP - LDD                                       | In-line and duplex medium pressure filter                                 | 60  | 870                    | 360  | 95   |
| 427  | LMP 900 - 901                                   | In-line low pressure filter   | 30  | 435                    | 2000 | 528  |
| 435  | LMP 902 - 903                                   | In-line filter specifically designed to be mounted in series              | 20  | 290                    | 3000 | 793  |
| 444  | CLOGGING INDICATORS                             |   |     |                        |      |      |
| 450  | ACCESSORIES                                     |   |     |                        |      |      |

| page | HIGH PRESSURE FILTERS | up to P <sub>max</sub>   |     | up to Q <sub>max</sub> |     |     |
|------|-----------------------|--|-----|------------------------|-----|-----|
|      |                       | bar  | psi | l/min                  | gpm |     |
| 455  | FMP 039               | Filter high pressure, low flow rate applications                           | 110 | 1595                   | 80  | 21  |
| 463  | FMP                   | Filter high pressure, high flow rate applications                          | 320 | 4641                   | 500 | 132 |
| 475  | FHP                   | Typical high pressure filter for mobile applications, high flow rate       | 420 | 6092                   | 630 | 166 |
| 493  | FMM                   | Typical high pressure filter for mobile applications, low flow rate        | 420 | 6092                   | 300 | 79  |
| 503  | FHA 051               | Filter optimized for use in high pressure operating systems, low flow rate | 560 | 8122                   | 150 | 40  |
| 511  | FHM                   | High pressure filter with intermediate manifold construction               | 320 | 4641                   | 400 | 106 |
| 529  | FHB                   | High pressure for block mounting   | 320 | 4641                   | 485 | 128 |
| 543  | FHF 325               | In-line manifold top mounting  | 350 | 5076                   | 550 | 145 |
| 553  | FHD                   | In-line duplex high pressure filter  | 350 | 5076                   | 250 | 66  |
| 567  | HPB                   | Pressure filter kits for integration in control manifolds                  | 420 | 6092                   | 300 | 79  |
| 576  | CLOGGING INDICATORS   |  |     |                        |     |     |

| page | STAINLESS STEEL HIGH PRESSURE FILTERS | up to P <sub>max</sub>  |      | up to Q <sub>max</sub> |     |    |
|------|---------------------------------------|---|------|------------------------|-----|----|
|      |                                       | bar   | psi  | l/min                  | gpm |    |
| 587  | FZP                                   | In-line pressure filter with threaded mount                     | 420  | 6092                   | 160 | 42 |
| 597  | FZH                                   | In-line pressure filter with threaded mount for higher pressure | 700  | 10153                  | 80  | 21 |
| 607  | FZX                                   | In-line pressure filter with threaded mount up to 1000 bar      | 1000 | 14504                  | 10  | 3  |
| 615  | FZM                                   | Manifold top mounting   | 320  | 4641                   | 70  | 18 |
| 623  | FZB                                   | Manifold side mounting  | 320  | 4641                   | 70  | 18 |
| 631  | FZD                                   | Duplex pressure filter for continuous operation requirements    | 350  | 5076                   | 60  | 16 |
| 641  | CLOGGING INDICATORS                   |   |      |                        |     |    |

| page | CLOGGING INDICATORS   |
|------|-----------------------|
| 649  | QUICK REFERENCE GUIDE |

[www.sumy.ir](http://www.sumy.ir)

# CONTAMINATION MANAGEMENT

## INDEX

|  | Page |
|--|------|
| ① HYDRAULIC FLUIDS                                 | 12   |
| ② FLUIDS CONTAMINATION                             | 12   |
| ③ EFFECTS OF CONTAMINATION ON HYDRAULIC COMPONENTS | 12   |
| ④ MEASURING THE SOLID CONTAMINATION LEVEL          | 13   |
| ⑤ FILTRATION TECHNOLOGIES                          | 16   |
| ⑥ RECOMMENDED CONTAMINATION CLASSES                | 17   |
| ⑦ TYPES OF FILTERS                                 | 17   |
| ⑧ FILTER SIZING PARAMETERS                         | 18   |
| ⑨ APPLICABLE STANDARDS FOR FILTER DEVELOPMENT      | 19   |
| ⑩ WATER IN HYDRAULIC AND LUBRICATING FLUIDS        | 19   |
| ⑪ THE ANTI-STATIC FILTERS <b>zerospark+</b>        | 21   |

## 1 HYDRAULIC FLUIDS

The fluid is the vector that transmits power, energy within an oleodynamic circuit. In addition to transmitting energy through the circuit, it also performs additional functions such as lubrication, protection and cooling of the surfaces.

The classification of fluids used in hydraulic systems is coded in many regulatory references, different Standards.

The most popular classification criterion divides them into the following families:

- MINERAL OILS

Commonly used oil deriving fluids.

- FIRE RESISTANT FLUIDS

Fluids with intrinsic characteristics of incombustibility or high flash point.

- SYNTHETIC FLUIDS

Modified chemical products to obtain specific optimized features.

- ECOLOGICAL FLUIDS

Synthetic or vegetable origin fluids with high biodegradability characteristics.

The choice of fluid for an hydraulic system must take into account several parameters.

These parameters can adversely affect the performance of an hydraulic system, causing delay in the controls, pump cavitation, excessive absorption, excessive temperature rise, efficiency reduction, increased drainage, wear, jam/block or air intake in the plant.

The main properties that characterize hydraulic fluids and affect their choice are:

- DYNAMIC VISCOSITY

It identifies the fluid's resistance to sliding due to the impact of the particles forming it.

- KINEMATIC VISCOSITY

It is a widespread formal dimension in the hydraulic field.

It is calculated with the ratio between the dynamic viscosity and the fluid density.

Kinematic viscosity varies with temperature and pressure variations.

- VISCOSITY INDEX

This value expresses the ability of a fluid to maintain viscosity when the temperature changes.

A high viscosity index indicates the fluid's ability to limit viscosity variations by varying the temperature.

- FILTERABILITY INDEX

It is the value that indicates the ability of a fluid to cross the filter materials. A low filterability index could cause premature clogging of the filter material.

- WORKING TEMPERATURE

Working temperature affects the fundamental characteristics of the fluid. As already seen, some fluid characteristics, such as cinematic viscosity, vary with the temperature variation.

When choosing a hydraulic oil, must therefore be taken into account of the environmental conditions in which the machine will operate.

- COMPRESSIBILITY MODULE

Every fluid subjected to a pressure contracts, increasing its density.

The compressibility module identifies the increase in pressure required to cause a corresponding increase in density.

- HYDROLYTIC STABILITY

It is the characteristic that prevents galvanic pairs that can cause wear in the plant/system.

- ANTIOXIDANT STABILITY AND WEAR PROTECTION

These features translate into the capacity of a hydraulic oil to avoid corrosion of metal elements inside the system.

- HEAT TRANSFER CAPACITY

It is the characteristic that indicates the capacity of hydraulic oil to exchange heat with the surfaces and then cool them.

## 2 FLUID CONTAMINATION

Whatever the nature and properties of fluids, they are inevitably subject to contamination. Fluid contamination can have two origins:

- INITIAL CONTAMINATION

Caused by the introduction of contaminated fluid into the circuit, or by incorrect storage, transport or transfer operations.

- PROGRESSIVE CONTAMINATION

Caused by factors related to the operation of the system, such as metal surface wear, sealing wear, oxidation or degradation of the fluid, the introduction of contaminants during maintenance, corrosion due to chemical or electrochemical action between fluid and components, cavitation. The contamination of hydraulic systems can be of different nature:

- SOLID CONTAMINATION

For example rust, slag, metal particles, fibers, rubber particles, paint particles or additives

- LIQUID CONTAMINATION

For example, the presence of water due to condensation or external infiltration or acids


- GASEOUS CONTAMINATION

For example, the presence of air due to inadequate oil level in the tank, drainage in suction ducts, incorrect sizing of tubes or tanks.


## 3 EFFECTS OF CONTAMINATION ON HYDRAULIC COMPONENTS

Solid contamination is recognized as the main cause of malfunction, failure and early degradation in hydraulic systems. It is impossible to delete it completely, but it can be effectively controlled by appropriate devices.

CONTAMINATION IN PRESENCE OF LARGE TOLERANCES



CONTAMINATION IN PRESENCE OF NARROW TOLERANCES




Solid contamination mainly causes surface damage and component wear.

- ABRASION OF SURFACES

Cause of leakage through mechanical seals, reduction of system performance, failures.

- SURFACE EROSION  
Cause of leakage through mechanical seals, reduction of system performance, variation in adjustment of control components, failures.
- ADHESION OF MOVING PARTS  
Cause of failure due to lack of lubrication.
- DAMAGES DUE TO FATIGUE  
Cause of breakdowns and components breakdown.

- MODIFICATION OF FLUID PROPERTIES (COMPRESSIBILITY MODULE, DENSITY, VISCOSITY)  
Cause of system's reduction of efficiency and of control.  
It is easy to understand how a system without proper contamination management is subject to higher costs than a system that is provided.
- MAINTENANCE  
Maintenance activities, spare parts, machine stop costs
- ENERGY AND EFFICIENCY  
Efficiency and performance reduction due to friction, drainage, cavitation.

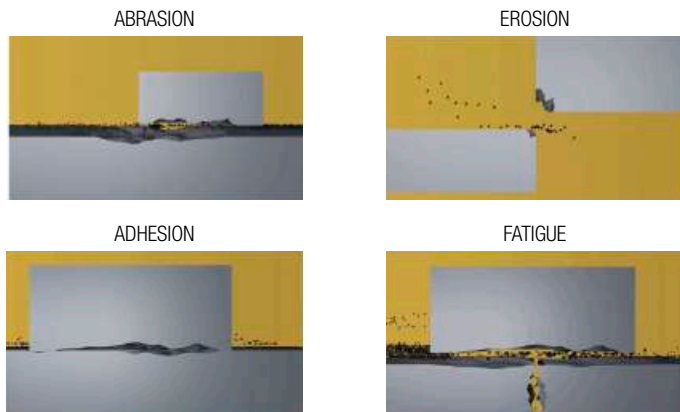

Liquid contamination mainly results in decay of lubrication performance and protection of fluid surfaces.

## DISSOLVED WATER

- INCREASING FLUID ACIDITY  
Cause of surface corrosion and premature fluid oxidation
- GALVANIC COUPLE AT HIGH TEMPERATURES  
Cause of corrosion

## FREE WATER - ADDITIONAL EFFECTS

- DECAY OF LUBRICANT PERFORMANCE  
Cause of rust and sludge formation, metal corrosion and increased solid contamination
- BATTERY COLONY CREATION  
Cause of worsening in the filterability feature
- ICE CREATION AT LOW TEMPERATURES  
Cause damage to the surface
- ADDITIVE DEPLETION  
Free water retains polar additives

Gaseous contamination mainly results in decay of system performance.

- CUSHION SUSPENSION  
Cause of increased noise and cavitation.
- FLUID OXIDATION  
Cause of corrosion acceleration of metal parts.

## 4 MEASURING THE SOLID CONTAMINATION LEVEL

The level of contamination of a system identifies the amount of contaminant contained in a fluid.


This parameter refers to a unit volume of fluid.

The level of contamination may be different at different points in the system. From the information in the previous paragraphs it is also apparent that the level of contamination is heavily influenced by the working conditions of the system, by its working years and by the environmental conditions.


What is the size of the contaminating particles that we must handle in our hydraulic circuit?



HUMAN HAIR  
(75 µm)



MINIMUM DIMENSION  
VISIBLE WITH HUMAN EYES  
(40 µm)



TYPICAL CONTAMINANT  
DIMENSION IN A  
HYDRAULIC CIRCUIT  
(4 - 14 µm)

Contamination level analysis is significant only if performed with a uniform and repeatable method, conducted with standard test methods and suitably calibrated equipment.

To this end, ISO has issued a set of standards that allow tests to be conducted and express the measured values in the following ways.

- GRAVIMETRIC LEVEL - ISO 4405

The level of contamination is defined by checking the weight of particles collected by a laboratory membrane. The membrane must be cleaned, dried and desiccated, with fluid and conditions defined by the Standard.

The volume of fluid is filtered through the membrane by using a suitable suction system. The weight of the contaminant is determined by checking the weight of the membrane before and after the fluid filtration.



CLEAN  
MEMBRANE



CONTAMINATED  
MEMBRANE

# CONTAMINATION MANAGEMENT

## - CUMULATIVE DISTRIBUTION OF THE PARTICLES SIZE - ISO 4406

The level of contamination is defined by counting the number of particles of certain dimensions per unit of volume of fluid. Measurement is performed by Automatic Particle Counters (APC).

Following the count, the contamination classes are determined, corresponding to the number of particles detected in the unit of fluid.

The most common classification methods follow ISO 4406 and SAE AS 4059 (Aerospace Sector) regulations.

NAS 1638 is still used although obsolete.

### Classification example according to ISO 4406

The International Standards Organisation standard ISO 4406 is the preferred method of quoting the number of solid contaminant particles in a sample.

The code is constructed from the combination of three scale numbers selected from the following table.

The first number represents the number of particles that are larger than  $4 \mu\text{m}_{(c)}$ .

The second number represents the number of particles larger than  $6 \mu\text{m}_{(c)}$ .

The third scale number represents the number of particles in a millilitre sample of the fluid that are larger than  $14 \mu\text{m}_{(c)}$ .

ISO 4406 - Allocation of Scale Numbers

| Class | Number of particles per ml |           |
|-------|----------------------------|-----------|
|       | Over                       | Up to     |
| 28    | 1 300 000                  | 2 500 000 |
| 27    | 640 000                    | 1 300 000 |
| 26    | 320 000                    | 640 000   |
| 25    | 160 000                    | 320 000   |
| 24    | 80 000                     | 160 000   |
| 23    | 40 000                     | 80 000    |
| 22    | 20 000                     | 40 000    |
| 21    | 10 000                     | 20 000    |
| 20    | 5 000                      | 10 000    |
| 19    | 2 500                      | 5 000     |
| 18    | 1 300                      | 2 500     |
| 17    | 640                        | 1 300     |
| 16    | 320                        | 640       |
| 15    | 160                        | 320       |
| 14    | 80                         | 160       |
| 13    | 40                         | 80        |
| 12    | 20                         | 40        |
| 11    | 10                         | 20        |
| 10    | 5                          | 10        |
| 9     | 2.5                        | 5         |
| 8     | 1.3                        | 2.5       |
| 7     | 0.64                       | 1.3       |
| 6     | 0.32                       | 0.64      |
| 5     | 0.16                       | 0.32      |
| 4     | 0.08                       | 0.16      |
| 3     | 0.04                       | 0.08      |
| 2     | 0.02                       | 0.04      |
| 1     | 0.01                       | 0.02      |
| 0     | 0                          | 0.01      |

>  $4 \mu\text{m}_{(c)}$  = 350 particles

>  $6 \mu\text{m}_{(c)}$  = 100 particles


>  $14 \mu\text{m}_{(c)}$  = 25 particles

16 / 14 / 12

## ISO 4406 Cleanliness Code System

Microscope counting examines the particles differently to APCs and the code is given with two scale numbers only.

These are at  $5 \mu\text{m}$  and  $15 \mu\text{m}$  equivalent to the  $6 \mu\text{m}_{(c)}$  and  $14 \mu\text{m}_{(c)}$  of APCs.

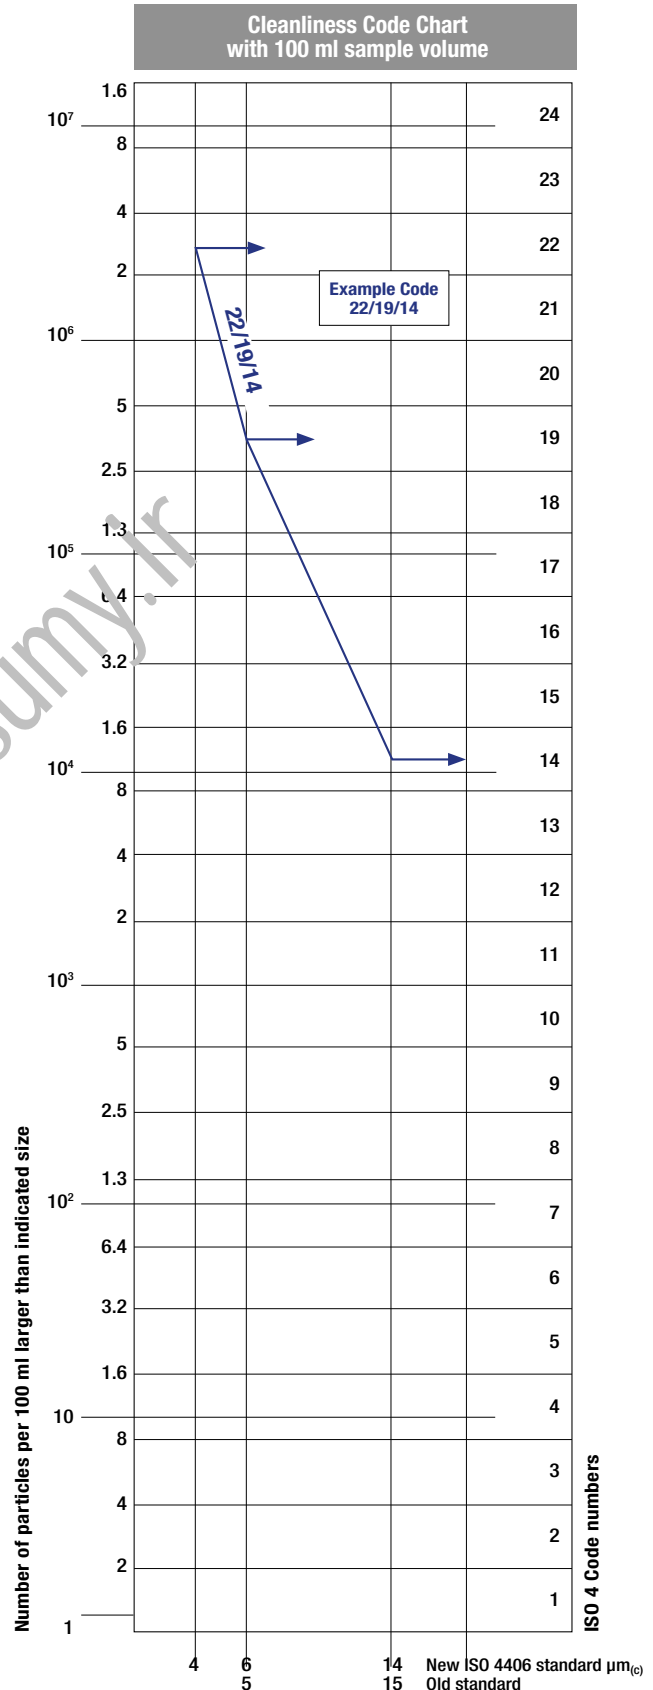



- CUMULATIVE DISTRIBUTION OF THE PARTICLES SIZE - SAE AS 4059-1 and SAE AS 4059-2

Classification example according to

SAE AS4059 - Rev. E and SAE AS4059-2 - Rev. F

The code, prepared for the aerospace industry, is based on the size, quantity, and particle spacing in a 100 ml fluid sample. The contamination classes are defined by numeric codes, the size of the contaminant is identified by letters (A-F).

## SAE AS4059 - REV. E

It can be made a differential measurement (Table 1) or a cumulative measurement (Table 2)

Table 1 - Class for differential measurement

| Class | Dimension of contaminant<br>Maximum Contamination Limits per 100 ml |                           |                           |                           |                         |
|-------|---|---------------------------|---------------------------|---------------------------|-------------------------|
|       | 6-14 $\mu\text{m}_{(c)}$  | 14-21 $\mu\text{m}_{(c)}$ | 21-38 $\mu\text{m}_{(c)}$ | 38-70 $\mu\text{m}_{(c)}$ | >70 $\mu\text{m}_{(c)}$ |
| 00    | 125   | 22                        | 4                         | 1                         | 0                       |
| 0     | 250   | 44                        | 8                         | 2                         | 0                       |
| 1     | 500   | 89                        | 16                        | 3                         | 1                       |
| 2     | 1 000   | 178                       | 32                        | 6                         | 1                       |
| 3     | 2 000   | 356                       | 63                        | 11                        | 2                       |
| 4     | 4 000   | 712                       | 126                       | 22                        | 4                       |
| 5     | 8 000   | 1 425                     | 253                       | 45                        | 8                       |
| 6     | 16 000  | 2 850                     | 506                       | 90                        | 16                      |
| 7     | 32 000  | 5 700                     | 1 012                     | 180                       | 32                      |
| 8     | 64 000  | 11 400                    | 2 025                     | 360                       | 64                      |
| 9     | 128 000   | 22 800                    | 4 050                     | 720                       | 128                     |
| 10    | 256 000   | 45 600                    | 8 100                     | 1 440                     | 256                     |
| 11    | 512 000   | 91 200                    | 16 200                    | 2 880                     | 512                     |
| 12    | 1 024 000   | 182 400                   | 32 400                    | 5 760                     | 1 024                   |

|   |
|---|
| 6 - 14 $\mu\text{m}_{(c)}$ = 15 000 particles |
| 14 - 21 $\mu\text{m}_{(c)}$ = 2 200 particles |
| 21 - 38 $\mu\text{m}_{(c)}$ = 200 particles   |
| 38 - 70 $\mu\text{m}_{(c)}$ = 35 particles    |
| > 70 $\mu\text{m}_{(c)}$ = 3 particles        |
| SAE AS4059 REV E - Class 6                    |

Table 2 - Class for cumulative measurement

| Class | Dimension of contaminant<br>Maximum Contamination Limits per 100 ml |                        |                         |                         |                         |                         |
|-------|---|------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
|       | >4 $\mu\text{m}_{(c)}$  | >6 $\mu\text{m}_{(c)}$ | >14 $\mu\text{m}_{(c)}$ | >21 $\mu\text{m}_{(c)}$ | >38 $\mu\text{m}_{(c)}$ | >70 $\mu\text{m}_{(c)}$ |
| 000   | 195   | 76                     | 14                      | 3                       | 1                       | 0                       |
| 00    | 390   | 152                    | 27                      | 5                       | 1                       | 0                       |
| 0     | 780   | 304                    | 54                      | 10                      | 2                       | 0                       |
| 1     | 1 560   | 609                    | 109                     | 20                      | 4                       | 1                       |
| 2     | 3 120   | 1 217                  | 217                     | 39                      | 7                       | 1                       |
| 3     | 6 250   | 2 432                  | 432                     | 76                      | 13                      | 2                       |
| 4     | 12 500  | 4 864                  | 864                     | 152                     | 26                      | 4                       |
| 5     | 25 000  | 9 731                  | 1 731                   | 306                     | 53                      | 8                       |
| 6     | 50 000  | 19 462                 | 3 462                   | 612                     | 106                     | 16                      |
| 7     | 100 000   | 38 924                 | 6 924                   | 1 224                   | 212                     | 32                      |
| 8     | 200 000   | 77 849                 | 13 849                  | 2 449                   | 424                     | 64                      |
| 9     | 400 000   | 155 698                | 27 698                  | 4 898                   | 848                     | 128                     |
| 10    | 800 000   | 311 396                | 55 396                  | 9 796                   | 1 696                   | 256                     |
| 11    | 1 600 000   | 622 792                | 110 792                 | 19 592                  | 3 392                   | 512                     |
| 12    | 3 200 000   | 1 245 584              | 221 584                 | 39 184                  | 6 784                   | 1 024                   |

|  |
|--|
| > 4 $\mu\text{m}_{(c)}$ = 45 000 particles |
| > 6 $\mu\text{m}_{(c)}$ = 15 000 particles |
| > 14 $\mu\text{m}_{(c)}$ = 1 500 particles |
| > 21 $\mu\text{m}_{(c)}$ = 250 particles   |
| > 38 $\mu\text{m}_{(c)}$ = 15 particles    |
| > 70 $\mu\text{m}_{(c)}$ = 3 particle      |
| SAE AS4059 REV E<br>6A/6B/5C/5D/4E/2F      |

The information reproduced on this page is a brief extract from SAE AS4059 Rev.E, revised in May 2005. For further details and explanations refer to the full Standard.

## SAE AS4059 - REV. F

It can be made a differential measurement (Table 1) or a cumulative measurement (Table 2)

Table 1 - Class for differential measurement

| Class | Dimension of contaminant<br>Maximum Contamination Limits per 100 ml |                     |                     |                      |                    |
|-------|---|---------------------|---------------------|----------------------|--------------------|
|       | 5-15 $\mu\text{m}$  | 15-25 $\mu\text{m}$ | 25-50 $\mu\text{m}$ | 50-100 $\mu\text{m}$ | >100 $\mu\text{m}$ |
| 00    | 125   | 22                  | 4                   | 1                    | 0                  |
| 0     | 250   | 44                  | 8                   | 2                    | 0                  |
| 1     | 500   | 89                  | 16                  | 3                    | 1                  |
| 2     | 1 000   | 178                 | 32                  | 6                    | 1                  |
| 3     | 2 000   | 356                 | 63                  | 11                   | 2                  |
| 4     | 4 000   | 712                 | 126                 | 22                   | 4                  |
| 5     | 8 000   | 1 425               | 253                 | 45                   | 8                  |
| 6     | 16 000  | 2 850               | 506                 | 90                   | 16                 |
| 7     | 32 000  | 5 700               | 1 012               | 180                  | 32                 |
| 8     | 64 000  | 11 400              | 2 025               | 360                  | 64                 |
| 9     | 128 000   | 22 800              | 4 050               | 720                  | 128                |
| 10    | 256 000   | 45 600              | 8 100               | 1 440                | 256                |
| 11    | 512 000   | 91 200              | 16 200              | 2 880                | 512                |
| 12    | 1 024 000   | 182 400             | 32 400              | 5 760                | 1 024              |

|   |
|---|
| 6 - 14 $\mu\text{m}_{(c)}$ = 15 000 particles |
| 14 - 21 $\mu\text{m}_{(c)}$ = 2 200 particles |
| 21 - 38 $\mu\text{m}_{(c)}$ = 200 particles   |
| 38 - 70 $\mu\text{m}_{(c)}$ = 35 particles    |
| > 70 $\mu\text{m}_{(c)}$ = 3 particles        |
| SAE AS4059 REV F - Class 6                    |

- (1) Size range, microscope particle counts, based on longest dimension as measured per AS598 or ISO 4407.
- (2) Size range, APC calibrated per ISO 11171 or an optical or electron microscope with image analysis software, based on projected area equivalent diameter.
- (3) Contamination classes and particle count limits are identical to NAS 1638.

Table 2 - Class for cumulative measurement

| Class | Dimension of contaminant<br>Maximum Contamination Limits per 100 ml |                  |                   |                   |                   |                    |
|-------|---|------------------|-------------------|-------------------|-------------------|--------------------|
|       | >1 $\mu\text{m}$  | >5 $\mu\text{m}$ | >15 $\mu\text{m}$ | >25 $\mu\text{m}$ | >50 $\mu\text{m}$ | >100 $\mu\text{m}$ |
| 000   | 195   | 76               | 14                | 3                 | 1                 | 0                  |
| 00    | 390   | 152              | 27                | 5                 | 1                 | 0                  |
| 0     | 780   | 304              | 54                | 10                | 2                 | 0                  |
| 1     | 1 560   | 609              | 109               | 20                | 4                 | 1                  |
| 2     | 3 120   | 1 217            | 217               | 39                | 7                 | 1                  |
| 3     | 6 250   | 2 432            | 432               | 76                | 13                | 2                  |
| 4     | 12 500  | 4 864            | 864               | 152               | 26                | 4                  |
| 5     | 25 000  | 9 731            | 1 731             | 306               | 53                | 8                  |
| 6     | 50 000  | 19 462           | 3 462             | 612               | 106               | 16                 |
| 7     | 100 000   | 38 924           | 6 924             | 1 224             | 212               | 32                 |
| 8     | 200 000   | 77 849           | 13 849            | 2 449             | 424               | 64                 |
| 9     | 400 000   | 155 698          | 27 698            | 4 898             | 848               | 128                |
| 10    | 800 000   | 311 396          | 55 396            | 9 796             | 1 696             | 256                |
| 11    | 1 600 000   | 622 792          | 110 792           | 19 592            | 3 392             | 512                |
| 12    | 3 200 000   | 1 245 584        | 221 584           | 39 184            | 6 784             | 1 024              |

|  |
|--|
| > 4 $\mu\text{m}_{(c)}$ = 45 000 particles   |
| > 6 $\mu\text{m}_{(c)}$ = 15 000 particles   |
| > 14 $\mu\text{m}_{(c)}$ = 1 500 particles   |
| > 21 $\mu\text{m}_{(c)}$ = 250 particles     |
| > 38 $\mu\text{m}_{(c)}$ = 15 particles      |
| > 70 $\mu\text{m}_{(c)}$ = 3 particle        |
| SAE AS4059 REV F<br>cpc* Class 6 6/6/5/5/4/2 |

\* cumulative particle count

- (1) Size range, optical microscope, based on longest dimension as measured per AS598 or ISO 4407.
- (2) Size range, APC calibrated per ISO 11171 or an optical or electron microscope with image analysis software, based on projected area equivalent diameter.

# CONTAMINATION MANAGEMENT

## - CLASSES OF CONTAMINATION ACCORDING TO NAS 1638 (January 1964)

The NAS system was originally developed in 1964 to define contamination classes for the contamination contained within aircraft components.

The application of this standard was extended to industrial hydraulic systems simply because nothing else existed at the time.

The coding system defines the maximum numbers permitted of 100 ml volume at various size intervals (differential counts) rather than using cumulative counts as in ISO 4406. Although there is no guidance given in the standard on how to quote the levels, most industrial users quote a single code which is the highest recorded in all sizes and this convention is used on MP Filtri APC's.

The contamination classes are defined by a number (from 00 to 12) which indicates the maximum number of particles per 100 ml, counted on a differential basis, in a given size bracket.

Size Range Classes (in microns)

| Maximum Contamination Limits per 100 ml |           |         |        |        |       |
|---|-----------|---------|--------|--------|-------|
| Class                                   | 5-15      | 15-25   | 25-50  | 50-100 | >100  |
| 00                                      | 125       | 22      | 4      | 1      | 0     |
| 0                                       | 250       | 44      | 8      | 2      | 0     |
| 1                                       | 500       | 89      | 16     | 3      | 1     |
| 2                                       | 1 000     | 178     | 32     | 6      | 1     |
| 3                                       | 2 000     | 356     | 63     | 11     | 2     |
| 4                                       | 4 000     | 712     | 126    | 22     | 4     |
| 5                                       | 8 000     | 1 425   | 253    | 45     | 8     |
| 6                                       | 16 000    | 2 850   | 506    | 90     | 16    |
| 7                                       | 32 000    | 5 700   | 1 012  | 180    | 32    |
| 8                                       | 64 000    | 11 400  | 2 025  | 360    | 64    |
| 9                                       | 128 000   | 22 800  | 4 050  | 720    | 128   |
| 10                                      | 256 000   | 45 600  | 8 100  | 1 440  | 256   |
| 11                                      | 512 000   | 91 200  | 16 200 | 2 880  | 512   |
| 12                                      | 1 024 000 | 182 400 | 32 400 | 5 760  | 1 024 |

|             |                    |
|-------------|--------------------|
| 5-15 µm     | = 42 000 particles |
| 15-25 µm    | = 2 200 particles  |
| 25-50 µm    | = 150 particles    |
| 50-100 µm   | = 18 particles     |
| > 100 µm    | = 3 particles      |
| Class NAS 8 |                    |

## - CUMULATIVE DISTRIBUTION OF THE PARTICLES SIZE - ISO 4407

The level of contamination is defined by counting the number of particles collected by a laboratory membrane per unit of fluid volume. The measurement is done by a microscope. The membrane must be cleaned, dried and desiccated, with fluid and conditions defined by the Standard. The fluid volume is filtered through the membrane, using a suitable suction system.

The level of contamination is identified by dividing the membrane into a predefined number of areas and by counting the contaminant particles using a suitable laboratory microscope.

MICROSCOPE CONTROL AND MEASUREMENT



Example figure 1 and 2  
ISO 4406  
SAE AS4059E Table 1  
NAS 1638  
SAE AS4059E Table 2

COMPARISON PHOTOGRAPH'S  
1 graduation = 10µm

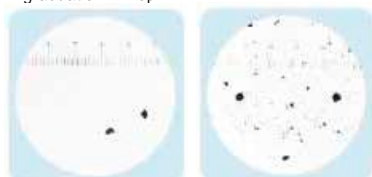


Fig. 1  
Class 16/14/11  
Class 5  
Class 5  
Class 6A/5B/5C

Fig. 2  
Class 22/20/17  
Class 11  
Class 11  
Class 12A/11B/11C

For other comparison photographs for contamination classes see the "Fluid Condition and Filtration Handbook".

## - CLEANLINESS CODE COMPARISON

Although ISO 4406 standard is being used extensively within the hydraulics industry other standards are occasionally required and a comparison may be requested. The table below gives a very general comparison but often no direct comparison is possible due to the different classes and sizes involved.

| ISO 4406   | SAE AS4059 Table 2   | SAE AS4059 Table 1                            | NAS 1638                                 |
|--|--|---|--|
| > 4 µm <sub>(c)</sub><br>6 µm <sub>(c)</sub><br>14 µm <sub>(c)</sub> | > 4 µm <sub>(c)</sub><br>6 µm <sub>(c)</sub><br>14 µm <sub>(c)</sub> | 4-6<br>6-14<br>14-21<br>21-38<br>38-70<br>>70 | 5-15<br>15-25<br>25-50<br>50-100<br>>100 |
| 23 / 21 / 18   | 13A / 12B / 12C  | 12  | 12                                       |
| 22 / 20 / 17   | 12A / 11B / 11C  | 11  | 11                                       |
| 21 / 19 / 16   | 11A / 10B / 10C  | 10  | 10                                       |
| 20 / 18 / 15   | 10A / 9B / 9C  | 9   | 9  |
| 19 / 17 / 14   | 9A / 8B / 8C   | 8   | 8  |
| 18 / 16 / 13   | 8A / 7B / 7C   | 7   | 7  |
| 17 / 15 / 12   | 7A / 6B / 6C   | 6   | 6  |
| 16 / 14 / 11   | 6A / 5B / 5C   | 5   | 5  |
| 15 / 13 / 10   | 5A / 4B / 4C   | 4   | 4  |
| 14 / 12 / 09   | 4A / 3B / 3C   | 3   | 3  |

## 5 FILTRATION TECHNOLOGIES

Various mechanisms such as mechanical stoppage, magnetism, gravimetric deposit, or centrifugal separation can be used to reduce the level of contamination.

The mechanical stoppage method is most effective and can take place in two ways:

### - SURFACE FILTRATION

It is by direct interception. The filter prevents particles larger than the pores from continuing in the plant / system. Surface filters are generally manufactured with metal canvases or meshes.


### - DEPTH FILTERING

Filters are constructed by fiber interlacing. Such wraps form pathways of different shapes and sizes in which the particles remain trapped when they find smaller apertures than their diameter.

Depth filters are generally produced with papers impregnated with phenolic resins, metal fibers or inorganic fibers.

In inorganic fiber filtration, commonly called microfibre, the filtering layers are often overlapped in order to increase the ability to retain the contaminant.

WIRE MESH FILTRATION




PAPER FILTRATION



MICROFIBER FILTRATION



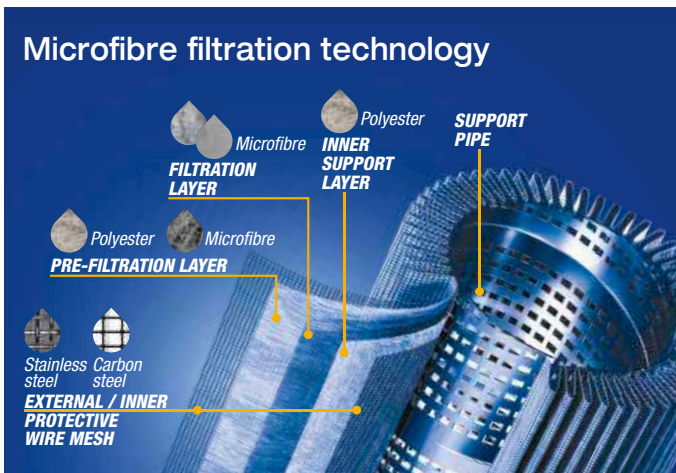

The filtration efficiency of metallic mesh filtrations is defined as the maximum particle size that can pass through the meshes of the filtering grid. The efficiency of microfibre and paper filtration ( $\beta_{x(c)}$ ) is defined through a lab test called Multipass Test. The efficiency value ( $\beta_{x(c)}$ ) is defined as the ratio between the number of particles of certain dimensions detected upstream and downstream of the filter.

$$\frac{\text{Upstream particles number} > X \mu\text{m}_{(c)}}{\text{Downstream particles number} > X \mu\text{m}_{(c)}} = \beta_{x(c)}$$



| Value ( $\beta_{x(c)}$ ) | 2   | 10  | 75    | 100 | 200   | 1000  |
|--------------------------|-----|-----|-------|-----|-------|-------|
| Efficiency               | 50% | 90% | 98.7% | 99% | 99.5% | 99.9% |

Test conditions, such as type of fluid to be used (MIL-H-5606), type of contaminant to be used (ISO MTD), fluid viscosity, test temperature, are determined by ISO 16889.

In addition to the filtration efficiency value during the Multipass test, other important features, such as filtration stability ( $\beta$  stability) and dirt holding capacity (DHC), are also tested.

Poor filtration stability is the cause of the filtering quality worsening as the filter life rises. Low dirt holding capacity causes a reduction in the life of the filter.

| Filtration ISO Standard Comparison |                             |                                |
|------------------------------------|-----------------------------|--------------------------------|
| $\beta_{x(c)} > 1000$<br>ISO 16889 | $\beta_x > 200$<br>ISO 4572 | MP Filtri<br>Filter media code |
| 5 $\mu\text{m}_{(c)}$              | 3 $\mu\text{m}$             | A03                            |
| 7 $\mu\text{m}_{(c)}$              | 6 $\mu\text{m}$             | A06                            |
| 10 $\mu\text{m}_{(c)}$             | 10 $\mu\text{m}$            | A10                            |
| 16 $\mu\text{m}_{(c)}$             | 18 $\mu\text{m}$            | A16                            |
| 21 $\mu\text{m}_{(c)}$             | 25 $\mu\text{m}$            | A25                            |

## 6 RECOMMENDED CONTAMINATION CLASSES

Any are the nature and the properties of fluids, they are inevitably subject to contamination. The level of contamination can be managed by using special components called filters.

Hydraulic components builders, knowing the problem of contamination, recommend the filtration level appropriate to the use of their products.

Example of recommended contamination levels for pressures below 140 bar.

|  |                        |                        |                        |                       |                       |                       |
|--|------------------------|------------------------|------------------------|-----------------------|-----------------------|-----------------------|
| Piston pumps with fixed flow rate                | •                      |                        |                        |                       |                       |                       |
| Piston pumps with variable flow rate             |                        |                        | •                      |                       |                       |                       |
| Vane pumps with fixed flow rate                  |                        | •                      |                        |                       |                       |                       |
| Vane pumps with variable flow                    |                        |                        | •                      |                       |                       |                       |
| Engines  | •                      |                        |                        |                       |                       |                       |
| Hydraulic cylinders                              | •                      |                        |                        |                       |                       |                       |
| Actuators  |                        |                        |                        |                       | •                     |                       |
| Test benches                                     |                        |                        |                        |                       |                       | •                     |
| Check valve                                      | •                      |                        |                        |                       |                       |                       |
| Directional valves                               | •                      |                        |                        |                       |                       |                       |
| Flow regulating valves                           | •                      |                        |                        |                       |                       |                       |
| Proportional valves                              |                        |                        |                        | •                     |                       |                       |
| Servo-valves                                     |                        |                        |                        |                       |                       | •                     |
| Flat bearings                                    |                        |                        | •                      |                       |                       |                       |
| Rail bearings                                    |                        |                        |                        |                       | •                     |                       |
| ISO 4406 CODE                                    | 20/18/15               | 19/17/14               | 18/16/13               | 17/15/12              | 16/14/11              | 15/13/10              |
| Recommended filtration $\beta_{x(c)} \geq 1.000$ | $\beta_{20(c)} > 1000$ | $\beta_{15(c)} > 1000$ | $\beta_{10(c)} > 1000$ | $\beta_{7(c)} > 1000$ | $\beta_{7(c)} > 1000$ | $\beta_{5(c)} > 1000$ |

The common classification of filters is determined by their position in the plant.

## 7 TYPES OF FILTERS

### Suction filters

They are positioned before the pump and are responsible for protecting the pump from dirty contaminants. It also provides additional flow guidance to the pump suction line.

Being subject to negligible working pressures are manufactured with simple and lightweight construction.

They are mainly produced with gross grade surface filtrations, mainly  $60 \div 125 \mu\text{m}$ . They can be equipped with a magnetic filter for retaining ferrous particles. They are generally placed under the fluid head to take advantage of the piezometric thrust of the fluid and reduce the risk of cavitation.

There are two types of suction filters:

- IMMERSION FILTERS  
Simple filter element screwed on the suction pipe
- FILTERS WITH CONTAINER  
Container filters that are more bulky, but provide easier maintenance of the tank

### Delivery (or Pressure) filters

They are positioned between the pump and most sensitive regulating and controlling components, such as servo valves or proportional valves, and are designed to ensure the class of contamination required by the components used in the circuit.

Being subjected to high working pressures are manufactured with more robust and articulated construction. In particular situations of corrosive environments or aggressive fluids can be made of stainless steel.

They are mainly produced with filtering depths of  $3 \div 25 \mu\text{m}$ .

They can be manufactured with in-line connections, with plate or flange connections or directly integrated into the circuit control blocks / manifolds. They can also be manufactured in duplex configuration to allow the contaminated section to be maintained even when the plant / system is in operation without interruption of the working cycle.

## Return filters

They are positioned on the return line to the tank and perform the task of filtering the fluid from particles entering the system from the outside or generated by the wear of the components.

They are generally fixed to the reservoir (for this reason also called top tank mounted), positioned semi-immersed or completely immersed.

The positioning of the return filters must guarantee in all operating conditions that the fluid drainage takes place in immersed condition; this is to avoid creating foams in the tank that can cause malfunctions or cavitation in the pumps.

For the sizing of the return filters, account must be taken of the presence of accumulators or cylinders that can make the return flow considerably greater than the pump suction flow rate.

Being subject to contained working pressures are manufactured with simple and lightweight construction.

Normally it is possible to extract the filter element without disconnecting the filter from the rest of the system.

## Combined filters

They are designed to be applied to systems with two or more circuits. They are commonly used in hydrostatic transmission machines where they have a dual filtration function of the return line and suction line of the hydrostatic transmission pump.

The filter is equipped with a valve that keeps the 0.5 bar pressure inside the filter. A portion of the fluid that returns to the tank is filtered by the return filter element, generally produced with absolute filtration, and returns to the transmission booster pump.

Only excess fluid returns to the tank through the valve.

The internal pressure of the filter and the absolute filtration help to avoid the cavitation phenomenon inside the pump.

## Off-line filters

They are generally used in very large systems / plants, placed in a closed circuit independent from the main circuit. They remain in operation regardless of the operation of the main circuit and are crossed by a constant flow rate.

They can also be manufactured in duplex configuration to allow the contaminated section to be maintained even when the unit is in operation without interruption of the work cycle.

## Venting filters

During the operation of the plants, the fluid level present in the reservoir changes continuously.

The result of this continuous fluctuation is an exchange of air with the outside environment.

The venting filter function, positioned on the tank, is to filter the air that enters the tank to compensate for fluid level variations.

## 8 FILTER SIZING PARAMETERS

The choice of the filter system for an hydraulic system is influenced by several factors.

It is necessary to consider the characteristics of the various components present in the plant and their sensitivity to contamination.

It is also necessary to consider all the tasks that the filter will have to do within the plant:

- FLUID PROTECTION FROM CONTAMINATION
- PROTECTION OF OLEODYNAMIC COMPONENTS SENSITIVE TO CONTAMINATION
- PROTECTION OF OLEODYNAMIC PLANTS FROM ENVIRONMENTAL WASTE
- PROTECTION OF OLEODYNAMIC PLANTS FROM CONTAMINATION CAUSED BY COMPONENTS' FAILURES

The advantages of proper positioning and sizing of the filters are

- MORE RELIABILITY OF THE SYSTEM
- LONGER LIFE OF THE FLUID COMPONENTS
- REDUCTION OF STOP TIME
- REDUCTION OF FAILURE CASUALTIES

Each hydraulic filter is described by general features that identify the possibility of use in different applications.

- **MAXIMUM WORKING PRESSURE ( $P_{max}$ )**

The maximum working pressure of the filter must be greater than or equal to the pressure of the circuit section in which it will be installed.

- **PRESSURE DROP ( $\Delta P$ )**

The pressure drop depends on a number of factors, such as the working circuit temperature, the fluid viscosity, the filter element cleaning condition.

- **WORKING TEMPERATURE ( $T$ )**

The working temperature deeply affect the choice of materials. Excessively high or low temperatures may adversely affect the strength of the materials or the characteristics of the seals.

- **FILTRATION EFFICIENCY (%) / FILTRATION RATIO ( $\beta_{x(c)}$ )**

Filtration efficiency is the most important parameter to consider when selecting a filter.

When choosing the filtration performances, the needs of the most sensitive components in the system must be considered.

- **FLUID TYPE**

The type of fluid influences the choice of filters in terms of compatibility and viscosity. It is always mandatory to check the filterability.

- **PLACEMENT IN THE PLANT**

The position of the filter in the system conditions the efficiency of all filter performances.

## 9 APPLICABLE STANDARDS FOR FILTER DEVELOPMENT

In order to obtain unique criteria for development and verification of the filters performance, specific regulations for the filters and filter elements testing have been issued by ISO. These norms describe the target, the methodology, the conditions and the presentation methods for the test results.

### ISO 2941

*Hydraulic fluid power -- Filter elements -- Verification of collapse/burst pressure rating*

This Standard describes the method for testing the collapse / burst resistance of the filter elements.

The test is performed by crossing the contaminated fluid filter element at a predefined flow rate. The progressive clogging of the filter element, determined by contamination, causes an increase in differential pressure.

### ISO 2942

*Hydraulic fluid power -- Filter elements -- Verification of fabrication integrity and determination of the first bubble point*

This Standard describes the method to verify the integrity of the assembled filter elements.

It can be used to verify the quality of the production process or the quality of the materials by verifying the pressure value of the first bubble point.

### ISO 2943

*Hydraulic fluid power -- Filter elements -- Verification of material compatibility with fluids*

This Standard describes the method to verify the compatibility of materials with certain hydraulic fluids.

The test is carried out by keeping the element (the material sample) immersed in the fluid under high or low temperature conditions for a given period of time and verifying the retention of the characteristics.

### ISO 3723

*Hydraulic fluid power -- Filter elements -- Method for end load test*

This Standard describes the method for verifying the axial load resistance of the filter elements.

After performing the procedure described in ISO 2943, the designed axial load is applied to the filter element. To verify the test results, then the test described in ISO 2941 is performed.

### ISO 3968

*Hydraulic fluid power -- Filters -- Evaluation of differential pressure versus flow characteristics*

This Standard describes the method for checking the pressure drop across the filter.

The test is carried out by crossing the filter from a given fluid and by detecting upstream and downstream pressures.

Some of the parameters defined by the Standard are the fluid, the test temperature, the size of the tubes, the position of the pressure detection points.

### ISO 16889

*Hydraulic fluid power -- Filters -- Multi-pass method for evaluating filtration performance of a filter element*

This Standard describes the method to check the filtration characteristics of the filter elements.

The test is performed by constant introduction of contaminant (ISO MTD). The characteristics observed during the test are the filtration efficiency and the dirty holding capacity related to the differential pressure.

### ISO 23181

*Hydraulic fluid power -- Filter elements -- Determination of resistance to flow fatigue using high viscosity fluid*

This Standard describes the method for testing the fatigue resistance of the filter elements. The test is carried out by subjecting the filter to continuous flow variations, thus differential pressure, using a high viscosity fluid.

### ISO 11170

*Hydraulic fluid power -- Sequence of tests for verifying performance characteristics of filter elements*

The Standard describes the method for testing the performance of filter elements. The protocol described by the regulations provides the sequence of all the tests described above in order to verify all the working characteristics (mechanical, hydraulic and filtration).

### ISO 10771-1

*Hydraulic fluid power -- Fatigue pressure testing of metal pressure-containing envelopes -- Test method*

This Standard describes the method to check the resistance of the hydraulic components with pulsing pressure.

It can be applied to all metal components (excluding tubes) subject to cyclic pressure used in the hydraulic field.


## 10 WATER IN HYDRAULIC AND LUBRICATING FLUIDS

### Water Content

In mineral oils and non aqueous resistant fluids water is undesirable. Mineral oil usually has a water content of 50-300 ppm (@40°C) which it can support without adverse consequences.

Once the water content exceeds about 300ppm the oil starts to appear hazy. Above this level there is a danger of free water accumulating in the system in areas of low flow. This can lead to corrosion and accelerated wear.

Similarly, fire resistant fluids have a natural water which may be different to mineral oil.

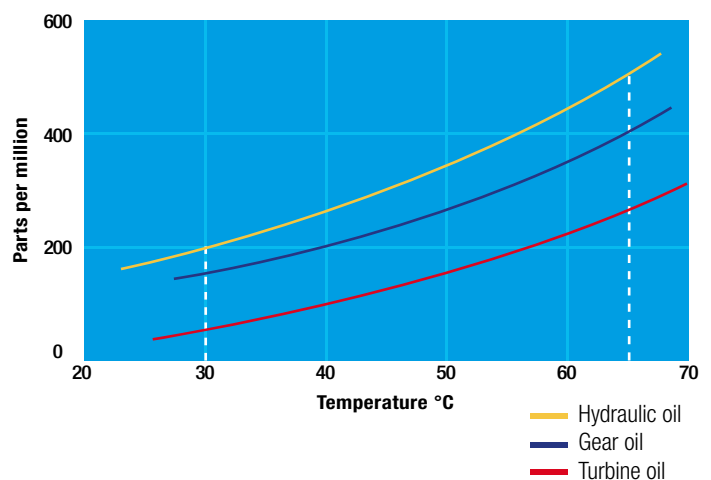

# CONTAMINATION MANAGEMENT

## Saturation Levels

Since the effects of free (also emulsified) water is more harmful than those of dissolved water, water levels should remain well below the saturation point.


However, even water in solution can cause damage and therefore every reasonable effort should be made to keep saturation levels as low as possible. There is no such thing as too little water. As a guideline, we recommend maintaining saturation levels below 50% in all equipment.

### TYPICAL WATER SATURATION LEVEL FOR NEW OILS

Examples:

Hydraulic oil @ 30°C = 200 ppm = 100% saturation

Hydraulic oil @ 65°C = 500 ppm = 100% saturation

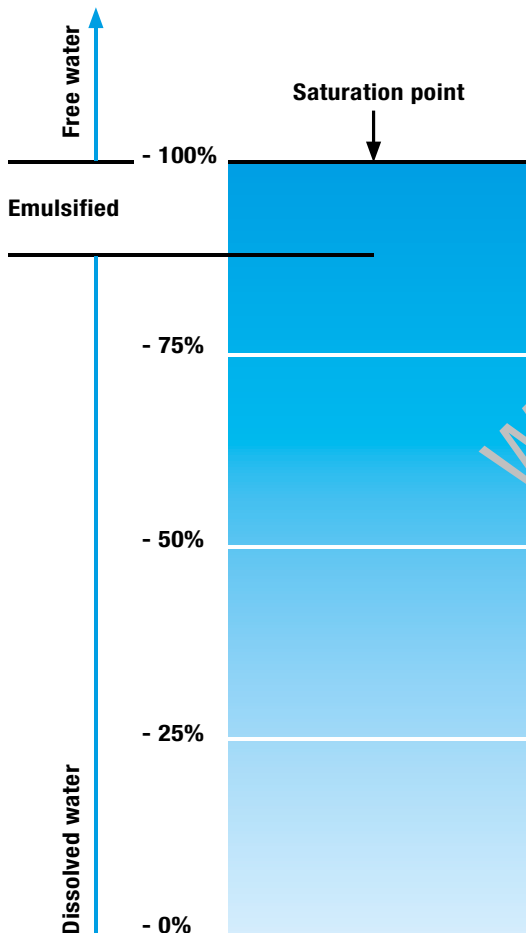

## Water absorber

Water is present everywhere, during storage, handling and servicing.


MP Filtri filter elements feature an absorbent media which protects hydraulic systems from both particulate and water contamination.

MP Filtri's filter element technology is available with inorganic microfiber media with a filtration rating 25 µm (therefore identified with media designation WA025), providing absolute filtration of solid particles to  $\beta_{x(c)} = 1000$ .

Absorbent media is made by water absorbent fibres which increase in size during the absorption process.

Free water is thus bonded to the filter media and completely removed from the system (it cannot even be squeezed out).

Filter Media




Fabric that absorbs water

Absorber media layer



The Filter Media has absorbed water

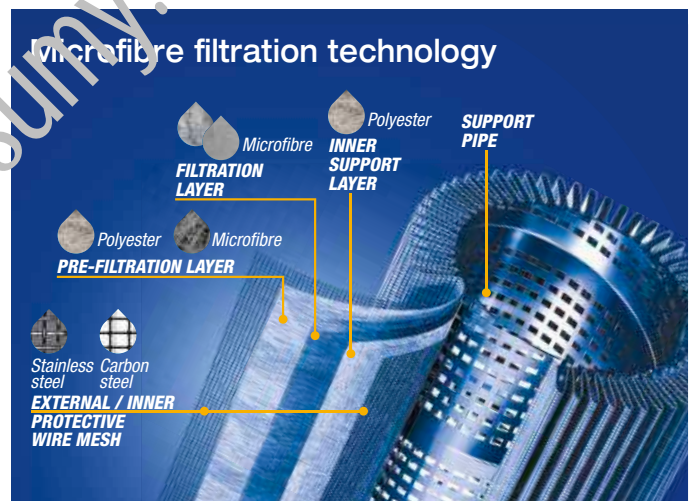

By removing water from your fluid power system, you can prevent such key problems as:

- corrosion (metal etching)
- loss of lubricant power
- accelerated abrasive wear in hydraulic components
- valve-locking
- bearing fatigue
- viscosity variance (reduction in lubricating properties)
- additive precipitation and oil oxidation
- increase in acidity level
- increased electrical conductivity (loss of dielectric strength)
- slow/weak response of control systems

### Product availability:

LOW & MEDIUM PRESSURE FILTERS - LMP Series

|         |         |
|---------|---------|
| LMP 210 | LMP 900 |
| LMP 211 | LMP 901 |
| LMP 400 | LMP 902 |
| LMP 401 | LMP 903 |
| LMP 430 | LMP 950 |


## 11 THE ANTI-STATIC FILTERS

### zerospark

zerospark is a specialist solution designed to solve the problem of electrostatic discharge inside hydraulic filters. Caused by the electrical charge build-up due to the passage of oil through the filters, this can result in damage to filter elements, oils and circuit components. It can even cause fire hazards in environments where flammable materials are present.

#### THE TRIBOELECTRIC EFFECT

The body with the most electronegativity strips electrons from the other, generating a build-up of a net negative charge on itself. The other body is charged by the same amount but with the opposite sign, giving rise to very high potential differences. These, if not dissipated, can give rise to electrostatic discharges.

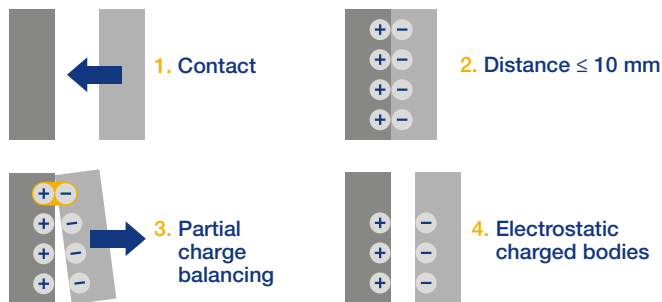


#### DISSIPATIVE FILTER ELEMENTS

To solve the problem of charge build-up in filters, MP Filtri has developed an innovative solution. By replacing certain insulating components with conductive zerospark versions, the charges on the media are free to move towards the head and are thus dissipated to the ground.

#### ⊕ Dissipative elements

#### ● Standard elements

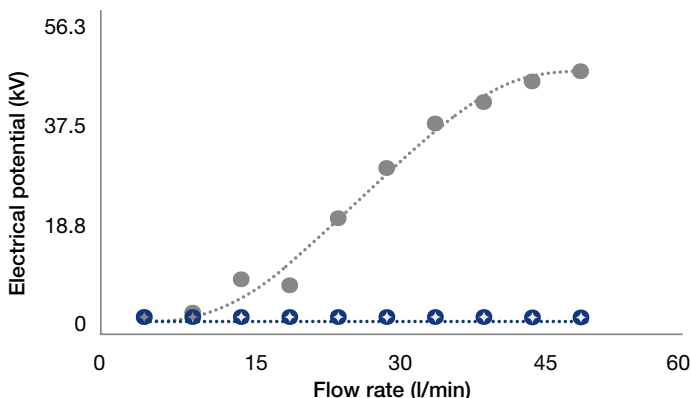

Under standard working conditions, the potential goes from tens of kV to zero, clearly showing the effectiveness of our dissipative filters.

The following table summarises some examples of test results at the same flow rate and temperature for elements of the same size but made of different materials.

| Filter element               | Electrical potential (kV) | Current ( $\mu$ A) |
|------------------------------|---------------------------|--------------------|
| Standard glass microfibre    | 11                        | -6.0               |
| Dissipative glass microfibre | 0                         | -9.0               |
| Standard cellulose           | 6                         | -1.3               |
| Dissipative cellulose        | 0                         | -2.1               |
| Other glass microfibre       | 9-15                      | -7.0               |
| Other glass microfibre       | 3-8                       | -16.0              |

When using a synthetic oil instead of mineral oil, the values and sign of the two electrical quantities may vary.

| Filter element               | Mineral oil               | Synthetic oil |
|------------------------------|---------------------------|---------------|
|                              | Electrical potential (kV) |               |
| Standard glass microfibre    | +11                       | +30           |
| Dissipative glass microfibre | 0                         | ~0.0          |
| Standard cellulose           | +6                        | -43           |
| Dissipative cellulose        | 0                         | ~0.0          |

# FILTER SIZING

## INDEX

|                   | Page |
|-------------------|------|
| CALCULATION       | 23   |
| CORRECTIVE FACTOR | 24   |

[www.sumy.ir](http://www.sumy.ir)



**THE CORRECT FILTER SIZING HAVE TO BE BASED ON THE TOTAL PRESSURE DROP DEPENDING BY THE APPLICATION.**

FOR EXAMPLE, THE MAXIMUM TOTAL PRESSURE DROP ALLOWED BY A NEW AND CLEAN RETURN FILTER HAVE TO BE IN THE RANGE 0.4 - 0.6 bar / 5.80 - 8.70 psi.

The pressure drop calculation is performed by adding together the value of the housing with the value of the filter element. The pressure drop  $\Delta pc$  of the housing is proportional to the fluid density ( $\text{kg}/\text{dm}^3$  /  $\text{lb}/\text{ft}^3$ ). The filter element pressure drop  $\Delta pe$  is proportional to its viscosity ( $\text{mm}^2/\text{s}$  / SUS), the corrective factor Y have to be used in case of an oil viscosity different than  $30 \text{ mm}^2/\text{s}$  (cSt) / 150 SUS.

**Sizing data for single filter element, head at top**

- $\Delta pc$  = Filter housing pressure drop [bar / psi]
- $\Delta pe$  = Filter element pressure drop [bar / psi]
- Y = Corrective factor Y (see correspondent table), depending on the filter type, on the filter element size, on the filter element length and on the filter media
- Q = flow rate (l/min - gpm)
- V1 reference oil viscosity =  $30 \text{ mm}^2/\text{s}$  (cSt) / 150 SUS
- V2 = operating oil viscosity in  $\text{mm}^2/\text{s}$  (cSt) / SUS

**Filter element pressure drop calculation with an oil viscosity different than  $30 \text{ mm}^2/\text{s}$  (cSt) / 150 SUS**

- International system:  
 $\Delta pe = Y : 1000 \times Q \times (V2:V1)$
- Imperial system:  
 $\Delta pe = Y : 17.2 \times Q \times (V2:V1)$

$\Delta p \text{ Tot.} = \Delta pc + \Delta pe$

Verification formula  
 $\Delta p \text{ Tot.} \leq \Delta p \text{ max allowed}$

**Maximum total pressure drop ( $\Delta p \text{ max}$ ) allowed by a new and clean filter**

| Application                   | Range:[ bar ]   | [ psi ]                                   |
|-------------------------------|-----------------|---|
| Suction filters               | 0.08 - 0.10 bar | 1.16 - 1.45 psi                           |
| Return filters                | 0.4 - 0.6 bar   | 5.80 - 8.70 psi                           |
| Return - Suction filters (*)  | 0.8 - 1.0 bar   | 11.60 - 14.50 psi                         |
| Low & Medium Pressure filters | 0.4 - 0.6 bar   | 5.80 - 8.70 psi return lines              |
|                               | 0.3 - 0.5 bar   | 4.35 - 7.25 psi lubrication lines         |
|                               | 0.3 - 0.4 bar   | 4.35 - 5.80 psi off-line in power systems |
|                               | 0.1 - 0.3 bar   | 1.45 - 4.35 psi off-line in test benches  |
|                               | 0.4 - 0.6 bar   | 5.80 - 8.7 psi over-boost                 |
| High Pressure filters         | 0.8 - 1.5 bar   | 11.60 - 21.75 psi                         |
| Stainless Steel filters       | 0.8 - 1.5 bar   | 11.60 - 21.75 psi                         |


(\*)The suction flow rate should not exceed 30% of the return flow rate

**Generic filter calculation example**

- Application data:
- Tank top return filter
- Pressure Pmax = 10 bar
- Flow rate Q = 120 l/min
- Viscosity V2 =  $46 \text{ mm}^2/\text{s}$  (cSt)
- Oil density =  $0.86 \text{ kg}/\text{dm}^3$
- Required filtration efficiency =  $25 \mu\text{m}$  with absolute filtration
- With bypass valve and G 1 1/4" inlet connection

Calculation:

$\Delta pc = 0.03 \text{ bar} / 0.43 \text{ psi}$  (see graphic below)

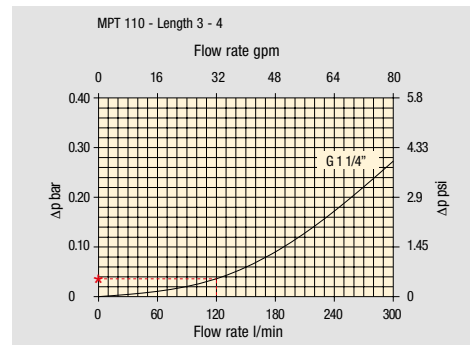

Filter housings  $\Delta p$  pressure drop. The curves are plotted using mineral oil with density of  $0.86 \text{ kg}/\text{dm}^3$  in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

$\Delta pe = (2.00 : 1000) \times 120 \times (46 : 30) = 0.37 \text{ bar}$   
 $\Delta pe = (2.00 : 17.2) \times 32 \times (216 : 150) = 5.36 \text{ psi}$

| Filter element        | Absolute filtration<br>H Series |       |       |       |       | Nominal filtration<br>N Series |      |                   |      |
|-----------------------|---------------------------------|-------|-------|-------|-------|--------------------------------|------|-------------------|------|
|                       | A03                             | A06   | A10   | A16   | A25   | P10                            | P25  | M25<br>M60<br>M90 |      |
| <b>Return filters</b> |                                 |       |       |       |       |                                |      |                   |      |
| MF 020                | 2                               | 29.20 | 24.12 | 8.00  | 7.22  | 5.00                           | 3.33 | 2.85              | 2.00 |
|                       | 3                               | 22.00 | 19.00 | 6.56  | 5.33  | 4.33                           | 1.68 | 1.44              | 1.30 |
| MF 030                | 1                               | 74.00 | 50.08 | 20.00 | 16.00 | 9.00                           | 6.43 | 5.51              | 3.40 |
| MF 100                | 1                               | 28.20 | 24.40 | 8.67  | 8.17  | 6.88                           | 4.62 | 3.96              | 1.25 |
|                       | 2                               | 17.33 | 12.50 | 6.86  | 5.70  | 4.00                           | 3.05 | 2.47              | 1.10 |
| MFX 100               | 3                               | 10.25 | 9.00  | 3.65  | 3.33  | 2.50                           | 1.63 | 1.32              | 0.96 |
|                       | 4                               | 6.10  | 5.40  | 2.30  | 2.20  | 2.00                           | 1.19 | 0.96              | 0.82 |

$\Delta p \text{ Tot.} = 0.03 + 0.37 = 0.4 \text{ bar}$   
 $\Delta p \text{ Tot.} = 0.43 + 5.36 = 5.79 \text{ psi}$

The selection is correct because the total pressure drop value is inside the admissible range for top tank return filters. In case the allowed max total pressure drop is not verified, it is necessary to repeat the calculation changing the filter length/size.

# FILTER SIZING Corrective factor

Corrective factor Y to be used for the filter element pressure drop calculation. The values depend to the filter size and length and to the filter media.  
Reference oil viscosity 30 mm<sup>2</sup>/s

## Return filters

| Filter element    | Absolute filtration<br>H Series |       |       |       |       | Nominal filtration<br>N Series |      |      |                   |
|-------------------|---------------------------------|-------|-------|-------|-------|--------------------------------|------|------|-------------------|
|                   | Type                            | A03   | A06   | A10   | A16   | A25                            | P10  | P25  | M25<br>M60<br>M90 |
| MF 020            | 1                               | 74.00 | 50.08 | 20.00 | 16.00 | 9.00                           | 6.43 | 5.51 | 4.40              |
|                   | 2                               | 29.20 | 24.12 | 8.00  | 7.22  | 5.00                           | 3.33 | 2.85 | 2.00              |
|                   | 3                               | 22.00 | 19.00 | 6.56  | 5.33  | 4.33                           | 1.68 | 1.44 | 1.30              |
| MF 030<br>MFX 030 | 1                               | 74.00 | 50.08 | 20.00 | 16.00 | 9.00                           | 6.43 | 5.51 | 3.40              |
| MF 100<br>MFX 100 | 1                               | 28.20 | 24.40 | 8.67  | 8.17  | 6.88                           | 4.62 | 3.96 | 1.25              |
|                   | 2                               | 17.33 | 12.50 | 6.86  | 5.70  | 4.00                           | 3.05 | 2.47 | 1.10              |
|                   | 3                               | 10.25 | 9.00  | 3.65  | 3.33  | 2.50                           | 1.63 | 1.32 | 0.96              |
|                   | 4                               | 6.10  | 5.40  | 2.30  | 2.20  | 2.00                           | 1.19 | 0.96 | 0.82              |
| MF 180<br>MFX 180 | 1                               | 3.67  | 3.05  | 1.64  | 1.56  | 1.24                           | 1.18 | 1.06 | 0.26              |
|                   | 2                               | 1.69  | 1.37  | 0.68  | 0.54  | 0.51                           | 0.43 | 0.39 | 0.12              |
| MF 190<br>MFX 190 | 2                               | 1.69  | 1.37  | 0.60  | 0.49  | 0.44                           | 0.35 | 0.31 | 0.11              |
| MF 400<br>MFX 400 | 1                               | 3.20  | 2.75  | 1.39  | 1.33  | 1.06                           | 0.96 | 0.87 | 0.22              |
|                   | 2                               | 2.00  | 1.87  | 0.88  | 0.85  | 0.55                           | 0.49 | 0.45 | 0.13              |
|                   | 3                               | 1.90  | 1.60  | 0.63  | 0.51  | 0.49                           | 0.39 | 0.35 | 0.11              |
| MF 750<br>MFX 750 | 1                               | 1.08  | 0.84  | 0.49  | 0.36  | 0.26                           | 0.21 | 0.19 | 0.06              |
| MLX 250           | 2                               | 3.00  | 3.04  | 1.46  | 1.25  | 1.17                           | -    | -    | M25<br>0.20       |
| MLX 660           | 2                               | 1.29  | 1.26  | 0.52  | 0.44  | 0.38                           | -    | -    | M25<br>0.10       |
| CU 025            |                                 | 78.00 | 48.00 | 28.00 | 24.00 | 9.33                           | 6.33 | 8.51 | 1.25              |
| CU 040            |                                 | 25.88 | 20.88 | 10.44 | 10.00 | 3.78                           | 3.78 | 3.30 | 1.25              |
| CU 100            |                                 | 15.20 | 14.53 | 5.14  | 4.95  | 2.00                           | 2.00 | 0.17 | 1.10              |
| CU 250            |                                 | 3.25  | 2.55  | 1.55  | 1.35  | 0.71                           | 0.71 | 0.59 | 0.25              |
| CU 630            |                                 | 1.96  | 1.68  | 0.85  | 0.72  | 0.42                           | 0.42 | 0.36 | 0.09              |
| CU 850            |                                 | 1.06  | 0.84  | 0.42  | 0.33  | 0.17                           | 0.17 | 0.13 | 0.04              |
| MR 100            | 1                               | 19.00 | 17.00 | 6.90  | 6.30  | 4.60                           | 2.94 | 2.52 | 1.60              |
|                   | 2                               | 11.70 | 10.80 | 4.40  | 4.30  | 3.00                           | 2.94 | 2.52 | 1.37              |
|                   | 3                               | 7.80  | 6.87  | 3.70  | 3.10  | 2.70                           | 2.14 | 1.84 | 1.34              |
|                   | 4                               | 5.50  | 4.97  | 2.60  | 2.40  | 2.18                           | 1.72 | 1.47 | 1.34              |
|                   | 5                               | 4.20  | 3.84  | 2.36  | 2.15  | 1.90                           | 1.60 | 1.37 | 1.34              |
| MR 250            | 1                               | 5.35  | 4.85  | 2.32  | 1.92  | 1.50                           | 1.38 | 1.20 | 0.15              |
|                   | 2                               | 4.00  | 3.28  | 1.44  | 1.10  | 1.07                           | 0.96 | 0.83 | 0.13              |
|                   | 3                               | 2.60  | 2.20  | 1.08  | 1.00  | 0.86                           | 0.77 | 0.64 | 0.12              |
|                   | 4                               | 1.84  | 1.56  | 0.68  | 0.56  | 0.44                           | 0.37 | 0.23 | 0.11              |
| MR 630            | 1                               | 3.10  | 2.48  | 1.32  | 1.14  | 0.92                           | 0.83 | 0.73 | 0.09              |
|                   | 2                               | 2.06  | 1.92  | 0.82  | 0.76  | 0.38                           | 0.33 | 0.27 | 0.08              |
|                   | 3                               | 1.48  | 1.30  | 0.60  | 0.56  | 0.26                           | 0.22 | 0.17 | 0.08              |
|                   | 4                               | 1.30  | 1.20  | 0.48  | 0.40  | 0.25                           | 0.21 | 0.16 | 0.08              |
|                   | 5                               | 0.74  | 0.65  | 0.30  | 0.28  | 0.13                           | 0.10 | 0.08 | 0.04              |
| MR 850            | 1                               | 0.60  | 0.43  | 0.34  | 0.25  | 0.13                           | 0.12 | 0.09 | 0.03              |
|                   | 2                               | 0.37  | 0.26  | 0.23  | 0.21  | 0.11                           | 0.08 | 0.07 | 0.03              |
|                   | 3                               | 0.27  | 0.18  | 0.17  | 0.17  | 0.05                           | 0.04 | 0.04 | 0.02              |
|                   | 4                               | 0.23  | 0.16  | 0.13  | 0.12  | 0.04                           | 0.03 | 0.03 | 0.02              |

## Return / Suction filters

| Filter element     | Absolute filtration               |       |       |      |      |      |      |                   |      |
|--------------------|-----------------------------------|-------|-------|------|------|------|------|-------------------|------|
|                    | Type                              | A10   | A16   | A25  |      |      |      |                   |      |
| RSX 116            | 1                                 | 5.12  | 4.33  | 3.85 |      |      |      |                   |      |
|                    | 2                                 | 2.22  | 1.87  | 1.22 |      |      |      |                   |      |
| RSX 165<br>RSX 166 | 1                                 | 2.06  | 1.75  | 1.46 |      |      |      |                   |      |
|                    | 2                                 | 1.24  | 1.05  | 0.96 |      |      |      |                   |      |
|                    | 3                                 | 0.94  | 0.86  | 0.61 |      |      |      |                   |      |
| Filter element     | Absolute filtration<br>N Series   |       |       |      |      |      |      |                   |      |
| Type               | A03                               | A06   | A10   | A16  | A25  | P10  | P25  | M25<br>M60<br>M90 |      |
| CU 110             | 1                                 | 16.25 | 15.16 | 8.75 | 8.14 | 5.87 | 2.86 | 2.65              | 0.14 |
|                    | 2                                 | 12.62 | 10.44 | 6.11 | 6.02 | 4.16 | 1.60 | 1.49              | 0.12 |
|                    | 3                                 | 8.57  | 7.95  | 5.07 | 4.07 | 2.40 | 1.24 | 1.15              | 0.11 |
|                    | 4                                 | 5.76  | 4.05  | 2.80 | 2.36 | 1.14 | 0.91 | 0.85              | 0.05 |
| Filter element     | Absolute filtration<br>N-W Series |       |       |      |      |      |      |                   |      |
| Type               | A03                               | A06   | A10   | A16  | A25  | P10  | P25  | M25               |      |
| CU 110             | 1                                 | 16.25 | 15.16 | 8.75 | 8.14 | 5.87 | 2.86 | 2.65              | 0.14 |
|                    | 2                                 | 12.62 | 10.44 | 6.11 | 6.02 | 4.15 | 1.60 | 1.49              | 0.12 |
|                    | 3                                 | 8.57  | 7.95  | 5.07 | 4.07 | 2.40 | 1.24 | 1.15              | 0.11 |
|                    | 4                                 | 5.76  | 4.05  | 2.80 | 2.36 | 1.14 | 0.91 | 0.85              | 0.05 |
| CU 210             | 1                                 | 5.30  | 4.80  | 2.00 | 1.66 | 1.32 | 0.56 | 0.43              | 0.12 |
|                    | 2                                 | 3.44  | 2.95  | 1.24 | 1.09 | 0.70 | 0.42 | 0.35              | 0.09 |
|                    | 3                                 | 2.40  | 1.70  | 0.94 | 0.84 | 0.54 | 0.33 | 0.23              | 0.05 |
| DN                 | 016                               | 7.95  | 7.20  | 3.00 | 2.49 | 1.98 | 0.84 | 0.65              | 0.18 |
|                    | 025                               | 5.00  | 4.53  | 1.89 | 1.57 | 1.25 | 0.53 | 0.41              | 0.11 |
|                    | 040                               | 3.13  | 2.66  | 1.12 | 0.98 | 0.63 | 0.38 | 0.32              | 0.08 |
| CU 400             | 2                                 | 3.13  | 2.55  | 1.46 | 1.22 | 0.78 | 0.75 | 0.64              | 0.19 |
|                    | 3                                 | 2.15  | 1.70  | 0.94 | 0.78 | 0.50 | 0.40 | 0.34              | 0.10 |
|                    | 4                                 | 1.60  | 1.28  | 0.71 | 0.61 | 0.40 | 0.34 | 0.27              | 0.08 |
|                    | 5                                 | 1.00  | 0.83  | 0.47 | 0.34 | 0.20 | 0.24 | 0.19              | 0.06 |
|                    | 6                                 | 0.82  | 0.58  | 0.30 | 0.27 | 0.17 | 0.22 | 0.18              | 0.05 |
|                    | CU 900                            | 1     | 0.86  | 0.63 | 0.32 | 0.30 | 0.21 | -                 | -    |
| CU 950             | 2                                 | 1.03  | 0.80  | 0.59 | 0.40 | 0.26 | -    | -                 | 0.05 |
|                    | 3                                 | 0.44  | 0.40  | 0.27 | 0.18 | 0.15 | -    | -                 | 0.02 |
| MR 630             | 7                                 | 0.88  | 0.78  | 0.36 | 0.34 | 0.16 | 0.12 | 0.96              | 0.47 |

## Low & Medium pressure filters

**Corrective factor Y to be used for the filter element pressure drop calculation. The values depend to the filter size and length and to the filter media.**  
Reference oil viscosity 30 mm<sup>2</sup>/s

## High pressure filters

| Filter element                        | Absolute filtration<br>N - R Series |        |        |        |        | Nominal filtration<br>N Series |      |
|---------------------------------------|-------------------------------------|--------|--------|--------|--------|--------------------------------|------|
|                                       | Type                                | A03    | A06    | A10    | A16    | A25                            | M25  |
| HP 011                                | 1                                   | 332.71 | 250.07 | 184.32 | 152.36 | 128.36                         | -    |
|                                       | 2                                   | 220.28 | 165.56 | 74.08  | 59.13  | 37.05                          | -    |
|                                       | 3                                   | 123.24 | 92.68  | 41.48  | 33.08  | 20.72                          | -    |
|                                       | 4                                   | 77.76  | 58.52  | 28.37  | 22.67  | 16.17                          | -    |
| HP 039                                | 2                                   | 70.66  | 53.20  | 25.77  | 20.57  | 14.67                          | 4.90 |
|                                       | 3                                   | 36.57  | 32.28  | 18.00  | 13.38  | 8.00                           | 2.90 |
|                                       | 4                                   | 26.57  | 23.27  | 12.46  | 8.80   | 5.58                           | 2.20 |
| HP 050                                | 1                                   | 31.75  | 30.30  | 13.16  | 12.3   | 7.29                           | 1.60 |
|                                       | 2                                   | 24.25  | 21.26  | 11.70  | 9.09   | 4.90                           | 1.40 |
|                                       | 3                                   | 17.37  | 16.25  | 8.90   | 7.18   | 3.63                           | 1.25 |
|                                       | 4                                   | 12.12  | 10.75  | 6.10   | 5.75   | 3.08                           | 1.07 |
|                                       | 5                                   | 7.00   | 6.56   | 3.60   | 3.10   | 2.25                           | 0.80 |
| HP 065                                | 1                                   | 58.50  | 43.46  | 23.16  | 19.66  | 10.71                          | 1.28 |
|                                       | 2                                   | 42.60  | 25.64  | 16.22  | 13.88  | 7.32                           | 1.11 |
|                                       | 3                                   | 20.50  | 15.88  | 8.18   | 6.81   | 3.91                           | 0.58 |
| HP 135                                | 1                                   | 20.33  | 18.80  | 9.71   | 8.66   | 4.78                           | 2.78 |
|                                       | 2                                   | 11.14  | 10.16  | 6.60   | 6.38   | 2.22                           | 1.11 |
|                                       | 3                                   | 6.48   | 6.33   | 3.38   | 3.16   | 2.14                           | 1.01 |
| HP 150                                | 1                                   | 17.53  | 15.91  | 7.48   | 6.96   | 5.94                           | 1.07 |
|                                       | 2                                   | 8.60   | 8.37   | 3.54   | 3.38   | 3.15                           | 0.58 |
|                                       | 3                                   | 6.53   | 5.90   | 2.93   | 2.79   | 2.12                           | 0.49 |
| HP 320                                | 1                                   | 10.88  | 9.73   | 5.02   | 3.73   | 2.54                           | 1.04 |
|                                       | 2                                   | 4.40   | 3.83   | 1.75   | 1.48   | 0.88                           | 0.71 |
|                                       | 3                                   | 2.75   | 2.11   | 1.05   | 0.87   | 0.77                           | 0.61 |
|                                       | 4                                   | 2.12   | 1.77   | 0.98   | 0.78   | 0.55                           | 0.47 |
| HP 500                                | 1                                   | 4.44   | 3.67   | 2.30   | 2.10   | 1.65                           | 0.15 |
|                                       | 2                                   | 3.37   | 2.77   | 1.78   | 1.68   | 1.24                           | 0.10 |
|                                       | 3                                   | 2.22   | 1.98   | 1.11   | 1.09   | 0.75                           | 0.08 |
|                                       | 4                                   | 1.81   | 1.33   | 0.93   | 0.86   | 0.68                           | 0.05 |
|                                       | 5                                   | 1.33   | 1.15   | 0.77   | 0.68   | 0.48                           | 0.04 |
| <b>Absolute filtration - N Series</b> |                                     |        |        |        |        |                                |      |
| Type                                  | A03                                 | A06    | A10    | A16    | A25    | M25                            |      |
| HF 325                                | 1                                   | 3.65   | 2.95   | 2.80   | 1.80   | 0.90                           | 0.38 |
|                                       | 2                                   | 2.03   | 1.73   | 1.61   | 1.35   | 0.85                           | 0.36 |
|                                       | 3                                   | 1.84   | 1.42   | 1.32   | 1.22   | 0.80                           | 0.35 |

## Suction filters

| Nominal filtration - N Series |      |      |      |      |      |      |
|-------------------------------|------|------|------|------|------|------|
| Type                          | P10  | P25  | M25  | M60  | M90  | M250 |
| SF 250                        | 0.65 | 0.20 | 0.10 | 0.08 | 0.05 | 0.03 |
| SF 503                        | -    | -    | 0.17 | 0.11 | 0.11 | 0.11 |
| SF 504                        | -    | -    | 0.11 | 0.08 | 0.08 | 0.08 |
| SF 505                        | -    | -    | 0.23 | 0.18 | 0.18 | 0.18 |
| SF 510                        | -    | -    | 0.18 | 0.14 | 0.14 | 0.14 |
| SF 535                        | -    | -    | 0.08 | 0.05 | 0.05 | 0.05 |
| SF 540                        | -    | -    | 0.05 | 0.04 | 0.04 | 0.04 |

## Stainless steel high pressure filters

| Filter element                              | Absolute filtration<br>N Series |        |        |        |        |        |
|---|---------------------------------|--------|--------|--------|--------|--------|
|   | Type                            | A03    | A06    | A10    | A16    | A25    |
| HP 011                                      | 1                               | 332.71 | 250.07 | 184.32 | 152.36 | 128.36 |
|   | 2                               | 220.28 | 165.56 | 74.08  | 59.13  | 37.05  |
|   | 3                               | 123.24 | 92.68  | 41.48  | 33.08  | 20.72  |
|   | 4                               | 77.76  | 58.52  | 28.37  | 22.67  | 16.17  |
| HP 039                                      | 2                               | 70.66  | 53.20  | 25.77  | 20.57  | 14.67  |
|   | 3                               | 36.57  | 32.28  | 18.00  | 13.38  | 8.00   |
|   | 4                               | 26.57  | 23.27  | 12.46  | 8.80   | 5.58   |
| HP 050                                      | 1                               | 31.75  | 30.30  | 13.16  | 12.3   | 7.29   |
|   | 2                               | 24.25  | 21.26  | 11.70  | 9.09   | 4.90   |
|   | 3                               | 17.37  | 16.25  | 8.90   | 7.18   | 3.63   |
|   | 4                               | 12.12  | 10.75  | 6.10   | 5.75   | 3.08   |
|   | 5                               | 7.00   | 6.56   | 3.60   | 3.10   | 2.25   |
| HP 135                                      | 1                               | 20.33  | 18.80  | 9.71   | 8.66   | 4.78   |
|   | 2                               | 11.14  | 10.16  | 6.60   | 6.38   | 2.22   |
|   | 3                               | 6.48   | 6.33   | 3.38   | 3.16   | 2.14   |
| <b>Absolute filtration<br/>H - U Series</b> |                                 |        |        |        |        |        |
| Type  | A03                             | A06    | A10    | A16    | A25    |        |
| HP 011                                      | 1                               | 424.58 | 319.74 | 235.17 | 194.44 | 163.78 |
|   | 2                               | 281.06 | 211.25 | 94.53  | 75.45  | 47.26  |
|   | 3                               | 130.14 | 97.50  | 43.63  | 34.82  | 21.81  |
|   | 4                               | 109.39 | 82.25  | 36.79  | 29.37  | 18.40  |
| HP 039                                      | 2                               | 73.00  | 57.00  | 28.00  | 24.00  | 17.20  |
|   | 3                               | 40.90  | 36.33  | 21.88  | 18.80  | 11.20  |
|   | 4                               | 31.50  | 28.22  | 17.22  | 9.30   | 6.70   |
| HP 050                                      | 1                               | 47.33  | 34.25  | 21.50  | 20.50  | 14.71  |
|   | 2                               | 29.10  | 25.95  | 14.04  | 10.90  | 5.88   |
|   | 3                               | 20.85  | 19.50  | 10.68  | 8.61   | 4.36   |
|   | 4                               | 14.55  | 12.90  | 7.32   | 6.90   | 3.69   |
|   | 5                               | 9.86   | 9.34   | 6.40   | 4.80   | 2.50   |
| HP 135                                      | 1                               | 29.16  | 25.33  | 13.00  | 12.47  | 5.92   |
|   | 2                               | 14.28  | 11.04  | 7.86   | 7.60   | 4.44   |
|   | 3                               | 8.96   | 7.46   | 4.89   | 4.16   | 3.07   |


# TYPICAL FILTER SIZING Selection Software

## Step 1

Select "FILTER SIZING SOFTWARE" after login

OR


Select "FILTER SIZING" after login from a product page

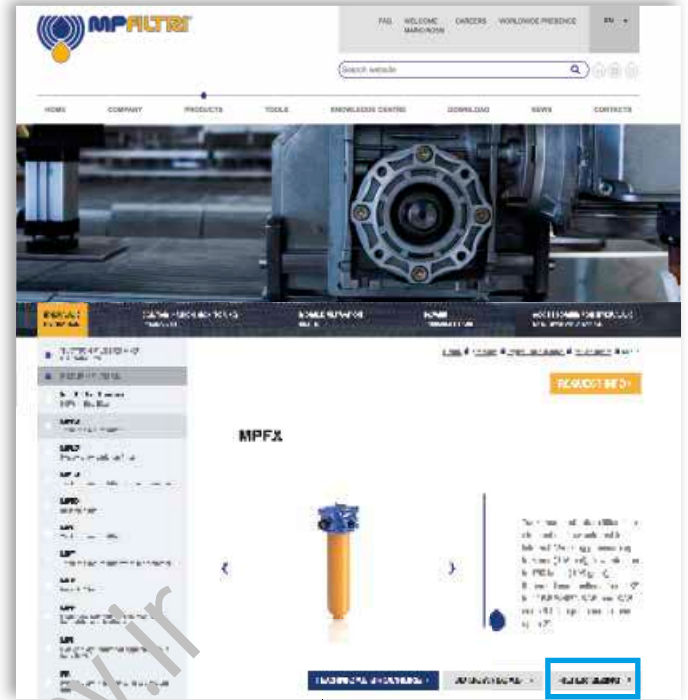

Choose the type of filter family.  
Enter the main data for sizing the filter  
then push CALCULATE.

## Step 2

Enter the main data for sizing the filter  
then push CALCULATE.

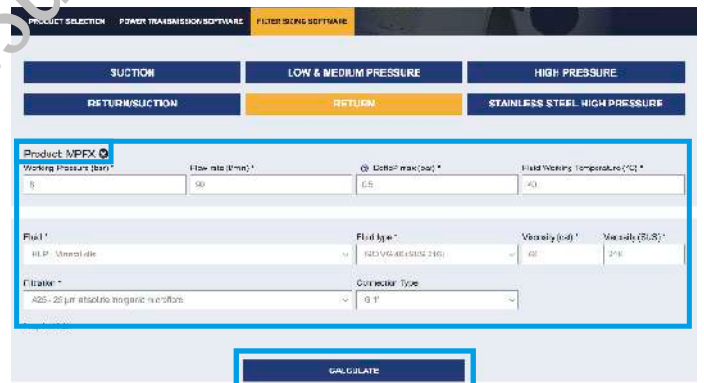

## Step 3

Select the desired options to choose the appropriate filter type for the application.

Working Pressure: 8 (bar) | Fluid: HLP

Flow rate: 50 (l/min) | Fluid type: ISO VG 46 (SUS 216)

DP max of the project: 0.5 (bar) | Seal: A - NBR

Working Temperature: 40 (°C) | Working Temperature: -25 + 110 (°C)

Filtration: 20 µm absolute inorganic microfine | Optional seals: Y - PPM

Connection Type: G 1" | Working Temperature with options: -20 + 110 (°C)

Viscosity: 46 (cst) - 215 (SUS)

NEW SEARCH

Filter type: MPFX: Tank lid mounting - (Pinax) | Seal: A - NBR

Option1: Single or duplex | DIN Standard: NOT APPLICABLE | Indicator: Visual

| Image | Code                      | Press |     | GPM<br>lpm | AP<br>bar | Housing AP |     | Element AP |     | Connection | Seal | Link |   |  |
|-------|---------------------------|-------|-----|------------|-----------|------------|-----|------------|-----|------------|------|------|---|--|
|       |                           | bar   | psi |            |           | bar        | psi | bar        | psi |            |      |      |   |  |
|       | MPFX-120-B-A-03-A23-H-BF0 | 5     | 116 | 36.74      | 25.3      | 0.47       | 7   | 0.2        | 2   | 0.32       | 1    | G 1" | A |  |
|       | MPFX-120-B-A-03-A23-H-BF0 | 5     | 116 | 36.74      | 25.3      | 0.47       | 7   | 0.2        | 2   | 0.32       | 1    | G 1" | A |  |

## Step 4

Choose the most suitable filter from the proposed list.

| Image | Code                 | Flow rate | Pressure | AP    | Housing AP | Element AP | Connection | Seal | Link |      |   |       |   |  |
|-------|----------------------|-----------|----------|-------|------------|------------|------------|------|------|------|---|-------|---|--|
|       | MFFX-UB3A-03-AS4-BF0 | 5         | 190      | 50-74 | 25.5       | 0.47       | 7          | 9-12 | 2    | 9-30 | 1 | C 1.1 | A |  |
|       | MFFX-UB3A-03-AS4-BF0 | 5         | 190      | 50-74 | 25.5       | 0.47       | 7          | 9-12 | 2    | 9-30 | 1 | C 1.1 | A |  |

## Step 5

It is possible to change the filter modifying every parameter.



**A** SAVE YOUR FILTER'S REPORT



**B** MANUAL EDIT




SAVE IN YOUR ARCHIVE  
typing your reference data and then SAVE AS PDF

A new browser window displays the pdf

see **A**



Close the report window

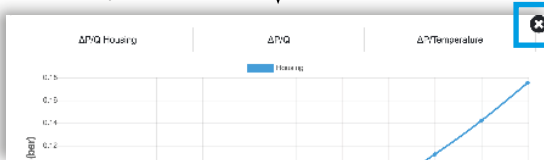

By clicking your WELCOME button, the SHOW REPORTS is displayed: select it to see your filters list.

**Suction filters are used as safety filters to protect pumps from gross contamination which can cause them to grip.**

**They are available in 2 styles:**

- **Suction Strainer (STR, MPA, MPM)**
- **SF2 external filters, for mounting semi-immersed under the oil level**

**SF2 semi-immersed filters, which shut-off oil flow while the filter element is being replaced, replace the butterfly valves usually used for servicing hydraulic pumps.**

[www.sumy.ir](http://www.sumy.ir)

## FILTER SIZING

For the proper corrective factor Y see chapter at page 25

# Suction filters



|                 |         |
|-----------------|---------|
| STR & MPA - MPM | page 31 |
| SF2 250 - 350   | 39      |
| SF2 500         | 47      |
| INDICATORS      | 57      |

[www.sumy.ir](http://www.sumy.ir)



# STR & MPA - MPM series

Flow rate up to 1000 l/min



# STR & MPA-MPM GENERAL INFORMATION

## Description

## Technical data

### Suction filters

**Flow rate up to 1000 l/min**

#### STR

STR is a range of suction strainers for protection of the downstream pump against the coarse contamination.

They are placed below the oil level directly connected to the suction line of the pump.

#### Available features:

- Female threaded connections up to 3", for a maximum flow rate of 1000 l/min
- Bypass valve, to relieve excessive pressure drop across the filter media

#### Common application:

- Mobile machines (Construction and Agriculture machines)
- Industrial equipment

#### MPA - MPM

MPA and MPM are ranges of suction strainers for protection of the downstream pump against the coarse contamination.

They are placed below the minimum oil level, directly connected to the suction line of the pump.

The robust design allows the use of these filters in any heavy duty application.

#### Available features:

- Female threaded connections up to 3", for a maximum flow rate of 1000 l/min
- Magnetic filter (MPM), to hold the ferrous particles

#### Common application:

Industrial equipment

#### STR materials

- 1 - Connection: Polyamide, GF reinforced
- 2 - Core tube: Tinned Steel
- 3 - Wire mesh
- 4 - End cap: Polyamide, GF reinforced
- 5 - Bypass valve: Polyamide, GF reinforced - Steel

#### MPA - MPM materials

- 1 - Connection: Aluminium
- 2 - Magnetic filter
- 3 - Tie rod: Galvanized Steel
- 4 - End cap: Galvanized Steel
- 5 - Core tube: Galvanized Steel
- 6 - Filter media: Wire mesh
- 7 - Bottom: Galvanized Steel
- 8 - Washer: Galvanized Steel
- 9 - Self-locking nut: Galvanized Steel - Nylon

#### Bypass valve

Opening pressure 30 kPa (0.3 bar)

#### Elements

Fluid flow through the filter element from OUT to IN.





#### Temperature

From -25 °C to +110 °C

## Weights [kg]

| Filter series    |             |
|------------------|-------------|
| <b>STR</b>       | see page 35 |
| <b>MPA - MPM</b> | see page 37 |

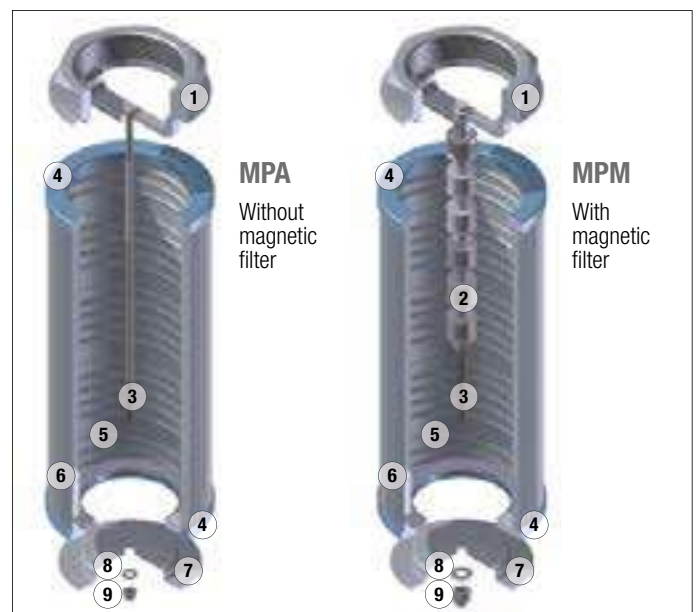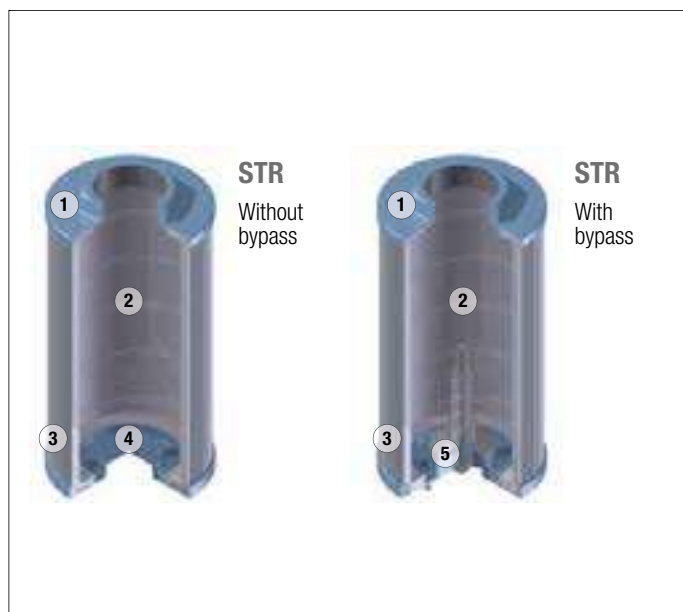

| Filter series              | Thread | l/min |
|----------------------------|--------|-------|
| <b>STR &amp; MPA - MPM</b> | 3/8"   | 19    |
|                            | 1/2"   | 28    |
|                            | 3/4"   | 67    |
|                            | 1"     | 126   |
|                            | 1 1/4" | 167   |
|                            | 1 1/2" | 258   |
|                            | 2"     | 480   |
|                            | 2 1/2" | 854   |
|                            | 3"     | 995   |

### Maximum flow rate for a complete suction filter with a pressure drop $\Delta p = 0.08$ bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure.

Please, contact our Sales Department for further additional information.

### Hydraulic symbols

| Filter series    | Style S | Style B |
|------------------|---------|---------|
| <b>STR</b>       | •       | •       |
| <b>MPA - MPM</b> | •       | •       |




  

Style S

Style B

### Pressure drop

Filters pressure drop  $\Delta p$   
in function of connection type

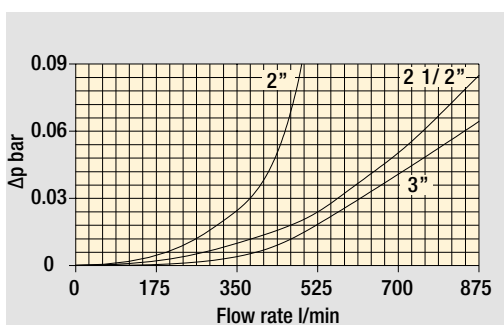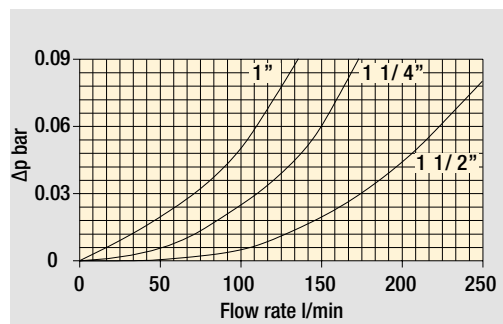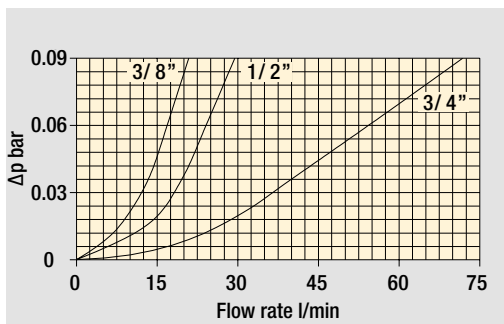

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

### COMPLETE FILTER

#### Element series and size

|               |
|---------------|
| <b>STR045</b> |
| <b>STR050</b> |
| <b>STR065</b> |
| <b>STR070</b> |
| <b>STR086</b> |
| <b>STR100</b> |
| <b>STR140</b> |
| <b>STR150</b> |

Configuration example 1: 

|        |   |   |    |     |     |
|--------|---|---|----|-----|-----|
| STR045 | 1 | B | G1 | M60 | P01 |
|--------|---|---|----|-----|-----|

Configuration example 2: 

|        |   |   |    |      |     |
|--------|---|---|----|------|-----|
| STR100 | 4 | S | G2 | M250 | P01 |
|--------|---|---|----|------|-----|

#### Connection type

|          | STR045 | STR050 | STR065 | STR070 | STR086 | STR100 | STR140 | STR150 |
|----------|--------|--------|--------|--------|--------|--------|--------|--------|
| <b>1</b> | 3/8"   | 3/8"   | 1/2"   | 1/2"   | 1 1/2" | 1 1/4" | 1 1/2" | 2"     |
| <b>2</b> | 1/2"   | 1/2"   | 3/4"   | 3/4"   | 2"     | 1 1/4" | 2"     | 2 1/2" |
| <b>3</b> | -      | -      | 3/4"   | 3/4"   | 1 1/2" | 1 1/2" | 2"     | 3"     |
| <b>4</b> | -      | -      | 1"     | 1"     | 2"     | 2"     | 2 1/2" | -      |
| <b>5</b> | -      | -      | -      | -      | 1 1/2" | 1 1/2" | 3"     | -      |
| <b>6</b> | -      | -      | -      | 1/2"   | 2"     | -      | 3"     | -      |

#### Valves

|          |                     |
|----------|---------------------|
| <b>S</b> | Without bypass      |
| <b>B</b> | With bypass 0.3 bar |

#### Thread type

|           |            |
|-----------|------------|
| <b>G1</b> | Thread GAS |
| <b>G2</b> | Thread NPT |

#### Filtration rating (filter media)

|             |           |        |
|-------------|-----------|--------|
| <b>M25</b>  | Wire mesh | 25 µm  |
| <b>M60</b>  | Wire mesh | 60 µm  |
| <b>M90</b>  | Wire mesh | 90 µm  |
| <b>M250</b> | Wire mesh | 250 µm |


### OTHER INFORMATION

#### Conditions of packaging

| Filter size | Pcs. per box |
|-------------|--------------|
| <b>045</b>  | 12           |
| <b>050</b>  | 12           |
| <b>065</b>  | 6            |
| <b>070</b>  | 6            |
| <b>086</b>  | 6            |
| <b>100</b>  | 6            |
| <b>140</b>  | 1            |
| <b>150</b>  | 1            |

#### Execution

|            |                    |
|------------|--------------------|
| <b>P01</b> | MP Filtri standard |
| <b>Pxx</b> | Customized         |

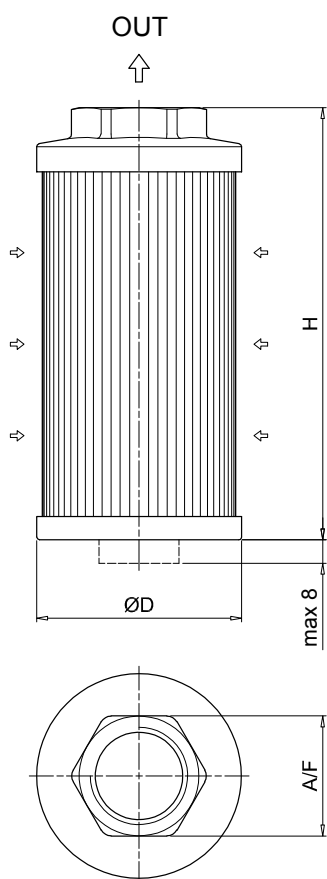

| STR         |                 |        |         |        |            |             |
|-------------|-----------------|--------|---------|--------|------------|-------------|
| Filter size | Connection type | Thread | ØD [mm] | H [mm] | A / F [mm] | Weight [kg] |
| <b>045</b>  | 1               | 3/8"   | 46      | 105    | 30         | 0.15        |
|             | 2               | 1/2"   | 46      | 105    | 30         | 0.19        |
| <b>050</b>  | 1               | 3/8"   | 52      | 79     | 30         | 0.11        |
|             | 2               | 1/2"   | 52      | 79     | 30         | 0.11        |
| <b>065</b>  | 1               | 1/2"   | 65      | 110    | 41         | 0.19        |
|             | 2               | 3/4"   | 65      | 110    | 41         | 0.22        |
|             | 3               | 3/4"   | 65      | 144    | 41         | 0.24        |
|             | 4               | 1"     | 65      | 144    | 41         | 0.22        |
| <b>070</b>  | 1               | 1/2"   | 70      | 95     | 41         | 0.18        |
|             | 2               | 3/4"   | 70      | 95     | 41         | 0.17        |
|             | 3               | 3/4"   | 70      | 141    | 41         | 0.23        |
|             | 4               | 1"     | 70      | 141    | 41         | 0.22        |
|             | 6               | 1/2"   | 70      | 141    | 41         | 0.24        |
| <b>086</b>  | 1               | 1 1/2" | 86      | 143    | 69         | 0.33        |
|             | 2               | 2"     | 86      | 143    | 69         | 0.30        |
|             | 3               | 1 1/2" | 86      | 201    | 69         | 0.43        |
|             | 4               | 2"     | 86      | 201    | 69         | 0.40        |
|             | 5               | 1 1/2" | 86      | 261    | 69         | 0.53        |
|             | 6               | 2"     | 86      | 261    | 69         | 0.50        |
| <b>100</b>  | 1               | 1 1/4" | 99      | 137    | 69         | 0.47        |
|             | 2               | 1 1/4" | 99      | 227    | 69         | 0.58        |
|             | 3               | 1 1/2" | 99      | 227    | 69         | 0.55        |
|             | 4               | 2"     | 99      | 227    | 69         | 0.51        |
|             | 5               | 1 1/2" | 99      | 137    | 69         | 0.43        |
| <b>140</b>  | 1               | 1 1/2" | 130     | 160    | 69         | 0.70        |
|             | 2               | 2"     | 130     | 160    | 69         | 0.68        |
|             | 3               | 2"     | 130     | 262    | 69         | 0.94        |
|             | 4               | 2 1/2" | 130     | 272    | 101        | 1.10        |
|             | 5               | 3"     | 130     | 272    | 101        | 1.00        |
|             | 6               | 3"     | 130     | 330    | 101        | 1.17        |
| <b>150</b>  | 1               | 2"     | 150     | 150    | 70         | 0.34        |
|             | 2               | 2 1/2" | 150     | 212    | 90         | 0.37        |
|             | 3               | 3"     | 150     | 272    | 100        | 0.40        |

# MPA-MPM


## Designation & Ordering code

### COMPLETE FILTER


| Element series                   |                         | Configuration example 1: |                    |           |             |            |
|----------------------------------|-------------------------|--------------------------|--------------------|-----------|-------------|------------|
| <b>MPA</b>                       | Without magnetic filter | <b>MPA</b>               | <b>030</b>         | <b>G1</b> | <b>M60</b>  | <b>P01</b> |
| <b>MPM</b>                       | With magnetic filter    | Configuration example 2: |                    |           |             |            |
|                                  |                         | <b>MPM</b>               | <b>430</b>         | <b>G2</b> | <b>M250</b> | <b>P01</b> |
| Connections                      |                         |                          |                    |           |             |            |
| <b>012</b>                       | 3/8"                    |                          |                    |           |             |            |
| <b>015</b>                       | 1/2"                    |                          |                    |           |             |            |
| <b>025</b>                       | 1/2"                    |                          |                    |           |             |            |
| <b>030</b>                       | 3/4"                    |                          |                    |           |             |            |
| <b>045</b>                       | 3/4"                    |                          |                    |           |             |            |
| <b>050</b>                       | 1"                      |                          |                    |           |             |            |
| <b>075</b>                       | 1"                      |                          |                    |           |             |            |
| <b>095</b>                       | 1 1/4"                  |                          |                    |           |             |            |
| <b>120</b>                       | 1 1/4"                  |                          |                    |           |             |            |
| <b>150</b>                       | 1 1/2"                  |                          |                    |           |             |            |
| <b>180</b>                       | 1 1/2"                  |                          |                    |           |             |            |
| <b>220</b>                       | 2"                      |                          |                    |           |             |            |
| <b>280</b>                       | 2"                      |                          |                    |           |             |            |
| <b>300</b>                       | 2 1/2"                  |                          |                    |           |             |            |
| <b>380</b>                       | 2"                      |                          |                    |           |             |            |
| <b>430</b>                       | 3"                      |                          |                    |           |             |            |
| Thread type                      |                         |                          |                    |           |             |            |
| <b>G1</b>                        | Thread GAS              |                          |                    |           |             |            |
| <b>G2</b>                        | Thread NPT              |                          |                    |           |             |            |
| Filtration rating (filter media) |                         |                          |                    |           |             |            |
| <b>M25</b>                       | Wire mesh 25 µm         |                          |                    |           |             |            |
| <b>M60</b>                       | Wire mesh 60 µm         |                          |                    |           |             |            |
| <b>M90</b>                       | Wire mesh 90 µm         |                          |                    |           |             |            |
| <b>M250</b>                      | Wire mesh 250 µm        |                          |                    |           |             |            |
|                                  |                         | Execution                |                    |           |             |            |
|                                  |                         | <b>P01</b>               | MP Filtri standard |           |             |            |
|                                  |                         | <b>Pxx</b>               | Customized         |           |             |            |

### OTHER INFORMATION

| Conditions of packaging |              |
|-------------------------|--------------|
| Size                    | Pcs. per box |
| <b>012</b>              | 12           |
| <b>015</b>              | 6            |
| <b>025</b>              | 6            |
| <b>030</b>              | 6            |
| <b>045</b>              | 6            |
| <b>050</b>              | 6            |
| <b>075</b>              | 6            |
| <b>095</b>              | 6            |
| <b>120</b>              | 6            |
| <b>150</b>              | 6            |
| <b>180</b>              | 1            |
| <b>220</b>              | 1            |
| <b>280</b>              | 1            |
| <b>300</b>              | 1            |
| <b>380</b>              | 1            |
| <b>430</b>              | 1            |

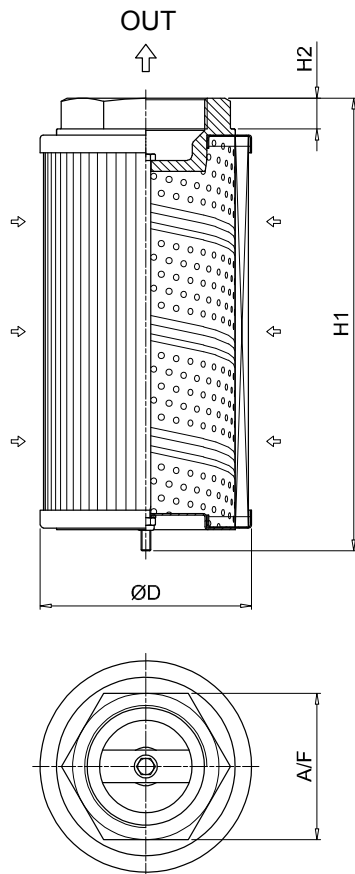

| MPA         |        |         |         |         |          |             |
|-------------|--------|---------|---------|---------|----------|-------------|
| Filter size | Thread | ØD [mm] | H1 [mm] | H2 [mm] | A/F [mm] | Weight [kg] |
| 012         | 3/8"   | 50      | 98      | 16      | 28       | 0.17        |
| 015         | 1/2"   | 50      | 98      | 16      | 28       | 0.17        |
| 025         | 1/2"   | 70      | 113     | 16      | 28       | 0.27        |
| 030         | 3/4"   | 70      | 115     | 18      | 42       | 0.36        |
| 045         | 3/4"   | 70      | 160     | 18      | 42       | 0.39        |
| 050         | 1"     | 70      | 160     | 18      | 42       | 0.35        |
| 075         | 1"     | 99      | 145     | 18      | 42       | 0.54        |
| 095         | 1 1/4" | 99      | 148     | 20      | 60       | 0.63        |
| 120         | 1 1/4" | 99      | 239     | 20      | 60       | 0.95        |
| 150         | 1 1/2" | 99      | 239     | 20      | 60       | 0.91        |
| 180         | 1 1/2" | 130     | 174     | 20      | 60       | 0.98        |
| 220         | 2"     | 130     | 162     | 13      | 80       | 1.00        |
| 280         | 2"     | 130     | 272     | 13      | 80       | 1.60        |
| 300         | 2 1/2" | 130     | 281     | 20      | 90       | 1.67        |
| 380         | 2"     | 130     | 322     | 13      | 80       | 1.60        |
| 430         | 3"     | 130     | 335     | 22      | 106      | 1.93        |

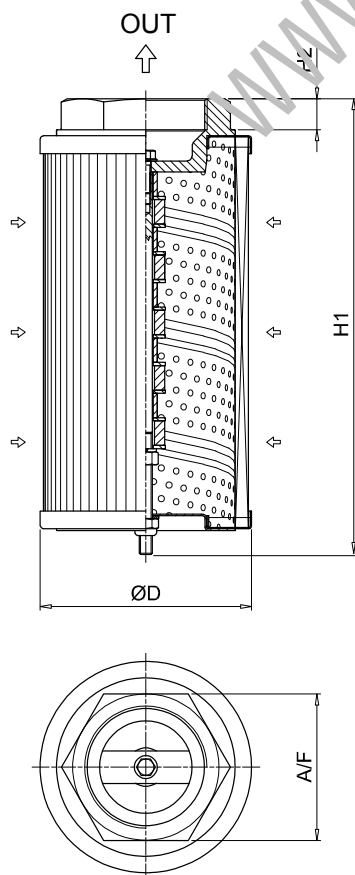

| MPM         |        |         |         |         |          |             |
|-------------|--------|---------|---------|---------|----------|-------------|
| Filter size | Thread | ØD [mm] | H1 [mm] | H2 [mm] | A/F [mm] | Weight [kg] |
| 012         | 3/8"   | 50      | 98      | 16      | 28       | 0.17        |
| 015         | 1/2"   | 50      | 98      | 16      | 28       | 0.17        |
| 025         | 1/2"   | 70      | 113     | 16      | 28       | 0.27        |
| 030         | 3/4"   | 70      | 115     | 18      | 42       | 0.36        |
| 045         | 3/4"   | 70      | 160     | 18      | 42       | 0.39        |
| 050         | 1"     | 70      | 160     | 18      | 42       | 0.35        |
| 075         | 1"     | 99      | 148     | 18      | 42       | 0.54        |
| 095         | 1 1/4" | 99      | 154     | 20      | 60       | 0.63        |
| 120         | 1 1/4" | 99      | 244     | 20      | 60       | 0.95        |
| 150         | 1 1/2" | 99      | 244     | 20      | 60       | 0.91        |
| 180         | 1 1/2" | 130     | 174     | 20      | 60       | 0.98        |
| 220         | 2"     | 130     | 163     | 13      | 80       | 1.00        |
| 280         | 2"     | 130     | 273     | 13      | 80       | 1.60        |
| 300         | 2 1/2" | 130     | 282     | 20      | 90       | 1.67        |
| 380         | 2"     | 130     | 323     | 13      | 80       | 1.60        |
| 430         | 3"     | 130     | 336     | 22      | 106      | 1.93        |

www.sumy.ir



# SF2 250-350 series

Flow rate up to 160 l/min



# SF2 250-350 GENERAL INFORMATION

## Description

## Technical data

### Suction filters

#### Flow rate up to 160 l/min

SF2 250 and SF2 350 are ranges of suction filters with integrated shut-off valve for protection of the downstream pump against the coarse contamination.

They are placed below the minimum oil level, directly connected to the suction line of the pump.

They can be fitted on the side or below the tank, allowing a more flexible design of the tank.

The shut-off valve closes automatically when the cover is removed, allowing the filter element replacement without the fluid drop.

#### Available features:

- Female threaded connections up to 1" and flanged connections up to 1 1/2", for a maximum flow rate of 160 l/min
- Multiple connections, to connect several suction lines
- Bypass valve, to relieve excessive pressure drop across the filter media
- Magnetic filter, to hold the ferrous particles
- Visual, electrical and electronic clogging indicators

#### Common application:

- Mobile machines
- Industrial equipment

### Filter housing materials

- Filter body: Aluminium
- Cover: Polyamide, GF reinforced
- Valve: Polyamide, GF reinforced - Steel
- Anti-Emptying valve: Steel

### Bypass valve

Opening pressure 30 kPa (0.3 bar)  $\pm 10\%$

### Elements

Fluid flow through the filter element from IN to OUT

### Seals

- Standard NBR series A
- Optional FPM series V

### Temperature

From -25 °C to +110 °C

### Note

SF2 250-350 filters mounting, see the drawings on page 43 and following.



## Weights [kg]

| Filter series | Weight [kg] |
|---------------|-------------|
| SF2 250       | 2.6         |
| SF2 350       | 2.6         |

# GENERAL INFORMATION SF2 250-350

FILTER ASSEMBLY SIZING  
Flow rates [l/min]

| Filter series | Filter element design - N Series |     |     |      |     |     |
|---------------|----------------------------------|-----|-----|------|-----|-----|
|               | M25                              | M60 | M90 | M250 | P10 | P25 |
| SF2 250       | 147                              | 151 | 155 | 160  | 85  | 132 |
| SF2 350       | 147                              | 151 | 155 | 160  | 85  | 132 |

## Maximum flow rate for a complete suction filter with a pressure drop $\Delta p = 0.08$ bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.


For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).


You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.


## Hydraulic symbols


| Filter series | Style R - S |   | Style Q - H |   |
|---------------|-------------|---|-------------|---|
| SF2 250       | •           |   | •           |   |
| SF2 350       |             | • |             | • |











## Pressure drop Filter housings $\Delta p$ pressure drop

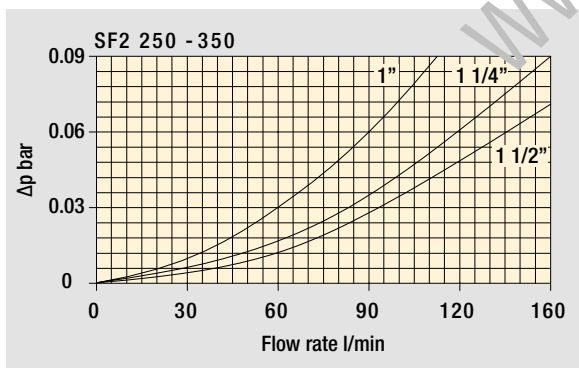

## Bypass valve pressure drop

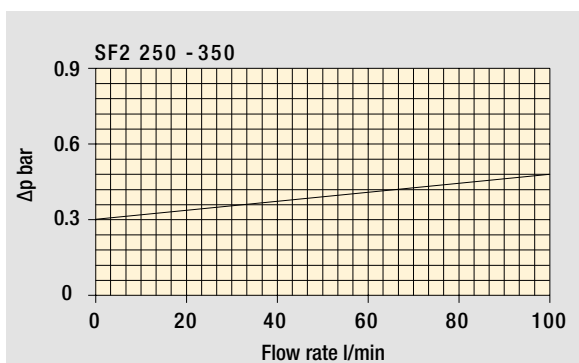

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

# SF2 250-350

## Designation & Ordering code

### COMPLETE FILTER

#### Series and size

|               |                          |        |   |    |   |     |     |
|---------------|--------------------------|--------|---|----|---|-----|-----|
| <b>SF2250</b> | Configuration example 1: | SF2250 | W | F2 | R | M25 | P01 |
| <b>SF2350</b> | Configuration example 2: | SF2350 | A | G1 | S | M90 | P01 |

| Seals and treatments                            | Filtration rating |     |
|---|-------------------|-----|
|   | Mxx               | Pxx |
| <b>A</b> NBR                                    | •                 | •   |
| <b>V</b> FPM                                    | •                 | •   |
| <b>W</b> NBR compatible with fluids HFA-HFB-HFC | •                 |     |
| <b>Z</b> FPM compatible with fluids HFA-HFB-HFC | •                 |     |

| Connections                        | Aux (only SF2350)        | SF2250 | SF2350 |
|------------------------------------|--------------------------|--------|--------|
| <b>G1</b> G 1 1/2"                 | G 1"                     | •      | •      |
| <b>G2</b> 1 1/2" NPT               | -                        | •      |        |
| <b>G3</b> SAE 24 - 1 7/8" - 12 UN  | SAE 16 - 1 5/16" - 12 UN | •      | •      |
| <b>G4</b> G 1 1/4"                 | -                        | •      |        |
| <b>G5</b> 1 1/4" NPT               | -                        | •      |        |
| <b>G6</b> SAE 20 - 1 5/8" - 12 UN  | -                        | •      |        |
| <b>G7</b> G 1"                     | -                        | •      |        |
| <b>G8</b> 1" NPT                   | -                        | •      |        |
| <b>G9</b> SAE 16 - 1 5/16" - 12 UN | -                        | •      |        |
| <b>F1</b> 1 1/2" SAE 3000 psi/M    | -                        | •      |        |
| <b>F2</b> 1 1/2" SAE 3000 psi/UNC  | -                        | •      |        |

#### Bypass valve and magnetic filter

|   |  |
|---|--|
| <b>R</b> With bypass, with magnetic filter    | <b>Q</b> Without bypass, with magnetic filter    |
| <b>S</b> With bypass, without magnetic filter | <b>H</b> Without bypass, without magnetic filter |

#### Filtration rating (filter media)

|                              |  |
|------------------------------|--|
| <b>M25</b> Wire mesh 25 µm   | <b>P10</b> Resin impregnated paper 10 µm |
| <b>M60</b> Wire mesh 60 µm   | <b>P25</b> Resin impregnated paper 25 µm |
| <b>M90</b> Wire mesh 90 µm   |  |
| <b>M250</b> Wire mesh 250 µm |  |

#### Execution

|                               |
|-------------------------------|
| <b>P01</b> MP Filtri standard |
| <b>Pxx</b> Customized         |

### FILTER ELEMENT

#### Element series and size

|              |                          |       |     |   |     |
|--------------|--------------------------|-------|-----|---|-----|
| <b>SF250</b> | Configuration example 1: | SF250 | M25 | W | P01 |
|--------------|--------------------------|-------|-----|---|-----|

|                          |       |     |   |     |
|--------------------------|-------|-----|---|-----|
| Configuration example 2: | SF250 | M90 | N | P01 |
|--------------------------|-------|-----|---|-----|

#### Filtration rating (filter media)

|                              |  |
|------------------------------|--|
| <b>M25</b> Wire mesh 25 µm   | <b>P10</b> Resin impregnated paper 10 µm |
| <b>M60</b> Wire mesh 60 µm   | <b>P25</b> Resin impregnated paper 25 µm |
| <b>M90</b> Wire mesh 90 µm   |  |
| <b>M250</b> Wire mesh 250 µm |  |



| Seals and treatments                            | Filtration rating |     |
|---|-------------------|-----|
|   | Mxx               | Pxx |
| <b>N</b> NBR                                    | •                 | •   |
| <b>V</b> FPM                                    | •                 | •   |
| <b>W</b> NBR compatible with fluids HFA-HFB-HFC | •                 |     |
| <b>Z</b> FPM compatible with fluids HFA-HFB-HFC | •                 |     |

#### Execution

|                               |
|-------------------------------|
| <b>P01</b> MP Filtri standard |
| <b>Pxx</b> Customized         |

### ACCESSORIES


| Clogging indicators                             | page |
|---|------|
| <b>VVA</b> Axial vacuum gauge                   | 59   |
| <b>VVR</b> Radial vacuum gauge                  | 59   |
| <b>VEA</b> Electrical vacuum indicator          | 58   |
| <b>VLA</b> Electrical / visual vacuum indicator | 58   |

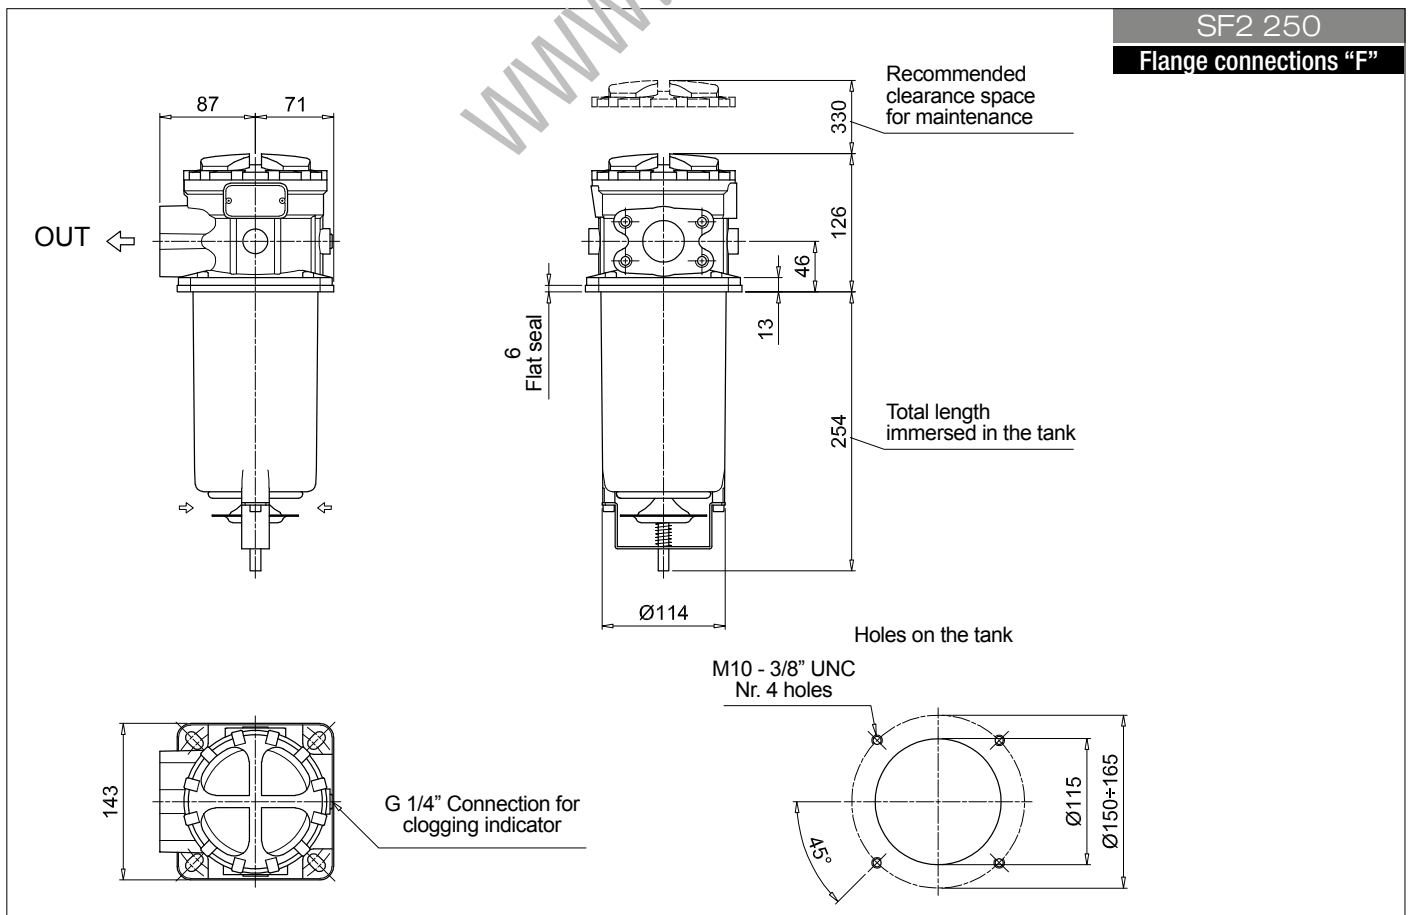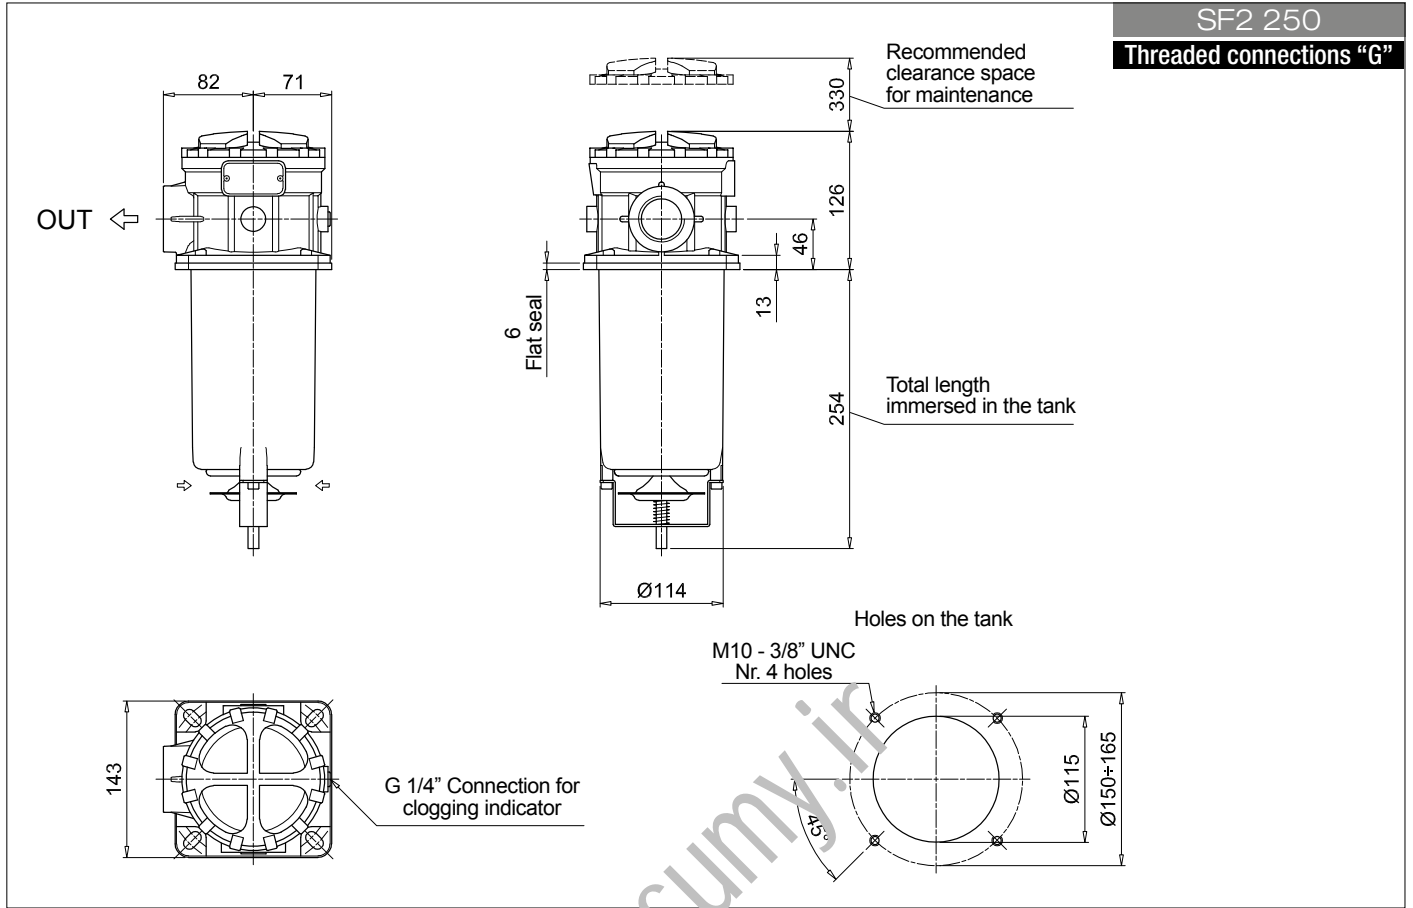

# SF2 250-350

## Dimensions

SF2 350

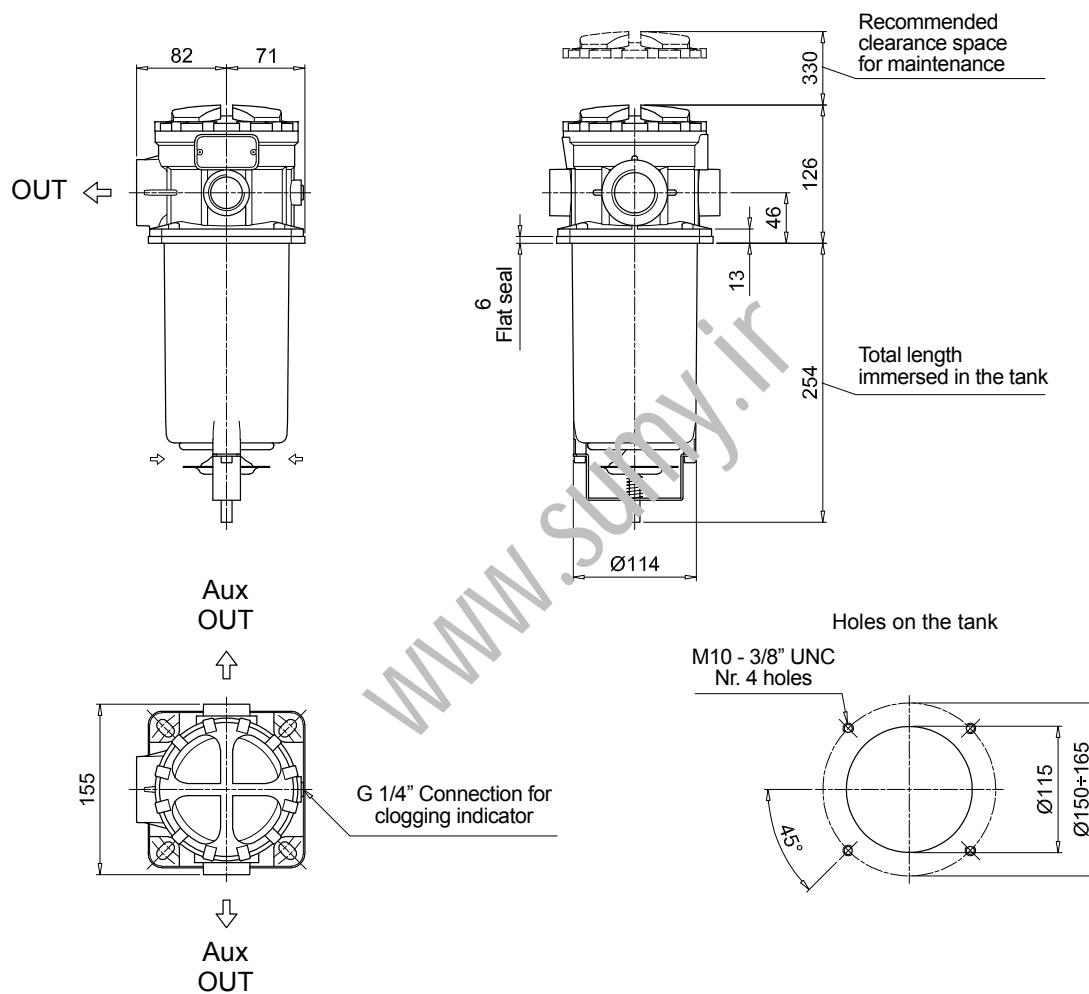


# SPARE PARTS SF2 250-350

Order number for spare parts

SF2 250

SF2 350

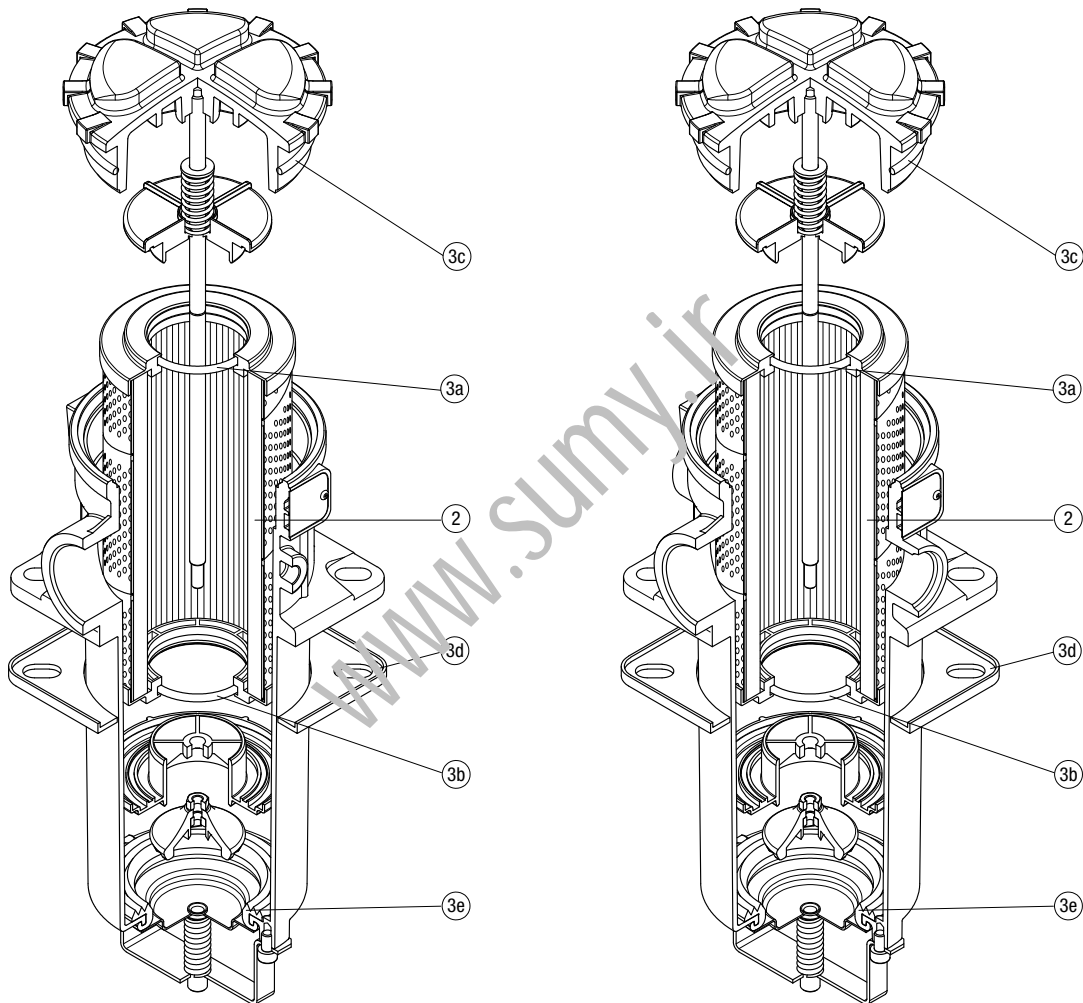

| Item:         | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          |
|---------------|-----------------|----------------------|----------|
| Filter series | Filter element  | Seal Kit code number |          |
| SF2 250 - 350 | See order table | NBR                  | FPM      |
|               | 2               | 02050586             | 02050587 |
|               |                 | 3 (3a ÷ 3e)          |          |

[www.sumy.ir](http://www.sumy.ir)



# SF2 500 series

Flow rate up to 700 l/min



# SF2 500 GENERAL INFORMATION

## Description

## Technical data

### Suction filters

#### Flow rate up to 700 l/min

SF2 500 is a range of suction filters with integrated shut-off valve for protection of the downstream pump against the coarse contamination. They are placed below the minimum oil level, directly connected to the suction line of the pump.

They can be fitted on the side or below the tank, allowing a more flexible design of the tank.

The shut-off valve closes automatically when the cover is removed, allowing the filter element replacement without the fluid drop.

#### Available features:

- Flanged connections up to 4", for a maximum flow rate of 700 l/min
- Optional hose fitting installed, to connect the suction line without the use of flanges
- Magnetic filter, to hold the ferrous particles
- Plastic and metal handle, to close the shut-off valve before the cover removal
- Electrical switch, to signal the closed shut-off valve
- Visual, electrical and electronic clogging indicators

#### Common application:

Industrial equipment

### Filter housing materials

- Housing:
  - Anodized Aluminium
  - Steel (chemical heat treatment): only for SF2 535 - 540
- Cover:
  - Anodized Aluminium
  - Steel (chemical heat treatment): only for SF2 535 - 540
- Optional flange:
  - Anodized Aluminium

### Elements

Fluid flow through the filter element from IN to OUT

### Seals

- Standard NBR series A
- Optional FPM series V

### Temperature

From -25 °C to +110 °C

### Note

SF2 500 filters mounting, see the drawings on page 51 and following



## Weights [kg]

| Filter series      |     |
|--------------------|-----|
| <b>SF2 500-501</b> | 4.0 |
| <b>SF2 503</b>     | 4.8 |
| <b>SF2 504</b>     | 5.8 |
| <b>SF2 505</b>     | 6.0 |
| <b>SF2 510</b>     | 7.2 |
| <b>SF2 535</b>     | 17  |
| <b>SF2 540</b>     | 19  |

# GENERAL INFORMATION SF2 500

## FILTER ASSEMBLY SIZING Flow rates [l/min]

| Filter series | Filter element design - N Series |                    |
|---------------|----------------------------------|--------------------|
|               | M25                              | M60<br>M90<br>M250 |
| SF2 500       | 219                              | 234                |
| SF2 501       | 259                              | 282                |
| SF2 503       | 325                              | 390                |
| SF2 504       | 484                              | 543                |
| SF2 505       | 199                              | 221                |
| SF2 510       | 259                              | 282                |
| SF2 535       | 439                              | 479                |
| SF2 540       | 644                              | 688                |


### Maximum flow rate for a complete suction filter with a pressure drop $\Delta p = 0.08$ bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.


For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.


| Filter series |   |
|---------------|---|
| SF2 500       | • |



### Hydraulic symbols

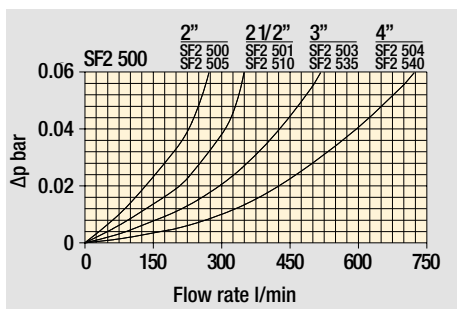

### Pressure drop Filter housings $\Delta p$ pressure drop

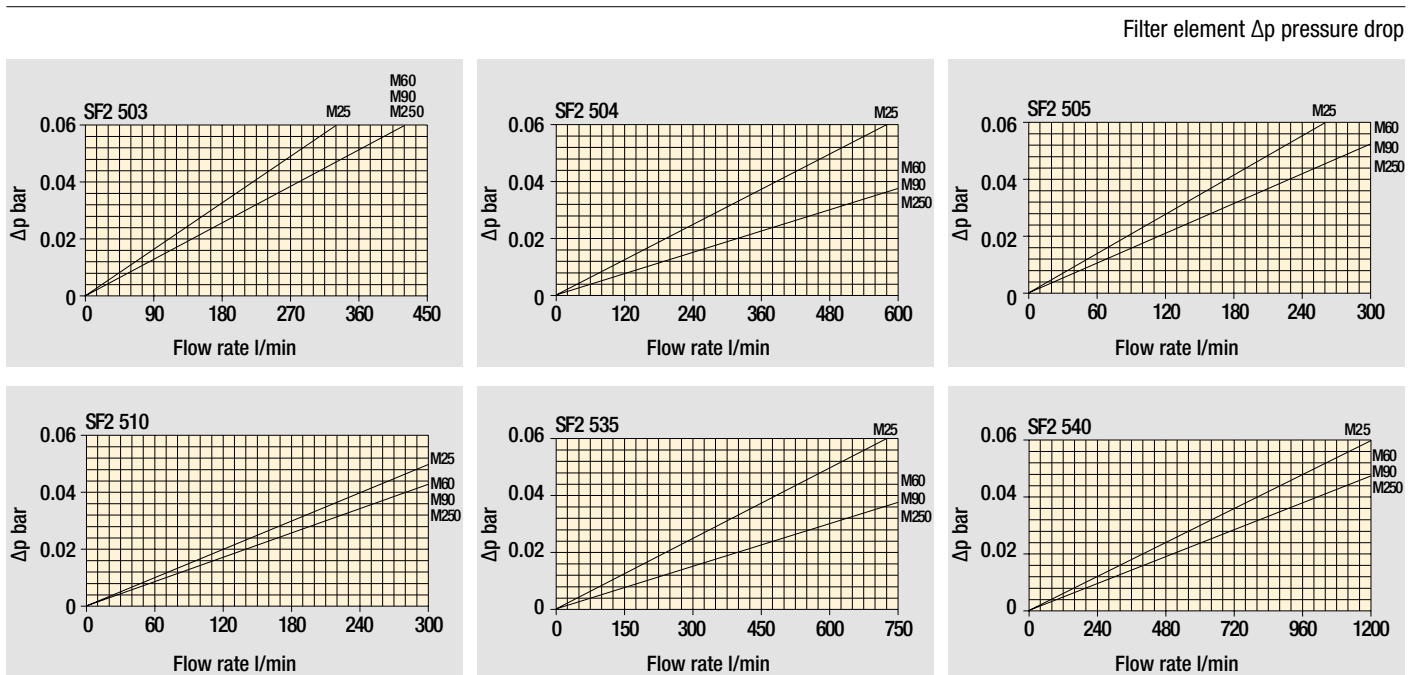

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

## Designation & Ordering code

### COMPLETE FILTER



|   |  |  |                        |                        |                        |                        |                               |
|---|--|--|------------------------|------------------------|------------------------|------------------------|-------------------------------|
| <b>Series and size</b>                          |  | Configuration example 1: <b>SF2500</b> <b>W</b> <b>F1</b> <b>D</b> <b>M25</b> <b>P01</b> |                        |                        |                        |                        |                               |
| <b>SF2500</b>                                   |  | Configuration example 2: <b>SF2535</b> <b>A</b> <b>F2</b> <b>C</b> <b>M60</b> <b>P01</b> |                        |                        |                        |                        |                               |
| <b>SF2501</b>                                   |  |  |                        |                        |                        |                        |                               |
| <b>SF2503</b>                                   |  |  |                        |                        |                        |                        |                               |
| <b>SF2504</b>                                   |  |  |                        |                        |                        |                        |                               |
| <b>SF2505</b>                                   |  |  |                        |                        |                        |                        |                               |
| <b>SF2510</b>                                   |  |  |                        |                        |                        |                        |                               |
| <b>SF2535</b>                                   |  |  |                        |                        |                        |                        |                               |
| <b>SF2540</b>                                   |  |  |                        |                        |                        |                        |                               |
| <b>Seals and treatments</b>                     |  | <b>Filtration rating</b>   |                        |                        |                        |                        |                               |
| <b>A</b> NBR                                    |  | <b>Mxx</b>   |                        |                        |                        |                        |                               |
| <b>V</b> FPM                                    |  |  |                        |                        |                        |                        |                               |
| <b>W</b> NBR compatible with fluids HFA-HFB-HFC |  |  |                        |                        |                        |                        |                               |
| <b>Z</b> FPM compatible with fluids HFA-HFB-HFC |  |  |                        |                        |                        |                        |                               |
| <b>Connections</b>                              |  |  |                        |                        |                        |                        |                               |
| <b>SF2500 - SF2505</b>                          |  | <b>SF2501 - SF2510</b>   |                        | <b>SF2503 - SF2535</b> |                        | <b>SF2504 - SF2540</b> |                               |
| <b>F1</b>                                       | 2" SAE 3000 psi/M                        | 2 1/2" SAE 3000 psi/M  | 3" SAE 3000 psi/M      | 4" SAE 3000 psi/M      |                        |                        |                               |
| <b>F2</b>                                       | 2" SAE 3000 psi/UNC                      | 2 1/2" SAE 3000 psi/UNC  | 3" SAE 3000 psi/UNC    | 4" SAE 3000 psi/UNC    |                        |                        |                               |
| <b>C1</b>                                       | Hose barb 2"/M                           | Hose barb 2 1/2"/M   | Hose barb 3"/M         | Hose barb 4"/M         |                        |                        |                               |
| <b>Microswitch and Handweel</b>                 |  |  |                        |                        |                        |                        |                               |
|   |  | <b>SF2500 - SF2501</b>   | <b>SF2503 - SF2504</b> | <b>SF2505 - SF2510</b> | <b>SF2535 - SF2540</b> |                        |                               |
| <b>S</b>  | Without microswitch, without handweel    | •  | •                      | •                      | •                      |                        |                               |
| <b>C</b>  | With microswitch, without handweel       |  |                        | •                      | •                      |                        |                               |
| <b>D</b>  | With microswitch, with Nylon handweel    | •  | •                      |                        |                        |                        |                               |
| <b>K</b>  | With microswitch, with steel handweel    | •  | •                      |                        |                        |                        |                               |
| <b>M</b>  | Without microswitch, with Nylon handweel | •  | •                      |                        |                        |                        |                               |
| <b>Filtration rating (filter media)</b>         |  |  |                        |                        |                        |                        |                               |
| <b>M25</b>                                      | Wire mesh 25 µm                          | <b>M90</b>   | Wire mesh 90 µm        |                        |                        |                        |                               |
| <b>M60</b>                                      | Wire mesh 60 µm                          | <b>M250</b>  | Wire mesh 250 µm       |                        |                        |                        |                               |
|   |  |  |                        |                        |                        |                        | <b>Execution</b>              |
|   |  |  |                        |                        |                        |                        | <b>P01</b> MP Filtri standard |
|   |  |  |                        |                        |                        |                        | <b>Pxx</b> Customized         |

### FILTER ELEMENT

|   |                 |               |                  |               |               |               |               |  |                               |  |  |  |
|---|-----------------|---------------|------------------|---------------|---------------|---------------|---------------|--|-------------------------------|--|--|--|
| <b>Element series and size</b>              |                 |               |                  |               |               |               |               | Configuration example 1: <b>SF510</b> <b>M25</b> <b>W</b> <b>P01</b> |                               |  |  |  |
|   |                 |               |                  |               |               |               |               | Configuration example 2: <b>SF535</b> <b>M60</b> <b></b> <b>P01</b>  |                               |  |  |  |
|   | <b>SF2500</b>   | <b>SF2501</b> | <b>SF2503</b>    | <b>SF2504</b> | <b>SF2505</b> | <b>SF2510</b> | <b>SF2535</b> | <b>SF2540</b>  |                               |  |  |  |
| <b>SF503</b>                                |                 |               | •                |               |               |               |               |  |                               |  |  |  |
| <b>SF504</b>                                |                 |               |                  | •             |               |               |               |  |                               |  |  |  |
| <b>SF505</b>                                |                 |               |                  |               | •             |               |               |  |                               |  |  |  |
| <b>SF510</b>                                | •               | •             |                  |               |               | •             |               |  |                               |  |  |  |
| <b>SF535</b>                                |                 |               |                  |               |               |               | •             |  |                               |  |  |  |
| <b>SF540</b>                                |                 |               |                  |               |               |               |               | •  |                               |  |  |  |
| <b>Filtration rating (filter media)</b>     |                 |               |                  |               |               |               |               |  |                               |  |  |  |
| <b>M25</b>                                  | Wire mesh 25 µm | <b>M90</b>    | Wire mesh 90 µm  |               |               |               |               |  |                               |  |  |  |
| <b>M60</b>                                  | Wire mesh 60 µm | <b>M250</b>   | Wire mesh 250 µm |               |               |               |               |  |                               |  |  |  |
| <b>Seals and treatments</b>                 |                 |               |                  |               |               |               |               |  | <b>Filtration rating</b>      |  |  |  |
|   |                 |               |                  |               |               |               |               |  | <b>Mxx</b> <b>Pxx</b>         |  |  |  |
| Standard version                            |                 |               |                  |               |               |               |               |  | • •                           |  |  |  |
| <b>W</b> Compatible with fluids HFA-HFB-HFC |                 |               |                  |               |               |               |               |  | •                             |  |  |  |
|   |                 |               |                  |               |               |               |               |  | <b>Execution</b>              |  |  |  |
|   |                 |               |                  |               |               |               |               |  | <b>P01</b> MP Filtri standard |  |  |  |
|   |                 |               |                  |               |               |               |               |  | <b>Pxx</b> Customized         |  |  |  |

### ACCESSORIES



| <b>Clogging indicators</b>                      | page |
|---|------|
| <b>VVA</b> Axial vacuum gauge                   | 59   |
| <b>VVR</b> Radial vacuum gauge                  | 59   |
| <b>VEA</b> Electrical vacuum indicator          | 58   |
| <b>VLA</b> Electrical / visual vacuum indicator | 58   |

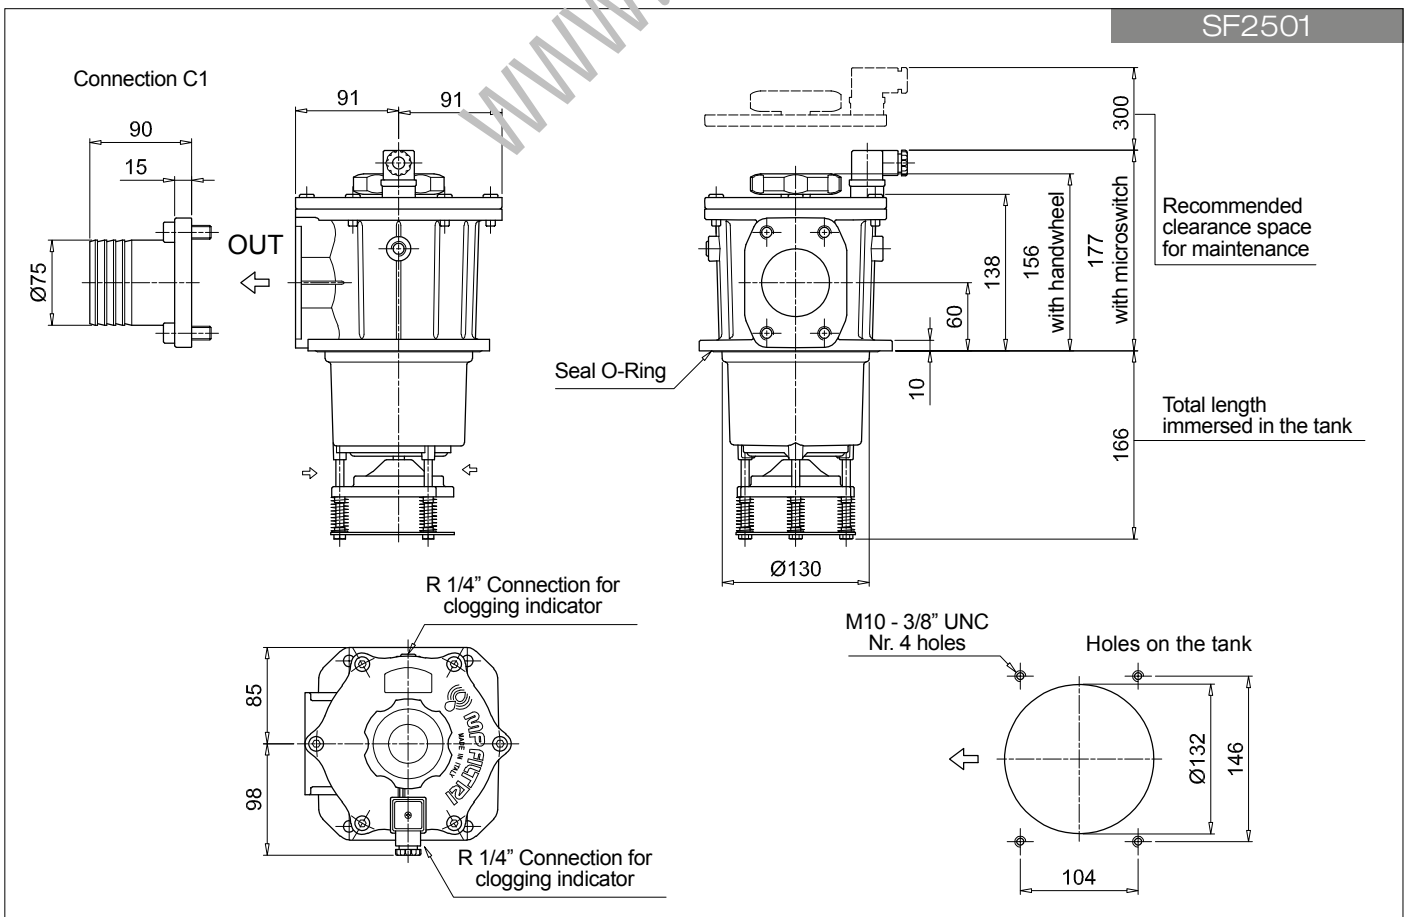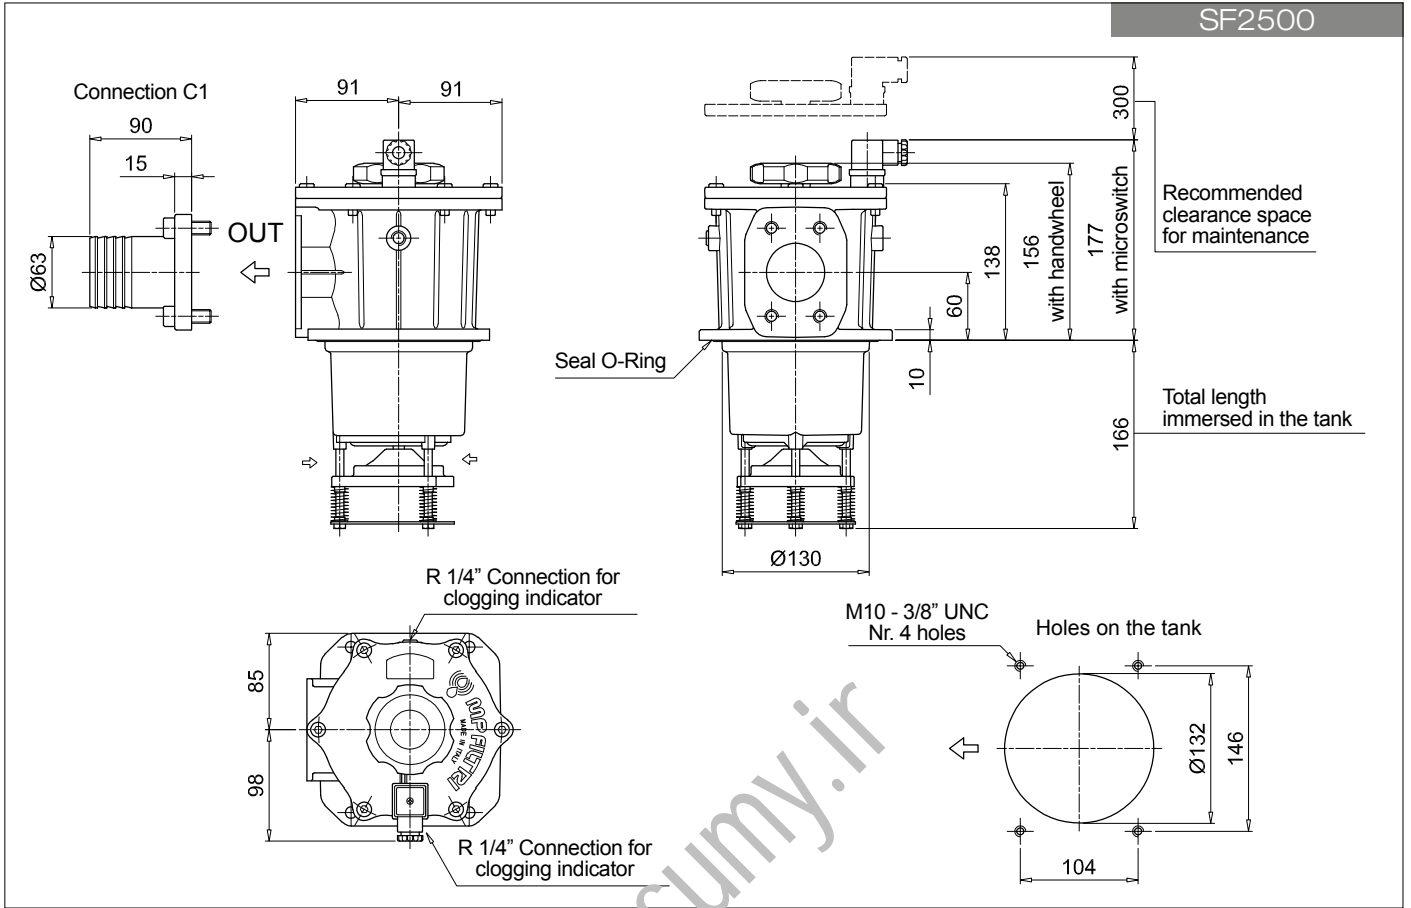


# SF2 500

SF2500 - SF2501 - SF2503 - SF2504 - SF2505 - SF2510 - SF2535 - SF2540

## Dimensions

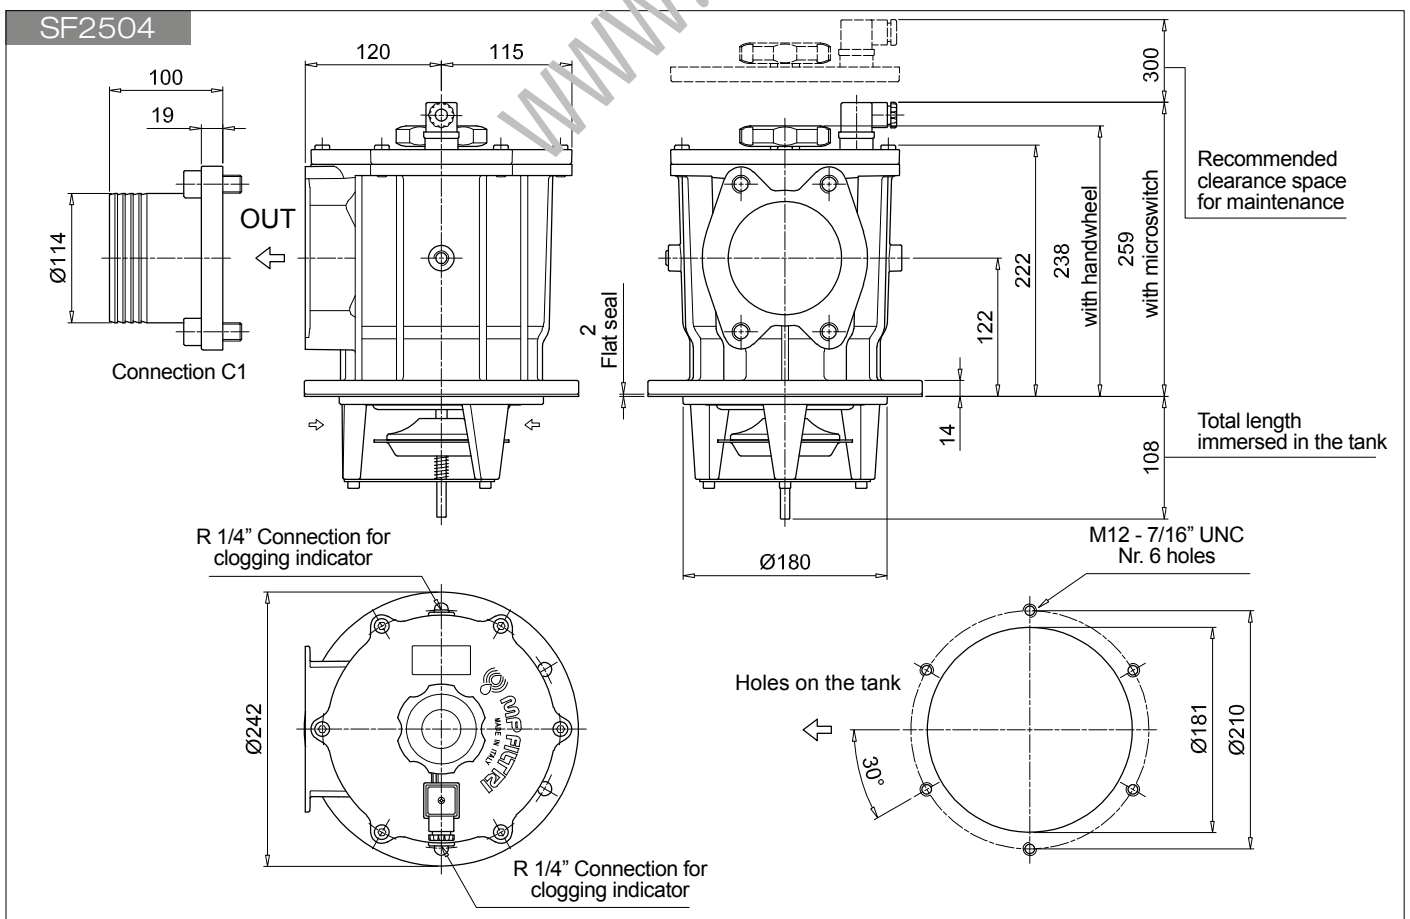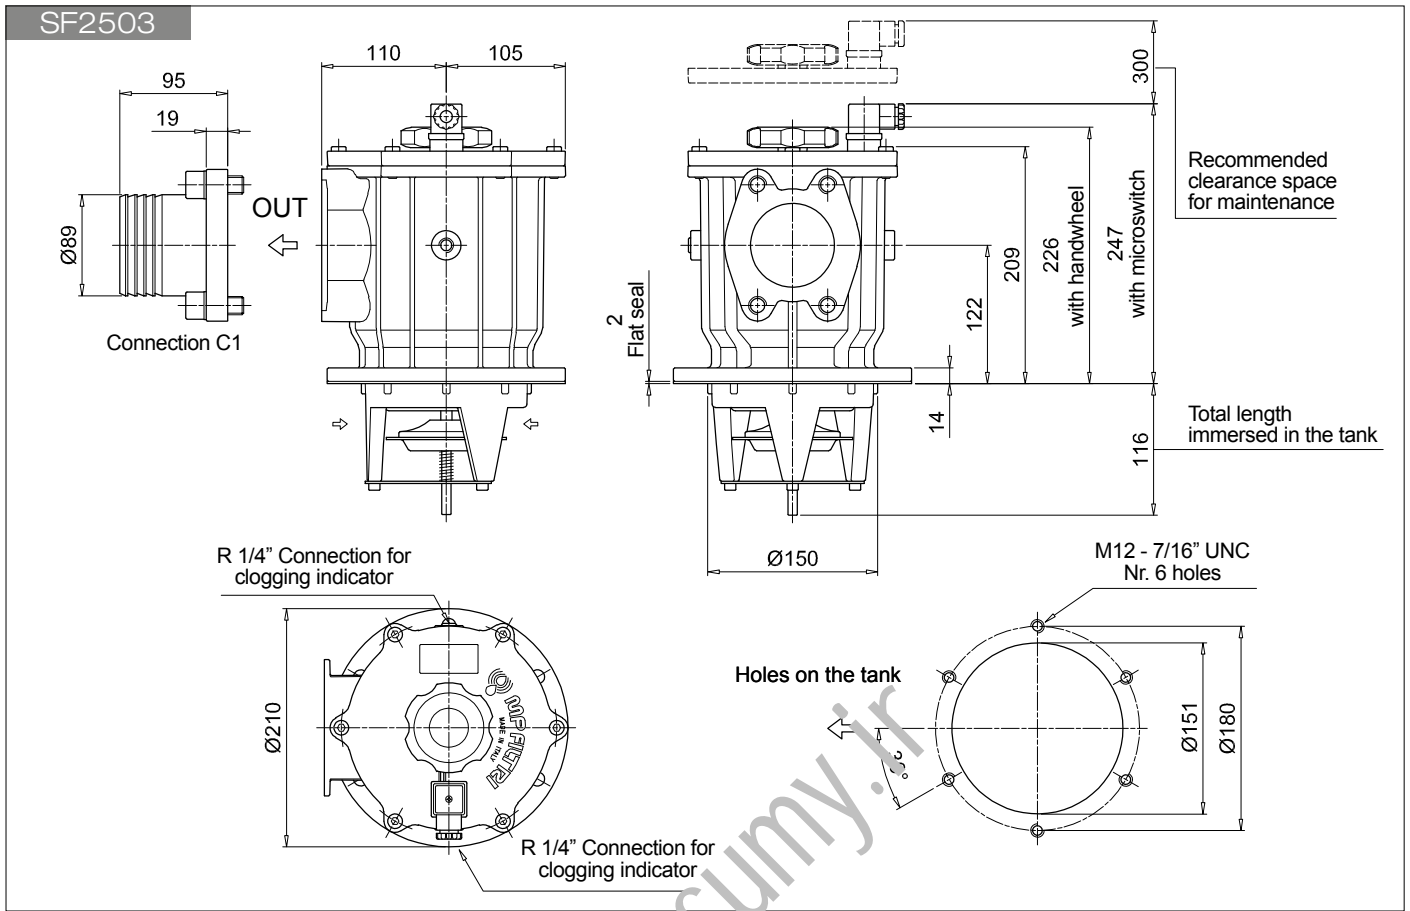



SF2505

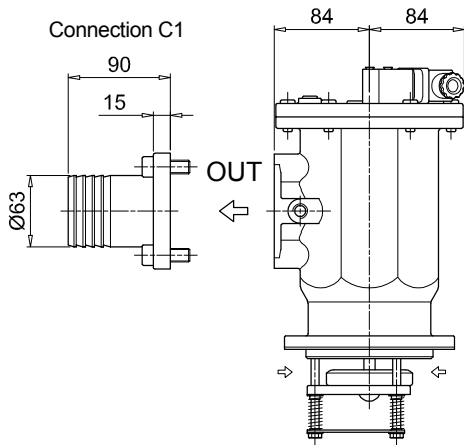

R 1/4" Connection for clogging indicator

R 1/4" Connection for clogging indicator


R 1/4" Connection for clogging indicator

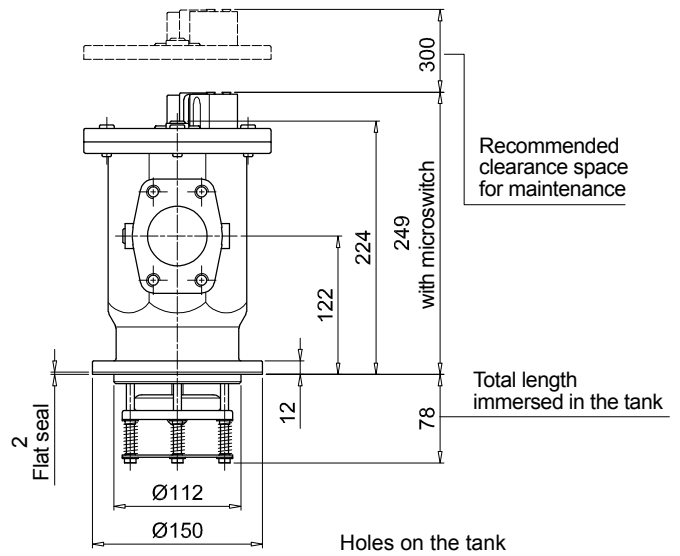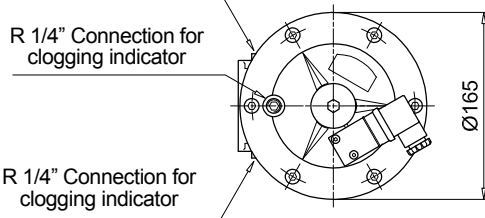


Recommended clearance space for maintenance

Total length immersed in the tank

M8 - 5/16" UNC  
Nr. 6 holes

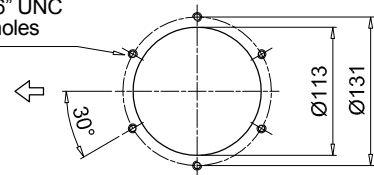



SF2510

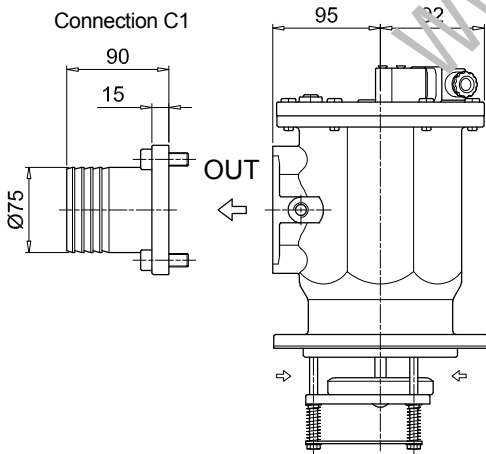

R 1/4" Connection for clogging indicator

R 1/4" Connection for clogging indicator

R 1/4" Connection for clogging indicator

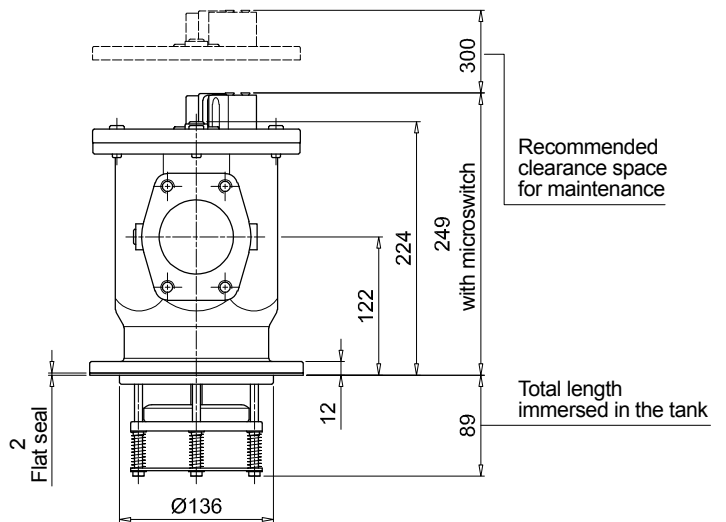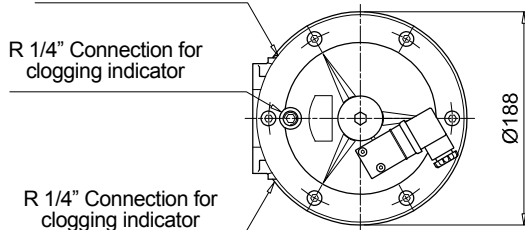


Recommended clearance space for maintenance

Total length immersed in the tank

M12 - 7/16" UNC  
Nr. 6 holes



Holes on the tank

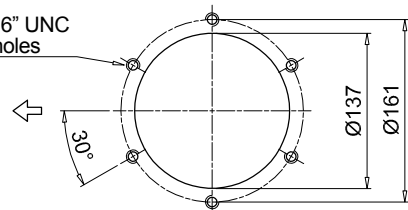




# SF2 500

SF2500 - SF2501 - SF2503 - SF2504 - SF2505 - SF2510 - SF2535 - SF2540

## Dimensions

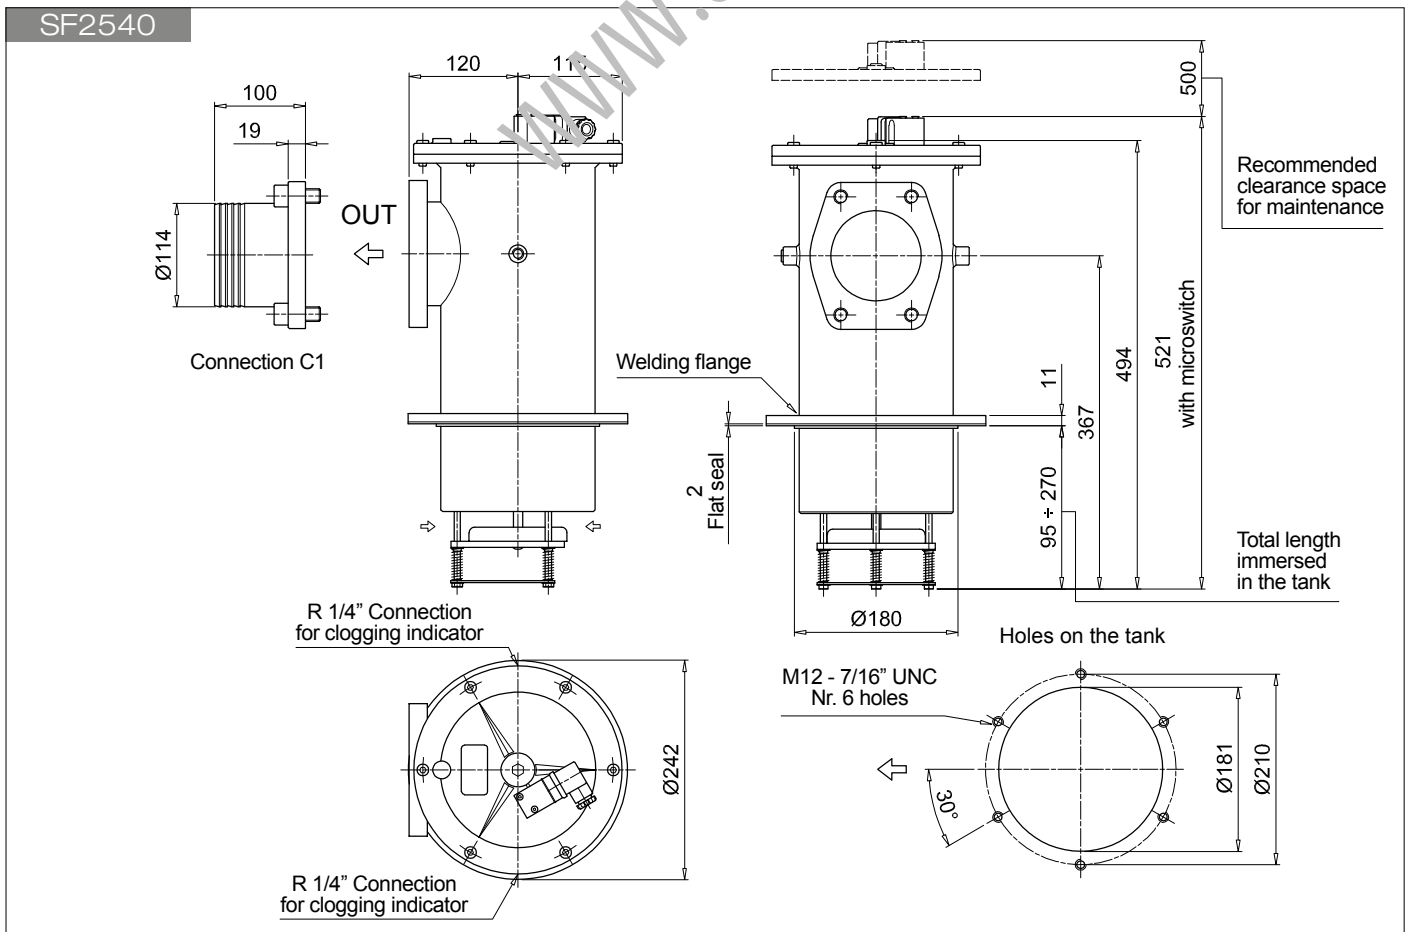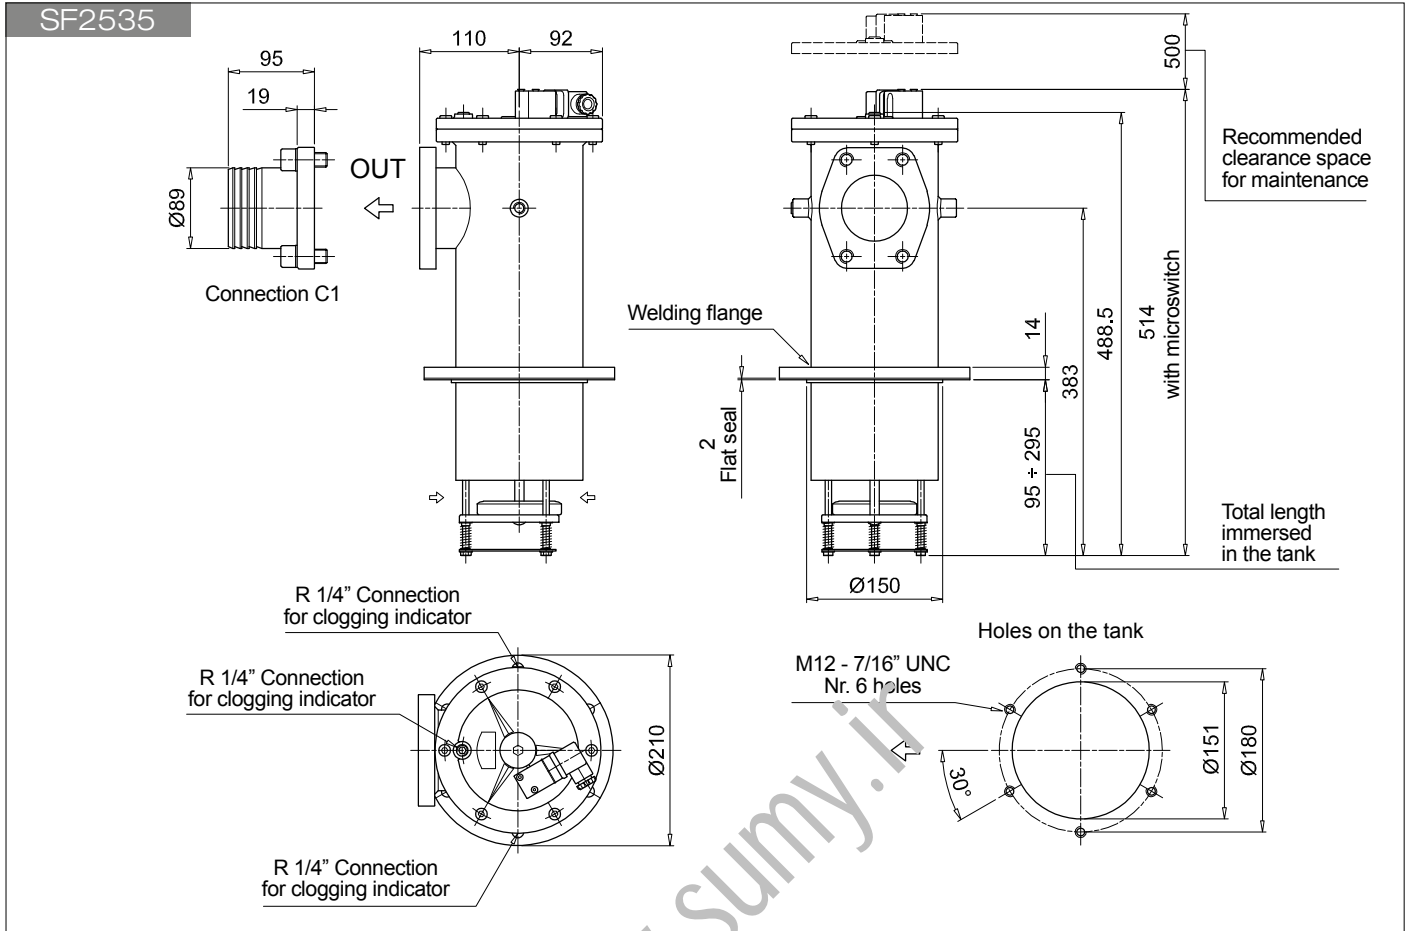



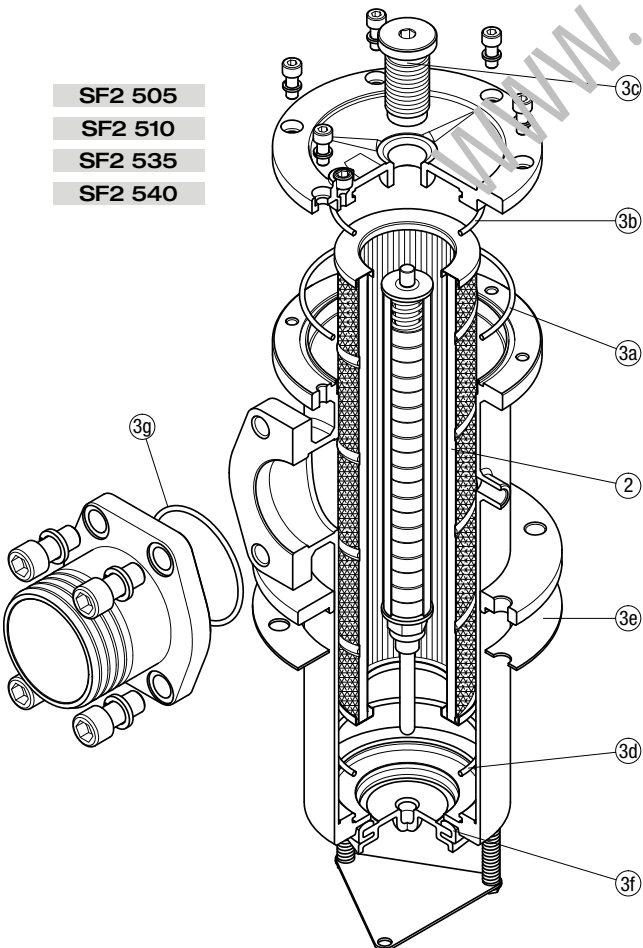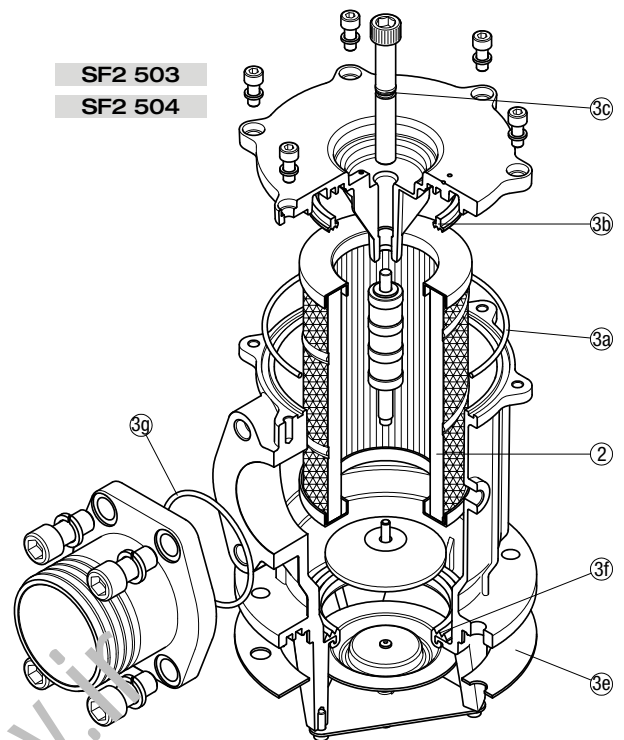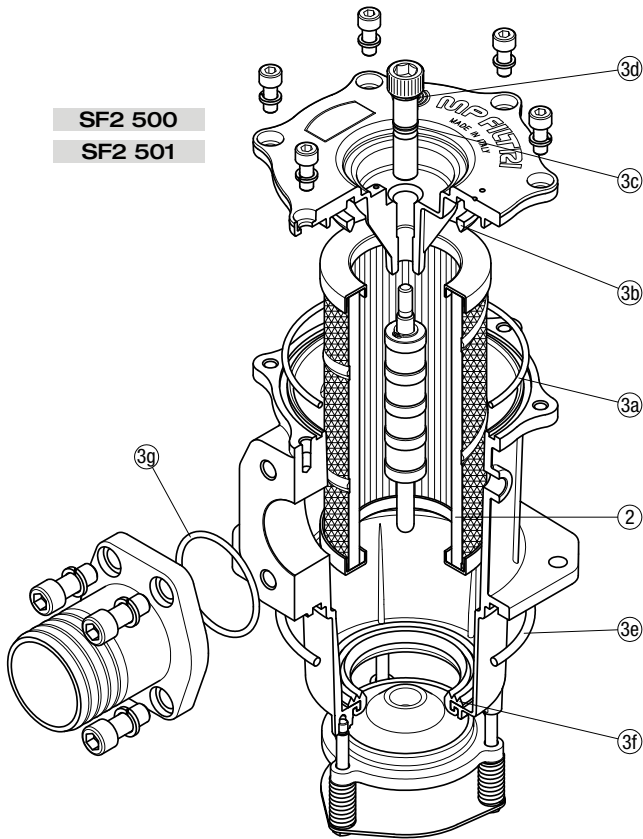

| Item:         | Q.ty: 1 pc.     |                      |          |
|---------------|-----------------|----------------------|----------|
|               | 2               | 3 (3a = 3g)          |          |
| Filter series | Filter element  | Seal Kit code number |          |
|               |                 | NBR                  | FPM      |
| SF2 500       | See order table | 02050141             | 02050142 |
| SF2 501       |                 | 02050143             | 02050144 |
| SF2 503       |                 | 02050070             | 02050071 |
| SF2 504       |                 | 02050072             | 02050073 |
| SF2 505       |                 | 02050043             | 02050044 |
| SF2 510       |                 | 02050045             | 02050046 |
| SF2 535       |                 | 02050051             | 02050052 |
| SF2 540       |                 | 02050053             | 02050054 |

www.sumy.ir

# Clogging indicators

## Vacuum indicators

### Introduction

Filter elements are efficient only if their Dirt Holding Capacity is fully exploited. This is achieved by using filter housings equipped with clogging indicators.

These devices trip when the clogging of the filter element causes an increase in pressure drop across the filter element.




The indicator is set to alarm before the element becomes fully clogged.

MP Filtri can supply vacuum indicators with a visual, electrical or both signals.

### Suitable indicator types

#### VACUUM INDICATORS

Vacuum indicators are used on the Suction line to check the efficiency of the filter element. They measure the pressure downstream of the filter element. Standard items are produced with R 1/4" EN 10226 connection.



### Quick reference guide

| Filter series                   | Visual indicator | Electrical indicator | Electrical / Visual indicator |
|---------------------------------|------------------|----------------------|-------------------------------|
| SF2 250 - 350                   | VVA16P01         |                      | VLA21AA51P01                  |
| SF2 500 - 501 - 503 - 504 - 505 | VVR16P01         | VEA21AA50P01         | VLA21AA52P01                  |
| SF2 510 - 535 - 540             |                  |                      | VLA21AA53P01                  |
|                                 |                  |                      | VLA21AA71P01                  |

# VACUUM INDICATORS

## Dimensions

| VE*50   |                      |
|---|----------------------|
| <b>Electrical Vacuum Indicator</b>  |                      |
| <b>R</b>  | <b>Ordering code</b> |
| EN 10226 - R1/4"  | VE A 21 A A 50 P01   |
|   |                      |
| <p><b>Hydraulic symbol</b></p>  |                      |
| <p><b>Electrical symbol</b></p>   |                      |
| <p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Base: Black Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: NBR</li> </ul>   |                      |
| <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Vacuum setting: -0.21 bar <math>\pm</math>10%</li> <li>- Max working pressure: 10 bar</li> <li>- Proof pressure: 15 bar</li> <li>- Working temperature: From -25 °C to +80 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids<br/>HFA, HFB, HFC according to ISO 2943</li> <li>- Degree of protection: IP65 according to EN 60529</li> </ul> |                      |
| <p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connection: EN 175301-803</li> <li>- Resistive load: 5 A / 14 Vdc<br/>4 A / 30 Vdc<br/>5 A / 125 Vac<br/>4 A / 250 Vac</li> <li>- Available Atex product: II 1GD Ex ia IIC Tx Ex ia IIIC Tx°C X</li> <li>- CE certification</li> </ul>  |                      |

| VL*51 - VL*52 - VL*53   |                      |
|---|----------------------|
| <b>Electrical/Visual Vacuum Indicator</b>   |                      |
| <b>R</b>  | <b>Ordering code</b> |
| EN 10226 - R1/4"  | VL A 21 A A xx P01   |
|   |                      |
| <p><b>Hydraulic symbol</b></p>  |                      |
| <p><b>Electrical symbol</b></p>   |                      |
| <p><b>Material:</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Base: Transparent Nylon</li> <li>- Contacts: Brass - Nylon</li> <li>- Seal: NBR</li> </ul>  |                      |
| <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Vacuum setting: -0.21 bar <math>\pm</math>10%</li> <li>- Max working pressure: 10 bar</li> <li>- Proof pressure: 15 bar</li> <li>- Working temperature: From -25 °C to +80 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids<br/>HFA, HFB, HFC according to ISO 2943</li> <li>- Degree of protection: IP65 according to EN 60529</li> </ul> |                      |
| <p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connection: EN 175301-803</li> <li>- Type: 51                      52                      53</li> <li>- Lamps: 24 Vdc              110 Vdc              230 Vac</li> <li>- Resistive load: 1 A / 24 Vdc    1 A / 110 Vdc    1 A / 230 Vac</li> </ul>   |                      |

| VL*71   |                       |
|---|-----------------------|
| <b>Electrical/Visual Vacuum Indicator</b>   |                       |
| <b>Connections</b>  | <b>Indicator code</b> |
| EN 10226 - R1/4"  | VL A 21 A A 71 P01    |
|   |                       |
| <p><b>Hydraulic symbol</b></p>  |                       |
| <p><b>Electrical symbol</b></p>   |                       |
| <p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Base: Black Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: NBR</li> </ul>   |                       |
| <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Vacuum setting: -0.21 bar <math>\pm</math>10%</li> <li>- Max working pressure: 10 bar</li> <li>- Proof pressure: 15 bar</li> <li>- Working temperature: From -25 °C to +80 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids<br/>HFA, HFB, HFC according to ISO 2943</li> <li>- Degree of protection: IP65 according to EN 60529</li> </ul> |                       |
| <p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connection: IEC 61076-2-101 D (M12)</li> <li>- Lamps: 24 Vdc</li> <li>- Resistive load: 0.4 A / 24 Vdc</li> </ul>   |                       |

| VVA                       |                      | Hydraulic symbol  | Materials   |  |       |     |       |     |       |     |
|---------------------------|----------------------|---|---|--|-------|-----|-------|-----|-------|-----|
| <b>Axial Vacuum Gauge</b> |                      |   |   | - Case: Painted Steel<br>- Window: Transparent plastic<br>- Dial: Painted Steel<br>- Pointer: Painted Aluminium<br>- Pressure connection: Brass<br>- Pressure element: Bourdon tube Cu-alloy soft soldered |       |     |       |     |       |     |
| <b>R</b>                  | <b>Ordering code</b> | <b>Dial scale</b>   |   |  |       |     |       |     |       |     |
| EN 10226 - R1/4"          | VV A 16 P01          |   | <b>Technical data</b><br>- Max working pressure: Static: 7 bar<br>Fluctuating: 6 bar<br>Short time: 10 bar<br>- Working temperature: From -40 °C to +60 °C<br>- Compatibility with fluids: Mineral oils, Synthetic fluids<br>HFA, HFB, HFC according to ISO 2943<br>- Accuracy: Class 2.5 according to EN 13190<br>- Degree of protection: IP31 according to EN 60529 |  |       |     |       |     |       |     |
|                           |                      | <b>Conversion to SI units</b><br><table border="1"> <thead> <tr> <th>[cmHg]</th> <th>[bar]</th> </tr> </thead> <tbody> <tr> <td>-12</td> <td>-0.16</td> </tr> <tr> <td>-18</td> <td>-0.24</td> </tr> <tr> <td>-76</td> <td>-1.01</td> </tr> </tbody> </table> |   | [cmHg]   | [bar] | -12 | -0.16 | -18 | -0.24 | -76 |
| [cmHg]                    | [bar]                |   |   |  |       |     |       |     |       |     |
| -12                       | -0.16                |   |   |  |       |     |       |     |       |     |
| -18                       | -0.24                |   |   |  |       |     |       |     |       |     |
| -76                       | -1.01                |   |   |  |       |     |       |     |       |     |

| VVR                        |                      | Hydraulic symbol  | Materials   |  |       |     |       |     |       |     |
|----------------------------|----------------------|---|---|--|-------|-----|-------|-----|-------|-----|
| <b>Radial Vacuum Gauge</b> |                      |   |   | - Case: Painted Steel<br>- Window: Transparent plastic<br>- Dial: Painted Steel<br>- Pointer: Painted Aluminium<br>- Pressure connection: Brass<br>- Pressure element: Bourdon tube Cu-alloy soft soldered |       |     |       |     |       |     |
| <b>R</b>                   | <b>Ordering code</b> | <b>Dial scale</b>   |   |  |       |     |       |     |       |     |
| EN 10226 - R1/4"           | VV R 16 P01          |   | <b>Technical data</b><br>- Max working pressure: Static: 7 bar<br>Fluctuating: 6 bar<br>Short time: 10 bar<br>- Working temperature: From -40 °C to +60 °C<br>- Compatibility with fluids: Mineral oils, Synthetic fluids<br>HFA, HFB, HFC according to ISO 2943<br>- Accuracy: Class 2.5 according to EN 13190<br>- Degree of protection: IP31 according to EN 60529 |  |       |     |       |     |       |     |
|                            |                      | <b>Conversion to SI units</b><br><table border="1"> <thead> <tr> <th>[cmHg]</th> <th>[bar]</th> </tr> </thead> <tbody> <tr> <td>-12</td> <td>-0.16</td> </tr> <tr> <td>-18</td> <td>-0.24</td> </tr> <tr> <td>-76</td> <td>-1.01</td> </tr> </tbody> </table> |   | [cmHg]   | [bar] | -12 | -0.16 | -18 | -0.24 | -76 |
| [cmHg]                     | [bar]                |   |   |  |       |     |       |     |       |     |
| -12                        | -0.16                |   |   |  |       |     |       |     |       |     |
| -18                        | -0.24                |   |   |  |       |     |       |     |       |     |
| -76                        | -1.01                |   |   |  |       |     |       |     |       |     |

| DESIGNATION & ORDERING CODE   |  |                          |                                    |           |    |   |   |    |                               |
|-------------------------------|--|--------------------------|------------------------------------|-----------|----|---|---|----|-------------------------------|
| <b>Series</b>                 |  | Configuration example 1: | VE                                 | A         | 21 | A | A | 50 | P01                           |
| <b>VE</b>                     | Electrical vacuum indicator                                      | Configuration example 2: | VL                                 | A         | 21 | A | A | 71 | P01                           |
| <b>VL</b>                     | Electrical/Visual vacuum indicator                               | Configuration example 3: | VV                                 | R         | 16 |   |   |    | P01                           |
| <b>VV</b>                     | Vacuum gauge   |                          |                                    |           |    |   |   |    |                               |
| <b>Type VE - VL</b>           |  | <b>Type VV</b>           |                                    |           |    |   |   |    |                               |
| <b>A</b>                      | Connection EN 10226 - R1/4"                                      | <b>A</b>                 | Axial connection EN 10226 - R1/4"  |           |    |   |   |    |                               |
|                               |  | <b>R</b>                 | Radial connection EN 10226 - R1/4" |           |    |   |   |    |                               |
| <b>Vacuum setting</b>         |  | <b>VE</b>                | <b>VL</b>                          | <b>VV</b> |    |   |   |    |                               |
| <b>16</b>                     | -0.16 bar  |                          |                                    | •         |    |   |   |    |                               |
| <b>21</b>                     | -0.21 bar  | •                        | •                                  |           |    |   |   |    |                               |
| <b>Seals</b>                  |  | <b>VE</b>                | <b>VL</b>                          | <b>VV</b> |    |   |   |    |                               |
| <b>A</b>                      | NBR  | •                        | •                                  |           |    |   |   |    |                               |
| <b>Thermostat</b>             |  | <b>VE</b>                | <b>VL</b>                          | <b>VV</b> |    |   |   |    |                               |
| <b>A</b>                      | Without  | •                        | •                                  |           |    |   |   |    |                               |
| <b>Electrical connections</b> |  | <b>VE</b>                | <b>VL</b>                          | <b>VV</b> |    |   |   |    |                               |
| <b>50</b>                     | Connection EN 175301-803   | •                        |                                    |           |    |   |   |    |                               |
| <b>51</b>                     | Connection EN 175301-803, transparent base with lamps 24 Vdc     |                          | •                                  |           |    |   |   |    |                               |
| <b>52</b>                     | Connection EN 175301-803, transparent base with lamps 110 Vdc    |                          | •                                  |           |    |   |   |    |                               |
| <b>53</b>                     | Connection EN 175301-803, transparent base with lamps 230 Vdc    |                          | •                                  |           |    |   |   |    |                               |
| <b>71</b>                     | Connection IEC 61076-2-101 D (M12), black base with lamps 24 Vdc |                          | •                                  |           |    |   |   |    |                               |
|                               |  |                          |                                    |           |    |   |   |    | <b>Option</b>                 |
|                               |  |                          |                                    |           |    |   |   |    | <b>P01</b> MP Filtri standard |
|                               |  |                          |                                    |           |    |   |   |    | <b>Pxx</b> Customized         |

**Return filters are used as process and safety filters to protect pumps and hydraulic circuits from contamination as per ISO 4406.**

**They are available in 8 styles:**

- **MPFX-MPF tank top semi-immersed filter with external / internal oil flow; standard filter element disassembly**
- **MPLX tank top semi-immersed filter completely interchangeable with Pall 8420 & 8520, with external / internal oil flow; easy filter element disassembly**
- **MPTX-MPT tank top semi-immersed filter with external / internal oil flow; easy filter element disassembly without any specific tool**
- **MFBX-MFB element and bowl assembly with optional cover and hold-down spring for dirtbox or molded tank applications**
- **MPH tank top semi-immersed filter with internal / external oil flow, therefore keeping the dirt inside the bowl and not on the filter element; standard filter element disassembly, magnetic filter as option**
- **MPI semi-immersed filter element specifically designed to be mounted directly on the oil tank; magnetic filter as option**
- **FRI, the oldest tank top semi-immersed return filter manufactured by MP FILTRI, with external / internal oil flow; available in the single or duplex versions with outlet connection, it can be used also as in-line filter**
- **RF2 semi-immersed filter with shut-off valve for side tank mounting, with external / internal oil flow; easy filter element disassembly without any specific tool.**

## FILTER SIZING

For the proper corrective factor Y see chapter at page 24

# Return filters



|      |         |
|------|---------|
| MPFX | page 63 |
| MPLX | 91      |
| MPTX | 99      |
| MFBX | 117     |
| MPF  | 125     |
| MPT  | 153     |
| MFB  | 171     |

|             |          |
|-------------|----------|
| MPH         | page 179 |
| MPI         | 203      |
| FRI         | 215      |
| RF2         | 231      |
| INDICATORS  | 238      |
| ACCESSORIES | 248      |



THE NEW FILTER CONCEPT

MPFX  
MPLX  
MPTX  
MFBX  
MFX  
series

### NEW FILTER ELEMENT WITH EXCLUSIVE INTERFACE CONNECTION

- ◆ **Protects the machine from improper use of non-original products.**
- ◆ **Safety of constant quality protection & reliability**

With exclusive filter element you are sure that only MP Filtri filter elements can be used, ensuring the best cleaning level of the oil due to the use of originals filter elements.



Filter element featuring our UNIQUE end cap with polygonal design.



UNIQUE polygonal spigot fitting within the filter bowl.

The products identified as MPFX, MPLX, MPTX, MFBX and MFX are protected by:

- ◆ Italian Patent n° 102014902261205
- ◆ Canadian Patent n° 2,937,258
- ◆ European Patent n° 16181725.9
- ◆ US Patent n° 15/224,337



# MPFX series

Maximum working pressure up to 800 kPa (8 bar) - Flow rate up to 900 l/min



# MPFX GENERAL INFORMATION

## Description

## Technical data

### Return filter

**Maximum working pressure up to 800 kPa (8 bar)**  
**Flow rate up to 900 l/min**

MPFX is a range of return filters for protection of the reservoir against the system contamination.

They are directly fixed to the reservoir, in immersed or semi-immersed position.

The filter output must be always immersed into the fluid to avoid aeration or foam generation into the reservoir.

### Available features:

- Female threaded connections up to 2" and flanged connections up to 2", for a maximum flow rate of 900 l/min
- Multiple connections, to connect several return lines or drains
- Fine filtration rating, to get a good cleanliness level into the reservoir
- Bypass valve integrated into the filter element, to relieve excessive pressure drop across the filter media
- 2, 3 or 4 fixing holes for installation, to suit a variety of reservoir surfaces
- O-ring or Flat Seal to suit a variety of reservoir surfaces
- Oil dipstick, to easily check the level of the fluid into the reservoir (sold as separate item)
- Extension tube, to be used in deep reservoirs (sold as separate item)
- Diffuser, to reduce the risk of aeration, foaming and noise (sold as separate item)
- Filler plug, to fill cleaned fluid into the tank without an additional connection
- Visual, electrical and electronic clogging indicators
- MYclean interface connection, to protect the product against non-original spare parts
- External protective wrap, to optimize the flow through the element and to save the element efficiency against non-proper handling

### Common applications:

- Light Industrial equipment
- Mobile application

### Filter housing materials

- Head: Aluminium
- Cover  
Nylon: MPFX 030-100-104-110  
Aluminium: MPFX 181-182-184-191-192-194-400-410-450-451-750
- Bowl: Nylon

### Bypass valve

- Opening pressure 175 kPa (1.75 bar)  $\pm 10\%$
- Opening pressure 300 kPa (3 bar)  $\pm 10\%$

### $\Delta p$ element type

- Microfiber filter elements - series H: 10 bar
- Fluid flow through the filter element from OUT to IN

### Seals

- Standard NBR series A
- Optional FPM series V

### Temperature

From -25 °C to +110 °C

### Note

MPFX filters are provided for vertical mounting



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series       | Weights [kg] |      |      |      | Volumes [dm <sup>3</sup> ] |        |      |      |      |      |
|---------------------|--------------|------|------|------|----------------------------|--------|------|------|------|------|
|                     | Length       | 1    | 2    | 3    | 4                          | Length | 1    | 2    | 3    | 4    |
| <b>MPFX 030</b>     |              | 0.40 | -    | -    | -                          |        | 0.29 | -    | -    | -    |
| <b>MPFX 100</b>     |              | 0.61 | 0.64 | 0.67 | 0.74                       |        | 0.64 | 0.85 | 1.20 | 1.65 |
| <b>MPFX 104</b>     |              | 0.82 | 0.96 | 1.02 | 1.25                       |        | 0.64 | 0.85 | 1.20 | 1.65 |
| <b>MPFX 110</b>     |              | 0.64 | 0.68 | 0.71 | 0.78                       |        | -    | -    | -    | -    |
| <b>MPFX 181</b>     |              | 2.20 | 3.00 | -    | -                          |        | 2.50 | 4.00 | -    | -    |
| <b>MPFX 182</b>     |              | 2.30 | 3.10 | -    | -                          |        | 2.50 | 4.00 | -    | -    |
| <b>MPFX 184</b>     |              | 2.55 | 3.45 | -    | -                          |        | 2.65 | 4.45 | -    | -    |
| <b>MPFX 191</b>     |              | -    | 3.00 | -    | -                          |        | -    | 4.25 | -    | -    |
| <b>MPFX 192</b>     |              | -    | 3.10 | -    | -                          |        | -    | 4.25 | -    | -    |
| <b>MPFX 194</b>     |              | -    | 3.45 | -    | -                          |        | -    | 4.45 | -    | -    |
| <b>MPFX 400</b>     |              | 3.35 | 3.65 | 3.90 | -                          |        | 3.70 | 4.60 | 5.40 | -    |
| <b>MPFX 410</b>     |              | 3.55 | 3.85 | 4.10 | -                          |        | 3.70 | 4.60 | 5.40 | -    |
| <b>MPFX 450-451</b> |              | 3.95 | 4.25 | 4.50 | -                          |        | 3.70 | 4.60 | 5.40 | -    |
| <b>MPFX 750</b>     |              | 6.30 | -    | -    | -                          |        | 8.45 | -    | -    | -    |

| Filter series           | Length   | Filter element design - H series |     |     |     |     | Filter element design - N series |     |     |
|-------------------------|----------|----------------------------------|-----|-----|-----|-----|----------------------------------|-----|-----|
|                         |          | A03                              | A06 | A10 | A16 | A25 | M25<br>M60<br>M90                | P10 | P25 |
| <b>MPFX 030</b>         | <b>1</b> | 7                                | 10  | 24  | 29  | 47  | 84                               | 60  | 66  |
| <b>MPFX 100-104-110</b> | <b>1</b> | 18                               | 20  | 53  | 56  | 65  | 153                              | 87  | 96  |
|                         | <b>2</b> | 28                               | 38  | 65  | 75  | 95  | 158                              | 111 | 123 |
|                         | <b>3</b> | 48                               | 55  | 125 | 135 | 169 | 289                              | 224 | 251 |
|                         | <b>4</b> | 79                               | 89  | 180 | 185 | 198 | 306                              | 264 | 289 |
| <b>MPFX 181-182-184</b> | <b>1</b> | 127                              | 148 | 235 | 243 | 278 | 441                              | 285 | 299 |
|                         | <b>2</b> | 231                              | 262 | 358 | 382 | 388 | 472                              | 404 | 412 |
| <b>MPFX 191-192-194</b> | <b>2</b> | 261                              | 305 | 489 | 528 | 546 | 696                              | 583 | 598 |
| <b>MPFX 400</b>         | <b>1</b> | 150                              | 171 | 294 | 304 | 350 | 585                              | 370 | 390 |
|                         | <b>2</b> | 237                              | 252 | 454 | 462 | 589 | 868                              | 619 | 645 |
|                         | <b>3</b> | 248                              | 288 | 553 | 609 | 621 | 885                              | 680 | 703 |
| <b>MPFX 410</b>         | <b>1</b> | 146                              | 167 | 277 | 285 | 325 | 512                              | 341 | 357 |
|                         | <b>2</b> | 226                              | 239 | 396 | 402 | 485 | 644                              | 503 | 519 |
|                         | <b>3</b> | 236                              | 269 | 462 | 497 | 505 | 653                              | 539 | 553 |
| <b>MPFX 450-451</b>     | <b>1</b> | 150                              | 171 | 294 | 304 | 350 | 585                              | 370 | 390 |
|                         | <b>2</b> | 237                              | 252 | 454 | 462 | 589 | 868                              | 619 | 645 |
|                         | <b>3</b> | 248                              | 288 | 553 | 609 | 621 | 885                              | 680 | 703 |
| <b>MPFX 750</b>         | <b>1</b> | 392                              | 465 | 623 | 700 | 769 | 929                              | 804 | 819 |

### Maximum flow rate for a complete return filter with a pressure drop $\Delta p > 0.5$ bar.



The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.80 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.

## Hydraulic symbols







| Filter series   | Style 1 connection | Style 2 connections |
|-----------------|--------------------|---------------------|
| <b>MPFX 030</b> | •                  |                     |
| <b>MPFX 100</b> | •                  |                     |
| <b>MPFX 104</b> | •                  |                     |
| <b>MPFX 110</b> |                    | •                   |
| <b>MPFX 181</b> | •                  |                     |
| <b>MPFX 182</b> |                    | •                   |
| <b>MPFX 184</b> | •                  | •                   |
| <b>MPFX 191</b> | •                  |                     |
| <b>MPFX 192</b> | •                  |                     |
| <b>MPFX 194</b> | •                  | •                   |
| <b>MPFX 400</b> | •                  |                     |
| <b>MPFX 410</b> |                    | •                   |
| <b>MPFX 450</b> | •                  |                     |
| <b>MPFX 451</b> |                    | •                   |
| <b>MPFX 750</b> | •                  |                     |







# MPFX GENERAL INFORMATION

## Pressure drop

### Filter housings $\Delta p$ pressure drop

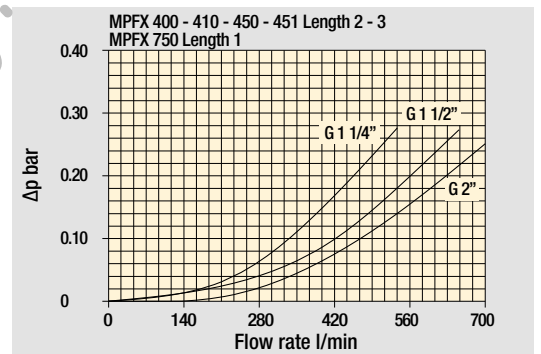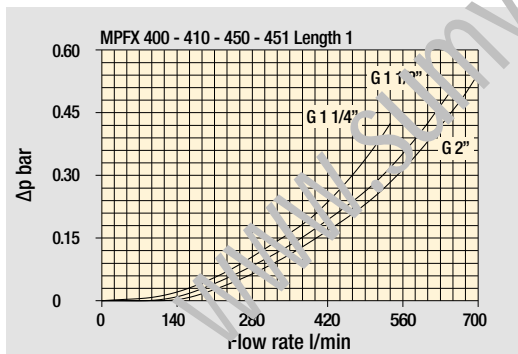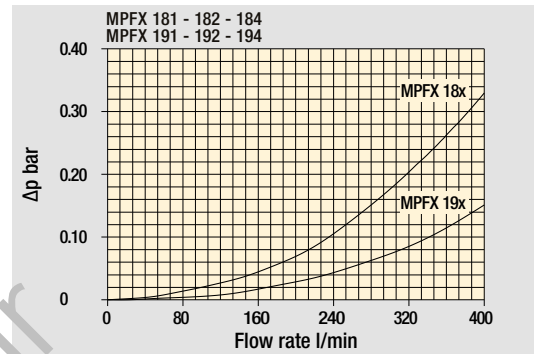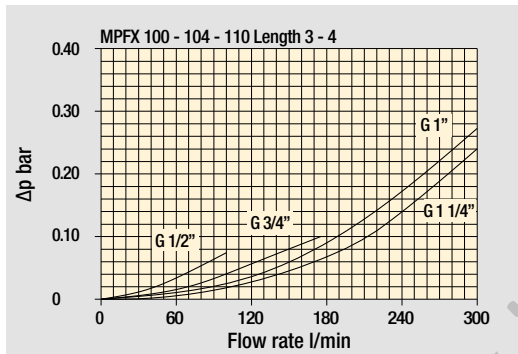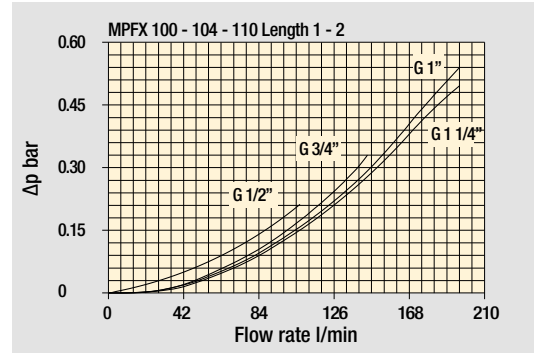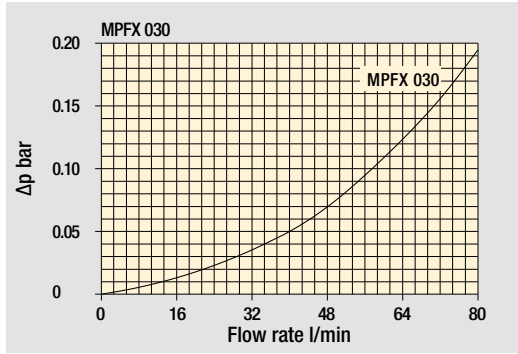

### Bypass valve pressure drop

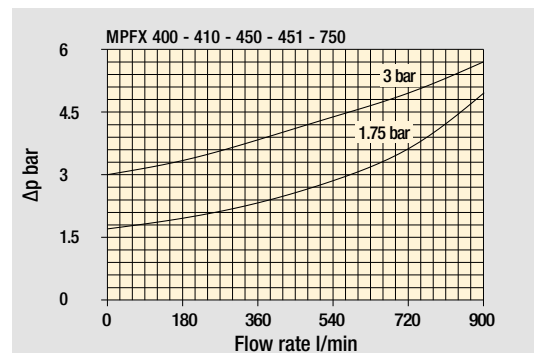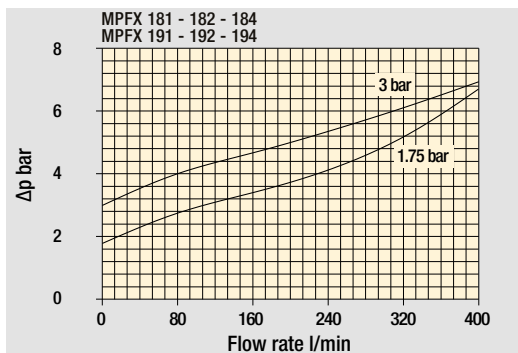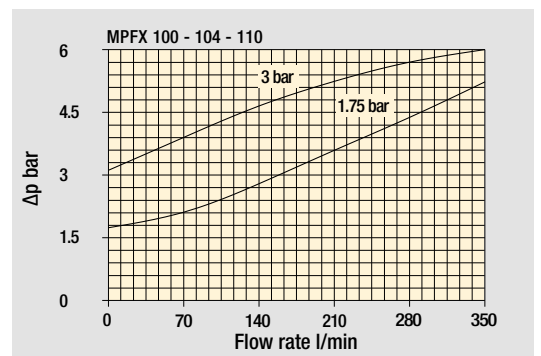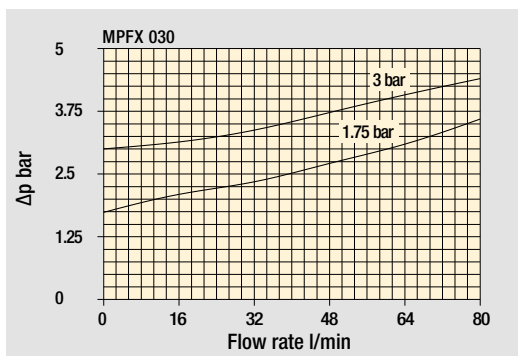

The curves are plotted using mineral oil with density of  $0.86 \text{ kg/dm}^3$  in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

Standard - Single IN port



Double IN port  
Option: double indicator port



Double IN port - Drain port  
Option: indicator port




Double IN port - Double drain port



www.sumy.ir



MPFX030

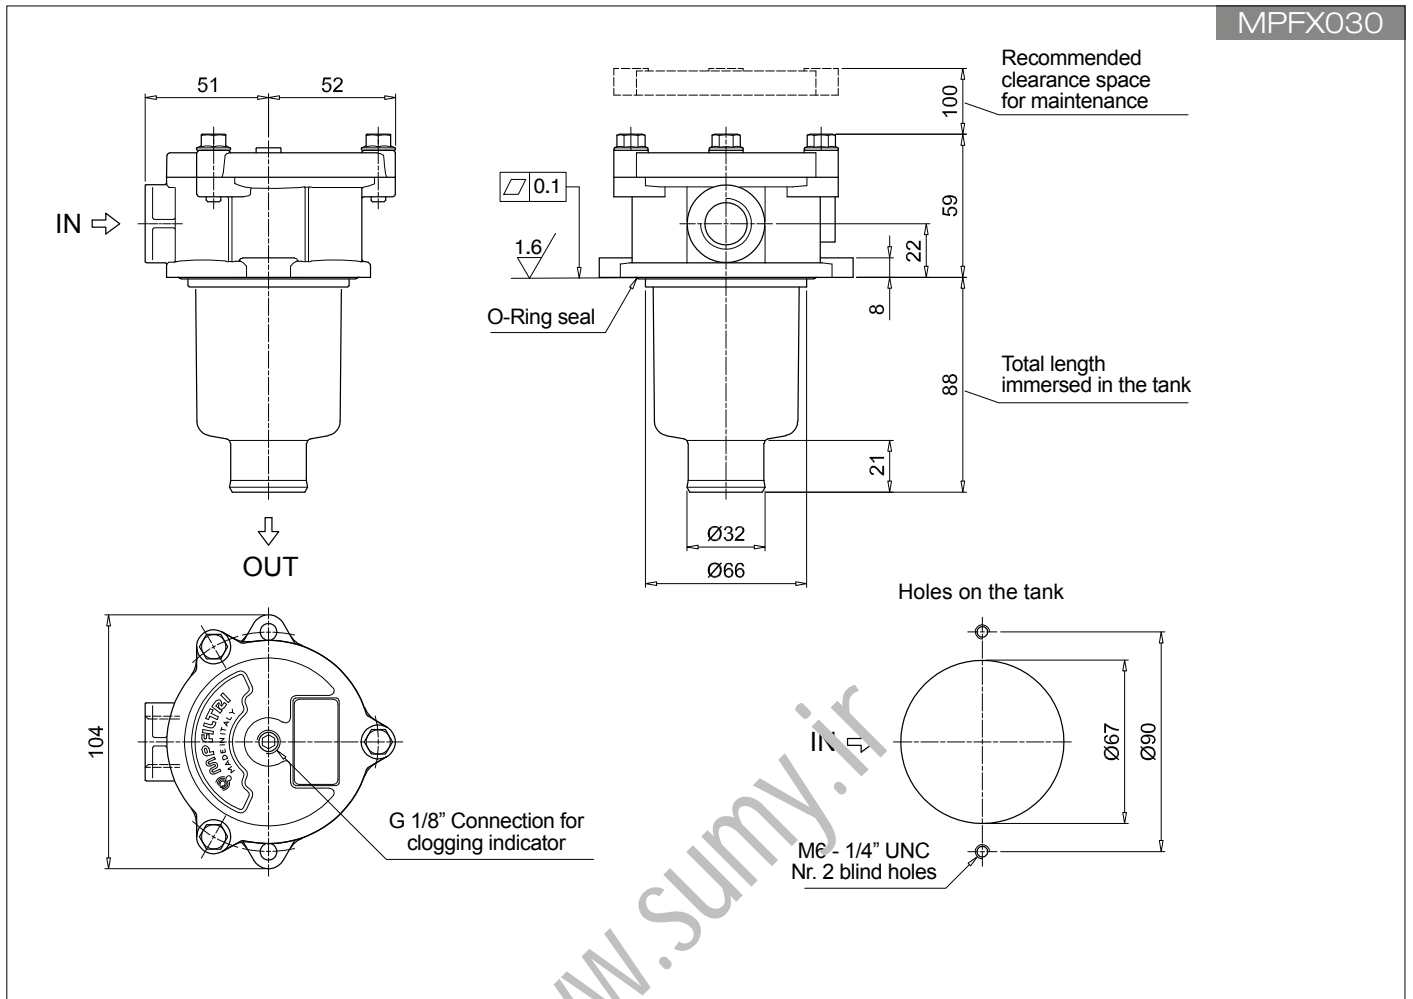

# MPFX MPFX100 - MPFX104

## Designation & Ordering code

### COMPLETE FILTER

|   |  |   |  |                     |  |                                    |  |                 |  |                 |  |
|---|--|---|--|---------------------|--|------------------------------------|--|-----------------|--|-----------------|--|
| <b>Series and size</b>                                      |  | Configuration example 1: <b>MPFX100</b>   <b>2</b>   <b>W</b>   <b>G3</b>   <b>A06</b>   <b>W</b>   <b>B</b>   <b>P01</b> |  |                     |  |                                    |  |                 |  |                 |  |
| <b>MPFX100   MPFX104</b> Filter element with private spigot |  | Configuration example 2: <b>MPFX104</b>   <b>4</b>   <b>A</b>   <b>G8</b>   <b>P10</b>   <b>N</b>   <b>E</b>   <b>P01</b> |  |                     |  |                                    |  |                 |  |                 |  |
| <b>Length</b>   |  |   |  |                     |  |                                    |  |                 |  |                 |  |
| <b>1</b>   <b>2</b>   <b>3</b>   <b>4</b>                   |  |   |  |                     |  |                                    |  |                 |  |                 |  |
| <b>Seals and treatments</b>                                 |  |   |  |                     |  |                                    |  |                 |  |                 |  |
| <b>A</b> NBR  |  |   |  |                     |  |                                    |  |                 |  |                 |  |
| <b>V</b> FPM  |  |   |  |                     |  |                                    |  |                 |  |                 |  |
| <b>W</b> NBR head anodized                                  |  |   |  |                     |  |                                    |  |                 |  |                 |  |
| <b>Z</b> FPM head anodized                                  |  |   |  |                     |  |                                    |  |                 |  |                 |  |
| <b>Connections</b>  |  | <b>Size 100</b>   |  | <b>Size 104</b>     |  | <b>Connections</b>                 |  | <b>Size 100</b> |  | <b>Size 104</b> |  |
| <b>G1</b> G 1/2"  |  | •   |  | •                   |  | <b>G7</b> SAE 8 - 3/4" - 16 UNF    |  | •               |  | •               |  |
| <b>G2</b> G 3/4"  |  | •   |  | •                   |  | <b>G8</b> SAE 12 - 1 1/16" - 12 UN |  | •               |  | •               |  |
| <b>G3</b> G 1"  |  | •   |  | •                   |  | <b>G9</b> SAE 16 - 1 5/16" - 12 UN |  | •               |  | •               |  |
| <b>G4</b> 1/2" NPT  |  | •   |  | •                   |  |                                    |  |                 |  |                 |  |
| <b>G5</b> 3/4" NPT  |  | •   |  | •                   |  |                                    |  |                 |  |                 |  |
| <b>G6</b> 1" NPT  |  | •   |  | •                   |  |                                    |  |                 |  |                 |  |
| <b>Filtration rating (filter media)</b>                     |  |   |  |                     |  |                                    |  |                 |  |                 |  |
| <b>A03</b> Inorganic microfiber 3 µm                        |  |   |  |                     |  |                                    |  |                 |  |                 |  |
| <b>A06</b> Inorganic microfiber 6 µm                        |  |   |  |                     |  |                                    |  |                 |  |                 |  |
| <b>A10</b> Inorganic microfiber 10 µm                       |  |   |  |                     |  |                                    |  |                 |  |                 |  |
| <b>A16</b> Inorganic microfiber 16 µm                       |  |   |  |                     |  |                                    |  |                 |  |                 |  |
| <b>A25</b> Inorganic microfiber 25 µm                       |  |   |  |                     |  |                                    |  |                 |  |                 |  |
| <b>M25</b> Wire mesh 25 µm                                  |  |   |  |                     |  |                                    |  |                 |  |                 |  |
| <b>M60</b> Wire mesh 60 µm                                  |  |   |  |                     |  |                                    |  |                 |  |                 |  |
| <b>M90</b> Wire mesh 90 µm                                  |  |   |  |                     |  |                                    |  |                 |  |                 |  |
| <b>P10</b> Resin impregnated paper 10 µm                    |  |   |  |                     |  |                                    |  |                 |  |                 |  |
| <b>P25</b> Resin impregnated paper 25 µm                    |  |   |  |                     |  |                                    |  |                 |  |                 |  |
| <b>Element Δp</b>   |  | <b>Filter media</b>   |  |                     |  |                                    |  |                 |  |                 |  |
|   |  | <b>Axx</b>   <b>Mxx</b>   <b>Pxx</b>  |  |                     |  |                                    |  |                 |  |                 |  |
| <b>N</b> 10 bar   |  | •   |  |                     |  |                                    |  |                 |  |                 |  |
| <b>H</b> 10 bar   |  | •   |  |                     |  |                                    |  |                 |  |                 |  |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC    |  | •   |  |                     |  |                                    |  |                 |  |                 |  |
|   |  |   |  | <b>Bypass valve</b> |  | <b>Execution</b>                   |  |                 |  |                 |  |
|   |  |   |  | <b>E</b> 3 bar      |  | <b>P01</b> MP Filtri standard      |  |                 |  |                 |  |
|   |  |   |  | <b>B</b> 1.75 bar   |  | <b>Pxx</b> Customized              |  |                 |  |                 |  |



### FILTER ELEMENT

|  |  |  |  |              |  |                     |  |                               |  |  |  |
|--|--|--|--|--------------|--|---------------------|--|-------------------------------|--|--|--|
| <b>Element series and size</b>                           |  | Configuration example 1: <b>MFX100</b>   <b>2</b>   <b>A06</b>   <b>W</b>   <b>B</b>   <b></b>   <b>P01</b>  |  |              |  |                     |  |                               |  |  |  |
| <b>MFX100</b> Filter element with private spigot         |  | Configuration example 2: <b>MFX100</b>   <b>4</b>   <b>P10</b>   <b>N</b>   <b>B</b>   <b>E</b>   <b>P01</b> |  |              |  |                     |  |                               |  |  |  |
| <b>Element length</b>                                    |  |  |  |              |  |                     |  |                               |  |  |  |
| <b>1</b>   <b>2</b>   <b>3</b>   <b>4</b>                |  |  |  |              |  |                     |  |                               |  |  |  |
| <b>Filtration rating (filter media)</b>                  |  |  |  |              |  |                     |  |                               |  |  |  |
| <b>A03</b> Inorganic microfiber 3 µm                     |  |  |  |              |  |                     |  |                               |  |  |  |
| <b>A06</b> Inorganic microfiber 6 µm                     |  |  |  |              |  |                     |  |                               |  |  |  |
| <b>A10</b> Inorganic microfiber 10 µm                    |  |  |  |              |  |                     |  |                               |  |  |  |
| <b>A16</b> Inorganic microfiber 16 µm                    |  |  |  |              |  |                     |  |                               |  |  |  |
| <b>A25</b> Inorganic microfiber 25 µm                    |  |  |  |              |  |                     |  |                               |  |  |  |
| <b>M25</b> Wire mesh 25 µm                               |  |  |  |              |  |                     |  |                               |  |  |  |
| <b>M60</b> Wire mesh 60 µm                               |  |  |  |              |  |                     |  |                               |  |  |  |
| <b>M90</b> Wire mesh 90 µm                               |  |  |  |              |  |                     |  |                               |  |  |  |
| <b>P10</b> Resin impregnated paper 10 µm                 |  |  |  |              |  |                     |  |                               |  |  |  |
| <b>P25</b> Resin impregnated paper 25 µm                 |  |  |  |              |  |                     |  |                               |  |  |  |
| <b>Element Δp</b>  |  | <b>Filter media</b>  |  |              |  |                     |  |                               |  |  |  |
|  |  | <b>Axx</b>   <b>Mxx</b>   <b>Pxx</b>   |  |              |  |                     |  |                               |  |  |  |
| <b>N</b> 10 bar  |  | •  |  |              |  |                     |  |                               |  |  |  |
| <b>H</b> 10 bar  |  | •  |  |              |  |                     |  |                               |  |  |  |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC |  | •  |  |              |  |                     |  |                               |  |  |  |
|  |  |  |  | <b>Seals</b> |  | <b>Bypass valve</b> |  | <b>Execution</b>              |  |  |  |
|  |  |  |  | <b>B</b> NBR |  | <b>E</b> 3 bar      |  | <b>P01</b> MP Filtri standard |  |  |  |
|  |  |  |  | <b>V</b> FPM |  | 1.75 bar            |  | <b>Pxx</b> Customized         |  |  |  |

### ACCESSORIES

|   |     |   |         |             |  |
|---|-----|---|---------|-------------|--|
| <b>Indicators</b>   |     | <b>page</b>                                       |         | <b>page</b> |  |
| <b>BVA</b> Axial pressure gauge                           | 240 | <b>BEA</b> Electrical pressure indicator          | 239     |             |  |
| <b>BVR</b> Radial pressure gauge                          | 240 | <b>BEM</b> Electrical pressure indicator          | 239     |             |  |
| <b>BVP</b> Visual pressure indicator with automatic reset | 241 | <b>BLA</b> Electrical / visual pressure indicator | 239-240 |             |  |
| <b>BVQ</b> Visual pressure indicator with manual reset    | 241 |   |         |             |  |
| <b>Additional features</b>                                |     | <b>page</b>                                       |         | <b>page</b> |  |
| <b>TE</b> Extension tube                                  | 248 | <b>T5</b> Filler plug M30x1.5                     | 249     |             |  |
| <b>DFS</b> Diffuser with fast lock connection             | 249 | <b>DPT</b> Dipstick                               | 249     |             |  |



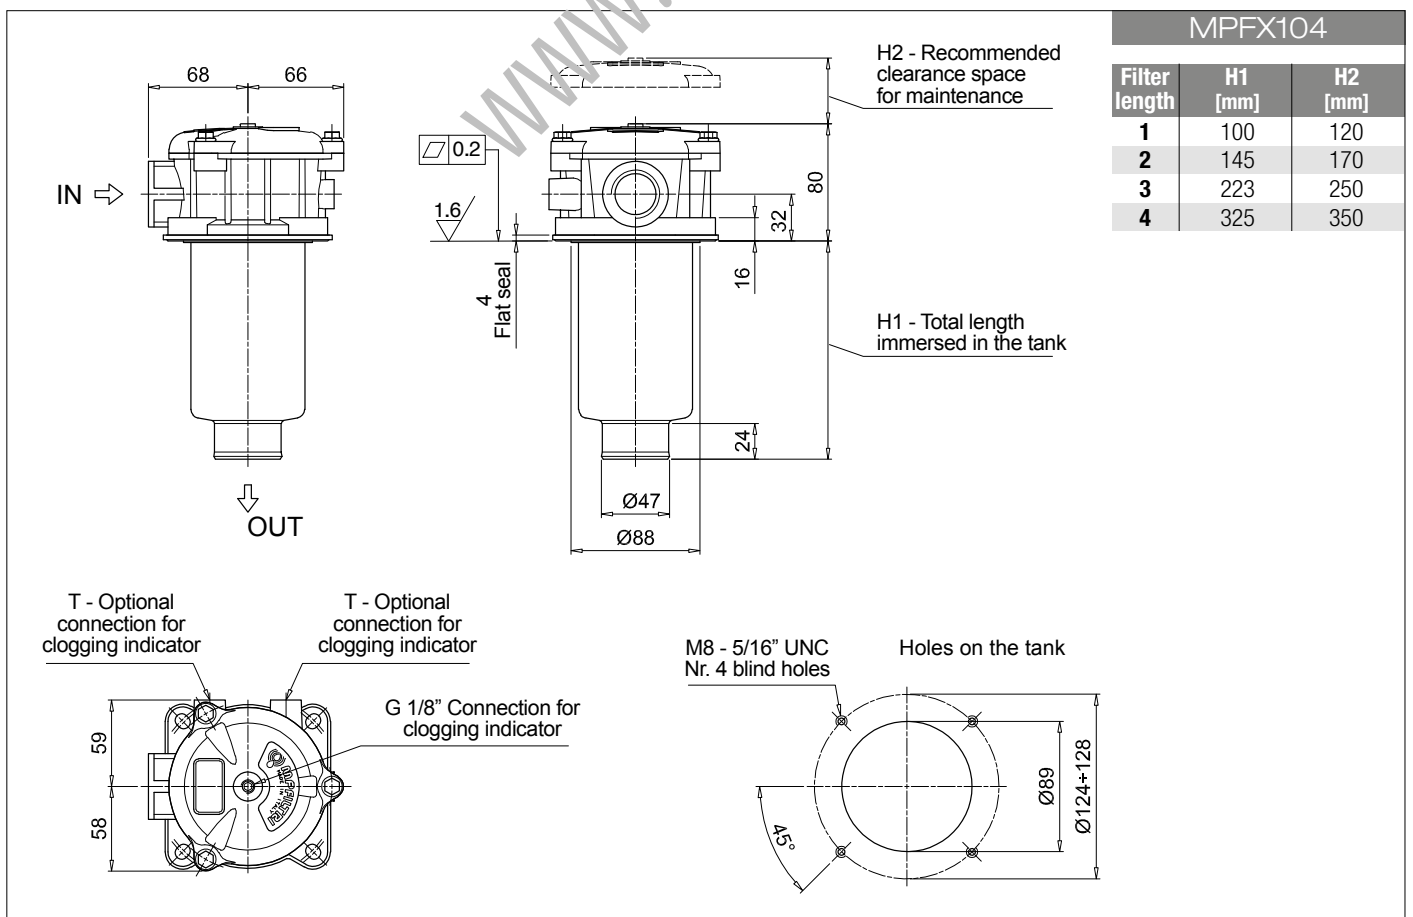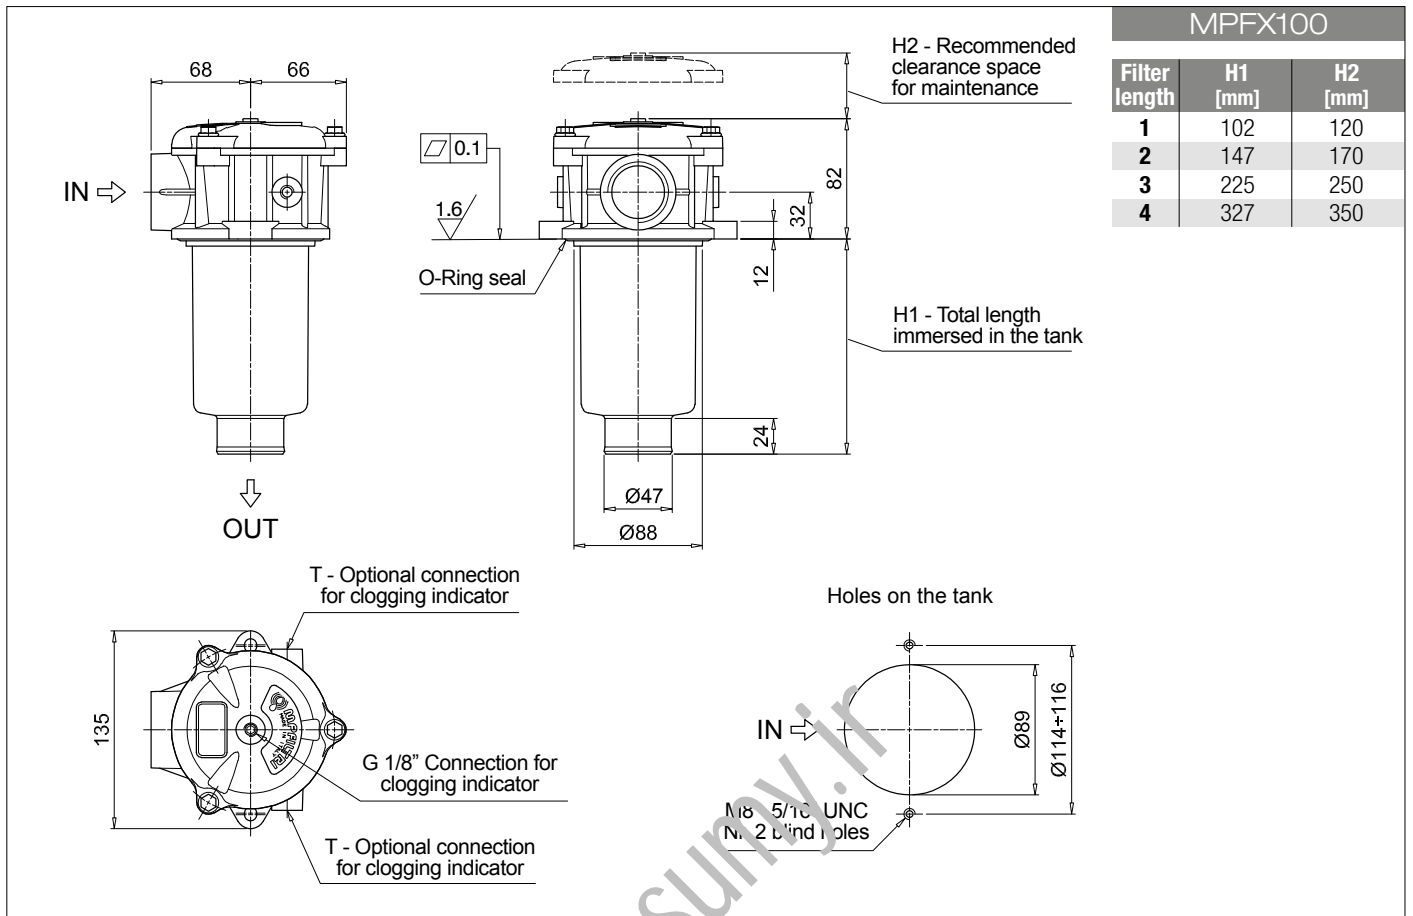

# MPFX MPFX110

## Designation & Ordering code

### COMPLETE FILTER


|  |                            |   |                                    |                        |                       |                               |  |  |  |  |  |              |                            |              |                            |
|--|----------------------------|---|------------------------------------|------------------------|-----------------------|-------------------------------|--|--|--|--|--|--------------|----------------------------|--------------|----------------------------|
| <b>Series and size</b>                                   |                            | Configuration example 1: <b>MPFX110</b>   <b>3</b>   <b>Z</b>   <b>G4</b>   <b>2</b>   <b>M25</b>   <b>W</b>   <b>B</b>   <b>P01</b>                                  |                                    |                        |                       |                               |  |  |  |  |  |              |                            |              |                            |
| <b>MPFX110</b> Filter element with private spigot        |                            | Configuration example 2: <b>MPFX110</b>   <b>4</b>   <b>A</b>   <b>G8</b>   <b>1</b>   <b>P10</b>   <b>N</b>   <b>E</b>   <b>P01</b>                                  |                                    |                        |                       |                               |  |  |  |  |  |              |                            |              |                            |
| <b>Length</b>  |                            | <b>1</b>   <b>2</b>   <b>3</b>   <b>4</b>   |                                    |                        |                       |                               |  |  |  |  |  |              |                            |              |                            |
| <b>Seals and treatments</b>                              |                            | <table border="0"> <tr> <td><b>A</b> NBR</td> <td><b>W</b> NBR head anodized</td> </tr> <tr> <td><b>V</b> FPM</td> <td><b>Z</b> FPM head anodized</td> </tr> </table> |                                    |                        |                       |                               |  |  |  |  |  | <b>A</b> NBR | <b>W</b> NBR head anodized | <b>V</b> FPM | <b>Z</b> FPM head anodized |
| <b>A</b> NBR   | <b>W</b> NBR head anodized |   |                                    |                        |                       |                               |  |  |  |  |  |              |                            |              |                            |
| <b>V</b> FPM   | <b>Z</b> FPM head anodized |   |                                    |                        |                       |                               |  |  |  |  |  |              |                            |              |                            |
| <b>Main Connections</b>                                  | <b>Aux size 1</b>          | <b>Aux size 2</b>   | <b>Main Connections</b>            | <b>Aux size 1</b>      | <b>Aux size 2</b>     |                               |  |  |  |  |  |              |                            |              |                            |
| <b>G1</b> G 1/2"   | G 3/8"                     | G 1/2"  | <b>G7</b> SAE 8 - 3/4" - 16 UNF    | SAE 6 - 9/16" - 18 UNF | SAE 8 - 3/4" - 16 UNF |                               |  |  |  |  |  |              |                            |              |                            |
| <b>G2</b> G 3/4"   |                            |   | <b>G8</b> SAE 12 - 1 1/16" - 12 UN |                        |                       |                               |  |  |  |  |  |              |                            |              |                            |
| <b>G3</b> G 1"   | 3/8" NPT                   | 1/2" NPT  | <b>G9</b> SAE 16 - 1 5/16" - 12 UN | G 3/8"                 | G 1/2"                |                               |  |  |  |  |  |              |                            |              |                            |
| <b>G4</b> 1/2" NPT                                       |                            |   | <b>G10</b> G 1 1/4"                |                        |                       |                               |  |  |  |  |  |              |                            |              |                            |
| <b>G5</b> 3/4" NPT                                       |                            |   | <b>G11</b> 1 1/4" NPT              |                        |                       |                               |  |  |  |  |  |              |                            |              |                            |
| <b>G6</b> 1" NPT   |                            |   | <b>G12</b> SAE 20 - 1 5/8" - 12 UN | SAE 6 - 9/16" - 18 UNF | SAE 8 - 3/4" - 16 UNF |                               |  |  |  |  |  |              |                            |              |                            |
| <b>Aux connection - see previous table</b>               |                            |   |                                    |                        |                       |                               |  |  |  |  |  |              |                            |              |                            |
| <b>1</b> Aux size 1                                      |                            | <b>2</b> Aux size 2   |                                    |                        |                       |                               |  |  |  |  |  |              |                            |              |                            |
| <b>Filtration rating (filter media)</b>                  |                            |   |                                    |                        |                       |                               |  |  |  |  |  |              |                            |              |                            |
| <b>A03</b> Inorganic microfiber 3 µm                     |                            | <b>M25</b> Wire mesh 25 µm  |                                    |                        |                       |                               |  |  |  |  |  |              |                            |              |                            |
| <b>A06</b> Inorganic microfiber 6 µm                     |                            | <b>M60</b> Wire mesh 60 µm  |                                    |                        |                       |                               |  |  |  |  |  |              |                            |              |                            |
| <b>A10</b> Inorganic microfiber 10 µm                    |                            | <b>M90</b> Wire mesh 90 µm  |                                    |                        |                       |                               |  |  |  |  |  |              |                            |              |                            |
| <b>A16</b> Inorganic microfiber 16 µm                    |                            | <b>P10</b> Resin impregnated paper 10 µm  |                                    |                        |                       |                               |  |  |  |  |  |              |                            |              |                            |
| <b>A25</b> Inorganic microfiber 25 µm                    |                            | <b>P25</b> Resin impregnated paper 25 µm  |                                    |                        |                       |                               |  |  |  |  |  |              |                            |              |                            |
| <b>Element Δp</b>  |                            | <b>Filter media</b>   |                                    |                        |                       |                               |  |  |  |  |  |              |                            |              |                            |
| <b>N</b> 10 bar  |                            | <b>Axx</b>   <b>Mxx</b>   <b>Pxx</b>  |                                    |                        |                       |                               |  |  |  |  |  |              |                            |              |                            |
| <b>H</b> 10 bar  |                            | • •   |                                    |                        |                       |                               |  |  |  |  |  |              |                            |              |                            |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC |                            | • •   |                                    |                        |                       |                               |  |  |  |  |  |              |                            |              |                            |
|  |                            |   |                                    | <b>Bypass valve</b>    |                       | <b>Execution</b>              |  |  |  |  |  |              |                            |              |                            |
|  |                            |   |                                    | <b>E</b> 3 bar         |                       | <b>P01</b> MP Filtri standard |  |  |  |  |  |              |                            |              |                            |
|  |                            |   |                                    | <b>B</b> 1.75 bar      |                       | <b>Pxx</b> Customized         |  |  |  |  |  |              |                            |              |                            |

### FILTER ELEMENT

|  |  |   |  |              |  |                     |  |                               |  |  |  |  |  |
|--|--|---|--|--------------|--|---------------------|--|-------------------------------|--|--|--|--|--|
| <b>Element series and size</b>                           |  | Configuration example 1: <b>MPFX100</b>   <b>3</b>   <b>M25</b>   <b>W</b>   <b>V</b>   <b></b>   <b>P01</b>  |  |              |  |                     |  |                               |  |  |  |  |  |
| <b>MPFX100</b> Filter element with private spigot        |  | Configuration example 2: <b>MPFX100</b>   <b>4</b>   <b>P10</b>   <b>N</b>   <b>B</b>   <b>E</b>   <b>P01</b> |  |              |  |                     |  |                               |  |  |  |  |  |
| <b>Element length</b>                                    |  | <b>1</b>   <b>2</b>   <b>3</b>   <b>4</b>   |  |              |  |                     |  |                               |  |  |  |  |  |
| <b>Filtration rating (filter media)</b>                  |  |   |  |              |  |                     |  |                               |  |  |  |  |  |
| <b>A03</b> Inorganic microfiber 3 µm                     |  | <b>M25</b> Wire mesh 25 µm  |  |              |  |                     |  |                               |  |  |  |  |  |
| <b>A06</b> Inorganic microfiber 6 µm                     |  | <b>M60</b> Wire mesh 60 µm  |  |              |  |                     |  |                               |  |  |  |  |  |
| <b>A10</b> Inorganic microfiber 10 µm                    |  | <b>M90</b> Wire mesh 90 µm  |  |              |  |                     |  |                               |  |  |  |  |  |
| <b>A16</b> Inorganic microfiber 16 µm                    |  | <b>P10</b> Resin impregnated paper 10 µm  |  |              |  |                     |  |                               |  |  |  |  |  |
| <b>A25</b> Inorganic microfiber 25 µm                    |  | <b>P25</b> Resin impregnated paper 25 µm  |  |              |  |                     |  |                               |  |  |  |  |  |
| <b>Element Δp</b>  |  | <b>Filter media</b>   |  |              |  |                     |  |                               |  |  |  |  |  |
| <b>N</b> 10 bar  |  | <b>Axx</b>   <b>Mxx</b>   <b>Pxx</b>  |  |              |  |                     |  |                               |  |  |  |  |  |
| <b>H</b> 10 bar  |  | • •   |  |              |  |                     |  |                               |  |  |  |  |  |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC |  | • •   |  |              |  |                     |  |                               |  |  |  |  |  |
|  |  |   |  | <b>Seals</b> |  | <b>Bypass valve</b> |  | <b>Execution</b>              |  |  |  |  |  |
|  |  |   |  | <b>B</b> NBR |  | <b>E</b> 3 bar      |  | <b>P01</b> MP Filtri standard |  |  |  |  |  |
|  |  |   |  | <b>V</b> FPM |  | 1.75 bar            |  | <b>Pxx</b> Customized         |  |  |  |  |  |

### ACCESSORIES

|   |      |   |         |
|---|------|---|---------|
| <b>Indicators</b>   | page |   | page    |
| <b>BVA</b> Axial pressure gauge                           | 240  | <b>BEA</b> Electrical pressure indicator          | 239     |
| <b>BVR</b> Radial pressure gauge                          | 240  | <b>BEM</b> Electrical pressure indicator          | 239     |
| <b>BVP</b> Visual pressure indicator with automatic reset | 241  | <b>BLA</b> Electrical / visual pressure indicator | 239-240 |
| <b>BVQ</b> Visual pressure indicator with manual reset    | 241  |   |         |
| <b>Additional features</b>                                | page |   | page    |
| <b>TE</b> Extension tube                                  | 248  | <b>T5</b> Filler plug M30x1.5                     | 249     |
| <b>DFS</b> Diffuser with fast lock connection             | 249  | <b>DPT</b> Dipstick                               | 249     |

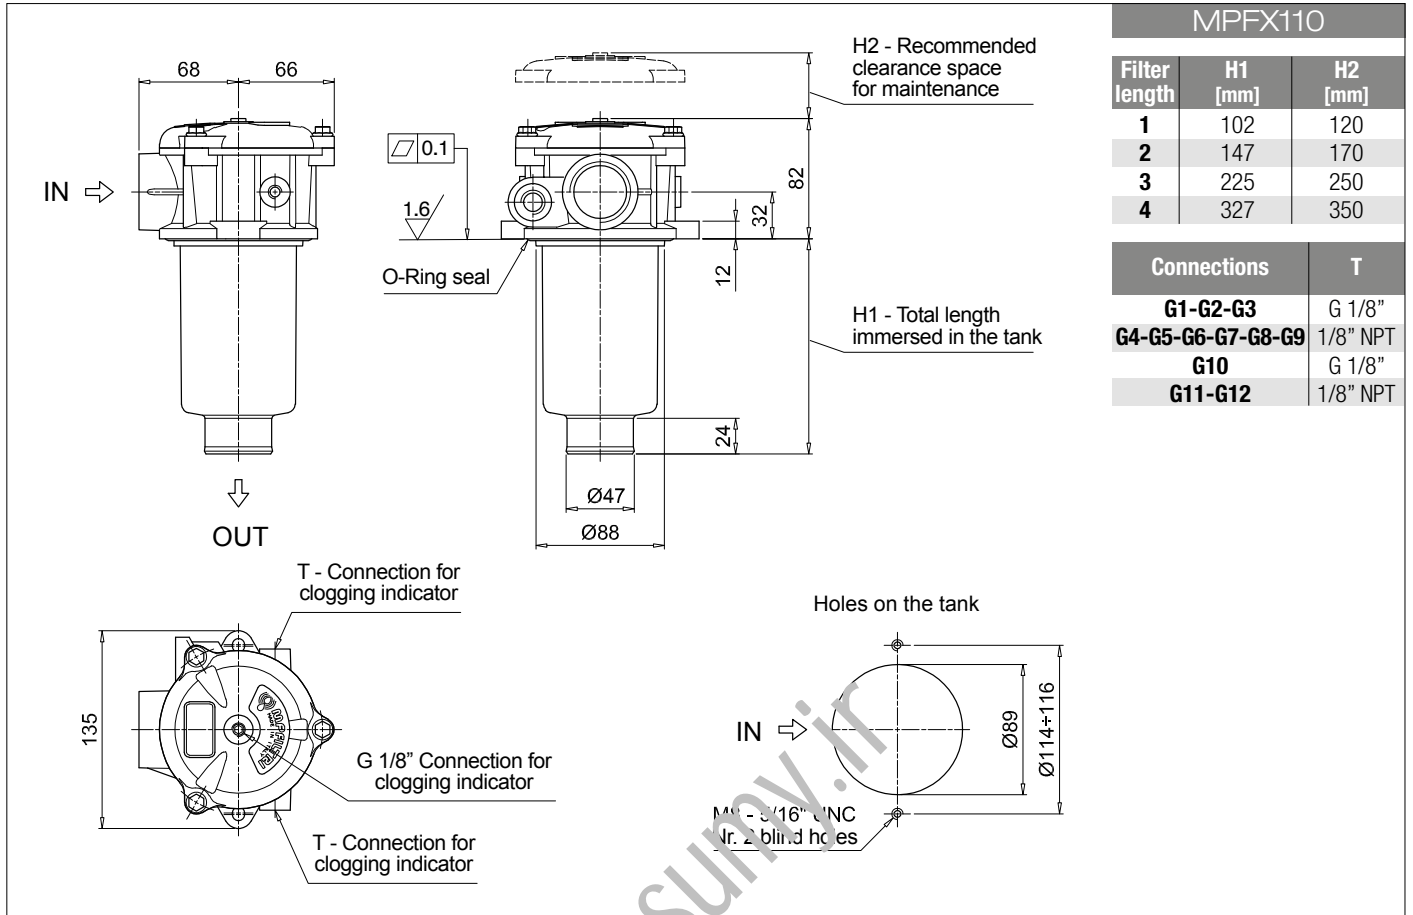

| MPFX110       |         |         |
|---------------|---------|---------|
| Filter length | H1 [mm] | H2 [mm] |
| 1             | 102     | 120     |
| 2             | 147     | 170     |
| 3             | 225     | 250     |
| 4             | 327     | 350     |

| Connections       | T        |
|-------------------|----------|
| G1-G2-G3          | G 1/8"   |
| G4-G5-G6-G7-G8-G9 | 1/8" NPT |
| G10               | G 1/8"   |
| G11-G12           | 1/8" NPT |

# MPFX MPFX181 - MPFX191

## Designation & Ordering code

### COMPLETE FILTER



|  |   |          |  |                                  |     |                     |  |                               |  |  |  |
|--|---|----------|--|----------------------------------|-----|---------------------|--|-------------------------------|--|--|--|
| <b>Series and size</b>   |   |          | Configuration example 1: <b>MPFX181</b>   1   A   G1   A25   H   E   P01 |                                  |     |                     |  |                               |  |  |  |
| <b>MPFX181</b>   <b>MPFX191</b> Filter element with private spigot |   |          | Configuration example 2: <b>MPFX191</b>   2   V   G2   P10   N   B   P01 |                                  |     |                     |  |                               |  |  |  |
| <b>Length</b>  |   |          |  |                                  |     |                     |  |                               |  |  |  |
|  | Size 181  | Size 191 |  |                                  |     |                     |  |                               |  |  |  |
| 1  | •   |          |  |                                  |     |                     |  |                               |  |  |  |
| 2  | •   | •        |  |                                  |     |                     |  |                               |  |  |  |
| <b>Seals and treatments</b>  |   |          |  |                                  |     |                     |  |                               |  |  |  |
| <b>A</b>   | NBR   | <b>B</b> | NBR  | flat seal on head                |     |                     |  |                               |  |  |  |
| <b>V</b>   | FPM   | <b>D</b> | FPM  | flat seal on head                |     |                     |  |                               |  |  |  |
| <b>W</b>   | NBR   | <b>L</b> | NBR  | head anodized, flat seal on head |     |                     |  |                               |  |  |  |
| <b>Z</b>   | FPM   | <b>M</b> | FPM  | head anodized, flat seal on head |     |                     |  |                               |  |  |  |
| <b>Connections</b>   |   |          |  |                                  |     |                     |  |                               |  |  |  |
| <b>G1</b>  | G 1 1/4"  |          | <b>G5</b>  | 1 1/2" NPT                       |     |                     |  |                               |  |  |  |
| <b>G2</b>  | G 1 1/2"  |          | <b>G7</b>  | SAE 20 - 1 5/8" - 12 UN          |     |                     |  |                               |  |  |  |
| <b>G4</b>  | 1 1/4" NPT                                      |          | <b>G8</b>  | SAE 24 - 1 7/8" - 12 UN          |     |                     |  |                               |  |  |  |
| <b>Filtration rating (filter media)</b>                            |   |          |  |                                  |     |                     |  |                               |  |  |  |
| <b>A03</b>   | Inorganic microfiber 3 µm                       |          | <b>M25</b>   | Wire mesh 25 µm                  |     |                     |  |                               |  |  |  |
| <b>A06</b>   | Inorganic microfiber 6 µm                       |          | <b>M60</b>   | Wire mesh 60 µm                  |     |                     |  |                               |  |  |  |
| <b>A10</b>   | Inorganic microfiber 10 µm                      |          | <b>M90</b>   | Wire mesh 90 µm                  |     |                     |  |                               |  |  |  |
| <b>A16</b>   | Inorganic microfiber 16 µm                      |          | <b>P10</b>   | Resin impregnated paper 10 µm    |     |                     |  |                               |  |  |  |
| <b>A25</b>   | Inorganic microfiber 25 µm                      |          | <b>P25</b>   | Resin impregnated paper 25 µm    |     |                     |  |                               |  |  |  |
| <b>Element Δp</b>  |   |          | Filter media   |                                  |     |                     |  |                               |  |  |  |
|  |   |          | Axx  | Mxx                              | Pxx |                     |  |                               |  |  |  |
| <b>N</b>   | 10 bar  |          |  | •                                | •   |                     |  |                               |  |  |  |
| <b>H</b>   | 10 bar  |          | •  |                                  |     |                     |  |                               |  |  |  |
| <b>W</b>   | 10 bar, compatible with fluids HFA, HFB and HFC |          | •  | •                                |     |                     |  |                               |  |  |  |
|  |   |          |  |                                  |     | <b>Bypass valve</b> |  | <b>Execution</b>              |  |  |  |
|  |   |          |  |                                  |     | <b>E</b> 3 bar      |  | <b>P01</b> MP Filtri standard |  |  |  |
|  |   |          |  |                                  |     | <b>B</b> 1.75 bar   |  | <b>Pxx</b> Customized         |  |  |  |

### FILTER ELEMENT

|  |   |  |  |                               |     |              |  |                     |  |                               |  |
|--|---|--|--|-------------------------------|-----|--------------|--|---------------------|--|-------------------------------|--|
| <b>Element series and size</b>                   |   |  | Configuration example 1: <b>MFX180</b>   1   A25   H   B   E   P01 |                               |     |              |  |                     |  |                               |  |
| <b>MFX180</b> Filter element with private spigot |   |  | Configuration example 2: <b>MFX180</b>   2   P10   N   V     P01   |                               |     |              |  |                     |  |                               |  |
| <b>Element length</b>                            |   |  |  |                               |     |              |  |                     |  |                               |  |
|  |   |  |  |                               |     |              |  |                     |  |                               |  |
| 1  |   |  |  |                               |     |              |  |                     |  |                               |  |
| 2  |   |  |  |                               |     |              |  |                     |  |                               |  |
| <b>Filtration rating (filter media)</b>          |   |  |  |                               |     |              |  |                     |  |                               |  |
| <b>A03</b>                                       | Inorganic microfiber 3 µm                       |  | <b>M25</b>   | Wire mesh 25 µm               |     |              |  |                     |  |                               |  |
| <b>A06</b>                                       | Inorganic microfiber 6 µm                       |  | <b>M60</b>   | Wire mesh 60 µm               |     |              |  |                     |  |                               |  |
| <b>A10</b>                                       | Inorganic microfiber 10 µm                      |  | <b>M90</b>   | Wire mesh 90 µm               |     |              |  |                     |  |                               |  |
| <b>A16</b>                                       | Inorganic microfiber 16 µm                      |  | <b>P10</b>   | Resin impregnated paper 10 µm |     |              |  |                     |  |                               |  |
| <b>A25</b>                                       | Inorganic microfiber 25 µm                      |  | <b>P25</b>   | Resin impregnated paper 25 µm |     |              |  |                     |  |                               |  |
| <b>Element Δp</b>                                |   |  | Filter media   |                               |     |              |  |                     |  |                               |  |
|  |   |  | Axx  | Mxx                           | Pxx |              |  |                     |  |                               |  |
| <b>N</b>   | 10 bar  |  |  | •                             | •   |              |  |                     |  |                               |  |
| <b>H</b>   | 10 bar  |  | •  |                               |     |              |  |                     |  |                               |  |
| <b>W</b>   | 10 bar, compatible with fluids HFA, HFB and HFC |  | •  | •                             |     |              |  |                     |  |                               |  |
|  |   |  |  |                               |     | <b>Seals</b> |  | <b>Bypass valve</b> |  | <b>Execution</b>              |  |
|  |   |  |  |                               |     | <b>B</b> NBR |  | <b>E</b> 3 bar      |  | <b>P01</b> MP Filtri standard |  |
|  |   |  |  |                               |     | <b>V</b> FPM |  | <b>B</b> 1.75 bar   |  | <b>Pxx</b> Customized         |  |

### ACCESSORIES

|                            |  |      |            |  |         |
|----------------------------|--|------|------------|--|---------|
| <b>Indicators</b>          |  | page |            |  | page    |
| <b>BVA</b>                 | Axial pressure gauge                           | 240  | <b>BEA</b> | Electrical pressure indicator          | 239     |
| <b>BVR</b>                 | Radial pressure gauge                          | 240  | <b>BEM</b> | Electrical pressure indicator          | 239     |
| <b>BVP</b>                 | Visual pressure indicator with automatic reset | 241  | <b>BLA</b> | Electrical / visual pressure indicator | 239-240 |
| <b>BVQ</b>                 | Visual pressure indicator with manual reset    | 241  |            |  |         |
| <b>Additional features</b> |  | page |            |  |         |
| <b>TE</b>                  | Extension tube                                 | 248  |            |  |         |
| <b>T5</b>                  | Filler plug M30x1.5                            | 249  |            |  |         |

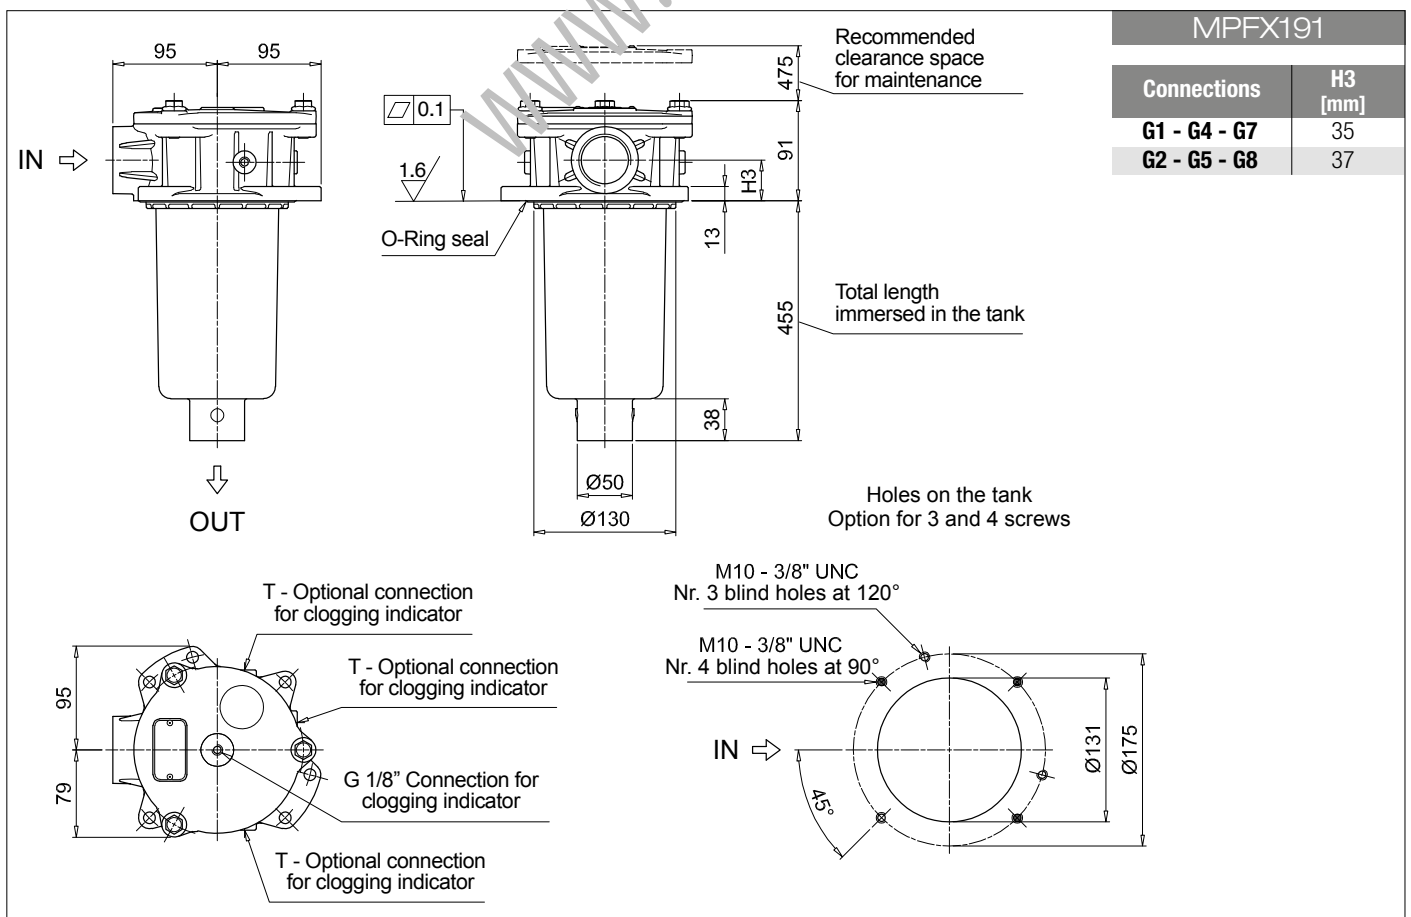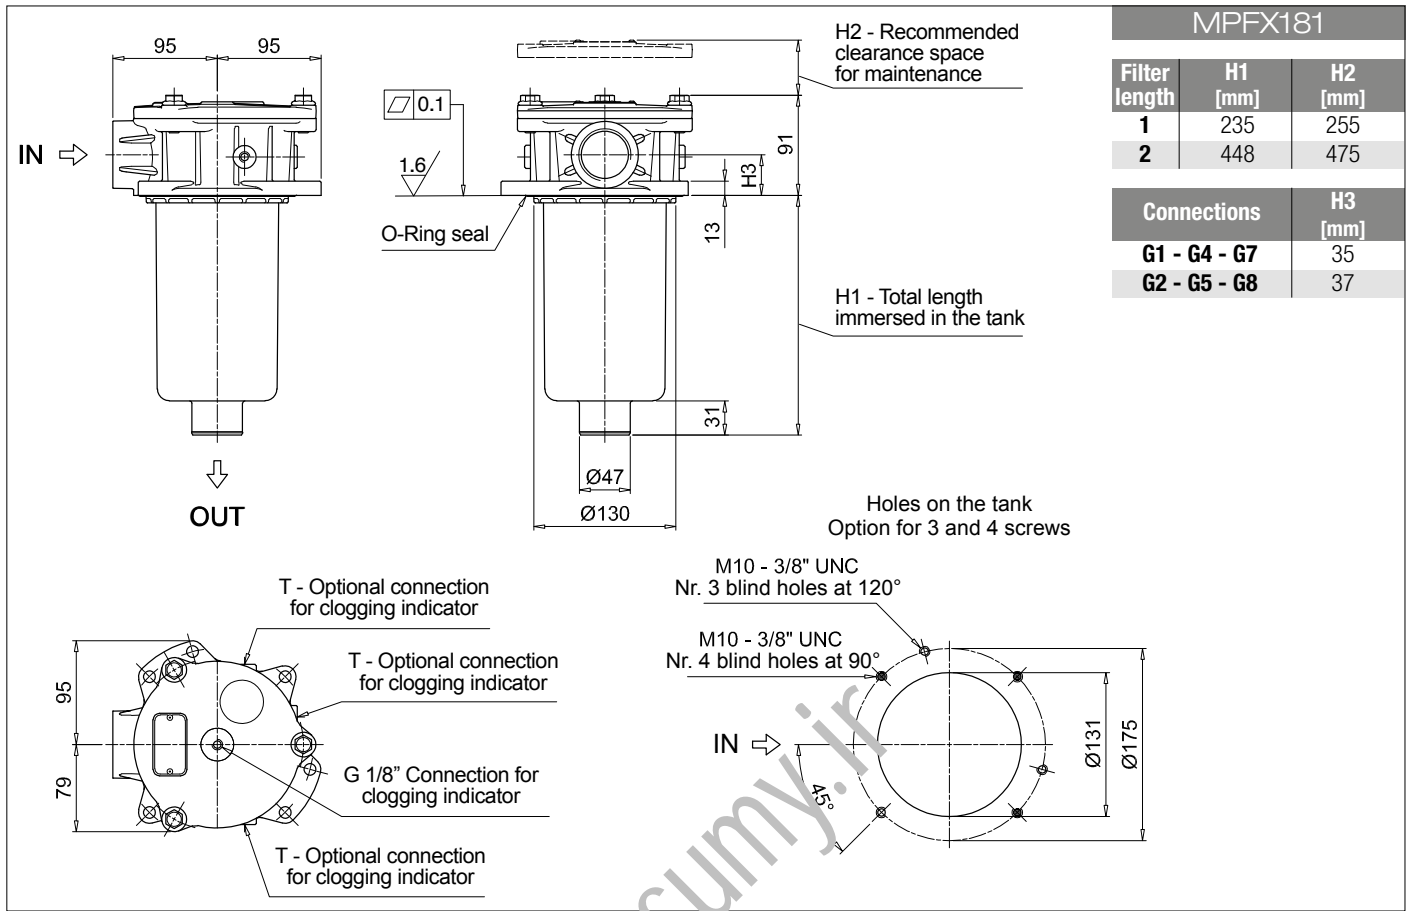

# MPFX MPFX182 - MPFX192

## Designation & Ordering code

### COMPLETE FILTER



|   |   |  |            |                               |  |  |  |  |  |  |  |
|---|---|--|------------|-------------------------------|--|--|--|--|--|--|--|
| <b>Series and size</b>                                      |   | Configuration example 1: <b>MPFX182</b>   1   A   G1   1   A25   H   E   P01 |            |                               |  |  |  |  |  |  |  |
| <b>MPFX182   MPFX192</b> Filter element with private spigot |   | Configuration example 2: <b>MPFX192</b>   2   V   G4   2   P10   N   B   P01 |            |                               |  |  |  |  |  |  |  |
| <b>Length</b>   |   | Size 182   | Size 192   |                               |  |  |  |  |  |  |  |
| 1   |   | •  |            |                               |  |  |  |  |  |  |  |
| 2   |   | •  | •          |                               |  |  |  |  |  |  |  |
| <b>Seals and treatments</b>                                 |   |  |            |                               |  |  |  |  |  |  |  |
| <b>A</b> NBR  | <b>B</b> NBR flat seal on head                |  |            |                               |  |  |  |  |  |  |  |
| <b>V</b> FPM  | <b>D</b> FPM flat seal on head                |  |            |                               |  |  |  |  |  |  |  |
| <b>W</b> NBR head anodized                                  | <b>L</b> NBR head anodized, flat seal on head |  |            |                               |  |  |  |  |  |  |  |
| <b>Z</b> FPM head anodized                                  | <b>M</b> FPM head anodized, flat seal on head |  |            |                               |  |  |  |  |  |  |  |
| <b>Main Connections</b>                                     |   | Aux size 1   | Aux size 2 |                               |  |  |  |  |  |  |  |
| <b>G1</b> G 1 1/4"  | G 1/2"  | G 3/4"   |            |                               |  |  |  |  |  |  |  |
| <b>G4</b> 1 1/4" NPT  | 1/2" NPT                                      | 3/4" NPT   |            |                               |  |  |  |  |  |  |  |
| <b>G7</b> SAE 20 - 1 5/8" - 12 UN                           | SAE 8 - 3/16" - 16 UNF                        | SAE 12 - 1 1/16" - 12 UN   |            |                               |  |  |  |  |  |  |  |
| <b>Aux connection</b> - see previous table                  |   |  |            |                               |  |  |  |  |  |  |  |
| 1 Aux size 1  | 2 Aux size 2                                  |  |            |                               |  |  |  |  |  |  |  |
| <b>Filtration rating (filter media)</b>                     |   |  |            |                               |  |  |  |  |  |  |  |
| <b>A03</b> Inorganic microfiber 3 µm                        | <b>M25</b> Wire mesh 25 µm                    |  |            |                               |  |  |  |  |  |  |  |
| <b>A06</b> Inorganic microfiber 6 µm                        | <b>M60</b> Wire mesh 60 µm                    |  |            |                               |  |  |  |  |  |  |  |
| <b>A10</b> Inorganic microfiber 10 µm                       | <b>M90</b> Wire mesh 90 µm                    |  |            |                               |  |  |  |  |  |  |  |
| <b>A16</b> Inorganic microfiber 16 µm                       | <b>P10</b> Resin impregnated paper 10 µm      |  |            |                               |  |  |  |  |  |  |  |
| <b>A25</b> Inorganic microfiber 25 µm                       | <b>P25</b> Resin impregnated paper 25 µm      |  |            |                               |  |  |  |  |  |  |  |
| <b>Element Δp</b>   |   | Filter media   |            |                               |  |  |  |  |  |  |  |
|   |   | Axx  | Mxx        | Pxx                           |  |  |  |  |  |  |  |
| <b>N</b> 10 bar   |   |  | •          | •                             |  |  |  |  |  |  |  |
| <b>H</b> 10 bar   |   | •  |            |                               |  |  |  |  |  |  |  |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC    |   | •  | •          |                               |  |  |  |  |  |  |  |
|   |   | <b>Bypass valve</b>  |            | <b>Execution</b>              |  |  |  |  |  |  |  |
|   |   | <b>E</b> 3 bar   |            | <b>P01</b> MP Filtri standard |  |  |  |  |  |  |  |
|   |   | <b>B</b> 1.75 bar  |            | <b>Pxx</b> Customized         |  |  |  |  |  |  |  |

### FILTER ELEMENT

|  |  |  |     |                     |  |                               |  |  |  |  |  |
|--|--|--|-----|---------------------|--|-------------------------------|--|--|--|--|--|
| <b>Element series and size</b>                           |  | Configuration example 1: <b>MFX180</b>   1   A25   H   B   E   P01 |     |                     |  |                               |  |  |  |  |  |
| <b>MFX180</b> Filter element with private spigot         |  | Configuration example 2: <b>MFX180</b>   2   P10   N   V     P01   |     |                     |  |                               |  |  |  |  |  |
| <b>Element length</b>                                    |  |  |     |                     |  |                               |  |  |  |  |  |
| 1  |  |  |     |                     |  |                               |  |  |  |  |  |
| 2  |  |  |     |                     |  |                               |  |  |  |  |  |
| <b>Filtration rating (filter media)</b>                  |  |  |     |                     |  |                               |  |  |  |  |  |
| <b>A03</b> Inorganic microfiber 3 µm                     | <b>M25</b> Wire mesh 25 µm               |  |     |                     |  |                               |  |  |  |  |  |
| <b>A06</b> Inorganic microfiber 6 µm                     | <b>M60</b> Wire mesh 60 µm               |  |     |                     |  |                               |  |  |  |  |  |
| <b>A10</b> Inorganic microfiber 10 µm                    | <b>M90</b> Wire mesh 90 µm               |  |     |                     |  |                               |  |  |  |  |  |
| <b>A16</b> Inorganic microfiber 16 µm                    | <b>P10</b> Resin impregnated paper 10 µm |  |     |                     |  |                               |  |  |  |  |  |
| <b>A25</b> Inorganic microfiber 25 µm                    | <b>P25</b> Resin impregnated paper 25 µm |  |     |                     |  |                               |  |  |  |  |  |
| <b>Element Δp</b>  |  | Filter media   |     |                     |  |                               |  |  |  |  |  |
|  |  | Axx  | Mxx | Pxx                 |  |                               |  |  |  |  |  |
| <b>N</b> 10 bar  |  |  | •   | •                   |  |                               |  |  |  |  |  |
| <b>H</b> 10 bar  |  | •  |     |                     |  |                               |  |  |  |  |  |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC |  | •  | •   |                     |  |                               |  |  |  |  |  |
|  |  | <b>Seals</b>   |     | <b>Bypass valve</b> |  | <b>Execution</b>              |  |  |  |  |  |
|  |  | <b>B</b> NBR   |     | <b>E</b> 3 bar      |  | <b>P01</b> MP Filtri standard |  |  |  |  |  |
|  |  | <b>V</b> FPM   |     | <b>B</b> 1.75 bar   |  | <b>Pxx</b> Customized         |  |  |  |  |  |

### ACCESSORIES

|   |      |   |         |
|---|------|---|---------|
| <b>Indicators</b>   | page |   | page    |
| <b>BVA</b> Axial pressure gauge                           | 240  | <b>BEA</b> Electrical pressure indicator          | 239     |
| <b>BVR</b> Radial pressure gauge                          | 240  | <b>BEM</b> Electrical pressure indicator          | 239     |
| <b>BVP</b> Visual pressure indicator with automatic reset | 241  | <b>BLA</b> Electrical / visual pressure indicator | 239-240 |
| <b>BVQ</b> Visual pressure indicator with manual reset    | 241  |   |         |
| <b>Additional features</b>                                | page |   |         |
| <b>TE</b> Extension tube                                  | 248  |   |         |
| <b>T5</b> Filler plug M30x1.5                             | 249  |   |         |

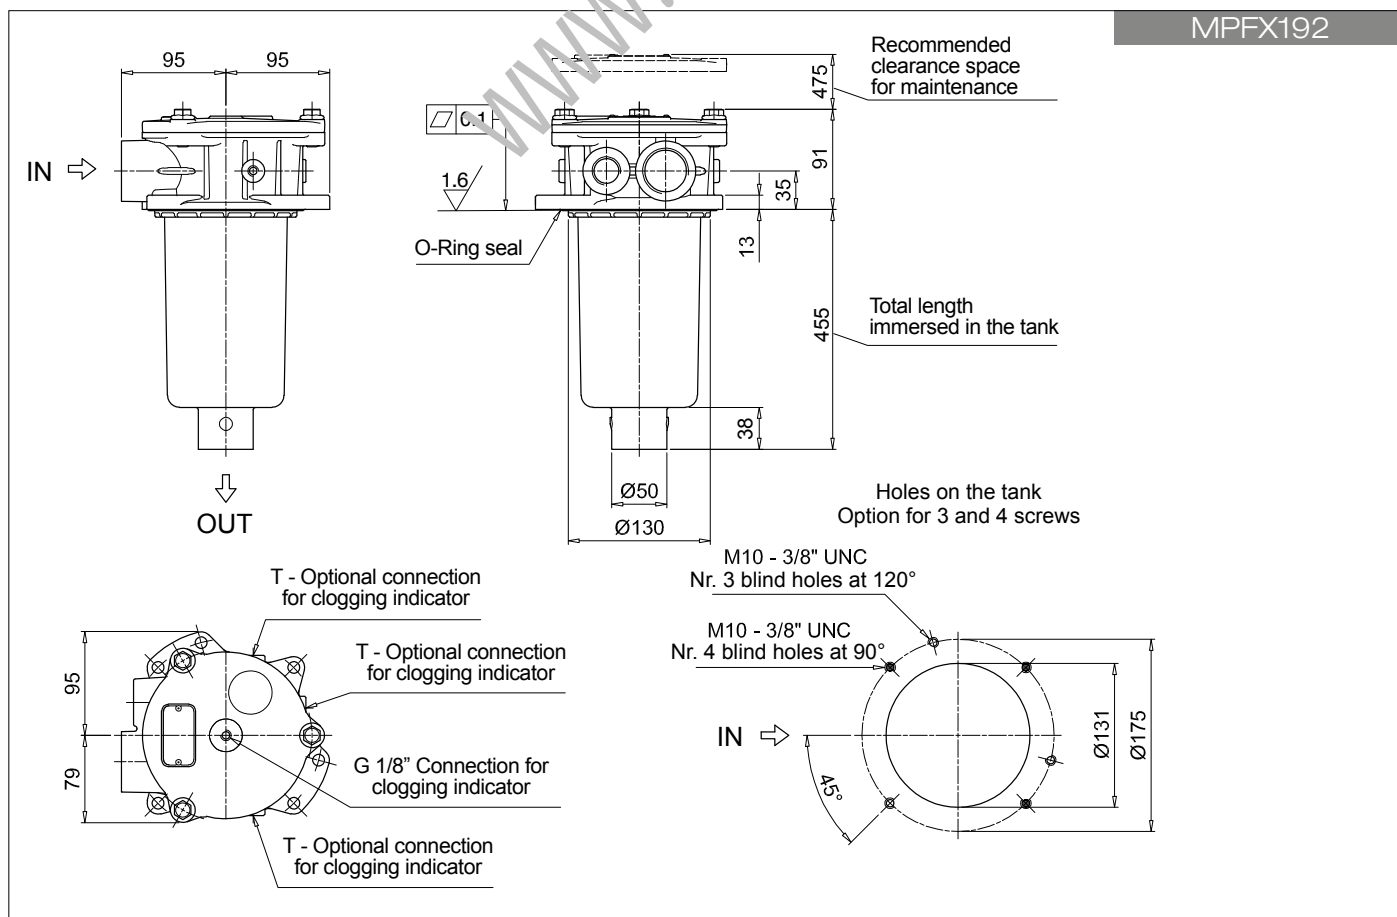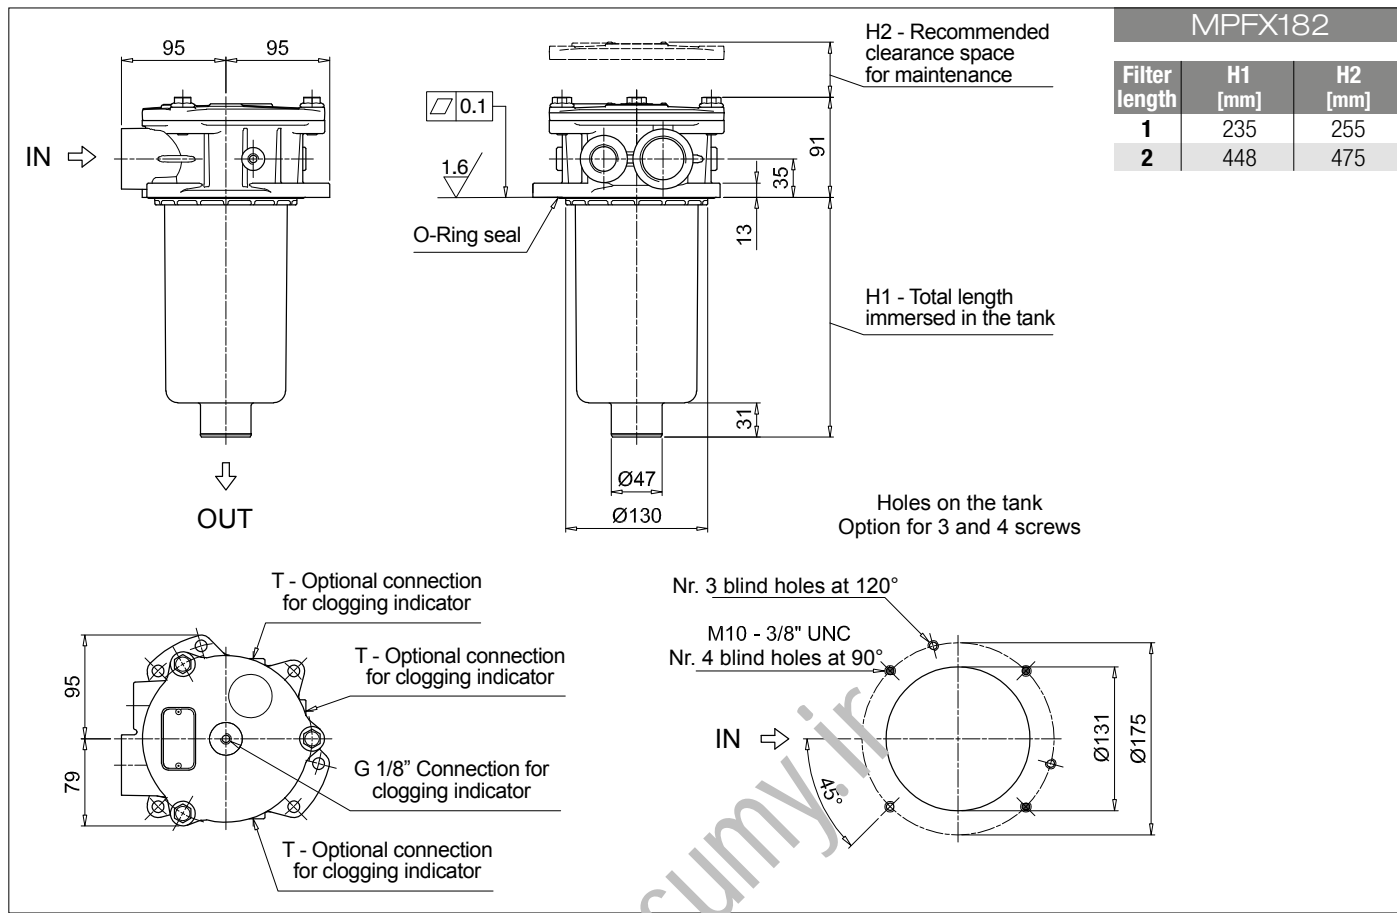

# MPFX MPFX184 - MPFX194

## Designation & Ordering code

### COMPLETE FILTER

|   |  |  |  |                            |  |                         |  |     |  |                        |  |
|---|--|--|--|----------------------------|--|-------------------------|--|-----|--|------------------------|--|
| <b>Series and size</b>                                      |  | Configuration example 1: <b>MPFX184</b>   1   A   G1   A25   H   E   P01 |  |                            |  |                         |  |     |  |                        |  |
| <b>MPFX184   MPFX194</b> Filter element with private spigot |  | Configuration example 2: <b>MPFX194</b>   2   V   F3   P10   N   B   P01 |  |                            |  |                         |  |     |  |                        |  |
| <b>Length</b>   |  | Size 184   |  | Size 194                   |  |                         |  |     |  |                        |  |
| 1   |  | •  |  |                            |  |                         |  |     |  |                        |  |
| 2   |  | •  |  | •                          |  |                         |  |     |  |                        |  |
| <b>Seals and treatments</b>                                 |  |  |  |                            |  |                         |  |     |  |                        |  |
| A NBR   |  | W NBR  |  | head anodized              |  |                         |  |     |  |                        |  |
| V FPM   |  | Z FPM  |  | head anodized              |  |                         |  |     |  |                        |  |
| <b>Main Connections</b>                                     |  | <b>Rear connections</b>  |  | <b>Main Connections</b>    |  | <b>Rear connections</b> |  |     |  |                        |  |
| G1 G 1 1/4"   |  | -  |  | G13 G 1 1/2"               |  | -                       |  |     |  |                        |  |
| G2 G 1 1/4"   |  | G 1 1/4"   |  | G14 G 1 1/2"               |  | G 1 1/4"                |  |     |  |                        |  |
| G4 1 1/4" NPT   |  | -  |  | G15 1 1/2" NPT             |  | -                       |  |     |  |                        |  |
| G5 1 1/4" NPT   |  | 1 1/4" NPT   |  | G16 1 1/2" NPT             |  | 1 1/4" NPT              |  |     |  |                        |  |
| G7 SAE 20 - 1 5/8" - 12 UN                                  |  | -  |  | F1 1 1/2" SAE 3000 psi/M   |  | -                       |  |     |  |                        |  |
| G8 SAE 20 - 1 5/8" - 12 UN                                  |  | SAE 20 - 1 5/8" - 12 UN  |  | F2 1 1/2" SAE 3000 psi/UNC |  | -                       |  |     |  |                        |  |
| G10 SAE 24 - 1 7/8" - 12 UN                                 |  | -  |  | F3 1 1/2" SAE 3000 psi/M   |  | 1 1/2" SAE 3000 psi/M   |  |     |  |                        |  |
| G11 SAE 24 - 1 7/8" - 12 UN                                 |  | SAE 20 - 1 5/8" - 12 UN  |  | F4 1 1/2" SAE 3000 psi/UNC |  | 1 1/2" SAE 3000 psi/UNC |  |     |  |                        |  |
| <b>Filtration rating (filter media)</b>                     |  |  |  |                            |  |                         |  |     |  |                        |  |
| A03 Inorganic microfiber 3 µm                               |  | M25 Wire mesh 25 µm  |  |                            |  |                         |  |     |  |                        |  |
| A06 Inorganic microfiber 6 µm                               |  | M60 Wire mesh 60 µm  |  |                            |  |                         |  |     |  |                        |  |
| A10 Inorganic microfiber 10 µm                              |  | M90 Wire mesh 90 µm  |  |                            |  |                         |  |     |  |                        |  |
| A16 Inorganic microfiber 16 µm                              |  | P10 Resin impregnated paper 10 µm  |  |                            |  |                         |  |     |  |                        |  |
| A25 Inorganic microfiber 25 µm                              |  | P25 Resin impregnated paper 25 µm  |  |                            |  |                         |  |     |  |                        |  |
| <b>Element Δp</b>   |  | Filter media   |  | Axx                        |  | Mxx                     |  | Pxx |  |                        |  |
| N 10 bar  |  |  |  | •                          |  | •                       |  | •   |  |                        |  |
| H 10 bar  |  |  |  | •                          |  |                         |  |     |  |                        |  |
| W 10 bar, compatible with fluids HFA, HFB and HFC           |  |  |  | •                          |  | •                       |  |     |  |                        |  |
|   |  |  |  |                            |  |                         |  |     |  | <b>Bypass valve</b>    |  |
|   |  |  |  |                            |  |                         |  |     |  | E 3 bar                |  |
|   |  |  |  |                            |  |                         |  |     |  | B 1.75 bar             |  |
|   |  |  |  |                            |  |                         |  |     |  | <b>Execution</b>       |  |
|   |  |  |  |                            |  |                         |  |     |  | P01 MP Filtri standard |  |
|   |  |  |  |                            |  |                         |  |     |  | Pxx Customized         |  |



### FILTER ELEMENT

|   |  |  |  |     |  |     |  |     |  |                        |  |
|---|--|--|--|-----|--|-----|--|-----|--|------------------------|--|
| <b>Element series and size</b>                    |  | Configuration example 1: <b>MFx180</b>   1   A25   H   B   E   P01 |  |     |  |     |  |     |  |                        |  |
| <b>MFx180</b> Filter element with private spigot  |  | Configuration example 2: <b>MFx180</b>   2   P10   N   V     P01   |  |     |  |     |  |     |  |                        |  |
| <b>Element length</b>                             |  |  |  |     |  |     |  |     |  |                        |  |
| 1   |  |  |  |     |  |     |  |     |  |                        |  |
| 2   |  |  |  |     |  |     |  |     |  |                        |  |
| <b>Filtration rating (filter media)</b>           |  |  |  |     |  |     |  |     |  |                        |  |
| A03 Inorganic microfiber 3 µm                     |  | M25 Wire mesh 25 µm  |  |     |  |     |  |     |  |                        |  |
| A06 Inorganic microfiber 6 µm                     |  | M60 Wire mesh 60 µm  |  |     |  |     |  |     |  |                        |  |
| A10 Inorganic microfiber 10 µm                    |  | M90 Wire mesh 90 µm  |  |     |  |     |  |     |  |                        |  |
| A16 Inorganic microfiber 16 µm                    |  | P10 Resin impregnated paper 10 µm                                  |  |     |  |     |  |     |  |                        |  |
| A25 Inorganic microfiber 25 µm                    |  | P25 Resin impregnated paper 25 µm                                  |  |     |  |     |  |     |  |                        |  |
| <b>Element Δp</b>                                 |  | Filter media   |  | Axx |  | Mxx |  | Pxx |  |                        |  |
| N 10 bar  |  |  |  | •   |  | •   |  | •   |  |                        |  |
| H 10 bar  |  |  |  | •   |  |     |  |     |  |                        |  |
| W 10 bar, compatible with fluids HFA, HFB and HFC |  |  |  | •   |  | •   |  |     |  |                        |  |
|   |  |  |  |     |  |     |  |     |  | <b>Seals</b>           |  |
|   |  |  |  |     |  |     |  |     |  | B NBR                  |  |
|   |  |  |  |     |  |     |  |     |  | V FPM                  |  |
|   |  |  |  |     |  |     |  |     |  | <b>Bypass valve</b>    |  |
|   |  |  |  |     |  |     |  |     |  | E 3 bar                |  |
|   |  |  |  |     |  |     |  |     |  | 1.75 bar               |  |
|   |  |  |  |     |  |     |  |     |  | <b>Execution</b>       |  |
|   |  |  |  |     |  |     |  |     |  | P01 MP Filtri standard |  |
|   |  |  |  |     |  |     |  |     |  | Pxx Customized         |  |

### ACCESSORIES



|                            |  |      |  |      |  |
|----------------------------|--|------|--|------|--|
| <b>Indicators</b>          |  | page |  | page |  |
| BVA                        | Axial pressure gauge                           | 240  |  | BEA  | Electrical pressure indicator          |
| BVR                        | Radial pressure gauge                          | 240  |  | BEM  | Electrical pressure indicator          |
| BVP                        | Visual pressure indicator with automatic reset | 241  |  | BLA  | Electrical / visual pressure indicator |
| BVQ                        | Visual pressure indicator with manual reset    | 241  |  |      |  |
| <b>Additional features</b> |  | page |  |      |  |
| TE                         | Extension tube                                 | 248  |  |      |  |
| T5                         | Filler plug M30x1.5                            | 249  |  |      |  |



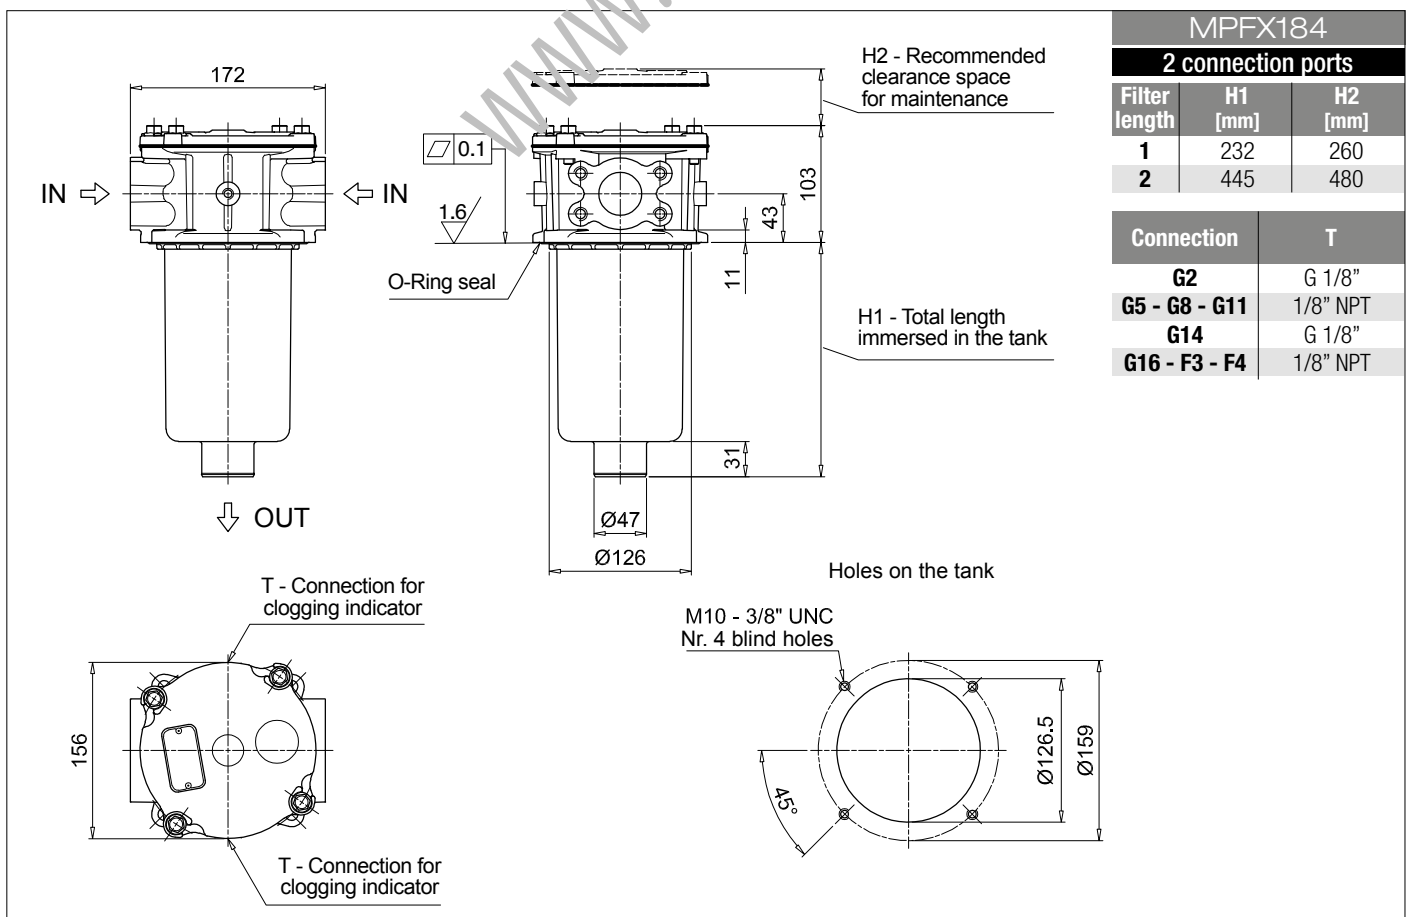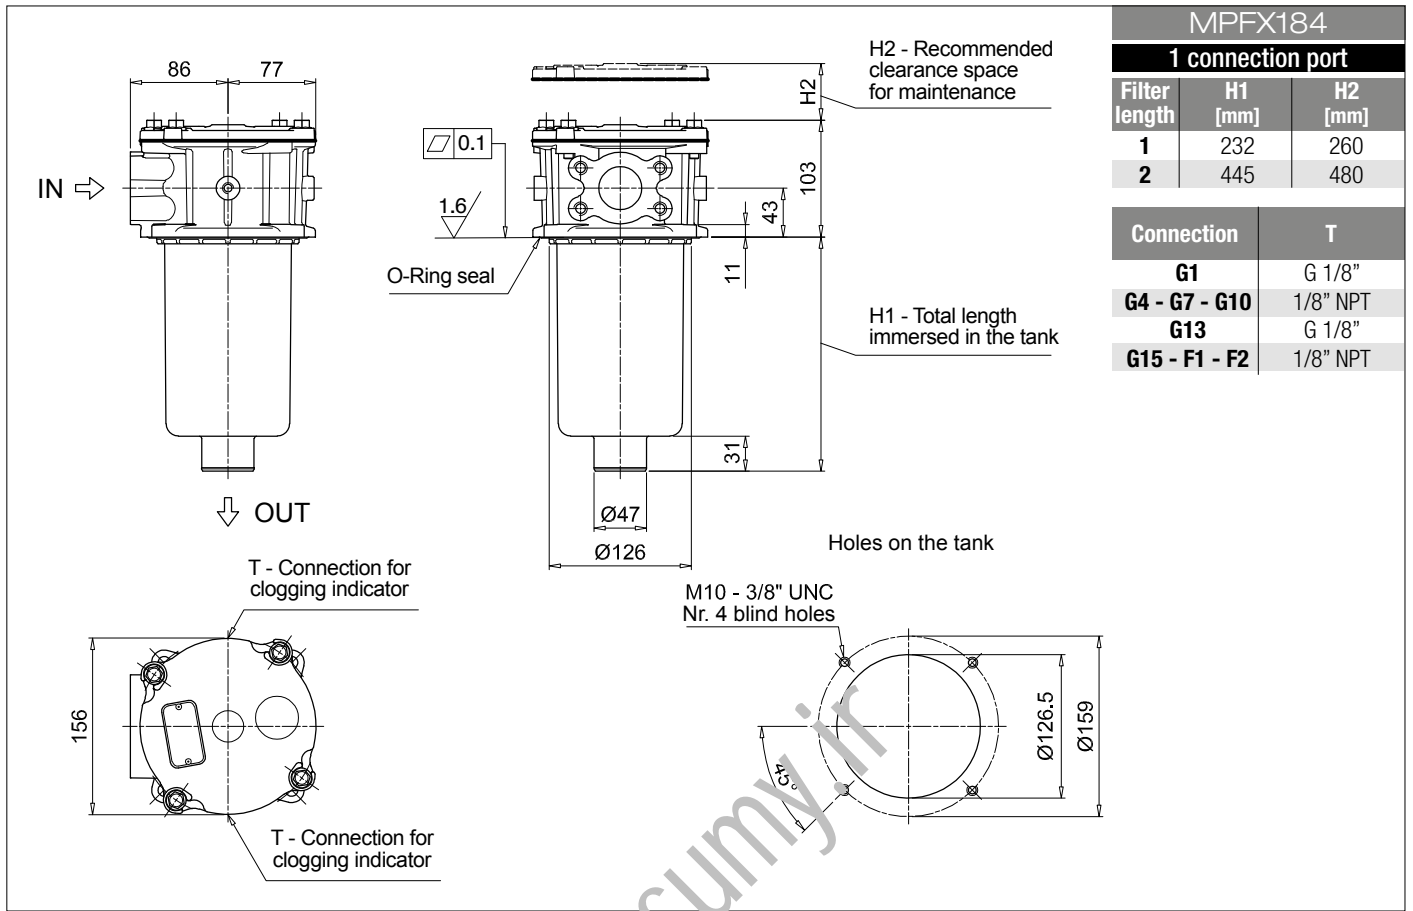

# MPFX MPFX184 - MPFX194

## Dimensions

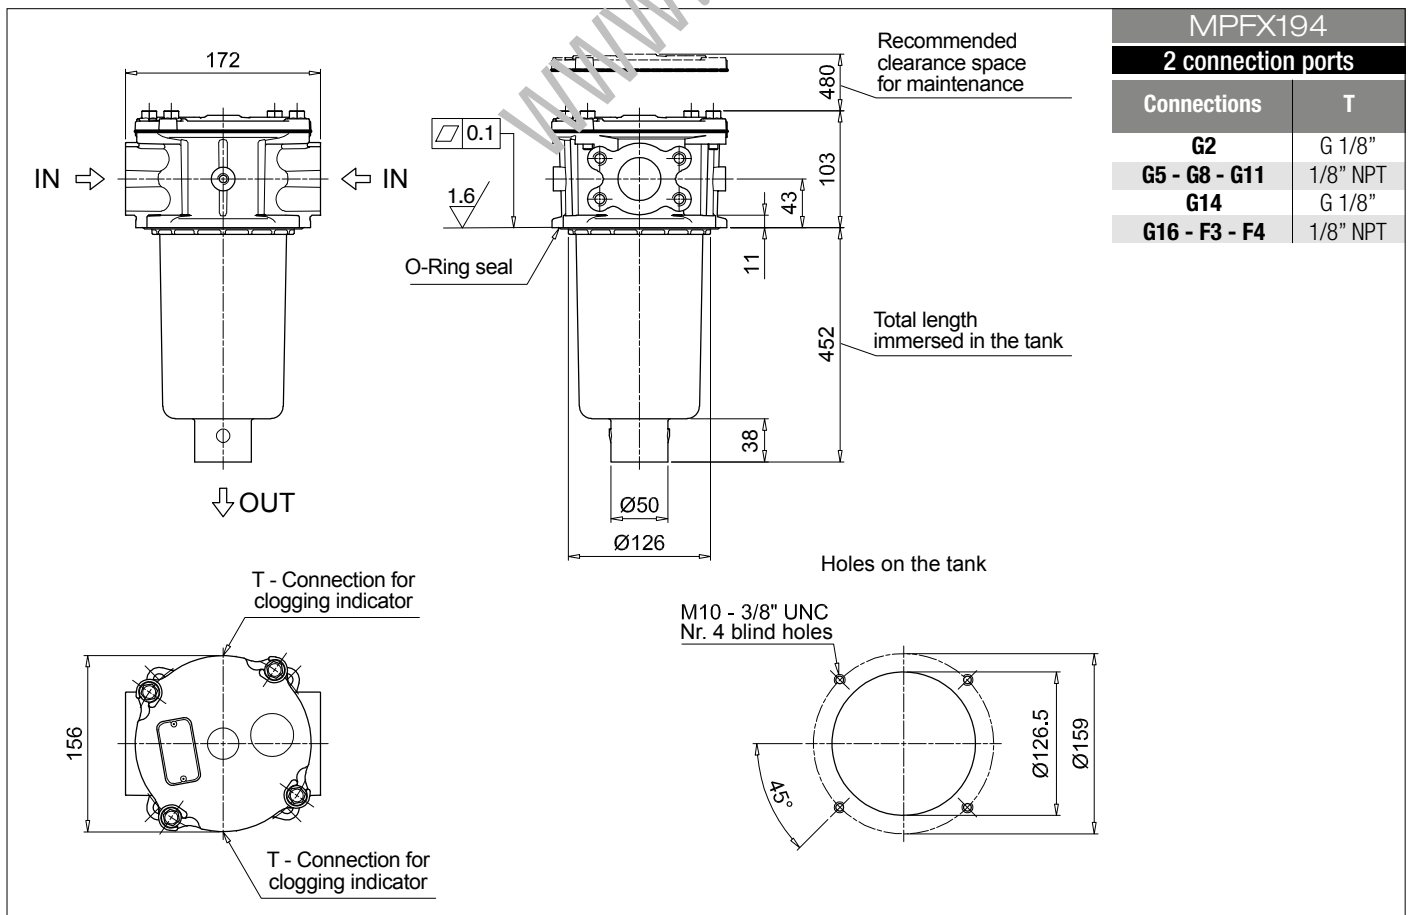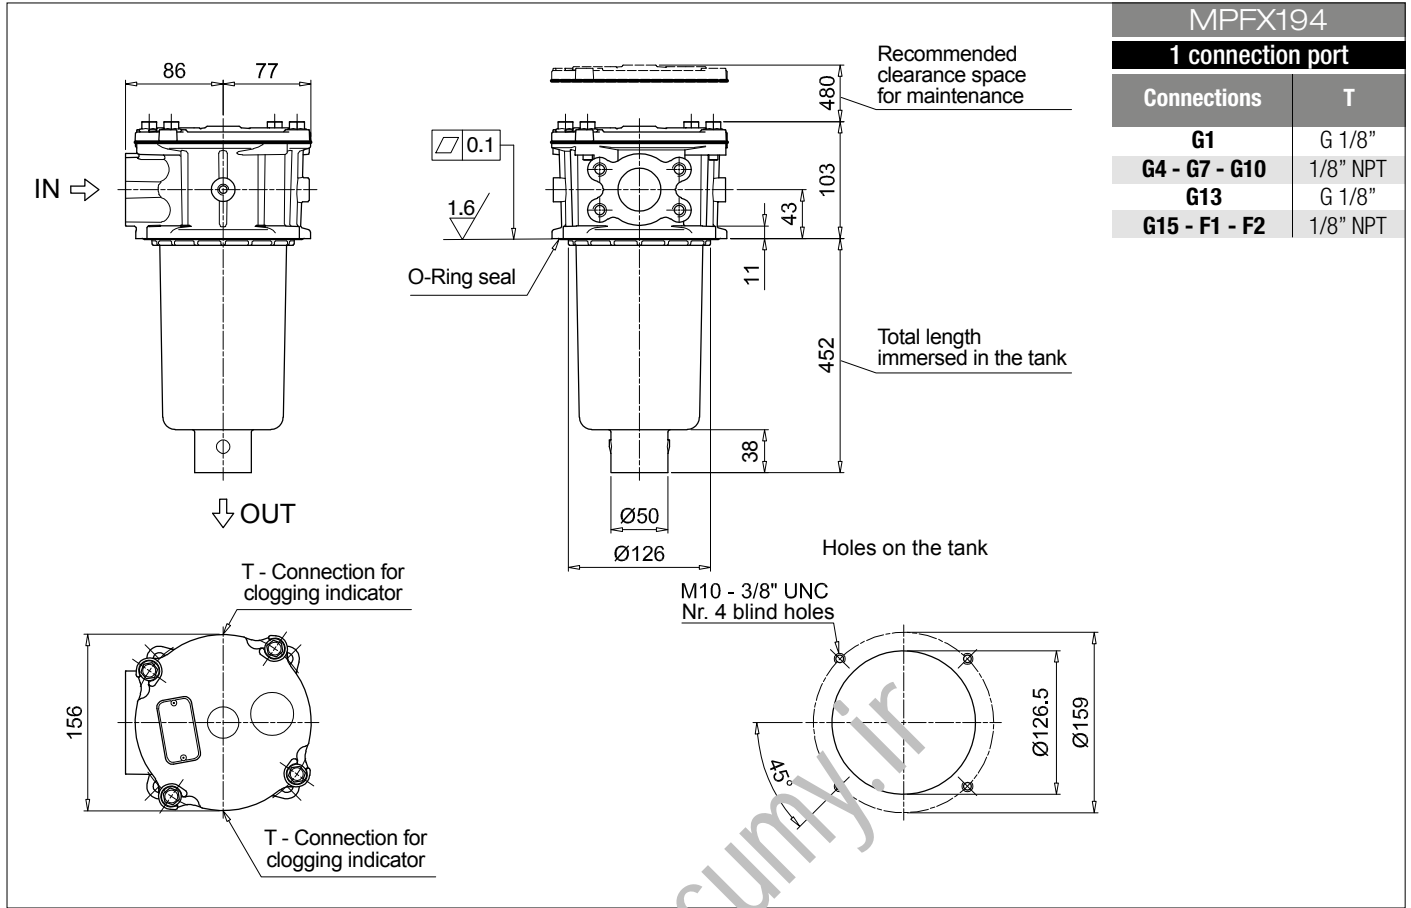

www.sumy.ir

# MPFX MPFX400

## Designation & Ordering code

### COMPLETE FILTER


|  |  |     |     |                     |                               |  |  |  |
|--|--|-----|-----|---------------------|-------------------------------|--|--|--|
| <b>Series and size</b>                                   | Configuration example 1: <b>MPFX400</b>   <b>1</b>   <b>A</b>   <b>G9</b>   <b>A25</b>   <b>H</b>   <b>B</b>   <b>P01</b>  |     |     |                     |                               |  |  |  |
| <b>MPFX400</b> Filter element with private spigot        | Configuration example 2: <b>MPFX400</b>   <b>2</b>   <b>V</b>   <b>G4</b>   <b>P10</b>   <b>N</b>   <b>E</b>   <b>P01</b>  |     |     |                     |                               |  |  |  |
| <b>Length</b>  | 1   2   3  |     |     |                     |                               |  |  |  |
| <b>Seals and treatments</b>                              | <b>A</b> NBR<br><b>V</b> FPM<br><b>W</b> NBR head anodized<br><b>Z</b> FPM head anodized   |     |     |                     |                               |  |  |  |
| <b>Connections</b>                                       | <b>G1</b> G 1 1/4" <b>G6</b> 2" NPT<br><b>G2</b> G 1 1/2" <b>G7</b> SAE 20 - 1 5/8" - 12 UN<br><b>G3</b> G 2" <b>G8</b> SAE 24 - 1 7/8" - 12 UN<br><b>G4</b> 1 1/4" NPT <b>G9</b> SAE 32 - 2 1/2" - 12 UN<br><b>G5</b> 1 1/2" NPT  |     |     |                     |                               |  |  |  |
| <b>Filtration rating (filter media)</b>                  | <b>A03</b> Inorganic microfiber 3 µm <b>M25</b> Wire mesh 25 µm<br><b>A06</b> Inorganic microfiber 6 µm <b>M60</b> Wire mesh 60 µm<br><b>A10</b> Inorganic microfiber 10 µm <b>M90</b> Wire mesh 90 µm<br><b>A16</b> Inorganic microfiber 16 µm <b>P10</b> Resin impregnated paper 10 µm<br><b>A25</b> Inorganic microfiber 25 µm <b>P25</b> Resin impregnated paper 25 µm |     |     |                     |                               |  |  |  |
| <b>Element Δp</b>  | Filter media   |     |     |                     |                               |  |  |  |
|  | Axx  | Mxx | Pxx |                     |                               |  |  |  |
| <b>N</b> 10 bar  |  | •   | •   |                     |                               |  |  |  |
| <b>H</b> 10 bar  |  | •   |     |                     |                               |  |  |  |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC | •  | •   |     |                     |                               |  |  |  |
|  |  |     |     | <b>Bypass valve</b> | <b>Execution</b>              |  |  |  |
|  |  |     |     | <b>E</b> 3 bar      | <b>P01</b> MP Filtri standard |  |  |  |
|  |  |     |     | <b>B</b> 1.75 bar   | <b>Pxx</b> Customized         |  |  |  |

### FILTER ELEMENT

|  |  |     |     |              |                     |                               |  |  |
|--|--|-----|-----|--------------|---------------------|-------------------------------|--|--|
| <b>Element series and size</b>                           | Configuration example 1: <b>MFX400</b>   <b>1</b>   <b>A25</b>   <b>H</b>   <b>B</b>   <b></b>   <b>P01</b>  |     |     |              |                     |                               |  |  |
| <b>MFX400</b> Filter element with private spigot         | Configuration example 2: <b>MFX400</b>   <b>2</b>   <b>P10</b>   <b>N</b>   <b>V</b>   <b>E</b>   <b>P01</b>   |     |     |              |                     |                               |  |  |
| <b>Element length</b>                                    | 1   2   3  |     |     |              |                     |                               |  |  |
| <b>Filtration rating (filter media)</b>                  | <b>A03</b> Inorganic microfiber 3 µm <b>M25</b> Wire mesh 25 µm<br><b>A06</b> Inorganic microfiber 6 µm <b>M60</b> Wire mesh 60 µm<br><b>A10</b> Inorganic microfiber 10 µm <b>M90</b> Wire mesh 90 µm<br><b>A16</b> Inorganic microfiber 16 µm <b>P10</b> Resin impregnated paper 10 µm<br><b>A25</b> Inorganic microfiber 25 µm <b>P25</b> Resin impregnated paper 25 µm |     |     |              |                     |                               |  |  |
| <b>Element Δp</b>  | Filter media   |     |     |              |                     |                               |  |  |
|  | Axx  | Mxx | Pxx |              |                     |                               |  |  |
| <b>N</b> 10 bar  |  | •   | •   |              |                     |                               |  |  |
| <b>H</b> 10 bar  |  | •   |     |              |                     |                               |  |  |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC | •  | •   |     |              |                     |                               |  |  |
|  |  |     |     | <b>Seals</b> | <b>Bypass valve</b> | <b>Execution</b>              |  |  |
|  |  |     |     | <b>B</b> NBR | <b>E</b> 3 bar      | <b>P01</b> MP Filtri standard |  |  |
|  |  |     |     | <b>V</b> FPM | 1.75 bar            | <b>Pxx</b> Customized         |  |  |

### ACCESSORIES

|   |      |   |         |
|---|------|---|---------|
| <b>Indicators</b>   | page |   | page    |
| <b>BVA</b> Axial pressure gauge                           | 240  | <b>BEA</b> Electrical pressure indicator          | 239     |
| <b>BVR</b> Radial pressure gauge                          | 240  | <b>BEM</b> Electrical pressure indicator          | 239     |
| <b>BVP</b> Visual pressure indicator with automatic reset | 241  | <b>BLA</b> Electrical / visual pressure indicator | 239-240 |
| <b>BVQ</b> Visual pressure indicator with manual reset    | 241  |   |         |
| <b>Additional features</b>                                | page |   |         |
| <b>T5</b> Filler plug M30x1.5                             | 249  |   |         |

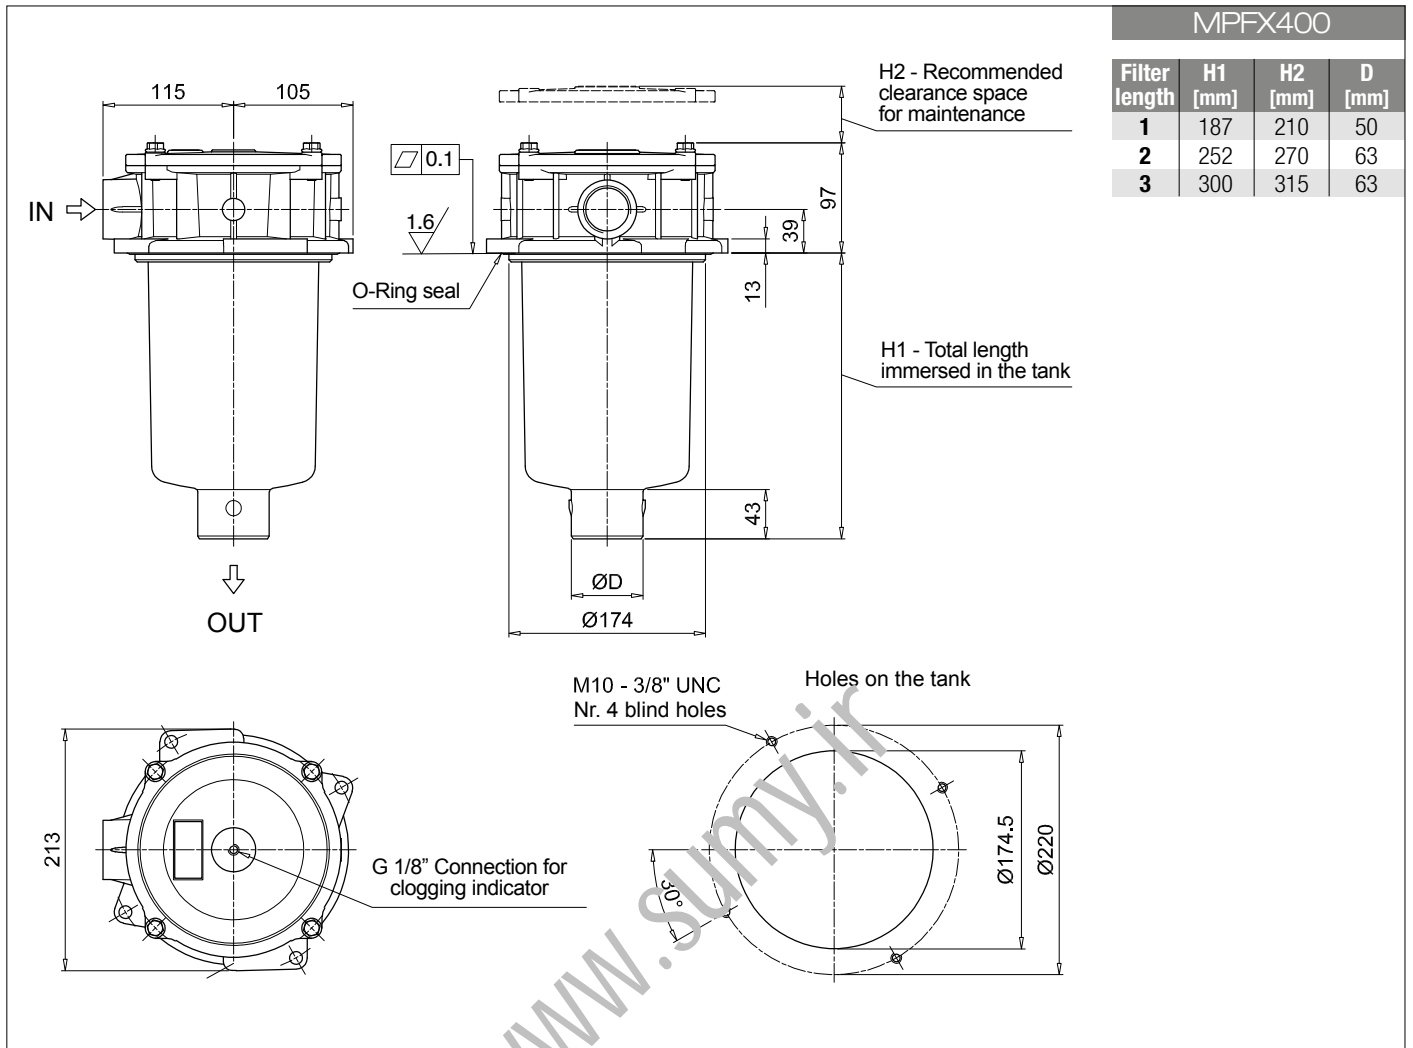

# MPFX MPFX410

## Designation & Ordering code

### COMPLETE FILTER


|   |  |
|---|--|
| <b>Series and size</b><br><b>MPFX410</b> Filter element with private spigot   | Configuration example 1: <b>MPFX410</b>   <b>1</b>   <b>V</b>   <b>G4</b>   <b>1</b>   <b>P10</b>   <b>N</b>   <b>E</b>   <b>P01</b> |
|   | Configuration example 2: <b>MPFX410</b>   <b>1</b>   <b>A</b>   <b>G1</b>   <b>1</b>   <b>A25</b>   <b>H</b>   <b>B</b>   <b>P01</b> |
| <b>Length</b><br><b>1</b>   <b>2</b>   <b>3</b>   |  |
| <b>Seals and treatments</b><br><b>A</b> NBR<br><b>V</b> FPM<br><b>W</b> NBR head anodized<br><b>Z</b> FPM head anodized |  |
| <b>Main Connections</b>   | <b>Aux size 1</b>  |
| <b>G1</b> G 1 1/4"  | G 1"   |
| <b>G4</b> 1 1/4" NPT  | 1" NPT   |
| <b>G7</b> SAE 20 - 1 5/8" - 12 UN   | SAE 16 - 1 5/16" - 12 UN   |
| <b>Aux connection</b> - see previous table<br><b>1</b> Aux size 1   |  |
| <b>Filtration rating (filter media)</b>   |  |
| <b>A03</b> Inorganic microfiber 3 µm  | <b>M25</b> Wire mesh 25 µm   |
| <b>A06</b> Inorganic microfiber 6 µm  | <b>M60</b> Wire mesh 60 µm   |
| <b>A10</b> Inorganic microfiber 10 µm   | <b>M90</b> Wire mesh 90 µm   |
| <b>A16</b> Inorganic microfiber 16 µm   | <b>P10</b> Resin impregnated paper 10 µm   |
| <b>A25</b> Inorganic microfiber 25 µm   | <b>P25</b> Resin impregnated paper 25 µm   |
| <b>Element Δp</b>   | <b>Filter media</b>  |
| <b>N</b> 10 bar   | <b>Axx</b>   <b>Mxx</b>   <b>Pxx</b>   |
| <b>H</b> 10 bar   | •  |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC  | • •  |
|   | <b>Bypass valve</b><br><b>E</b> 3 bar<br><b>B</b> 1.75 bar   |
|   | <b>Execution</b><br><b>P01</b> MP Filtri standard<br><b>Pxx</b> Customized   |

### FILTER ELEMENT

|  |  |
|--|--|
| <b>Element series and size</b><br><b>MFX400</b> Filter element with private spigot | Configuration example 1: <b>MFX400</b>   <b>1</b>   <b>P10</b>   <b>N</b>   <b>V</b>   <b>E</b>   <b>P01</b> |
|  | Configuration example 2: <b>MFX400</b>   <b>1</b>   <b>A25</b>   <b>H</b>   <b>B</b>   <b>P01</b>            |
| <b>Element length</b><br><b>1</b>   <b>2</b>   <b>3</b>                            |  |
| <b>Filtration rating (filter media)</b>  |  |
| <b>A03</b> Inorganic microfiber 3 µm   | <b>M25</b> Wire mesh 25 µm   |
| <b>A06</b> Inorganic microfiber 6 µm   | <b>M60</b> Wire mesh 60 µm   |
| <b>A10</b> Inorganic microfiber 10 µm  | <b>M90</b> Wire mesh 90 µm   |
| <b>A16</b> Inorganic microfiber 16 µm  | <b>P10</b> Resin impregnated paper 10 µm   |
| <b>A25</b> Inorganic microfiber 25 µm  | <b>P25</b> Resin impregnated paper 25 µm   |
| <b>Element Δp</b>  | <b>Filter media</b>  |
| <b>N</b> 10 bar  | <b>Axx</b>   <b>Mxx</b>   <b>Pxx</b>   |
| <b>H</b> 10 bar  | •  |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC                           | • •  |
|  | <b>Seals</b><br><b>B</b> NBR<br><b>V</b> FPM   |
|  | <b>Bypass valve</b><br><b>E</b> 3 bar<br><b>B</b> 1.75 bar   |
|  | <b>Execution</b><br><b>P01</b> MP Filtri standard<br><b>Pxx</b> Customized                                   |

### ACCESSORIES

|   |      |   |         |
|---|------|---|---------|
| <b>Indicators</b>   | page |   | page    |
| <b>BVA</b> Axial pressure gauge                           | 240  | <b>BEA</b> Electrical pressure indicator          | 239     |
| <b>BVR</b> Radial pressure gauge                          | 240  | <b>BEM</b> Electrical pressure indicator          | 239     |
| <b>BVP</b> Visual pressure indicator with automatic reset | 241  | <b>BLA</b> Electrical / visual pressure indicator | 239-240 |
| <b>BVQ</b> Visual pressure indicator with manual reset    | 241  |   |         |
| <b>Additional features</b>                                | page |   |         |
| <b>T5</b> Filler plug M30x1.5                             | 249  |   |         |

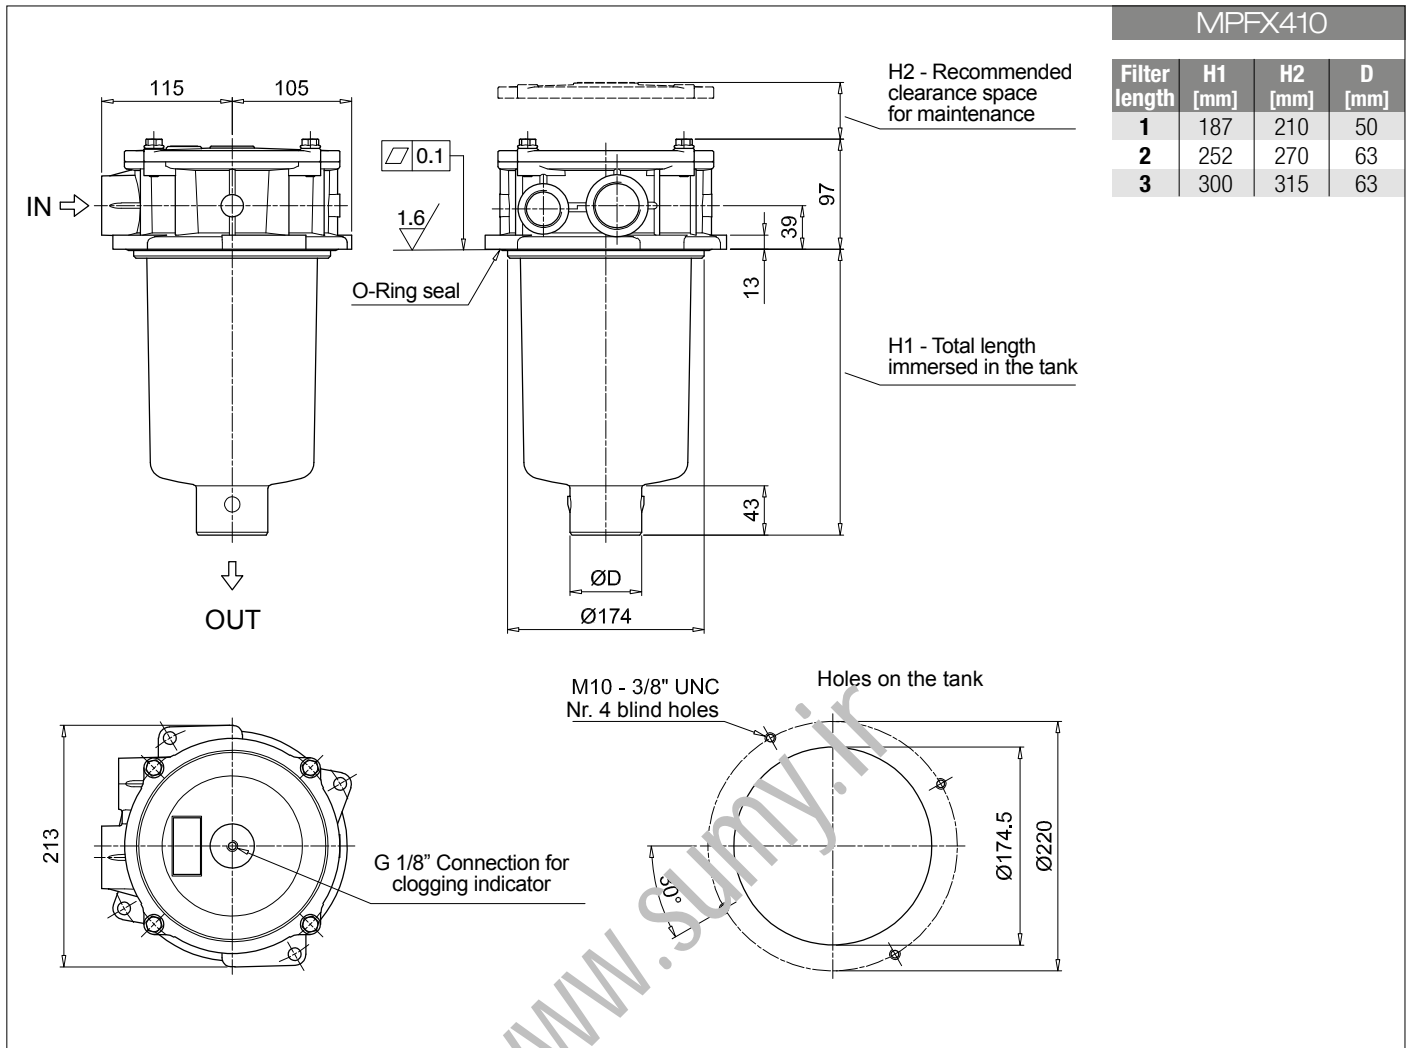

# MPFX MPFX450 - MPFX451 - MPFX750

## Designation & Ordering code

### COMPLETE FILTER

|   |  |  |  |   |                 |                               |  |  |  |  |  |  |
|---|--|--|--|---|-----------------|-------------------------------|--|--|--|--|--|--|
| <b>Series and size</b>  |  |  |  | Configuration example 1: <b>MPFX450</b>   <b>1</b>   <b>A</b>   <b>G1</b>   <b>A25</b>   <b>H</b>   <b>B</b>   <b>P01</b> |                 |                               |  |  |  |  |  |  |
| <b>MPFX450</b>   <b>MPFX451</b>   <b>MPFX750</b> Filter element with private spigot |  |  |  | Configuration example 2: <b>MPFX750</b>   <b>1</b>   <b>V</b>   <b>F2</b>   <b>P10</b>   <b>N</b>   <b>E</b>   <b>P01</b> |                 |                               |  |  |  |  |  |  |
| <b>Length</b>   |  |  |  | <b>MPFX 450</b>   | <b>MPFX 451</b> | <b>MPFX 750</b>               |  |  |  |  |  |  |
| <b>1</b>  |  |  |  | •   | •               | •                             |  |  |  |  |  |  |
| <b>2</b>  |  |  |  | •   | •               |                               |  |  |  |  |  |  |
| <b>3</b>  |  |  |  | •   | •               |                               |  |  |  |  |  |  |
| <b>Seals and treatments</b>   |  |  |  |   |                 |                               |  |  |  |  |  |  |
| <b>A</b> NBR  |  | <b>W</b> NBR head anodized               |  |   |                 |                               |  |  |  |  |  |  |
| <b>V</b> FPM  |  | <b>Z</b> FPM head anodized               |  |   |                 |                               |  |  |  |  |  |  |
| <b>Connections</b>  |  |  |  | <b>Aux (only size 451)</b>  |                 |                               |  |  |  |  |  |  |
| <b>G1</b> G 2"  |  | <b>G 3/4"</b>                            |  |   |                 |                               |  |  |  |  |  |  |
| <b>G4</b> 2" NPT  |  | <b>3/4" NPT</b>                          |  |   |                 |                               |  |  |  |  |  |  |
| <b>G7</b> SAE 32 - 2 1/2" - 12 UN   |  | <b>SAE 12 - 1 1/16" - 12 UN</b>          |  |   |                 |                               |  |  |  |  |  |  |
| <b>F1</b> 2" SAE 3000 psi/M   |  | <b>G 3/4"</b>                            |  |   |                 |                               |  |  |  |  |  |  |
| <b>F2</b> 2" SAE 3000 psi/UN  |  | <b>3/4" NPT</b>                          |  |   |                 |                               |  |  |  |  |  |  |
| <b>Filtration rating (filter media)</b>   |  |  |  |   |                 |                               |  |  |  |  |  |  |
| <b>A03</b> Inorganic microfiber 3 µm  |  | <b>M25</b> Wire mesh 25 µm               |  |   |                 |                               |  |  |  |  |  |  |
| <b>A06</b> Inorganic microfiber 6 µm  |  | <b>M60</b> Wire mesh 60 µm               |  |   |                 |                               |  |  |  |  |  |  |
| <b>A10</b> Inorganic microfiber 10 µm   |  | <b>M90</b> Wire mesh 90 µm               |  |   |                 |                               |  |  |  |  |  |  |
| <b>A16</b> Inorganic microfiber 16 µm   |  | <b>P10</b> Resin impregnated paper 10 µm |  |   |                 |                               |  |  |  |  |  |  |
| <b>A25</b> Inorganic microfiber 25 µm   |  | <b>P25</b> Resin impregnated paper 25 µm |  |   |                 |                               |  |  |  |  |  |  |
| <b>Element Δp</b>   |  |  |  | <b>Filter media</b>   |                 |                               |  |  |  |  |  |  |
|   |  |  |  | <b>Axx</b>  | <b>Mxx</b>      | <b>Pxx</b>                    |  |  |  |  |  |  |
| <b>N</b> 10 bar   |  |  |  |   | •               | •                             |  |  |  |  |  |  |
| <b>H</b> 10 bar   |  |  |  |   | •               |                               |  |  |  |  |  |  |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC                            |  |  |  | •   | •               |                               |  |  |  |  |  |  |
|   |  |  |  | <b>Bypass valve</b>   |                 | <b>Execution</b>              |  |  |  |  |  |  |
|   |  |  |  | <b>E</b> 3 bar  |                 | <b>P01</b> MP Filtri standard |  |  |  |  |  |  |
|   |  |  |  | <b>B</b> 1.75 bar   |                 | <b>Pxx</b> Customized         |  |  |  |  |  |  |

### FILTER ELEMENT



|  |  |  |  |  |                 |                     |  |                               |  |  |  |  |
|--|--|--|--|--|-----------------|---------------------|--|-------------------------------|--|--|--|--|
| <b>Element series and size</b>                                   |  |  |  | Configuration example 1: <b>MFx400</b>   <b>1</b>   <b>A25</b>   <b>H</b>   <b>B</b>   <b>P01</b>            |                 |                     |  |                               |  |  |  |  |
| <b>MFx400</b>   <b>MFx750</b> Filter element with private spigot |  |  |  | Configuration example 2: <b>MFx750</b>   <b>1</b>   <b>P10</b>   <b>N</b>   <b>V</b>   <b>E</b>   <b>P01</b> |                 |                     |  |                               |  |  |  |  |
| <b>Element length</b>  |  |  |  | <b>MPFX 450</b>  | <b>MPFX 451</b> | <b>MPFX 750</b>     |  |                               |  |  |  |  |
| <b>1</b>   |  |  |  | •  | •               | •                   |  |                               |  |  |  |  |
| <b>2</b>   |  |  |  | •  | •               |                     |  |                               |  |  |  |  |
| <b>3</b>   |  |  |  | •  | •               |                     |  |                               |  |  |  |  |
| <b>Filtration rating (filter media)</b>                          |  |  |  |  |                 |                     |  |                               |  |  |  |  |
| <b>A03</b> Inorganic microfiber 3 µm                             |  | <b>M25</b> Wire mesh 25 µm               |  |  |                 |                     |  |                               |  |  |  |  |
| <b>A06</b> Inorganic microfiber 6 µm                             |  | <b>M60</b> Wire mesh 60 µm               |  |  |                 |                     |  |                               |  |  |  |  |
| <b>A10</b> Inorganic microfiber 10 µm                            |  | <b>M90</b> Wire mesh 90 µm               |  |  |                 |                     |  |                               |  |  |  |  |
| <b>A16</b> Inorganic microfiber 16 µm                            |  | <b>P10</b> Resin impregnated paper 10 µm |  |  |                 |                     |  |                               |  |  |  |  |
| <b>A25</b> Inorganic microfiber 25 µm                            |  | <b>P25</b> Resin impregnated paper 25 µm |  |  |                 |                     |  |                               |  |  |  |  |
| <b>Element Δp</b>  |  |  |  | <b>Filter media</b>  |                 |                     |  |                               |  |  |  |  |
|  |  |  |  | <b>Axx</b>   | <b>Mxx</b>      | <b>Pxx</b>          |  |                               |  |  |  |  |
| <b>N</b> 10 bar  |  |  |  |  | •               | •                   |  |                               |  |  |  |  |
| <b>H</b> 10 bar  |  |  |  |  | •               |                     |  |                               |  |  |  |  |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC         |  |  |  | •  | •               |                     |  |                               |  |  |  |  |
|  |  |  |  | <b>Seals</b>   |                 | <b>Bypass valve</b> |  | <b>Execution</b>              |  |  |  |  |
|  |  |  |  | <b>B</b> NBR   |                 | <b>E</b> 3 bar      |  | <b>P01</b> MP Filtri standard |  |  |  |  |
|  |  |  |  | <b>V</b> FPM   |                 | <b>1.75 bar</b>     |  | <b>Pxx</b> Customized         |  |  |  |  |

### ACCESSORIES

|   |  |             |   |  |             |
|---|--|-------------|---|--|-------------|
| <b>Indicators</b>   |  | <b>page</b> |   |  | <b>page</b> |
| <b>BVA</b> Axial pressure gauge                           |  | 240         | <b>BEA</b> Electrical pressure indicator          |  | 239         |
| <b>BVR</b> Radial pressure gauge                          |  | 240         | <b>BEM</b> Electrical pressure indicator          |  | 239         |
| <b>BVP</b> Visual pressure indicator with automatic reset |  | 241         | <b>BLA</b> Electrical / visual pressure indicator |  | 239-240     |
| <b>BVQ</b> Visual pressure indicator with manual reset    |  | 241         |   |  |             |


|                               |  |             |
|-------------------------------|--|-------------|
| <b>Additional features</b>    |  | <b>page</b> |
| <b>T5</b> Filler plug M30x1.5 |  | 249         |



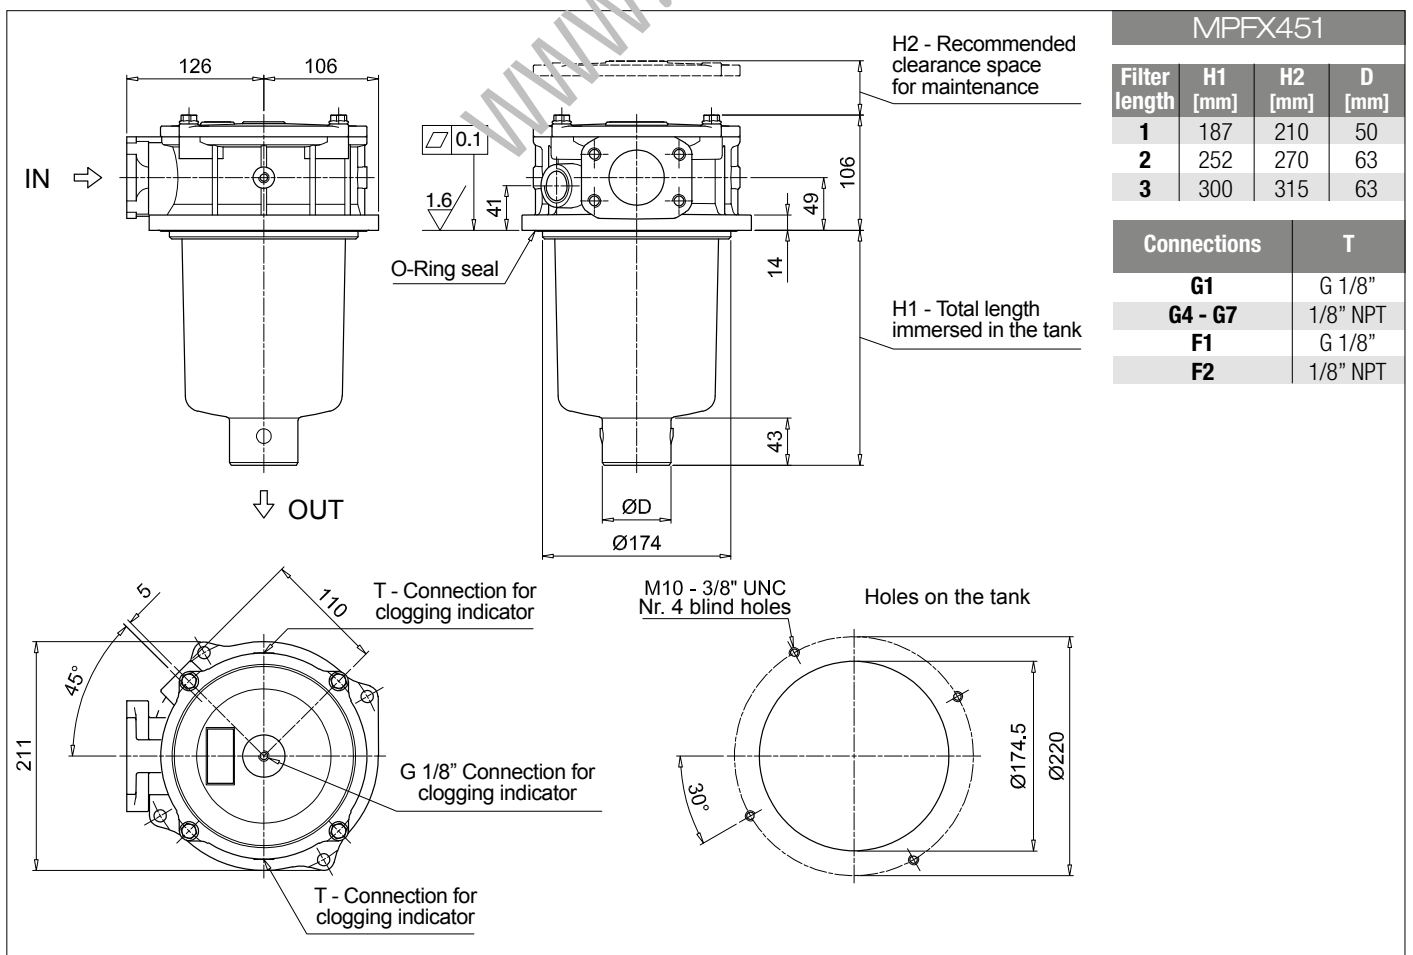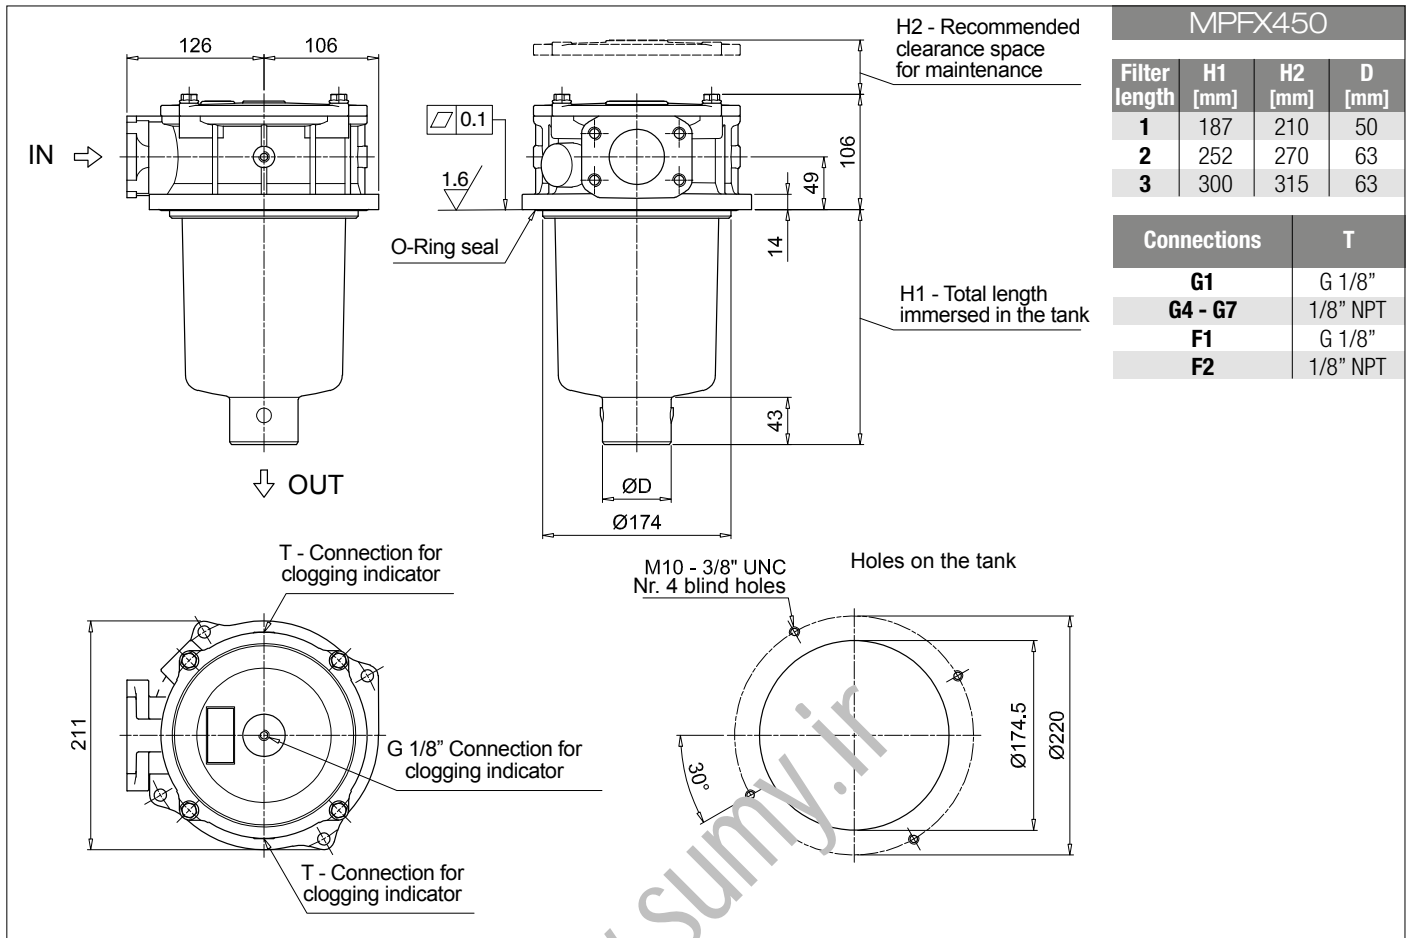

# MPFX MPFX450 - MPFX451 - MPFX750

## Dimensions

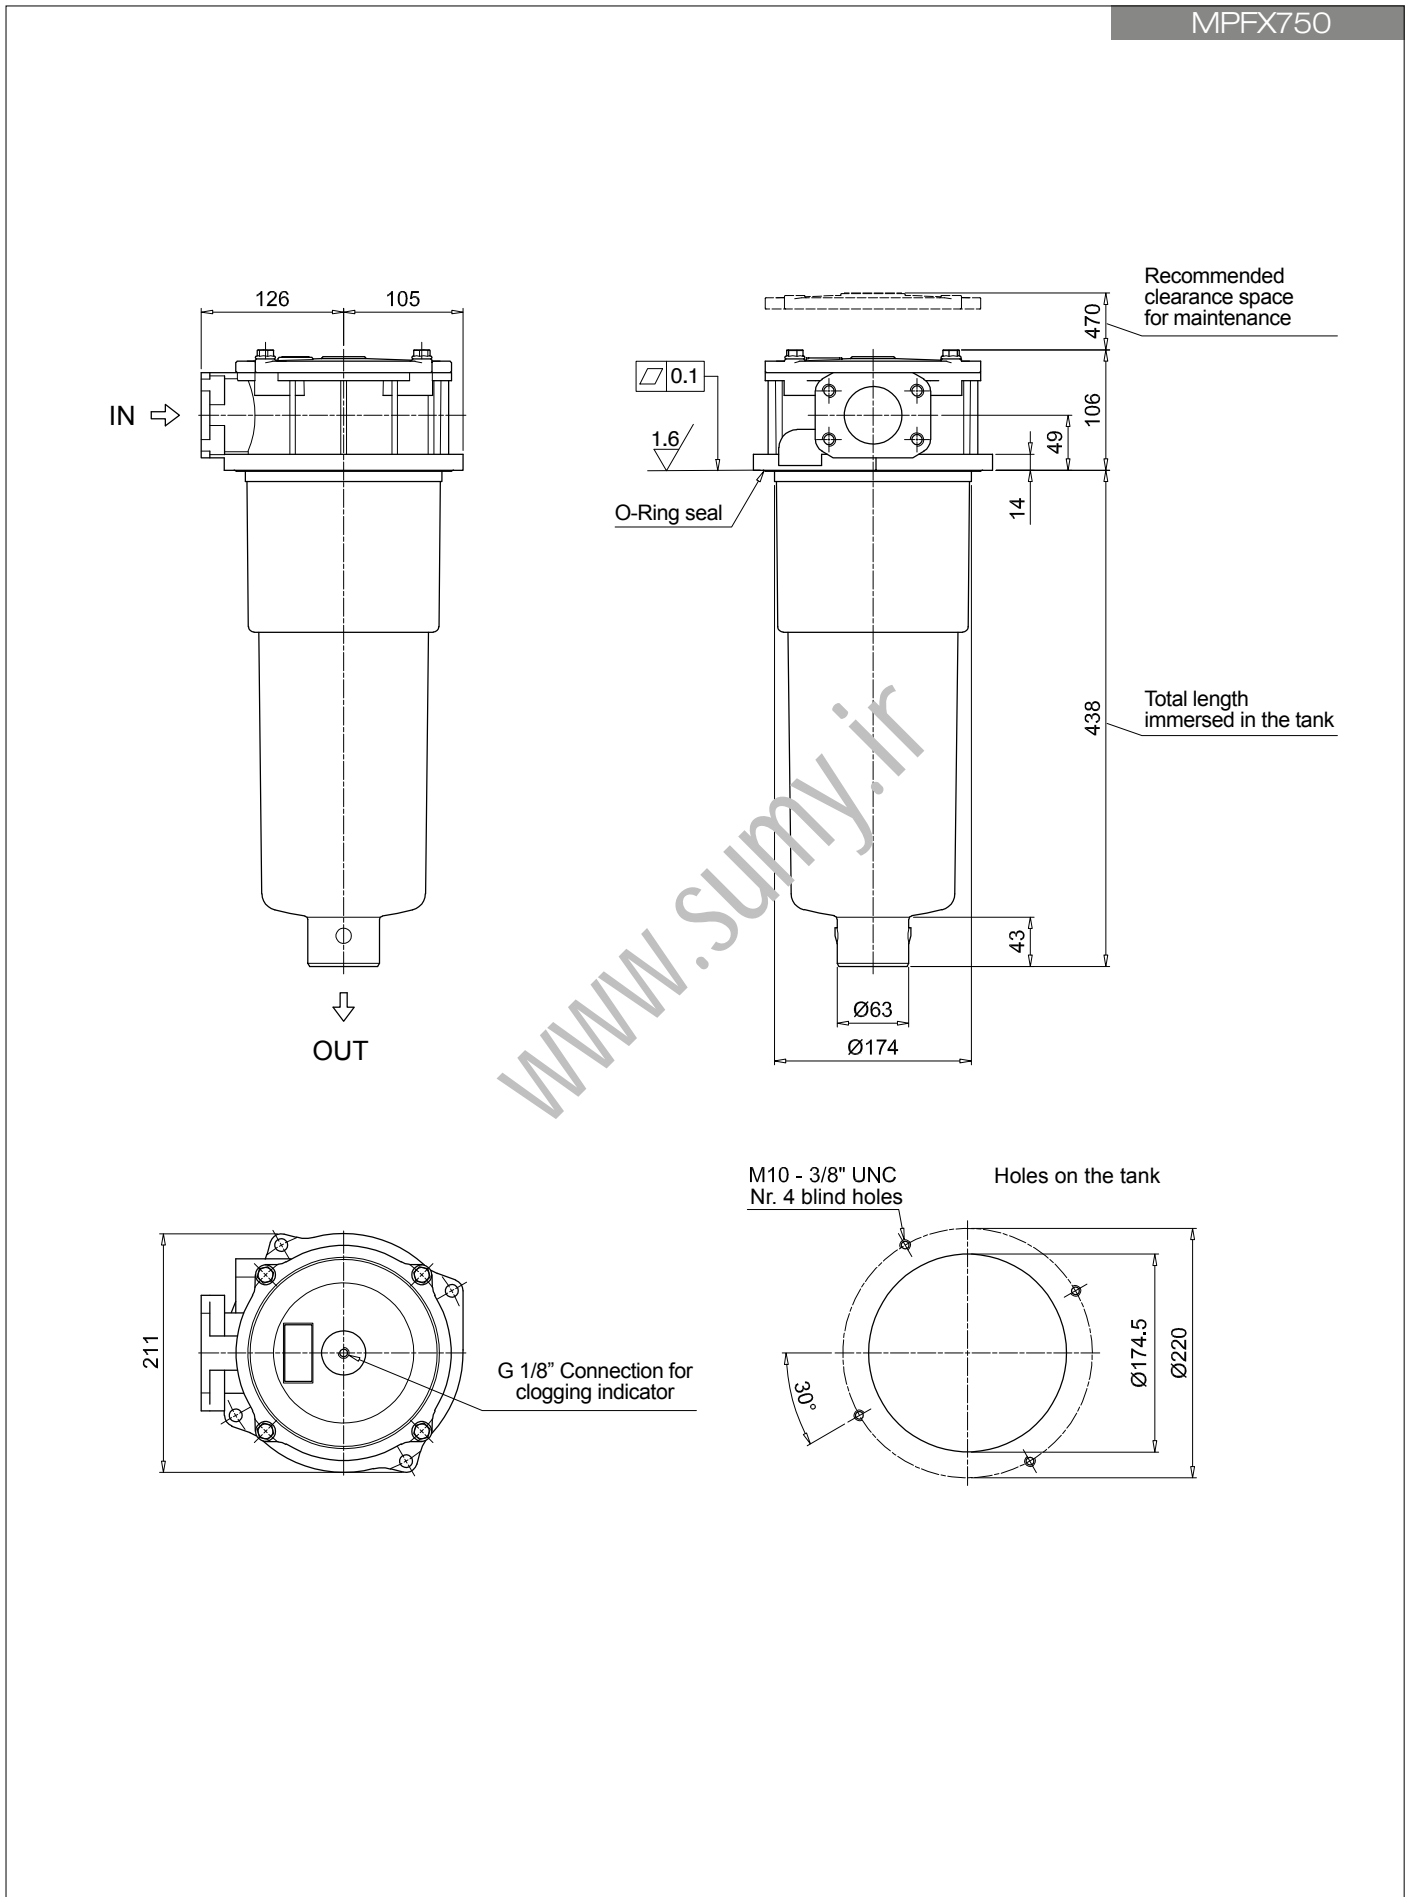

**MPFX 100**

**MPFX 181**

**O-RING SEAL**

|                     | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          |
|---------------------|-----------------|----------------------|----------|
| Item:               | <b>2</b>        | <b>3</b> (3a ÷ 3d)   |          |
| Filter series       | Filter element  | Seal Kit code number |          |
|                     |                 | NBR                  | FPM      |
| <b>MPFX 030</b>     | See order table | 02050675             | 02050676 |
| <b>MPFX 100-110</b> |                 | 02050677             | 02050678 |
| <b>MPFX 181-182</b> |                 | 02050681             | 02050682 |
| <b>MPFX 184</b>     |                 | 02050685             | 02050686 |
| <b>MPFX 191-192</b> |                 | 02050683             | 02050684 |
| <b>MPFX 194</b>     |                 | 02050687             | 02050688 |
| <b>MPFX 400-410</b> |                 | 02050695             | 02050696 |
| <b>MPFX 450-451</b> |                 | 02050697             | 02050698 |
| <b>MPFX 750</b>     |                 | 02050699             | 02050700 |

**MPFX 104**

**MPFX 181**

**FLAT SEAL**

|                     | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          |
|---------------------|-----------------|----------------------|----------|
| Item:               | <b>2</b>        | <b>3</b> (3a ÷ 3d)   |          |
| Filter series       | Filter element  | Seal Kit code number |          |
|                     |                 | NBR                  | FPM      |
| <b>MPFX 104</b>     | See order table | 02050679             | 02050680 |
| <b>MPFX 181-182</b> |                 | 02050691             | 02050692 |
| <b>MPFX 191-192</b> |                 | 02050691             | 02050692 |

www.sumy.ir

# MPLX series

Maximum working pressure up to 1 MPa (10 bar) - Flow rate up to 1800 l/min



## Description

## Technical data

### Return filter

**Maximum working pressure up to 1 MPa (10 bar)**  
**Flow rate up to 1800 l/min**

MPLX is a range of return filters for protection of the reservoir against the system contamination.

Completely interchangeable with Pall 8420 & 8520, they are directly fixed to the reservoir, in immersed or semi-immersed position.

The use of the diffuser is recommended, to place the filter output always immersed into the fluid to avoid aeration or foam generation into the reservoir.

The filter output must be always immersed into the fluid to avoid aeration or foam generation into the reservoir.

#### Available features:

- Flanged connections up to 3", for a maximum flow rate of 1800 l/min
- Fine filtration rating, to get a good cleanliness level into the reservoir
- Bypass valve, to relieve excessive pressure drop across the filter media
- 6 fixing holes for installation, to suit a variety of reservoir surfaces
- Diffuser, to reduce the risk of aeration, foaming and noise
- Filler plug, to fill cleaned fluid into the tank without an additional connection
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

- Heavy duty industrial equipment
- Heavy duty mobile equipment

### Filter housing materials

- Head: Anodized aluminium
- Cover: Anodized aluminium
- Bowl: Phosphatized steel
- Bypass valve: Steel

### Bypass valve

- Opening pressure 450 kPa (4.5 bar)  $\pm 10\%$

### $\Delta p$ element type

- Microfiber filter elements: 10 bar
- Fluid flow through the filter element from OUT to IN.

### Seals

- Standard NBR series A
- Optional FPM series V

### Temperature

From -25 °C to +110 °C

### Note

MPLX filters are provided for vertical mounting



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series   | Weights [kg] |       | Volumes [dm <sup>3</sup> ] |       |
|-----------------|--------------|-------|----------------------------|-------|
|                 | Length       | 2     | Length                     | 2     |
| <b>MPLX 250</b> |              | 8.95  |                            | 2.90  |
| <b>MPLX 660</b> |              | 20.20 |                            | 11.00 |

| Filter series   | Length   | Filter element design - N Series |     |     |     |      |                   |            |
|-----------------|----------|----------------------------------|-----|-----|-----|------|-------------------|------------|
|                 |          | A03                              | A06 | A10 | A16 | A25  | M25<br>M60<br>M90 | P10<br>P25 |
| <b>MPLX 250</b> | <b>2</b> | 157                              | 155 | 281 | 312 | 325  | 583               | 392        |
| <b>MPLX 660</b> | <b>2</b> | 376                              | 384 | 820 | 925 | 1018 | 1732              | 1332       |

### Maximum flow rate for a complete return filter with a pressure drop $\Delta p = 0.5$ bar.




The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).



You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.

### Hydraulic symbols

| Filter series   | Style 1 connection + Diff. indic. |
|-----------------|-----------------------------------|
| <b>MPLX 250</b> | •                                 |
| <b>MPLX 660</b> | •                                 |

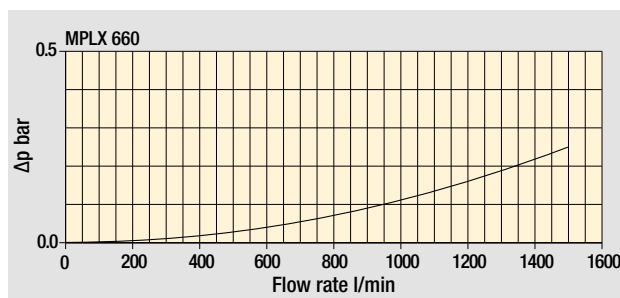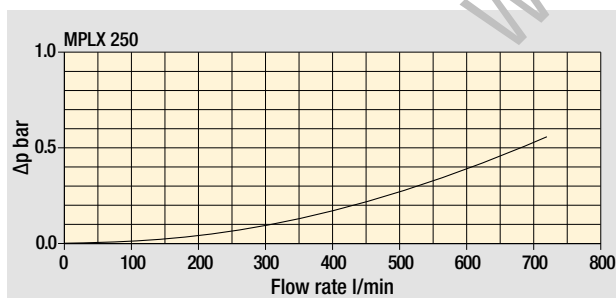Pressure drop  
Filter housings  
 $\Delta p$  pressure drop

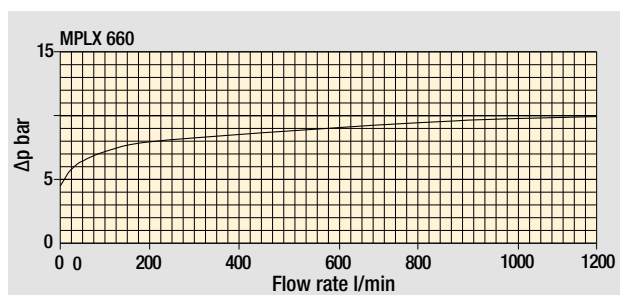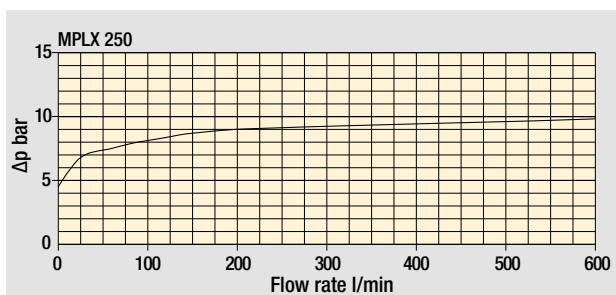

Bypass valve  
pressure drop

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

# MPLX MPLX250 - MPLX660

## Designation & Ordering code

### COMPLETE FILTER

|  |   |     |                     |  |  |  |  |  |  |                               |
|--|---|-----|---------------------|--|--|--|--|--|--|-------------------------------|
| <b>Series and size</b>   | Configuration example 1: <b>MPLX250</b>   2   D   S   W   A   6   M25   P01 |     |                     |  |  |  |  |  |  |                               |
| <b>MPLX250</b> Filter element with private spigot              | Configuration example 2: <b>MPLX660</b>   2   D   D   A   B   6   A10   P01 |     |                     |  |  |  |  |  |  |                               |
| <b>MPLX660</b> Filter element with private spigot              |   |     |                     |  |  |  |  |  |  |                               |
| <b>Length</b>  | 2   |     |                     |  |  |  |  |  |  |                               |
| <b>By-pass valve</b>   | D 4.5 bar   |     |                     |  |  |  |  |  |  |                               |
| <b>Diffuser</b>  | S Without diffuser<br>D With standard diffuser                              |     |                     |  |  |  |  |  |  |                               |
| <b>Seals and treatments</b>                                    | Filtration rating   |     |                     |  |  |  |  |  |  |                               |
|  | Axx   | Mxx | Pxx                 |  |  |  |  |  |  |                               |
| <b>A</b> NBR   | •   | •   | •                   |  |  |  |  |  |  |                               |
| <b>V</b> FPM   | •   | •   | •                   |  |  |  |  |  |  |                               |
| <b>W</b> NBR filter element compatible with fluids HFA-HFB-HFC | •   | •   |                     |  |  |  |  |  |  |                               |
| <b>Z</b> FPM   | •   | •   |                     |  |  |  |  |  |  |                               |
| <b>Connections</b>   | MPLX250   |     | MPLX660             |  |  |  |  |  |  |                               |
| <b>A</b>   | 2" SAE 3000 psi/M   |     | 3" SAE 3000 psi/M   |  |  |  |  |  |  |                               |
| <b>B</b>   | 2" SAE 3000 psi/UNC   |     | 3" SAE 3000 psi/UNC |  |  |  |  |  |  |                               |
| <b>Connection for differential indicator</b>                   | 6 With plugged connection   |     |                     |  |  |  |  |  |  |                               |
| <b>Filtration rating (filter media)</b>                        |   |     |                     |  |  |  |  |  |  |                               |
| <b>A03</b> Inorganic microfiber 3 µm                           | <b>M25</b> Wire mesh 25 µm  |     |                     |  |  |  |  |  |  |                               |
| <b>A06</b> Inorganic microfiber 6 µm                           | <b>M60</b> Wire mesh 60 µm  |     |                     |  |  |  |  |  |  |                               |
| <b>A10</b> Inorganic microfiber 10 µm                          | <b>M90</b> Wire mesh 90 µm  |     |                     |  |  |  |  |  |  |                               |
| <b>A16</b> Inorganic microfiber 16 µm                          | <b>P10</b> Resin impregnated paper 10 µm                                    |     |                     |  |  |  |  |  |  |                               |
| <b>A25</b> Inorganic microfiber 25 µm                          | <b>P25</b> Resin impregnated paper 25 µm                                    |     |                     |  |  |  |  |  |  |                               |
|  |   |     |                     |  |  |  |  |  |  | <b>Execution</b>              |
|  |   |     |                     |  |  |  |  |  |  | <b>P01</b> MP Filtri standard |
|  |   |     |                     |  |  |  |  |  |  | <b>Pxx</b> Customized         |



### FILTER ELEMENT

|  |  |     |     |  |  |                               |
|--|--|-----|-----|--|--|-------------------------------|
| <b>Element series and size</b>                                 | Configuration example 1: <b>MLX250</b>   2   M25   W   P01 |     |     |  |  |                               |
| <b>MLX250</b> Filter element with private spigot               | Configuration example 2: <b>MLX660</b>   2   A10   A   P01 |     |     |  |  |                               |
| <b>MLX660</b> Filter element with private spigot               |  |     |     |  |  |                               |
| <b>Element length</b>  | 2  |     |     |  |  |                               |
| <b>Filtration rating (filter media)</b>                        |  |     |     |  |  |                               |
| <b>A03</b> Inorganic microfiber 3 µm                           | <b>M25</b> Wire mesh 25 µm                                 |     |     |  |  |                               |
| <b>A06</b> Inorganic microfiber 6 µm                           | <b>M60</b> Wire mesh 60 µm                                 |     |     |  |  |                               |
| <b>A10</b> Inorganic microfiber 10 µm                          | <b>M90</b> Wire mesh 90 µm                                 |     |     |  |  |                               |
| <b>A16</b> Inorganic microfiber 16 µm                          | <b>P10</b> Resin impregnated paper 10 µm                   |     |     |  |  |                               |
| <b>A25</b> Inorganic microfiber 25 µm                          | <b>P25</b> Resin impregnated paper 25 µm                   |     |     |  |  |                               |
| <b>Seals and treatments</b>                                    | Filtration rating  |     |     |  |  |                               |
|  | Axx  | Mxx | Pxx |  |  |                               |
| <b>A</b> NBR   | •  | •   | •   |  |  |                               |
| <b>V</b> FPM   | •  | •   | •   |  |  |                               |
| <b>W</b> NBR filter element compatible with fluids HFA-HFB-HFC | •  | •   |     |  |  |                               |
| <b>Z</b> FPM   | •  | •   |     |  |  |                               |
|  |  |     |     |  |  | <b>Execution</b>              |
|  |  |     |     |  |  | <b>P01</b> MP Filtri standard |
|  |  |     |     |  |  | <b>Pxx</b> Customized         |

### ACCESSORIES



|   |         |  |     |  |
|---|---------|--|-----|--|
| <b>Indicators</b>                                     |         |  |     |  |
| <b>DEA</b> Electrical differential indicator          | 242     | <b>DTA</b> Electronic differential indicator | 245 |  |
| <b>DEM</b> Electrical differential indicator          | 242-243 | <b>DVA</b> Visual differential indicator     | 245 |  |
| <b>DLA</b> Electrical / visual differential indicator | 243-244 | <b>DVM</b> Visual differential indicator     | 245 |  |
| <b>DLE</b> Electrical / visual differential indicator | 244     |  |     |  |
| <b>Additional features</b>                            |         |  |     |  |
| <b>T2</b> Plug  | 246     |  |     |  |




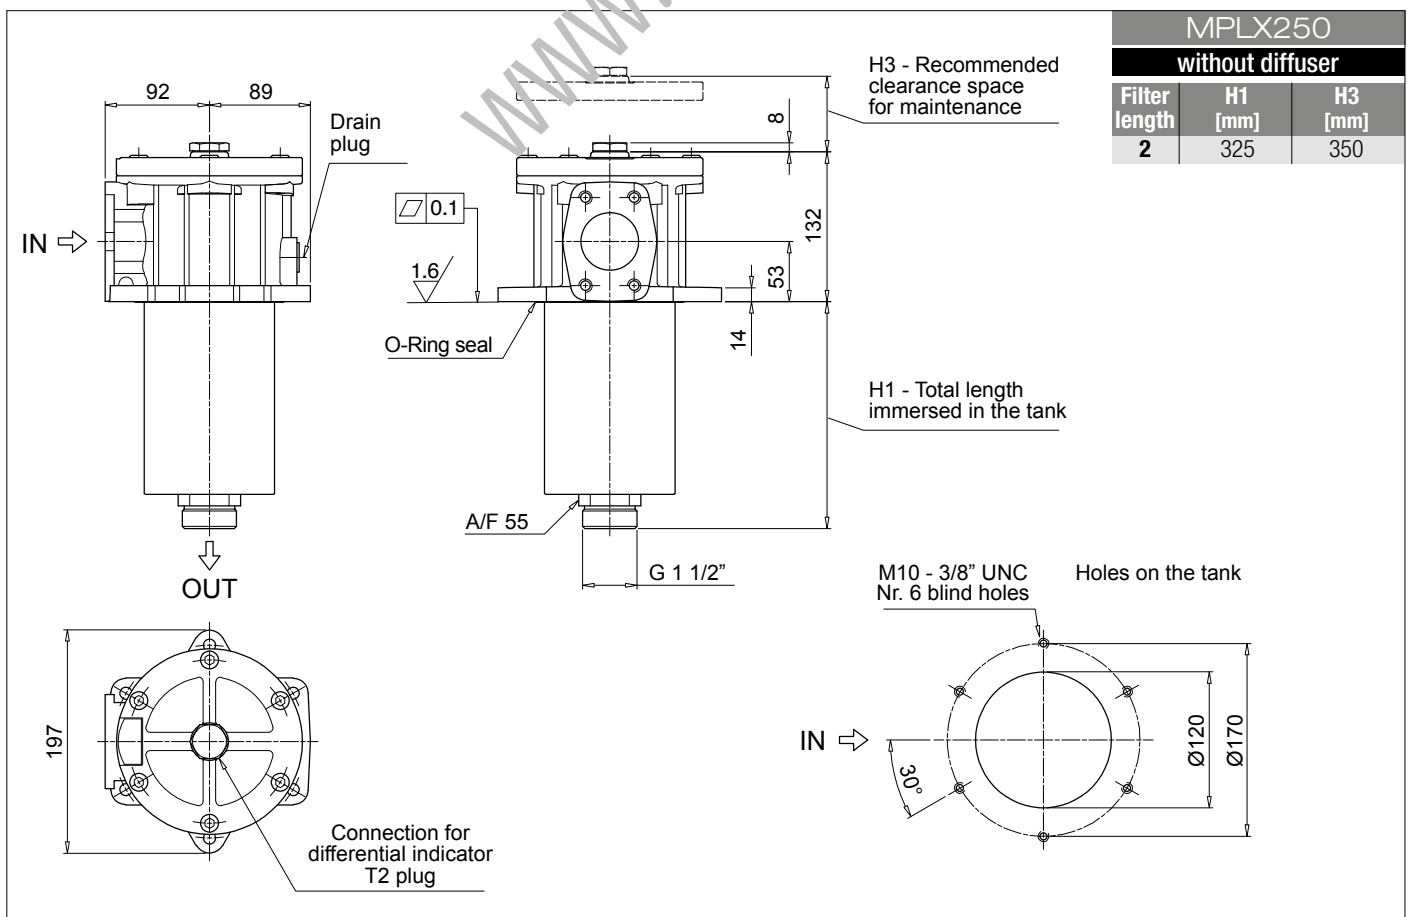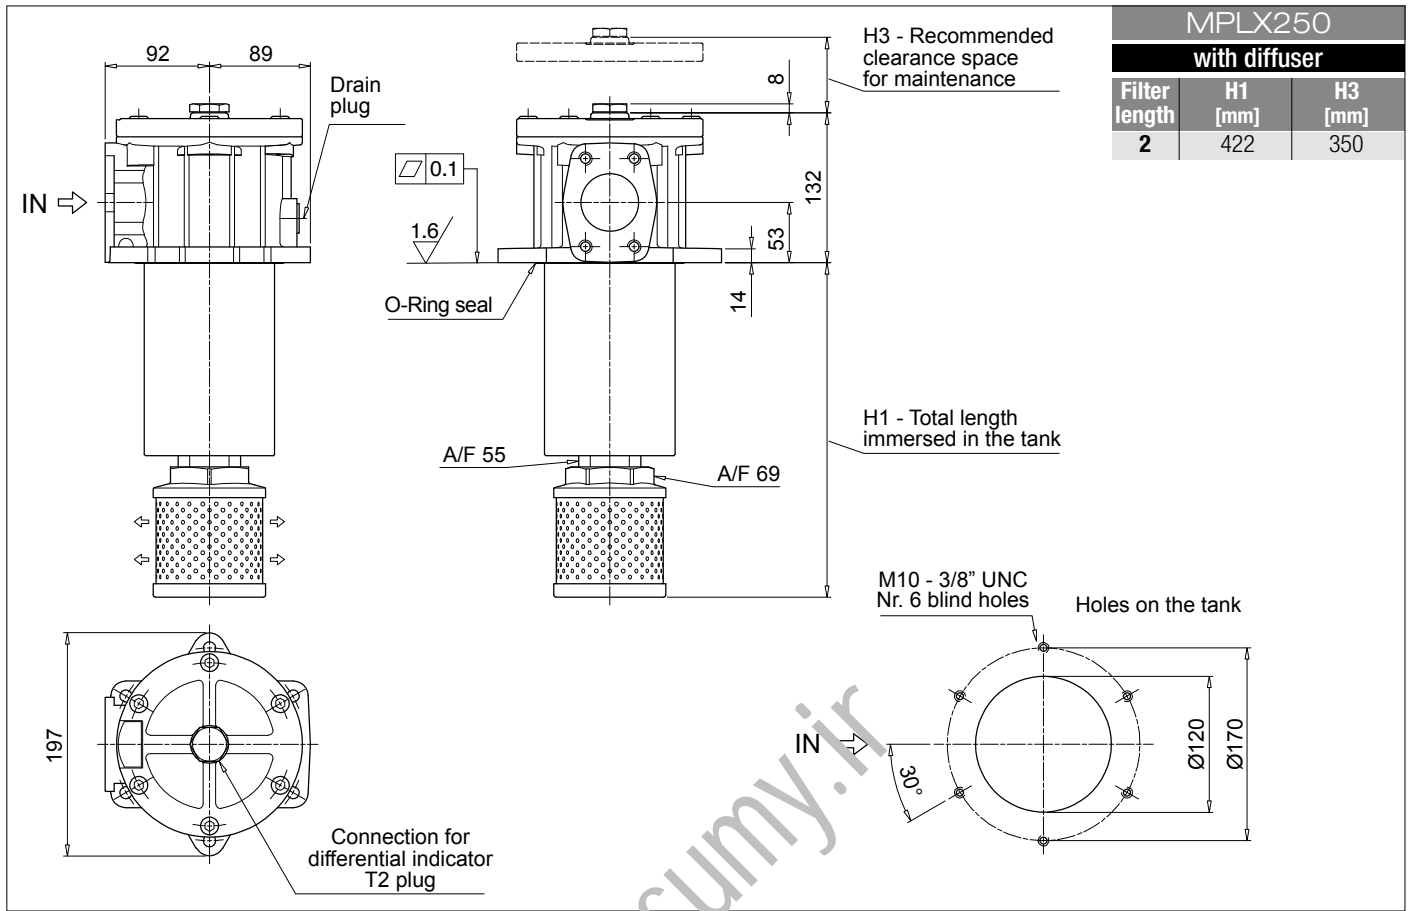

# MPLX MPLX660

## Dimensions

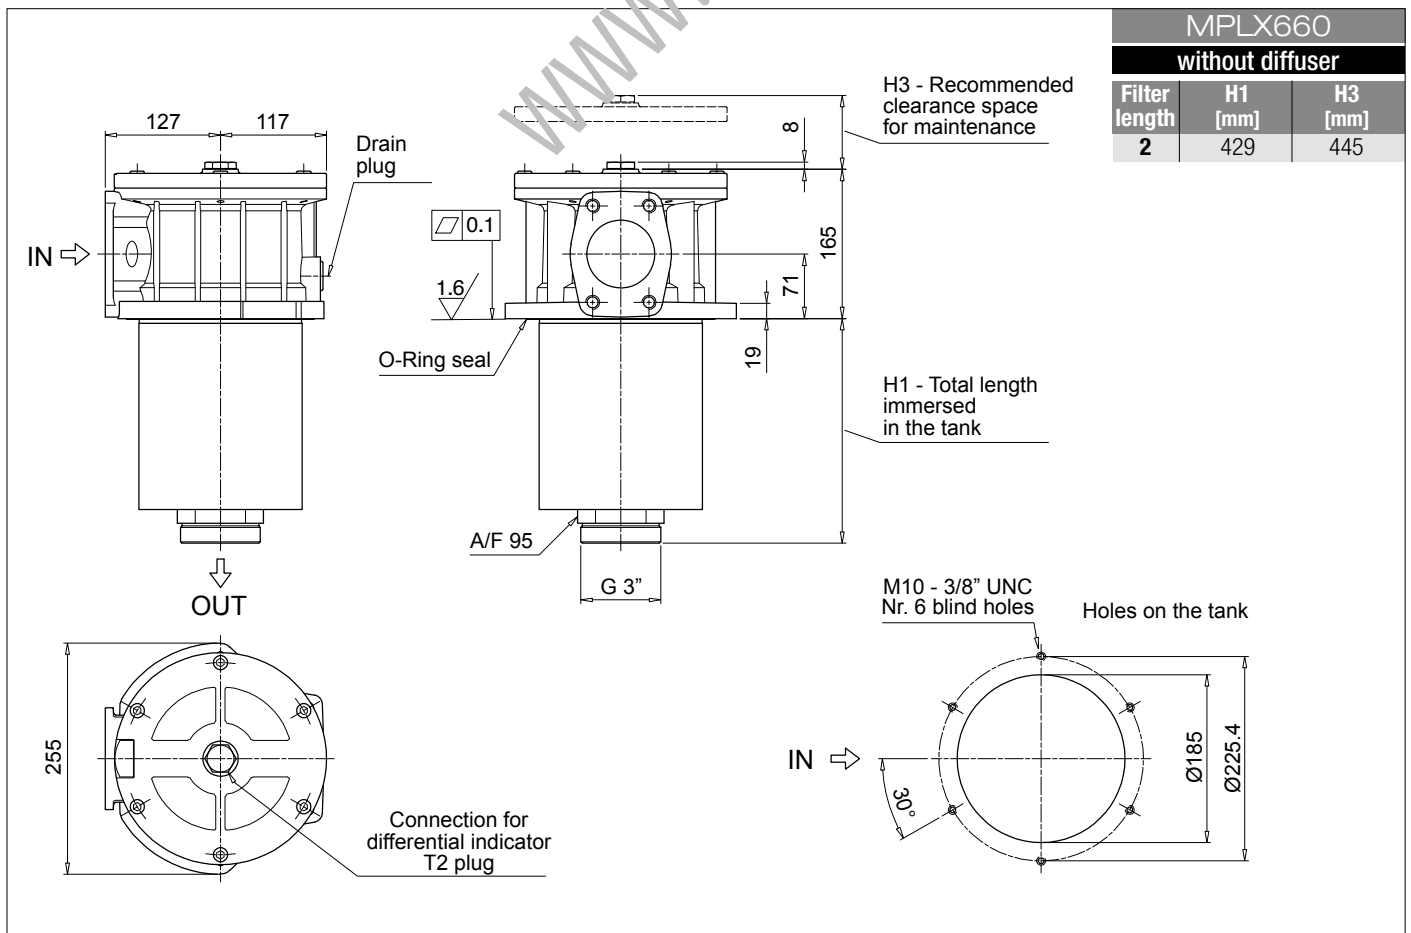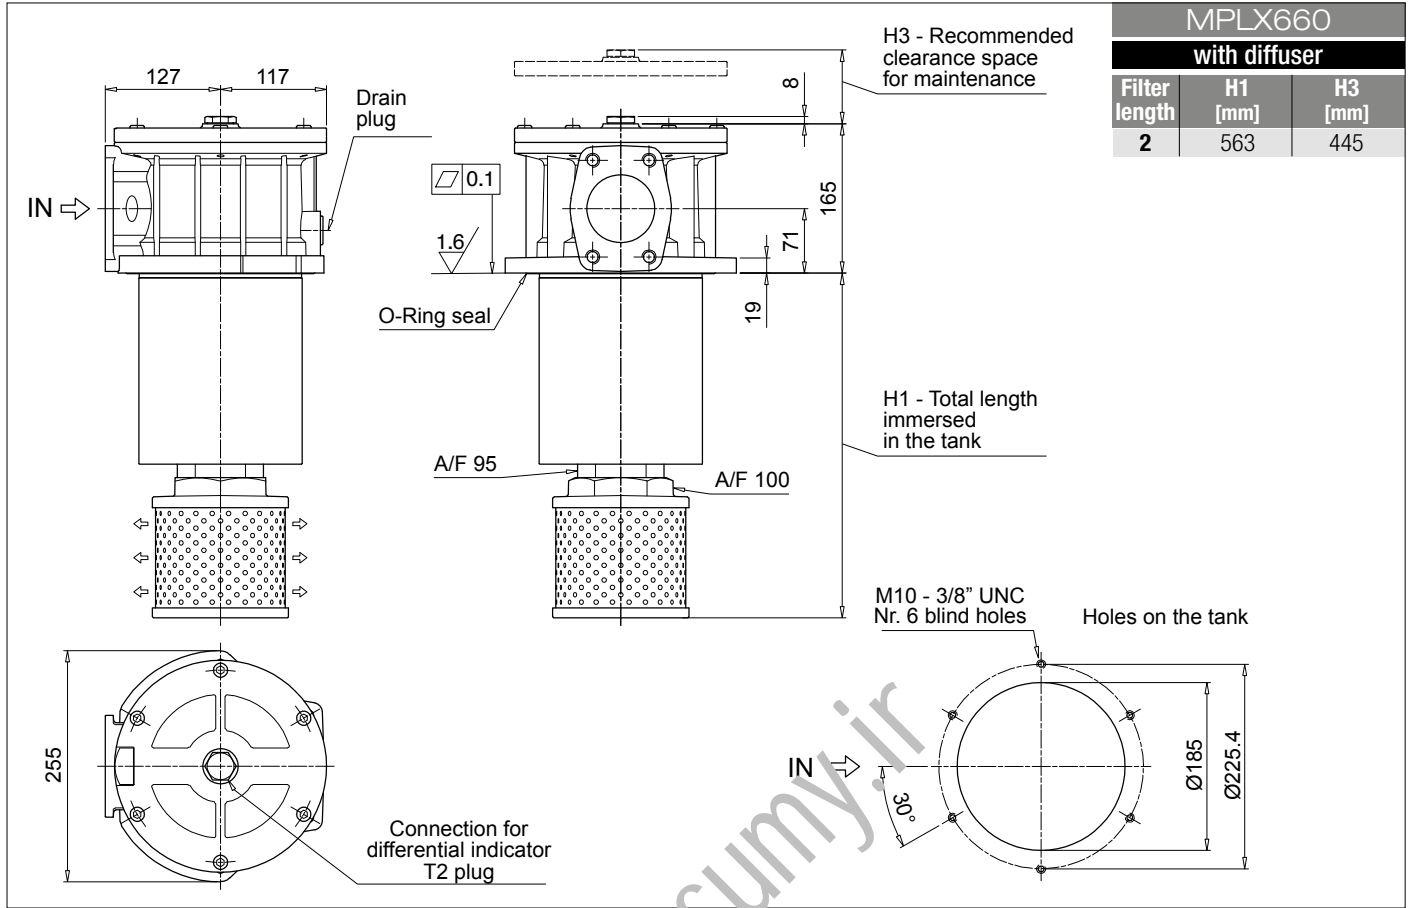

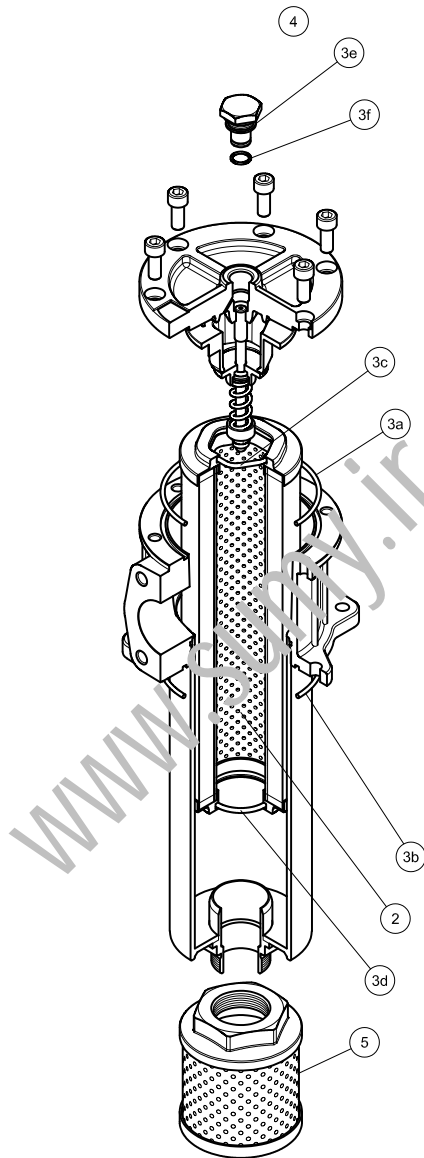

| Item:           | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          | Q.ty: 1 pc.               |     | Q.ty: 1 pc.       |
|-----------------|-----------------|----------------------|----------|---------------------------|-----|-------------------|
| Filter series   | Filter element  | Seal Kit code number |          | Indicator connection plug |     | Diffuser          |
|                 |                 | NBR                  | FPM      | NBR                       | FPM |                   |
| <b>MPLX 250</b> | See order table | 02050745             | 02050746 | T2H                       | T2V | STD 100 C 115 P01 |
| <b>MPLX 660</b> | See order table | 02050747             | 02050748 |                           |     | STD 150 E 155 P01 |

[www.sumy.ir](http://www.sumy.ir)

# MPTX series

Maximum working pressure up to 800 kPa (8 bar) - Flow rate up to 300 l/min



## Description

## Technical data

### Return filter

**Maximum working pressure up to 800 kPa (8 bar)**  
**Flow rate up to 300 l/min**

MPTX is a range of return filters with integrated breather filter, for protection of the reservoir against the system contamination. They are directly fixed to the reservoir, in immersed or semi-immersed position. The filter output must be always immersed into the fluid to avoid aeration or foam generation into the reservoir.

#### Available features:

- Female threaded connections up to 1 1/4", for a maximum flow rate of 300 l/min
- Multiple connections, to connect several return lines or drains
- Fine filtration rating, to get a good cleanliness level into the reservoir
- Bypass valve integrated into the filter element, to relieve excessive pressure drop across the filter media
- 2, 3 or 6 fixing holes for installation, to suit a variety of reservoir surfaces
- O-ring or Flat Seal to suit a variety of reservoir surfaces
- Screw-in cover with a special shape, to allow the filter element replacement without the use of specific tools
- Oil dipstick, to easily check the level of the fluid into the reservoir (sold as separate item)
- Extension tube, to be used in deep reservoirs (sold as separate item)
- Diffuser, to reduce the risk of aeration, foaming and noise (sold as separate item)
- Integrated breather filter, to clean the air that moves into the reservoir as result of the oil level fluctuation
- Integrated breather filter with pressurization valve, to clean the air that moves into the reservoir as result of the oil level fluctuation and to guarantee the pressurization into the reservoir
- Visual, electrical and electronic clogging indicators
- MYclean interface connection, to protect the product against non-original spare parts
- External protective wrap, to optimize the flow through the element and to save the element efficiency against non-proper handling

#### Common applications:

- Light industrial equipment
- Mobile application

### Filter housing materials

- Head: Aluminium
- Cover: Nylon
- Bowl: Nylon

### Bypass valve

- Opening pressure 175 kPa (1.75 bar)  $\pm 10\%$
- Opening pressure 300 kPa (3 bar)  $\pm 10\%$

### $\Delta p$ element type

- Microfiber filter elements - series H: 10 bar
- Fluid flow through the filter element from OUT to IN

### Seals

- Standard NBR series A
- Optional FPM series V

### Temperature

From -25 °C to +110 °C

**Note**  
 MPTX filters are provided for vertical mounting



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series   | Weights [kg] |      |      |      |      | Volumes [dm <sup>3</sup> ] |      |      |      |      |
|-----------------|--------------|------|------|------|------|----------------------------|------|------|------|------|
|                 | Length       | 1    | 2    | 3    | 4    | Length                     | 1    | 2    | 3    | 4    |
| <b>MPTX 025</b> |              | 0.41 | 0.45 | 0.50 | -    |                            | 0.24 | 0.35 | 0.42 | -    |
| <b>MPTX 027</b> |              | 0.44 | 0.48 | 0.55 | -    |                            | 0.24 | 0.35 | 0.42 | -    |
| <b>MPTX 110</b> |              | 1.00 | 1.05 | 1.15 | 1.40 |                            | 0.72 | 0.93 | 1.28 | 1.74 |
| <b>MPTX 114</b> |              | 1.10 | 1.15 | 1.25 | 1.50 |                            | 0.72 | 0.93 | 1.28 | 1.74 |
| <b>MPTX 116</b> |              | 1.10 | 1.15 | 1.25 | 1.50 |                            | 0.72 | 0.93 | 1.28 | 1.74 |
| <b>MPTX 120</b> |              | 1.00 | 1.05 | 1.15 | 1.40 |                            | 0.72 | 0.93 | 1.28 | 1.74 |

| Filter series                       | Length   | Filter element design - H series |     |     |     |     | Filter element design - N series |     |     |
|-------------------------------------|----------|----------------------------------|-----|-----|-----|-----|----------------------------------|-----|-----|
|                                     |          | A03                              | A06 | A10 | A16 | A25 | M25<br>M60<br>M90                | P10 | P25 |
| <b>MPTX<br/>025-027</b>             | <b>1</b> | 7                                | 10  | 23  | 28  | 42  | 59                               | 51  | 54  |
|                                     | <b>2</b> | 17                               | 20  | 45  | 48  | 56  | 72                               | 64  | 67  |
|                                     | <b>3</b> | 21                               | 24  | 50  | 55  | 59  | 76                               | 74  | 75  |
| <b>MPTX<br/>110-120<br/>114-116</b> | <b>1</b> | 18                               | 20  | 53  | 56  | 65  | 153                              | 87  | 96  |
|                                     | <b>2</b> | 28                               | 38  | 65  | 75  | 95  | 158                              | 111 | 123 |
|                                     | <b>3</b> | 48                               | 55  | 125 | 135 | 169 | 289                              | 224 | 251 |
|                                     | <b>4</b> | 79                               | 89  | 180 | 185 | 198 | 306                              | 264 | 289 |

### Maximum flow rate for a complete return filter with a pressure drop $\Delta p = 0.5$ bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).




You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.

## Hydraulic symbols



| Filter series   | Style 1 connection | Style 2 connections | Style 3 connections |
|-----------------|--------------------|---------------------|---------------------|
| <b>MPTX 025</b> | •                  |                     |                     |
| <b>MPTX 027</b> | •                  |                     |                     |
| <b>MPTX 110</b> |                    | •                   |                     |
| <b>MPTX 114</b> | •                  |                     |                     |
| <b>MPTX 116</b> | •                  |                     |                     |
| <b>MPTX 120</b> |                    |                     | •                   |

## Pressure drop



### Filter housings $\Delta p$ pressure drop

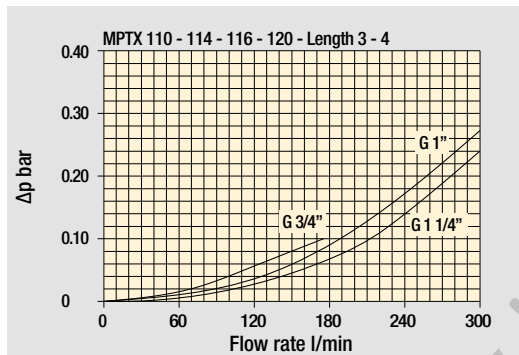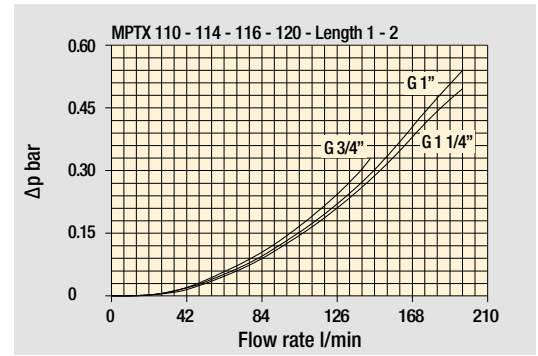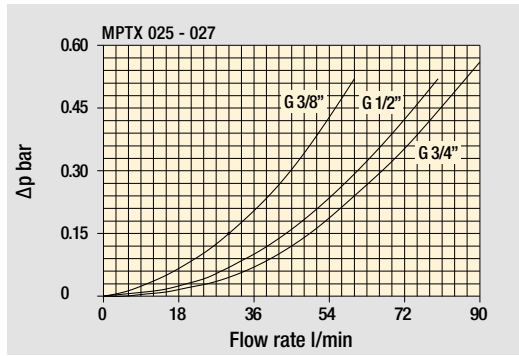

### Bypass valve pressure drop

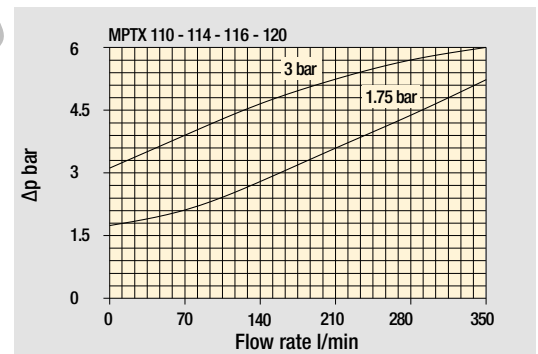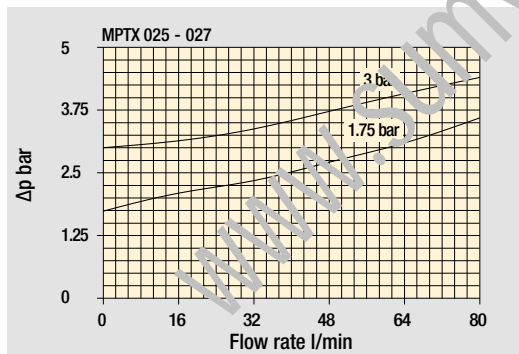

### Air breather pressure drop

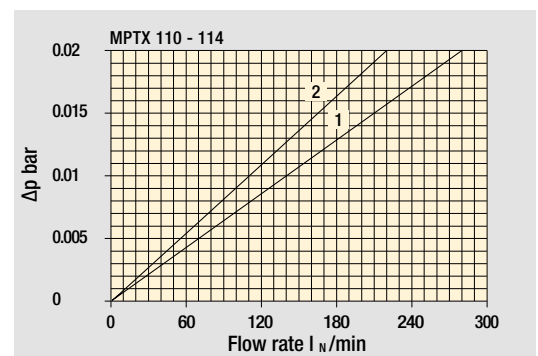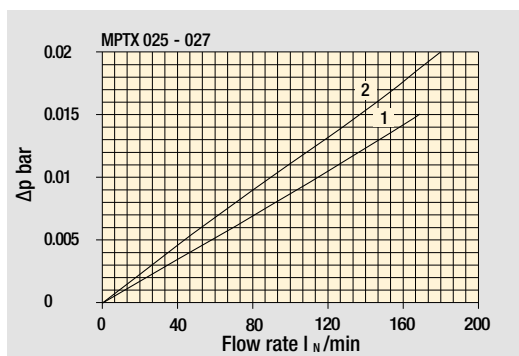





- 1  C With air breather 10  $\mu m$
- 2  D With anti-splash and SAP50 10  $\mu m$

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.



| MPTX 025 -027   |  |   |
|---|--|---|
| Air breather port plugged<br>Indicator port                                       | Air breather standard<br>Indicator port  | Anti-splash air breather & pressurized<br>Double indicator port                     |
|  |  |  |

Multiport - Multifunction

| MPTX 110  |  |
|---|--|
| Standard - Single IN Port   | Double IN Port - Double indicator port   |
|   |   |
| Double IN Port<br>Option: double drain port   | Double IN Port - Indicator port<br>Option: drain port                                |
|  |  |

**MPTX 120**  
Triple IN port

Option: double drain port



# MPTX MPTX025 - MPTX027

## Designation & Ordering code

### COMPLETE FILTER



|  |   |
|--|---|
| <b>Series and size</b><br><b>MPTX025   MPTX027</b> Filter element with private spigot  | Configuration example 1: <b>MPTX025</b>   <b>1</b>   <b>S</b>   <b>A</b>   <b>G3</b>   <b>A10</b>   <b>E</b>   <b>P01</b> |
|  | Configuration example 2: <b>MPTX027</b>   <b>3</b>   <b>C</b>   <b>W</b>   <b>G6</b>   <b>A03</b>   <b>B</b>   <b>P01</b> |
| <b>Length</b><br><b>1</b>   <b>2</b>   <b>3</b>  |   |
| <b>Air breather</b><br><b>S</b> Without air breather<br><b>C</b> With air breather 10 µm<br><b>D</b> With anti-splash and air breather SAP050 10 µm<br><b>P</b> With anti-splash and air breather SAP050 10 µm, pressurization 0.5 bar |   |
| <b>Seals and treatments</b>  | <b>Filtration rating</b>  |
| <b>A</b> NBR   | <b>Axx</b>   <b>Mxx</b>   <b>Pxx</b>  |
| <b>V</b> FPM   | •   •   •   |
| <b>W</b> NBR head anodized filter element compatible with fluids HFA-HFB-HFC   | •   •   •   |
| <b>Z</b> FPM head anodized   | •   •   •   |
| <b>Connections</b>   |   |
| <b>G1</b> G 3/8"   | <b>G6</b> 3/4" NPT  |
| <b>G2</b> G 1/2"   | <b>G7</b> SAE 6 - 9/16" - 18 UNF  |
| <b>G3</b> G 3/4"   | <b>G8</b> SAE 8 - 3/4" - 16 UNF   |
| <b>G4</b> 3/8" NPT   | <b>G9</b> SAE 12 - 1 1/16" - 12 UN  |
| <b>G5</b> 1/2" NPT   |   |
| <b>Filtration rating (filter media)</b>  |   |
| <b>A03</b> Inorganic microfiber 3 µm   | <b>M25</b> Wire mesh 25 µm  |
| <b>A06</b> Inorganic microfiber 6 µm   | <b>M60</b> Wire mesh 60 µm  |
| <b>A10</b> Inorganic microfiber 10 µm  | <b>M90</b> Wire mesh 90 µm  |
| <b>A16</b> Inorganic microfiber 16 µm  | <b>P10</b> Resin impregnated paper 10 µm  |
| <b>A25</b> Inorganic microfiber 25 µm  | <b>P25</b> Resin impregnated paper 25 µm  |
|  | <b>Bypass valve</b><br><b>E</b> 3 bar<br><b>B</b> 1.75 bar  |
|  | <b>Execution</b><br><b>P01</b> MP Filtri standard<br><b>Pxx</b> Customized  |

### FILTER ELEMENT

|   |   |
|---|---|
| <b>Element series and size</b><br><b>MFXX020</b> Filter element with private spigot | Configuration example 2: <b>MFXX020</b>   <b>1</b>   <b>A10</b>   <b>H</b>   <b>B</b>   <b>E</b>   <b>P01</b> |
|   | Configuration example 1: <b>MFXX020</b>   <b>3</b>   <b>A03</b>   <b>W</b>   <b>B</b>   <b>P01</b>            |
| <b>Element length</b><br><b>1</b>   <b>2</b>   <b>3</b>                             |   |
| <b>Filtration rating (filter media)</b>   |   |
| <b>A03</b> Inorganic microfiber 3 µm  | <b>M25</b> Wire mesh 25 µm  |
| <b>A06</b> Inorganic microfiber 6 µm  | <b>M60</b> Wire mesh 60 µm  |
| <b>A10</b> Inorganic microfiber 10 µm   | <b>M90</b> Wire mesh 90 µm  |
| <b>A16</b> Inorganic microfiber 16 µm   | <b>P10</b> Resin impregnated paper 10 µm  |
| <b>A25</b> Inorganic microfiber 25 µm   | <b>P25</b> Resin impregnated paper 25 µm  |
| <b>Element Δp</b>   | <b>Filter media</b>   |
| <b>N</b> 10 bar   | <b>Axx</b>   <b>Mxx</b>   <b>Pxx</b>  |
| <b>H</b> 10 bar   | •   •   •   |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC                            | •   •   •   |
|   | <b>Seals</b><br><b>B</b> NBR<br><b>V</b> FPM  |
|   | <b>Bypass valve</b><br><b>E</b> 3 bar<br>1.75 bar   |
|   | <b>Execution</b><br><b>P01</b> MP Filtri standard<br><b>Pxx</b> Customized                                    |

### ACCESSORIES

|   |      |   |         |
|---|------|---|---------|
| <b>Indicators</b>   | page |   | page    |
| <b>BVA</b> Axial pressure gauge                           | 240  | <b>BEA</b> Electrical pressure indicator          | 239     |
| <b>BVR</b> Radial pressure gauge                          | 240  | <b>BEM</b> Electrical pressure indicator          | 239     |
| <b>BVP</b> Visual pressure indicator with automatic reset | 241  | <b>BLA</b> Electrical / visual pressure indicator | 239-240 |
| <b>BVQ</b> Visual pressure indicator with manual reset    | 241  |   |         |
| <b>Additional features</b>                                | page |   |         |
| <b>TE</b> Extension tube                                  | 248  |   |         |
| <b>DPT</b> Dipstick                                       | 249  |   |         |

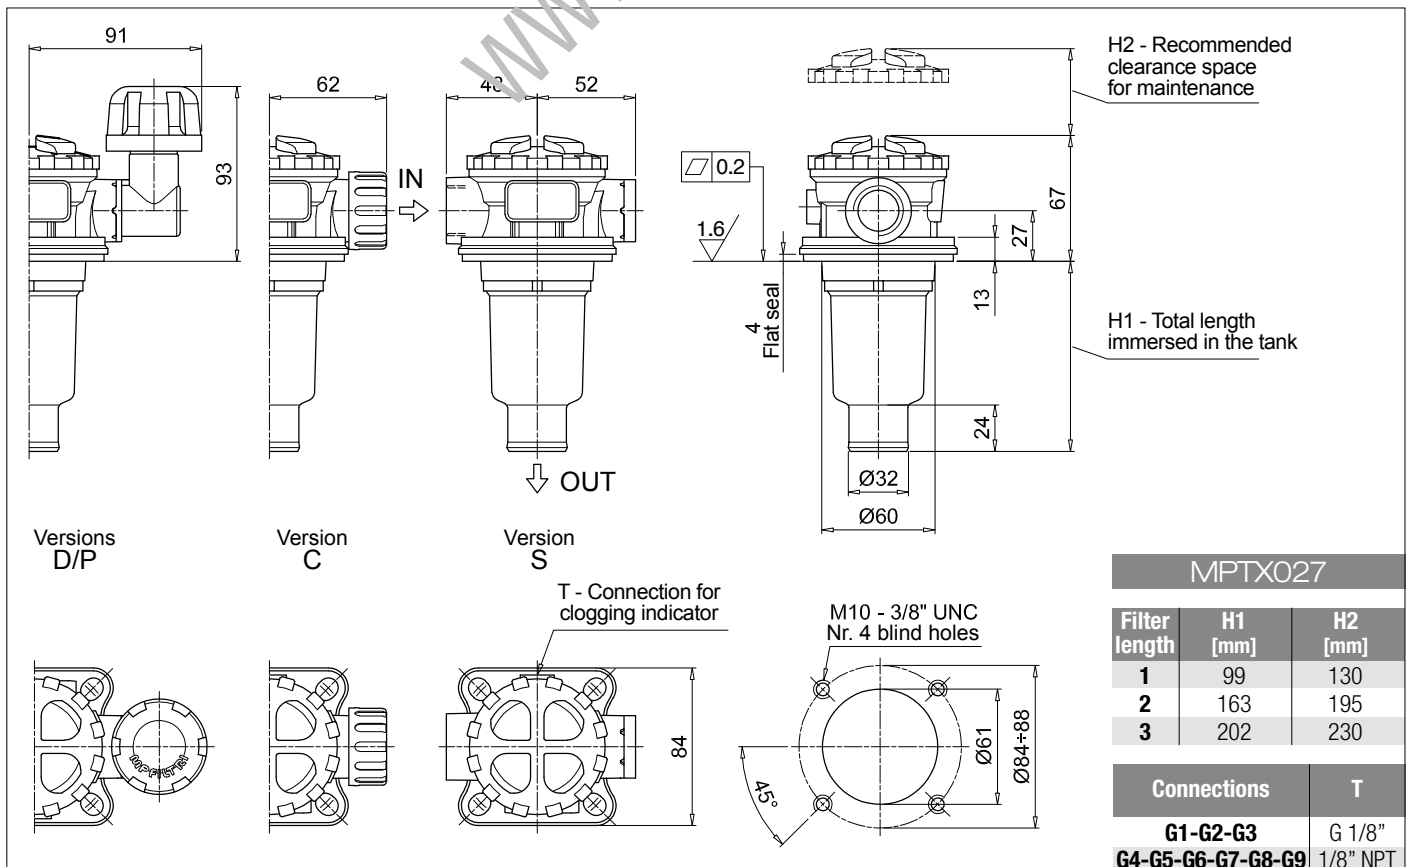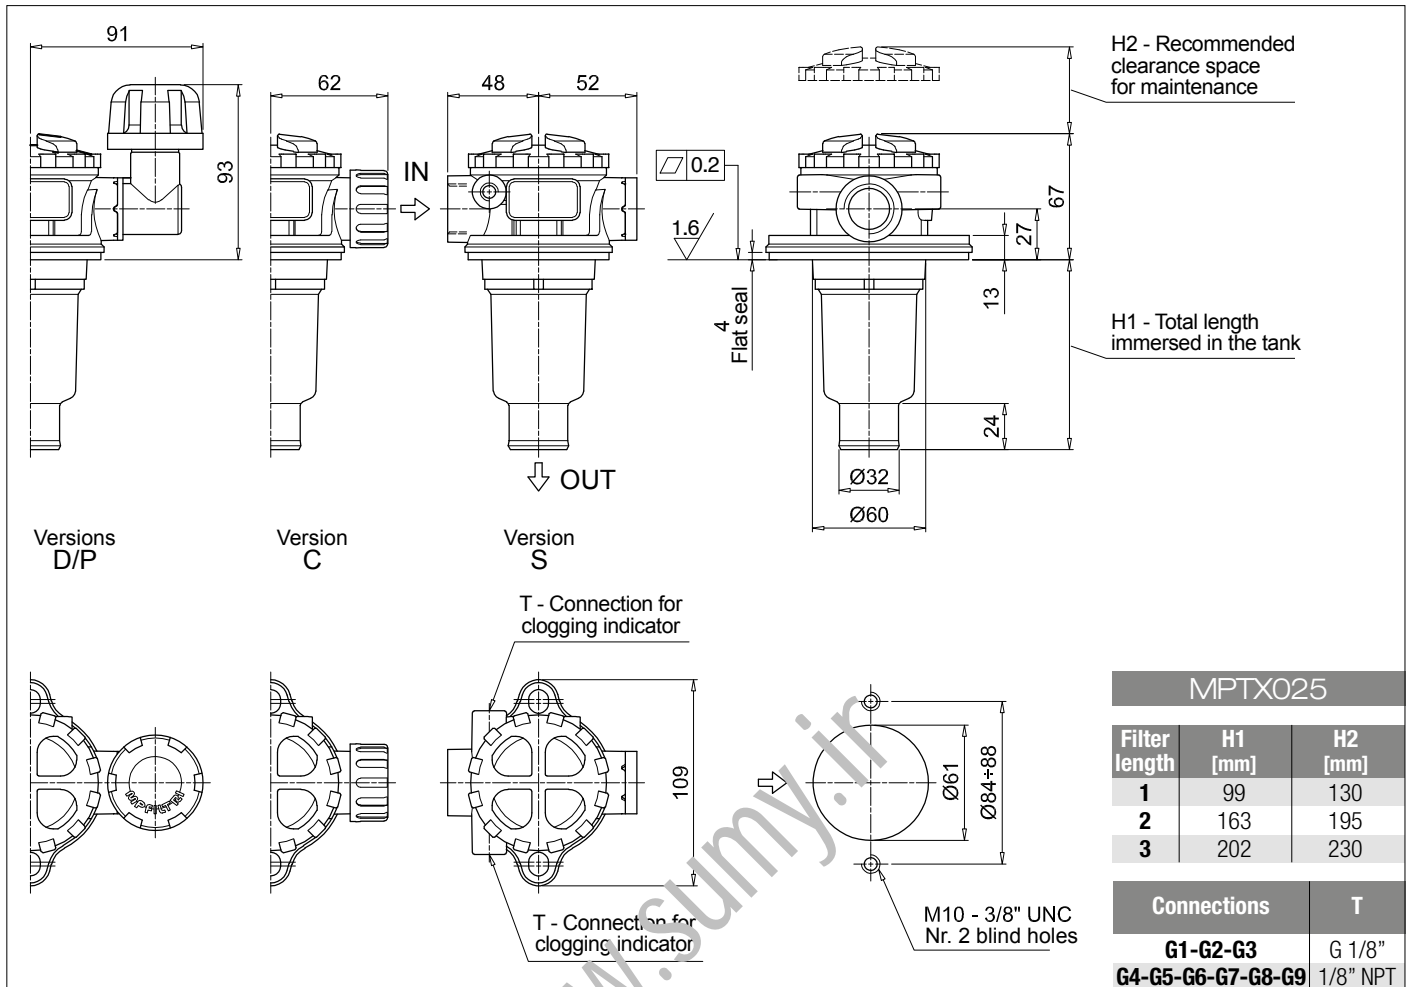

## Designation & Ordering code

### COMPLETE FILTER

|  |  |                   |  |                             |                        |   |                       |  |  |  |  |
|--|--|-------------------|--|-----------------------------|------------------------|---|-----------------------|--|--|--|--|
| <b>Series and size</b>   |  |                   | Configuration example 1: <b>MPTX110</b>   1   S   A   G1   0   A06   E   P01 |                             |                        |   |                       |  |  |  |  |
| <b>MPTX110</b> Filter element with private spigot                        |  |                   | Configuration example 2: <b>MPTX110</b>   3   P   V   G4   1   M25   B   P01 |                             |                        |   |                       |  |  |  |  |
| <b>Length</b>  |  |                   |  |                             |                        |   |                       |  |  |  |  |
| 1   2   3   4  |  |                   |  |                             |                        |   |                       |  |  |  |  |
| <b>Air breather</b>  |  |                   |  |                             |                        |   |                       |  |  |  |  |
| S Without air breather   |  |                   |  |                             |                        |   |                       |  |  |  |  |
| C With air breather 10 µm  |  |                   |  |                             |                        |   |                       |  |  |  |  |
| D With anti-splash and air breather SAP050 10 µm                         |  |                   |  |                             |                        |   |                       |  |  |  |  |
| P With anti-splash and air breather SAP050 10 µm, pressurization 0.5 bar |  |                   |  |                             |                        |   |                       |  |  |  |  |
| <b>Seals and treatments</b>  |  |                   | Filtration rating  |                             |                        |   |                       |  |  |  |  |
|  |  |                   | Axx  | Mxx                         | Pxx                    |   |                       |  |  |  |  |
| A NBR  |  |                   | •  | •                           | •                      |   |                       |  |  |  |  |
| V FPM  |  |                   | •  | •                           | •                      |   |                       |  |  |  |  |
| W NBR head anodized  |  |                   | •  | •                           |                        | filter element compatible with fluids HFA-HFB-HFC |                       |  |  |  |  |
| Z FPM head anodized  |  |                   | •  | •                           |                        |   |                       |  |  |  |  |
| <b>Main Connections</b>  |  | <b>Aux size 1</b> | <b>Aux size 2</b>  | <b>Main Connections</b>     |                        | <b>Aux size 1</b>                                 | <b>Aux size 2</b>     |  |  |  |  |
| G1 G 3/4"  |  | G 3/8"            | G 1/2"   | G6 1 1/4" NPT               |                        | 3/8" NPT  | 1/2" NPT              |  |  |  |  |
| G2 G 1"  |  |                   |  | G7 SAE 12 - 1 1/16" - 12 UN |                        | SAE 6 - 9/16" - 18 UNF                            | SAE 8 - 3/4" - 16 UNF |  |  |  |  |
| G3 G 1 1/4"  |  | 3/8" NPT          | 1/2" NPT   | G8 SAE 16 - 1 5/16" - 12 UN |                        |   |                       |  |  |  |  |
| G4 3/4" NPT  |  |                   |  | G9 SAE 20 - 1 5/8" - 12 UN  |                        |   |                       |  |  |  |  |
| G5 1" NPT  |  |                   |  |                             |                        |   |                       |  |  |  |  |
| <b>Aux connection - see previous table</b>                               |  |                   |  |                             |                        |   |                       |  |  |  |  |
| 0 Not machined   1 Aux size 1   2 Aux size 2                             |  |                   |  |                             |                        |   |                       |  |  |  |  |
| <b>Filtration rating (filter media)</b>                                  |  |                   |  |                             |                        |   |                       |  |  |  |  |
| A03 Inorganic microfiber 3 µm  |  |                   | M25 Wire mesh 25 µm  |                             |                        |   |                       |  |  |  |  |
| A06 Inorganic microfiber 6 µm  |  |                   | M60 Wire mesh 60 µm  |                             |                        |   |                       |  |  |  |  |
| A10 Inorganic microfiber 10 µm   |  |                   | M90 Wire mesh 90 µm  |                             |                        |   |                       |  |  |  |  |
| A16 Inorganic microfiber 16 µm   |  |                   | P10 Resin impregnated paper 10 µm  |                             |                        |   |                       |  |  |  |  |
| A25 Inorganic microfiber 25 µm   |  |                   | P25 Resin impregnated paper 25 µm  |                             |                        |   |                       |  |  |  |  |
|  |  |                   | <b>Bypass valve</b>  |                             | <b>Execution</b>       |   |                       |  |  |  |  |
|  |  |                   | E 3 bar  |                             | P01 MP Filtri standard |   |                       |  |  |  |  |
|  |  |                   | B 1.75 bar   |                             | Pxx Customized         |   |                       |  |  |  |  |

### FILTER ELEMENT

|   |  |  |  |     |                     |  |                        |  |  |  |  |
|---|--|--|--|-----|---------------------|--|------------------------|--|--|--|--|
| <b>Element series and size</b>                    |  |  | Configuration example 1: <b>MFx100</b>   1   A06   H   B   E   P01 |     |                     |  |                        |  |  |  |  |
| <b>MFx100</b> Filter element with private spigot  |  |  | Configuration example 2: <b>MFx100</b>   3   M25   N   V     P01   |     |                     |  |                        |  |  |  |  |
| <b>Element length</b>                             |  |  |  |     |                     |  |                        |  |  |  |  |
| 1   2   3   4                                     |  |  |  |     |                     |  |                        |  |  |  |  |
| <b>Filtration rating (filter media)</b>           |  |  |  |     |                     |  |                        |  |  |  |  |
| A03 Inorganic microfiber 3 µm                     |  |  | M25 Wire mesh 25 µm  |     |                     |  |                        |  |  |  |  |
| A06 Inorganic microfiber 6 µm                     |  |  | M60 Wire mesh 60 µm  |     |                     |  |                        |  |  |  |  |
| A10 Inorganic microfiber 10 µm                    |  |  | M90 Wire mesh 90 µm  |     |                     |  |                        |  |  |  |  |
| A16 Inorganic microfiber 16 µm                    |  |  | P10 Resin impregnated paper 10 µm                                  |     |                     |  |                        |  |  |  |  |
| A25 Inorganic microfiber 25 µm                    |  |  | P25 Resin impregnated paper 25 µm                                  |     |                     |  |                        |  |  |  |  |
| <b>Element Δp</b>                                 |  |  | Filter media   |     |                     |  |                        |  |  |  |  |
|   |  |  | Axx  | Mxx | Pxx                 |  |                        |  |  |  |  |
| N 10 bar  |  |  | •  | •   |                     |  |                        |  |  |  |  |
| H 10 bar  |  |  | •  |     |                     |  |                        |  |  |  |  |
| W 10 bar, compatible with fluids HFA, HFB and HFC |  |  | •  | •   |                     |  |                        |  |  |  |  |
|   |  |  | <b>Seals</b>   |     | <b>Bypass valve</b> |  | <b>Execution</b>       |  |  |  |  |
|   |  |  | B NBR  |     | E 3 bar             |  | P01 MP Filtri standard |  |  |  |  |
|   |  |  | V FPM  |     | 1.75 bar            |  | Pxx Customized         |  |  |  |  |


### ACCESSORIES

|                            |  |      |     |  |         |
|----------------------------|--|------|-----|--|---------|
| <b>Indicators</b>          |  | page |     |  | page    |
| BVA                        | Axial pressure gauge                           | 240  | BEA | Electrical pressure indicator          | 239     |
| BVR                        | Radial pressure gauge                          | 240  | BEM | Electrical pressure indicator          | 239     |
| BVP                        | Visual pressure indicator with automatic reset | 241  | BLA | Electrical / visual pressure indicator | 239-240 |
| BVQ                        | Visual pressure indicator with manual reset    | 241  |     |  |         |
| <b>Additional features</b> |  | page |     |  | page    |
| TE                         | Extension tube                                 | 248  | DPT | Dipstick                               | 249     |
| DFS                        | Diffuser with fast lock connection             | 249  |     |  |         |


| MPTX110       |         |         |
|---------------|---------|---------|
| Filter length | H1 [mm] | H2 [mm] |
| 1             | 99      | 120     |
| 2             | 144     | 170     |
| 3             | 222     | 250     |
| 4             | 324     | 350     |


| Connections       | T        |
|-------------------|----------|
| G1-G2-G3          | G 1/8"   |
| G4-G5-G6-G7-G8-G9 | 1/8" NPT |

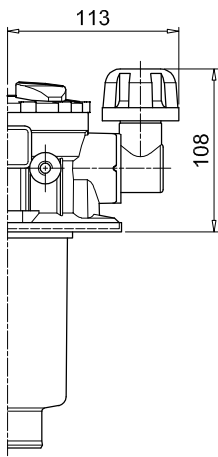






Versions D/P

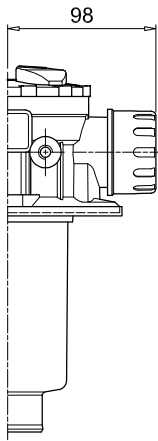

Version C

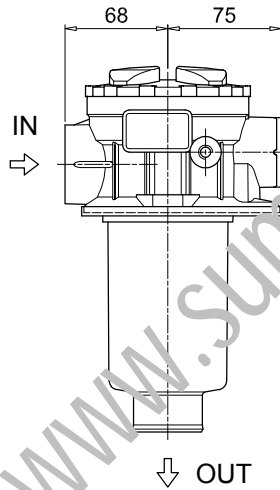

Version S

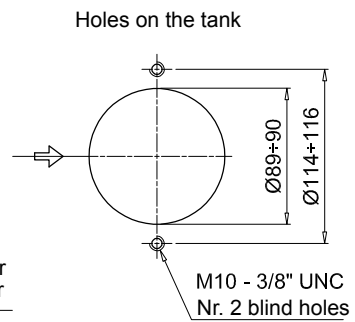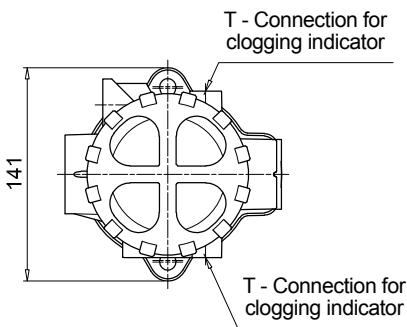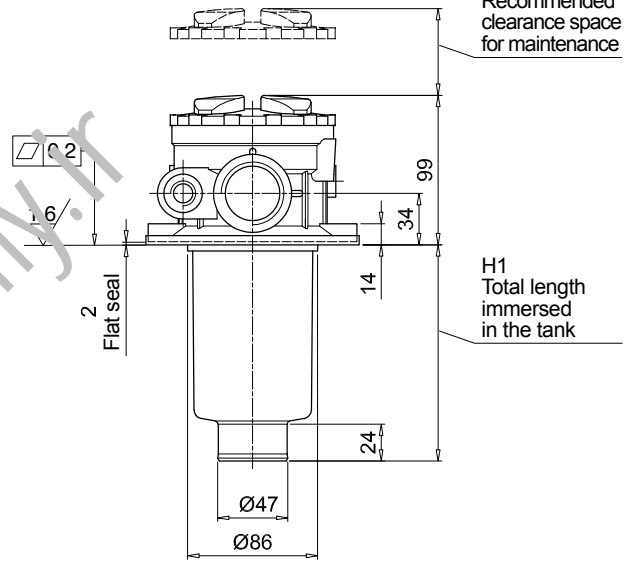

## Designation & Ordering code

### COMPLETE FILTER

|   |                          |         |   |   |   |    |     |   |     |
|---|--------------------------|---------|---|---|---|----|-----|---|-----|
| <b>Series and size</b>                            | Configuration example 1: | MPTX114 | 4 | S | A | G3 | A10 | E | P01 |
| <b>MPTX114</b> Filter element with private spigot | Configuration example 2: | MPTX114 | 3 | C | W | G6 | A03 | B | P01 |

|               |  |
|---------------|--|
| <b>Length</b> |  |
| 1   2   3   4 |  |

|  |  |
|--|--|
| <b>Air breather</b>  |  |
| <b>S</b> Without air breather  |  |
| <b>C</b> With air breather 10 µm   |  |
| <b>D</b> With anti-splash and air breather SAP050 10 µm                        |  |
| <b>P</b> With anti-splash and air breather SAP050 10 µm pressurization 0.5 bar |  |

| Seals and treatments       | Filtration rating |     |     |
|----------------------------|-------------------|-----|-----|
|                            | Axx               | Mxx | Pxx |
| <b>A</b> NBR               | •                 | •   | •   |
| <b>V</b> FPM               | •                 | •   | •   |
| <b>W</b> NBR head anodized | •                 | •   |     |
| <b>Z</b> FPM head anodized | •                 | •   |     |

|                    |                                    |
|--------------------|------------------------------------|
| <b>Connections</b> |                                    |
| <b>G1</b> G 3/4"   | <b>G6</b> 1 1/4" NPT               |
| <b>G2</b> G 1"     | <b>G7</b> SAE 12 - 1 1/16" - 12 UN |
| <b>G3</b> G 1 1/4" | <b>G8</b> SAE 16 - 1 5/16" - 12 UN |
| <b>G4</b> 3/4" NPT | <b>G9</b> SAE 20 - 1 5/8" - 12 UN  |
| <b>G5</b> 1" NPT   |                                    |

|   |  |
|---|--|
| <b>Filtration rating (filter media)</b> |  |
| <b>A03</b> Inorganic microfiber 3 µm    | <b>M25</b> Wire mesh 25 µm               |
| <b>A06</b> Inorganic microfiber 6 µm    | <b>M60</b> Wire mesh 60 µm               |
| <b>A10</b> Inorganic microfiber 10 µm   | <b>M90</b> Wire mesh 90 µm               |
| <b>A16</b> Inorganic microfiber 16 µm   | <b>P10</b> Resin impregnated paper 10 µm |
| <b>A25</b> Inorganic microfiber 25 µm   | <b>P25</b> Resin impregnated paper 25 µm |

|                     |                               |
|---------------------|-------------------------------|
| <b>Bypass valve</b> | <b>Execution</b>              |
| <b>E</b> 3 bar      | <b>P01</b> MP Filtri standard |
| <b>B</b> 1.75 bar   | <b>Pxx</b> Customized         |

### FILTER ELEMENT

|  |                          |        |   |     |   |   |   |     |
|--|--------------------------|--------|---|-----|---|---|---|-----|
| <b>Element series and size</b>                   | Configuration example 2: | MFx100 | 4 | A10 | H | B | E | P01 |
| <b>MFx100</b> Filter element with private spigot | Configuration example 1: | MFx100 | 3 | A03 | W | B |   | P01 |

|                       |  |
|-----------------------|--|
| <b>Element length</b> |  |
| 1   2   3   4         |  |

|   |  |
|---|--|
| <b>Filtration rating (filter media)</b> |  |
| <b>A03</b> Inorganic microfiber 3 µm    | <b>M25</b> Wire mesh 25 µm               |
| <b>A06</b> Inorganic microfiber 6 µm    | <b>M60</b> Wire mesh 60 µm               |
| <b>A10</b> Inorganic microfiber 10 µm   | <b>M90</b> Wire mesh 90 µm               |
| <b>A16</b> Inorganic microfiber 16 µm   | <b>P10</b> Resin impregnated paper 10 µm |
| <b>A25</b> Inorganic microfiber 25 µm   | <b>P25</b> Resin impregnated paper 25 µm |

| Element Δp   | Filter media |     |     |
|--|--------------|-----|-----|
|  | Axx          | Mxx | Pxx |
| <b>N</b> 10 bar  |              | •   | •   |
| <b>H</b> 10 bar  | •            |     |     |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC | •            | •   |     |

|              |                     |                               |
|--------------|---------------------|-------------------------------|
| <b>Seals</b> | <b>Bypass valve</b> | <b>Execution</b>              |
| <b>B</b> NBR | <b>E</b> 3 bar      | <b>P01</b> MP Filtri standard |
| <b>V</b> FPM | 1.75 bar            | <b>Pxx</b> Customized         |


### ACCESSORIES

|   |      |   |         |
|---|------|---|---------|
| <b>Indicators</b>   | page |   | page    |
| <b>BVA</b> Axial pressure gauge                           | 240  | <b>BEA</b> Electrical pressure indicator          | 239     |
| <b>BVR</b> Radial pressure gauge                          | 240  | <b>BEM</b> Electrical pressure indicator          | 239     |
| <b>BVP</b> Visual pressure indicator with automatic reset | 241  | <b>BLA</b> Electrical / visual pressure indicator | 239-240 |
| <b>BVQ</b> Visual pressure indicator with manual reset    | 241  |   |         |
| <b>Additional features</b>                                | page |   | page    |
| <b>TE</b> Extension tube                                  | 248  | <b>DPT</b> Dipstick                               | 249     |
| <b>DFS</b> Diffuser with fast lock connection             | 249  |   |         |


| MPTX114       |         |         |
|---------------|---------|---------|
| Filter length | H1 [mm] | H2 [mm] |
| 1             | 99      | 120     |
| 2             | 144     | 170     |
| 3             | 222     | 250     |
| 4             | 324     | 350     |


| Connections       | T        |
|-------------------|----------|
| G1-G2-G3          | G 1/8"   |
| G4-G5-G6-G7-G8-G9 | 1/8" NPT |

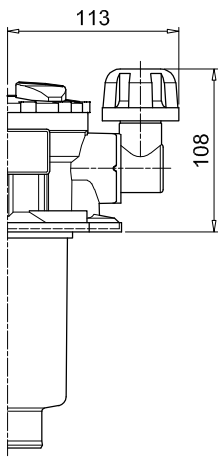






Versions D/P

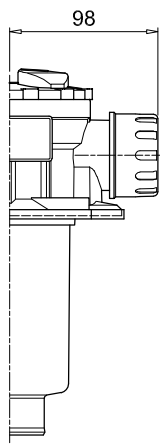

Version C

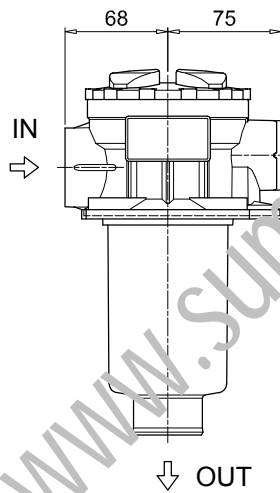

Version S

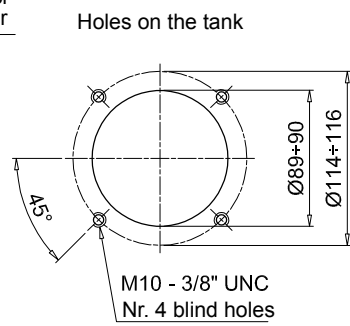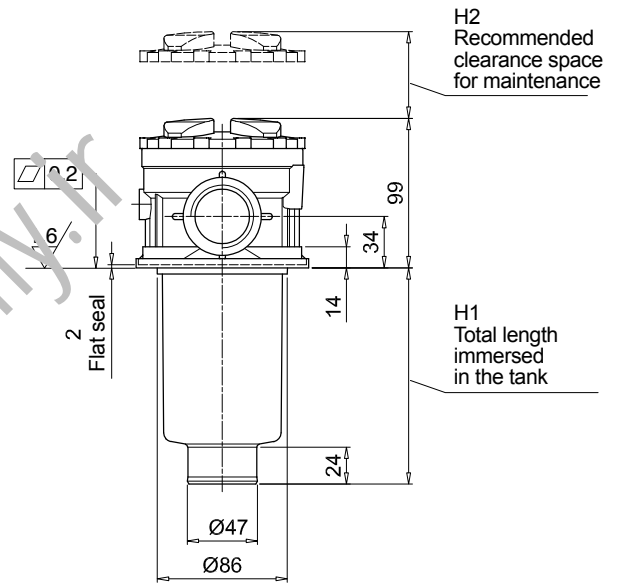

## Designation & Ordering code

### COMPLETE FILTER

|   |                          |         |   |   |   |    |     |   |     |
|---|--------------------------|---------|---|---|---|----|-----|---|-----|
| <b>Series and size</b>                            | Configuration example 1: | MPTX116 | 1 | S | A | G1 | M90 | E | P01 |
| <b>MPTX116</b> Filter element with private spigot | Configuration example 2: | MPTX116 | 2 | S | Z | G9 | A03 | B | P01 |

|               |  |
|---------------|--|
| <b>Length</b> |  |
| 1   2   3   4 |  |

|                        |  |
|------------------------|--|
| <b>Air breather</b>    |  |
| S Without air breather |  |

| Seals and treatments | Filtration rating |     |     |
|----------------------|-------------------|-----|-----|
|                      | Axx               | Mxx | Pxx |
| A NBR                | •                 | •   | •   |
| V FPM                | •                 | •   | •   |
| W NBR head anodized  | •                 | •   |     |
| Z FPM head anodized  | •                 | •   |     |

filter element compatible with fluids HFA-HFB-HFC

Flat seal on the head on request

|                    |                             |
|--------------------|-----------------------------|
| <b>Connections</b> |                             |
| G1 G 3/4"          | G6 1 1/4" NPT               |
| G2 G 1"            | G7 SAE 12 - 1 1/16" - 12 UN |
| G3 G 1 1/4"        | G8 SAE 16 - 1 5/16" - 12 UN |
| G4 3/4" NPT        | G9 SAE 20 - 1 5/8" - 12 UN  |
| G5 1" NPT          |                             |

|   |                                   |
|---|-----------------------------------|
| <b>Filtration rating (filter media)</b> |                                   |
| A03 Inorganic microfiber 3 µm           | M25 Wire mesh 25 µm               |
| A06 Inorganic microfiber 6 µm           | M60 Wire mesh 60 µm               |
| A10 Inorganic microfiber 10 µm          | M90 Wire mesh 90 µm               |
| A16 Inorganic microfiber 16 µm          | P10 Resin impregnated paper 10 µm |
| A25 Inorganic microfiber 25 µm          | P25 Resin impregnated paper 25 µm |

|                     |                        |
|---------------------|------------------------|
| <b>Bypass valve</b> | <b>Execution</b>       |
| E 3 bar             | P01 MP Filtri standard |
| B 1.75 bar          | Pxx Customized         |

### FILTER ELEMENT

|  |                          |        |   |     |   |   |   |     |
|--|--------------------------|--------|---|-----|---|---|---|-----|
| <b>Element series and size</b>                   | Configuration example 2: | MFx100 | 1 | M90 | N | B | E | P01 |
| <b>MFx100</b> Filter element with private spigot | Configuration example 1: | MFx100 | 2 | A03 | W | V |   | P01 |

|                       |  |
|-----------------------|--|
| <b>Element length</b> |  |
| 1   2   3   4         |  |

|   |                                   |
|---|-----------------------------------|
| <b>Filtration rating (filter media)</b> |                                   |
| A03 Inorganic microfiber 3 µm           | M25 Wire mesh 25 µm               |
| A06 Inorganic microfiber 6 µm           | M60 Wire mesh 60 µm               |
| A10 Inorganic microfiber 10 µm          | M90 Wire mesh 90 µm               |
| A16 Inorganic microfiber 16 µm          | P10 Resin impregnated paper 10 µm |
| A25 Inorganic microfiber 25 µm          | P25 Resin impregnated paper 25 µm |

| Element Δp  | Filter media |     |     |
|---|--------------|-----|-----|
|   | Axx          | Mxx | Pxx |
| N 10 bar  |              | •   | •   |
| H 10 bar  | •            |     |     |
| W 10 bar, compatible with fluids HFA, HFB and HFC | •            | •   |     |

|              |                     |                        |
|--------------|---------------------|------------------------|
| <b>Seals</b> | <b>Bypass valve</b> | <b>Execution</b>       |
| B NBR        | E 3 bar             | P01 MP Filtri standard |
| V FPM        | 1.75 bar            | Pxx Customized         |

### ACCESSORIES


|  |      |  |         |
|--|------|--|---------|
| <b>Indicators</b>                                  | page |  | page    |
| BVA Axial pressure gauge                           | 240  | BEA Electrical pressure indicator          | 239     |
| BVR Radial pressure gauge                          | 240  | BEM Electrical pressure indicator          | 239     |
| BVP Visual pressure indicator with automatic reset | 241  | BLA Electrical / visual pressure indicator | 239-240 |
| BVQ Visual pressure indicator with manual reset    | 241  |  |         |
| <b>Additional features</b>                         | page |  | page    |
| TE Extension tube                                  | 248  | DPT Dipstick                               | 249     |
| DFS Diffuser with fast lock connection             | 249  |  |         |



| MPTX116       |         |         |
|---------------|---------|---------|
| Filter length | H1 [mm] | H2 [mm] |
| 1             | 99      | 120     |
| 2             | 146     | 170     |
| 3             | 224     | 250     |
| 4             | 326     | 350     |

| Connections       | T        |
|-------------------|----------|
| G1-G2-G3          | G 1/8"   |
| G4-G5-G6-G7-G8-G9 | 1/8" NPT |

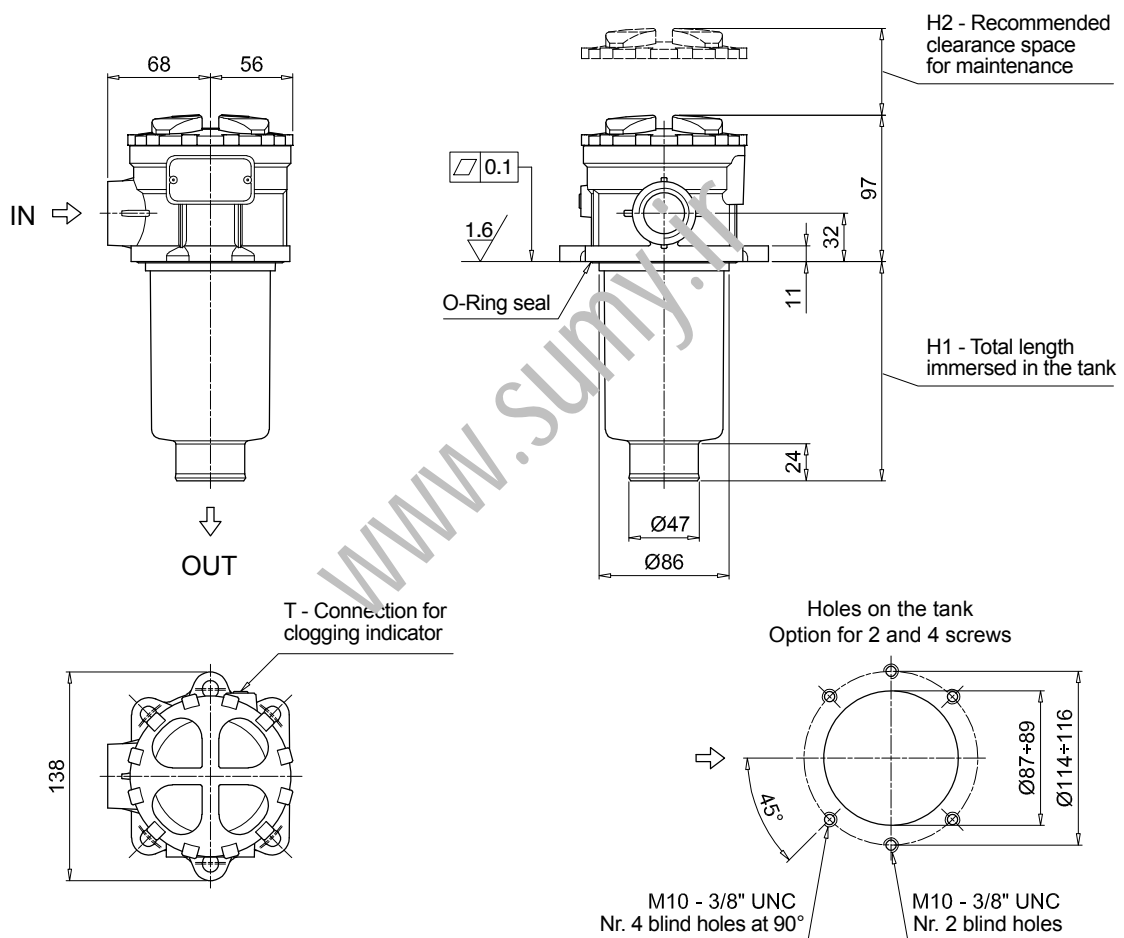

## Designation & Ordering code

### COMPLETE FILTER

|   |                          |         |   |   |    |   |     |   |     |
|---|--------------------------|---------|---|---|----|---|-----|---|-----|
| <b>Series and size</b>                            | Configuration example 1: | MPTX120 | 1 | A | G1 | 0 | A06 | E | P01 |
| <b>MPTX120</b> Filter element with private spigot | Configuration example 2: | MPTX120 | 3 | V | G4 | 1 | M25 | B | P01 |

|               |  |
|---------------|--|
| <b>Length</b> |  |
| 1   2   3   4 |  |

| Seals and treatments       | Filtration rating |     |     |
|----------------------------|-------------------|-----|-----|
|                            | Axx               | Mxx | Pxx |
| <b>A</b> NBR               | •                 | •   | •   |
| <b>V</b> FPM               | •                 | •   | •   |
| <b>W</b> NBR head anodized | •                 | •   |     |
| <b>Z</b> FPM head anodized | •                 | •   |     |

| Main Connections                   | Rear connections         | Aux size 1             | Aux size 2            |
|------------------------------------|--------------------------|------------------------|-----------------------|
| <b>G1</b> G 3/4"                   | G 3/4"                   |                        |                       |
| <b>G2</b> G 1"                     | G 1"                     | G 3/8"                 | G 1/2"                |
| <b>G3</b> G 1 1/4"                 | G 3/4"                   |                        |                       |
| <b>G4</b> 3/4" NPT                 | 3/4" NPT                 |                        |                       |
| <b>G5</b> 1" NPT                   | 1" NPT                   | 3/8" NPT               | 1/2" NPT              |
| <b>G6</b> 1 1/4" NPT               | 3/4" NPT                 |                        |                       |
| <b>G7</b> SAE 12 - 1 1/16" - 12 UN | SAE 12 - 1 1/16" - 12 UN |                        |                       |
| <b>G8</b> SAE 16 - 1 5/16" - 12 UN | SAE 16 - 1 5/16" - 12 UN | SAE 6 - 9/16" - 18 UNF | SAE 8 - 3/4" - 16 UNF |
| <b>G9</b> SAE 20 - 1 5/8" - 12 UN  | SAE 12 - 1 1/16" - 12 UN |                        |                       |

|  |              |
|--|--------------|
| <b>Aux connection</b> - see previous table |              |
| 0 Not machined                             | 1 Aux size 1 |
|  | 2 Aux size 2 |

| Filtration rating (filter media)      |  |
|---------------------------------------|--|
| <b>A03</b> Inorganic microfiber 3 µm  | <b>M25</b> Wire mesh 25 µm               |
| <b>A06</b> Inorganic microfiber 6 µm  | <b>M60</b> Wire mesh 60 µm               |
| <b>A10</b> Inorganic microfiber 10 µm | <b>M90</b> Wire mesh 90 µm               |
| <b>A16</b> Inorganic microfiber 16 µm | <b>P10</b> Resin impregnated paper 10 µm |
| <b>A25</b> Inorganic microfiber 25 µm | <b>P25</b> Resin impregnated paper 25 µm |

| Bypass valve      | Execution                     |
|-------------------|-------------------------------|
| <b>E</b> 3 bar    | <b>P01</b> MP Filtri standard |
| <b>B</b> 1.75 bar | <b>Pxx</b> Customized         |

### FILTER ELEMENT

|  |                          |        |   |     |   |   |   |     |
|--|--------------------------|--------|---|-----|---|---|---|-----|
| <b>Element series and size</b>                   | Configuration example 1: | MFx100 | 1 | A06 | H | B | E | P01 |
| <b>MFx100</b> Filter element with private spigot | Configuration example 2: | MFx100 | 3 | M25 | N | V |   | P01 |

|                       |  |
|-----------------------|--|
| <b>Element length</b> |  |
| 1   2   3   4         |  |

| Filtration rating (filter media)      |  |
|---------------------------------------|--|
| <b>A03</b> Inorganic microfiber 3 µm  | <b>M25</b> Wire mesh 25 µm               |
| <b>A06</b> Inorganic microfiber 6 µm  | <b>M60</b> Wire mesh 60 µm               |
| <b>A10</b> Inorganic microfiber 10 µm | <b>M90</b> Wire mesh 90 µm               |
| <b>A16</b> Inorganic microfiber 16 µm | <b>P10</b> Resin impregnated paper 10 µm |
| <b>A25</b> Inorganic microfiber 25 µm | <b>P25</b> Resin impregnated paper 25 µm |

| Element Δp   | Filter media |     |     |
|--|--------------|-----|-----|
|  | Axx          | Mxx | Pxx |
| <b>N</b> 10 bar  |              | •   | •   |
| <b>H</b> 10 bar  | •            |     |     |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC | •            | •   |     |

| Seals        | Bypass valve   | Execution                     |
|--------------|----------------|-------------------------------|
| <b>B</b> NBR | <b>E</b> 3 bar | <b>P01</b> MP Filtri standard |
| <b>V</b> FPM | 1.75 bar       | <b>Pxx</b> Customized         |


### ACCESSORIES

| Indicators  | page |   | page    |
|---|------|---|---------|
| <b>BVA</b> Axial pressure gauge                           | 240  | <b>BEA</b> Electrical pressure indicator          | 239     |
| <b>BVR</b> Radial pressure gauge                          | 240  | <b>BEM</b> Electrical pressure indicator          | 239     |
| <b>BVP</b> Visual pressure indicator with automatic reset | 241  | <b>BLA</b> Electrical / visual pressure indicator | 239-240 |
| <b>BVQ</b> Visual pressure indicator with manual reset    | 241  |   |         |
| Additional features                                       | page |   | page    |
| <b>TE</b> Extension tube                                  | 248  | <b>DPT</b> Dipstick                               | 249     |
| <b>DFS</b> Diffuser with fast lock connection             | 249  |   |         |

| MPTX120       |         |         |
|---------------|---------|---------|
| Filter length | H1 [mm] | H2 [mm] |
| 1             | 99      | 120     |
| 2             | 144     | 170     |
| 3             | 222     | 250     |
| 4             | 324     | 350     |


| Connections       | T        |
|-------------------|----------|
| G1-G2-G3          | G 1/8"   |
| G4-G5-G6-G7-G8-G9 | 1/8" NPT |

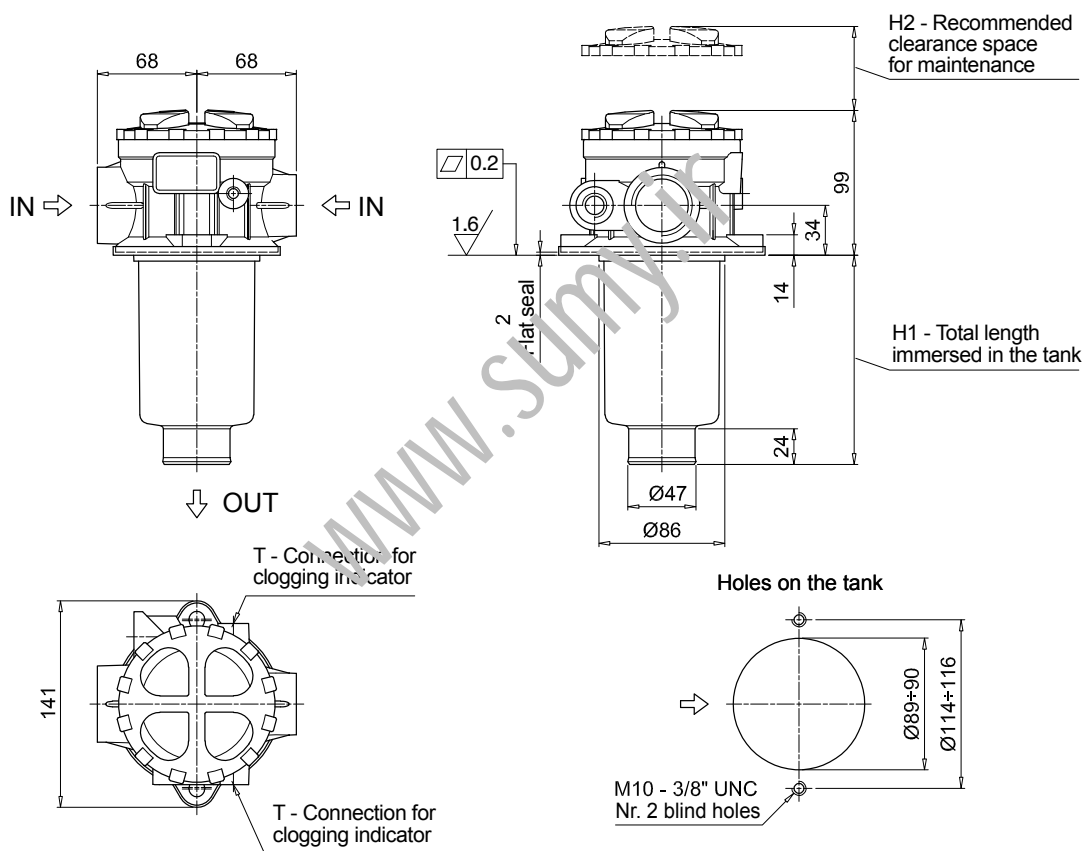


# MPTX SPARE PARTS

Order number for spare parts

**MPTX 025 - 027 - 110**

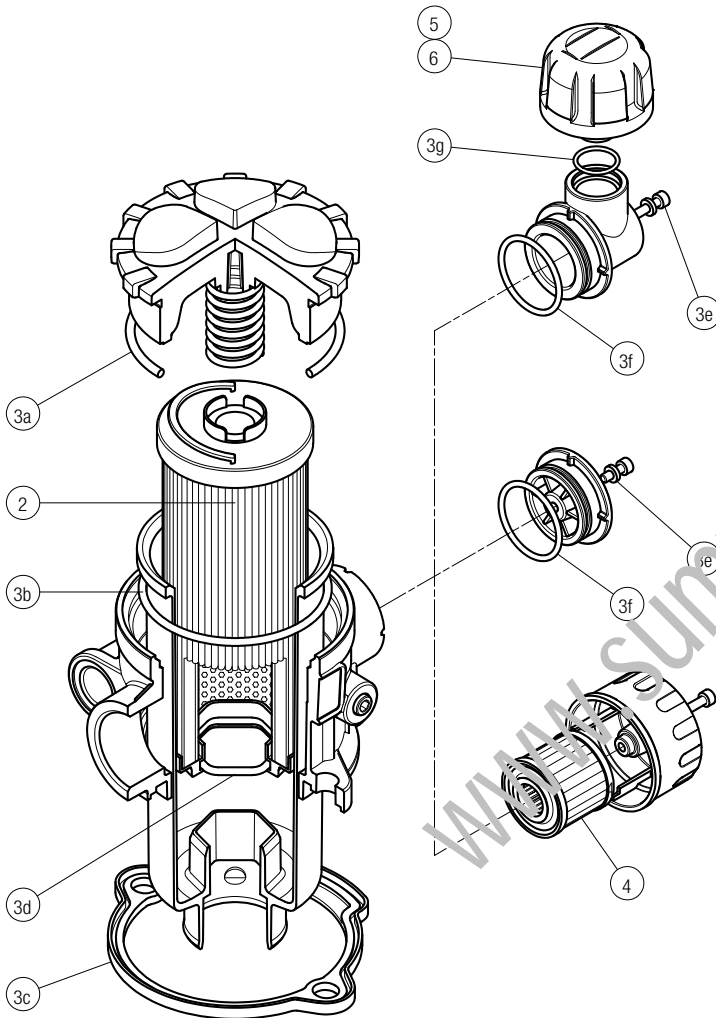


**MPTX 116**

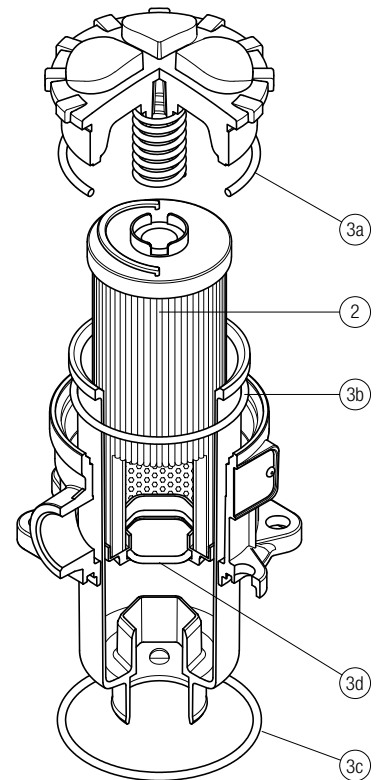


| Item:           | Q.ty: 1 pc.     | Q.ty: 1 pc.              | Q.ty: 1 pc. | Q.ty: 1 pc.                            | Q.ty: 1 pc.           |                       |
|-----------------|-----------------|--------------------------|-------------|--|-----------------------|-----------------------|
| Filter series   | Filter element  | Seal Kit code number NBR | FPM         | Air breather filter element - version: |                       |                       |
|                 |                 |                          |             | C                                      | D                     | P                     |
| <b>MPTX 025</b> | See order table | 02050701                 | 02050702    | 10 µm A3L03                            | 10 µm SAP50G3L03A0P01 | 10 µm SAP50G3L03A1P01 |
| <b>MPTX 027</b> |                 | 02050703                 | 02050704    | 10 µm A3L03                            | 10 µm SAP50G3L03A0P01 | 10 µm SAP50G3L03A1P01 |
| <b>MPTX 110</b> |                 | 02050709                 | 02050710    | 10 µm A5L03                            | 10 µm SAP50G3L03A0P01 | 10 µm SAP50G3L03A1P01 |

| Item:           | Q.ty: 1 pc.     | Q.ty: 1 pc.              |          |
|-----------------|-----------------|--------------------------|----------|
| Filter series   | Filter element  | Seal Kit code number NBR | FPM      |
| <b>MPTX 116</b> | See order table | 02050737                 | 02050738 |

**MPTX 114**

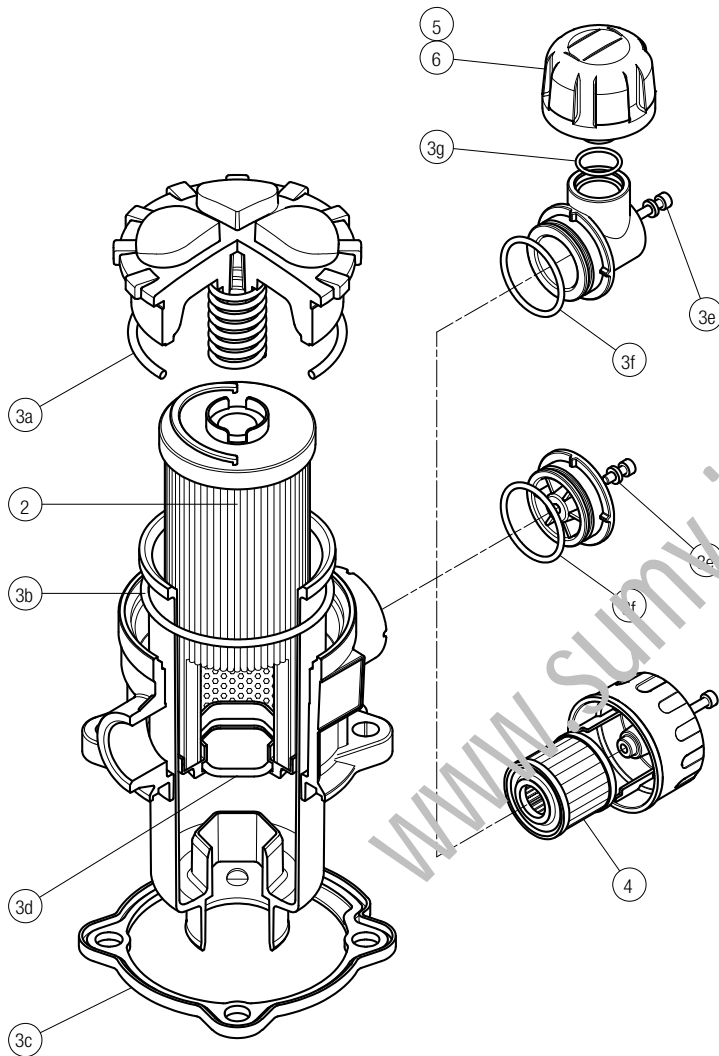

**MPTX 120**

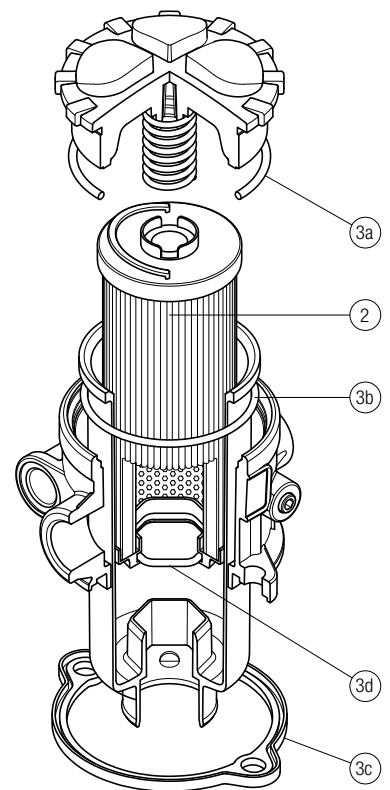

| Item:           | Q.ty: 1 pc.     | Q.ty: 1 pc.          | Q.ty: 1 pc. | Q.ty: 1 pc.                            | Q.ty: 1 pc.              |                          |
|-----------------|-----------------|----------------------|-------------|--|--------------------------|--------------------------|
| Filter series   | Filter element  | Seal Kit code number |             | Air breather filter element - version: |                          |                          |
|                 |                 | NBR                  | FPM         | C                                      | D                        | P                        |
| <b>MPTX 114</b> | See order table | 02050707             | 02050708    | 10 µm<br>A5L03                         | 10 µm<br>SAP50G3L03A0P01 | 10 µm<br>SAP50G3L03A1P01 |

| Item:           | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          |
|-----------------|-----------------|----------------------|----------|
| Filter series   | Filter element  | Seal Kit code number |          |
|                 |                 | NBR                  | FPM      |
| <b>MPTX 120</b> | See order table | 02050711             | 02050712 |

[www.sumy.ir](http://www.sumy.ir)

# MFBX series

BOWL ASSEMBLY

Maximum working pressure up to 800 kPa (8 bar) - Flow rate up to 700 l/min



### Return filter Bowl assembly

**Maximum working pressure up to 800 kPa (8 bar)**  
**Flow rate up to 700 l/min**

MFBX is a range of return filter kits for protection of the reservoir against the system contamination.

They are directly integrated in the moulded reservoir in immersed or semi-immersed position to save space into the tank.

Treaded or flanged covers can be provided.

The filter output must be always immersed into the fluid to avoid aeration or foam generation into the reservoir.

#### Available features:

- Fine filtration rating, to get a good cleanliness level into the reservoir
- Bypass valve integrated into the filter element, to relieve excessive pressure drop across the filter media
- Extension tube, to be used in deep reservoirs (sold as separate item)
- Diffuser, to reduce the risk of aeration, foaming and noise (sold as separate item)
- MyClean interface connection, to protect the product against non-original spare parts
- External protective wrap, to optimize the flow through the element and to save the element efficiency against non-proper handling

#### Common applications:

Mobile machines

#### Bowl assembly materials

- Cover  
Nylon: MFBX 020-030-100  
Aluminium: MFBX 180-190

- Bowl: Nylon

#### Filter element materials

- Caps: Nylon
- Spring: Spring steel

#### Bypass valve

- Opening pressure 175 kPa (1.75 bar)  $\pm 10\%$
- Opening pressure 300 kPa (3 bar)  $\pm 10\%$

#### $\Delta p$ element type

- Microfibre filter elements - series H: 10 bar
- Fluid flow through the filter element from OUT to IN

#### Seals

- Standard NBR Series A
- Optional FPM Series V

#### Temperature

From -25 °C to +110 °C

#### Note

MFBX filters are provided for vertical mounting



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series   | Weights [kg] |      |      |      |      | Volumes [dm <sup>3</sup> ] |      |      |      |      |
|-----------------|--------------|------|------|------|------|----------------------------|------|------|------|------|
|                 | Length       | 1    | 2    | 3    | 4    | Length                     | 1    | 2    | 3    | 4    |
| <b>MFBX 020</b> |              | 0.25 | 0.35 | 0.40 | -    |                            | 0.10 | 0.15 | 0.20 | -    |
| <b>MFBX 030</b> |              | 0.25 | -    | -    | -    |                            | 0.15 | -    | -    | -    |
| <b>MFBX 100</b> |              | 0.50 | 0.60 | 0.75 | 0.95 |                            | 0.35 | 0.50 | 0.80 | 1.10 |
| <b>MFBX 180</b> |              | 1.60 | 2.40 | -    | -    |                            | 1.50 | 2.90 | -    | -    |
| <b>MFBX 190</b> |              | -    | 2.40 | -    | -    |                            | -    | 3.00 | -    | -    |



| Filter series   | Length   | Filter element design - H series |     |     |     |     | Filter element design - N series |     |     |
|-----------------|----------|----------------------------------|-----|-----|-----|-----|----------------------------------|-----|-----|
|                 |          | A03                              | A06 | A10 | A16 | A25 | M25<br>M60<br>M90                | P10 | P25 |
| <b>MFBX 020</b> | <b>1</b> | 7                                | 10  | 23  | 28  | 42  | 59                               | 51  | 54  |
|                 | <b>2</b> | 17                               | 20  | 45  | 48  | 56  | 72                               | 64  | 67  |
|                 | <b>3</b> | 21                               | 24  | 50  | 55  | 59  | 76                               | 74  | 75  |
| <b>MFBX 030</b> | <b>1</b> | 7                                | 10  | 24  | 29  | 47  | 84                               | 60  | 66  |
| <b>MFBX 100</b> | <b>1</b> | 18                               | 20  | 53  | 56  | 65  | 153                              | 87  | 96  |
|                 | <b>2</b> | 28                               | 38  | 65  | 75  | 95  | 158                              | 111 | 123 |
|                 | <b>3</b> | 48                               | 55  | 125 | 135 | 169 | 289                              | 224 | 251 |
|                 | <b>4</b> | 79                               | 89  | 180 | 185 | 198 | 306                              | 264 | 289 |
| <b>MFBX 180</b> | <b>1</b> | 127                              | 148 | 235 | 243 | 278 | 441                              | 285 | 299 |
|                 | <b>2</b> | 231                              | 262 | 358 | 382 | 388 | 472                              | 404 | 412 |
| <b>MFBX 190</b> | <b>2</b> | 261                              | 305 | 489 | 528 | 546 | 696                              | 583 | 598 |

### Maximum flow rate for a complete return filter with a pressure drop $\Delta p = 0.5$ bar.


The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.

### Hydraulic symbols

| Filter series   | Style 1 connection |
|-----------------|--------------------|
| <b>MFBX 020</b> | •                  |
| <b>MFBX 030</b> | •                  |
| <b>MFBX 100</b> | •                  |
| <b>MFBX 180</b> | •                  |
| <b>MFBX 190</b> | •                  |



## Designation & Ordering code

### COMPLETE FILTER

|  |         |         |  |         |         |  |  |  |                     |  |                               |  |  |
|--|---------|---------|--|---------|---------|--|--|--|---------------------|--|-------------------------------|--|--|
| <b>Series and size</b>   |         |         |  |         |         | Configuration example 1: <b>MFBX100</b>   <b>1</b>   <b>A</b>   <b>2</b>   <b>A10</b>   <b>H</b>   <b>E</b>   <b>P01</b> |  |  |                     |  |                               |  |  |
| <b>MFBX020</b>   <b>MFBX030</b>   <b>MFBX100</b>   <b>MFBX180</b>   <b>MFBX190</b> |         |         |  |         |         | Configuration example 2: <b>MFBX180</b>   <b>2</b>   <b>V</b>   <b>1</b>   <b>M25</b>   <b>N</b>   <b>B</b>   <b>P01</b> |  |  |                     |  |                               |  |  |
| Filter element with private spigot   |         |         |  |         |         |  |  |  |                     |  |                               |  |  |
| <b>Length</b>  | MFBX020 | MFBX030 | MFBX100                                  | MFBX180 | MFBX190 |  |  |  |                     |  |                               |  |  |
| 1  | •       | •       | •  | •       |         |  |  |  |                     |  |                               |  |  |
| 2  | •       |         | •  | •       | •       |  |  |  |                     |  |                               |  |  |
| 3  | •       |         | •  |         |         |  |  |  |                     |  |                               |  |  |
| 4  |         |         | •  |         |         |  |  |  |                     |  |                               |  |  |
| <b>Seals</b>   |         |         |  |         |         |  |  |  |                     |  |                               |  |  |
| <b>A</b> NBR   |         |         |  |         |         |  |  |  |                     |  |                               |  |  |
| <b>V</b> FPM   |         |         |  |         |         |  |  |  |                     |  |                               |  |  |
| <b>Version</b>   |         |         |  |         |         |  |  |  |                     |  |                               |  |  |
| <b>1</b> Without cover   |         |         |  |         |         |  |  |  |                     |  |                               |  |  |
| <b>2</b> With flanged cover type MPF   |         |         |  |         |         |  |  |  |                     |  |                               |  |  |
| <b>3</b> With threaded cover type MPT  |         |         |  |         |         |  |  |  |                     |  |                               |  |  |
| <b>Filtration rating (filter media)</b>  |         |         |  |         |         |  |  |  |                     |  |                               |  |  |
| <b>A03</b> Inorganic microfiber 3 µm   |         |         | <b>M25</b> Wire mesh 25 µm               |         |         |  |  |  |                     |  |                               |  |  |
| <b>A06</b> Inorganic microfiber 6 µm   |         |         | <b>M60</b> Wire mesh 60 µm               |         |         |  |  |  |                     |  |                               |  |  |
| <b>A10</b> Inorganic microfiber 10 µm  |         |         | <b>M90</b> Wire mesh 90 µm               |         |         |  |  |  |                     |  |                               |  |  |
| <b>A16</b> Inorganic microfiber 16 µm  |         |         | <b>P10</b> Resin impregnated paper 10 µm |         |         |  |  |  |                     |  |                               |  |  |
| <b>A25</b> Inorganic microfiber 25 µm  |         |         | <b>P25</b> Resin impregnated paper 25 µm |         |         |  |  |  |                     |  |                               |  |  |
| <b>Element Δp</b>  |         |         |  |         |         | <b>Filter media</b>  |  |  |                     |  |                               |  |  |
|  |         |         |  |         |         | <b>Axx</b>   <b>Mxx</b>   <b>Pxx</b>   |  |  |                     |  |                               |  |  |
| <b>N</b> 10 bar  |         |         |  |         |         |  |  |  |                     |  |                               |  |  |
| <b>H</b> 10 bar  |         |         |  |         |         | •  |  |  |                     |  |                               |  |  |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC                           |         |         |  |         |         | • •  |  |  |                     |  |                               |  |  |
|  |         |         |  |         |         |  |  |  | <b>Bypass valve</b> |  | <b>Execution</b>              |  |  |
|  |         |         |  |         |         |  |  |  | <b>E</b> 3 bar      |  | <b>P01</b> MP Filtri standard |  |  |
|  |         |         |  |         |         |  |  |  | <b>B</b> 1.75 bar   |  | <b>Pxx</b> Customized         |  |  |


### FILTER ELEMENT

|   |        |        |  |        |        |  |  |  |              |  |                     |  |                               |  |
|---|--------|--------|--|--------|--------|--|--|--|--------------|--|---------------------|--|-------------------------------|--|
| <b>Element series and size</b>                                |        |        |  |        |        | Configuration example 1: <b>MFX180</b>   <b>2</b>   <b>M25</b>   <b>H</b>   <b>V</b>   <b></b>   <b>P01</b>  |  |  |              |  |                     |  |                               |  |
| <b>MFX020</b>   <b>MFX030</b>   <b>MFX100</b>   <b>MFX180</b> |        |        |  |        |        | Configuration example 2: <b>MFX100</b>   <b>1</b>   <b>A10</b>   <b>N</b>   <b>B</b>   <b>E</b>   <b>P01</b> |  |  |              |  |                     |  |                               |  |
| Filter element with private spigot                            |        |        |  |        |        |  |  |  |              |  |                     |  |                               |  |
| <b>Element length</b>   | MFX020 | MFX030 | MFX100                                   | MFX180 | MFX190 |  |  |  |              |  |                     |  |                               |  |
| 1   | •      | •      | •  | •      |        |  |  |  |              |  |                     |  |                               |  |
| 2   | •      |        | •  | •      | •      |  |  |  |              |  |                     |  |                               |  |
| 3   | •      |        | •  |        |        |  |  |  |              |  |                     |  |                               |  |
| 4   |        |        | •  |        |        |  |  |  |              |  |                     |  |                               |  |
| <b>Filtration rating (filter media)</b>                       |        |        |  |        |        |  |  |  |              |  |                     |  |                               |  |
| <b>A03</b> Inorganic microfiber 3 µm                          |        |        | <b>M25</b> Wire mesh 25 µm               |        |        |  |  |  |              |  |                     |  |                               |  |
| <b>A06</b> Inorganic microfiber 6 µm                          |        |        | <b>M60</b> Wire mesh 60 µm               |        |        |  |  |  |              |  |                     |  |                               |  |
| <b>A10</b> Inorganic microfiber 10 µm                         |        |        | <b>M90</b> Wire mesh 90 µm               |        |        |  |  |  |              |  |                     |  |                               |  |
| <b>A16</b> Inorganic microfiber 16 µm                         |        |        | <b>P10</b> Resin impregnated paper 10 µm |        |        |  |  |  |              |  |                     |  |                               |  |
| <b>A25</b> Inorganic microfiber 25 µm                         |        |        | <b>P25</b> Resin impregnated paper 25 µm |        |        |  |  |  |              |  |                     |  |                               |  |
| <b>Element Δp</b>   |        |        |  |        |        | <b>Filter media</b>  |  |  |              |  |                     |  |                               |  |
|   |        |        |  |        |        | <b>Axx</b>   <b>Mxx</b>   <b>Pxx</b>   |  |  |              |  |                     |  |                               |  |
| <b>N</b> 10 bar   |        |        |  |        |        |  |  |  |              |  |                     |  |                               |  |
| <b>H</b> 10 bar   |        |        |  |        |        | •  |  |  |              |  |                     |  |                               |  |
|   |        |        |  |        |        |  |  |  | <b>Seals</b> |  | <b>Bypass valve</b> |  | <b>Execution</b>              |  |
|   |        |        |  |        |        |  |  |  | <b>B</b> NBR |  | <b>E</b> 3 bar      |  | <b>P01</b> MP Filtri standard |  |
|   |        |        |  |        |        |  |  |  | <b>V</b> FPM |  | <b></b> 1.75 bar    |  | <b>Pxx</b> Customized         |  |

### ACCESSORIES

|                            |                                    |  |  |  |  |         |         |         |         |         |      |     |
|----------------------------|------------------------------------|--|--|--|--|---------|---------|---------|---------|---------|------|-----|
| <b>Additional features</b> |                                    |  |  |  |  |         |         |         |         |         | page |     |
|                            |                                    |  |  |  |  | MFBX020 | MFBX030 | MFBX100 | MFBX180 | MFBX190 |      |     |
| <b>TE</b>                  | Extension tube                     |  |  |  |  | •       | •       | •       | •       | •       |      | 248 |
| <b>DFS</b>                 | Diffuser with fast lock connection |  |  |  |  |         |         | •       |         |         |      | 249 |


MFBX

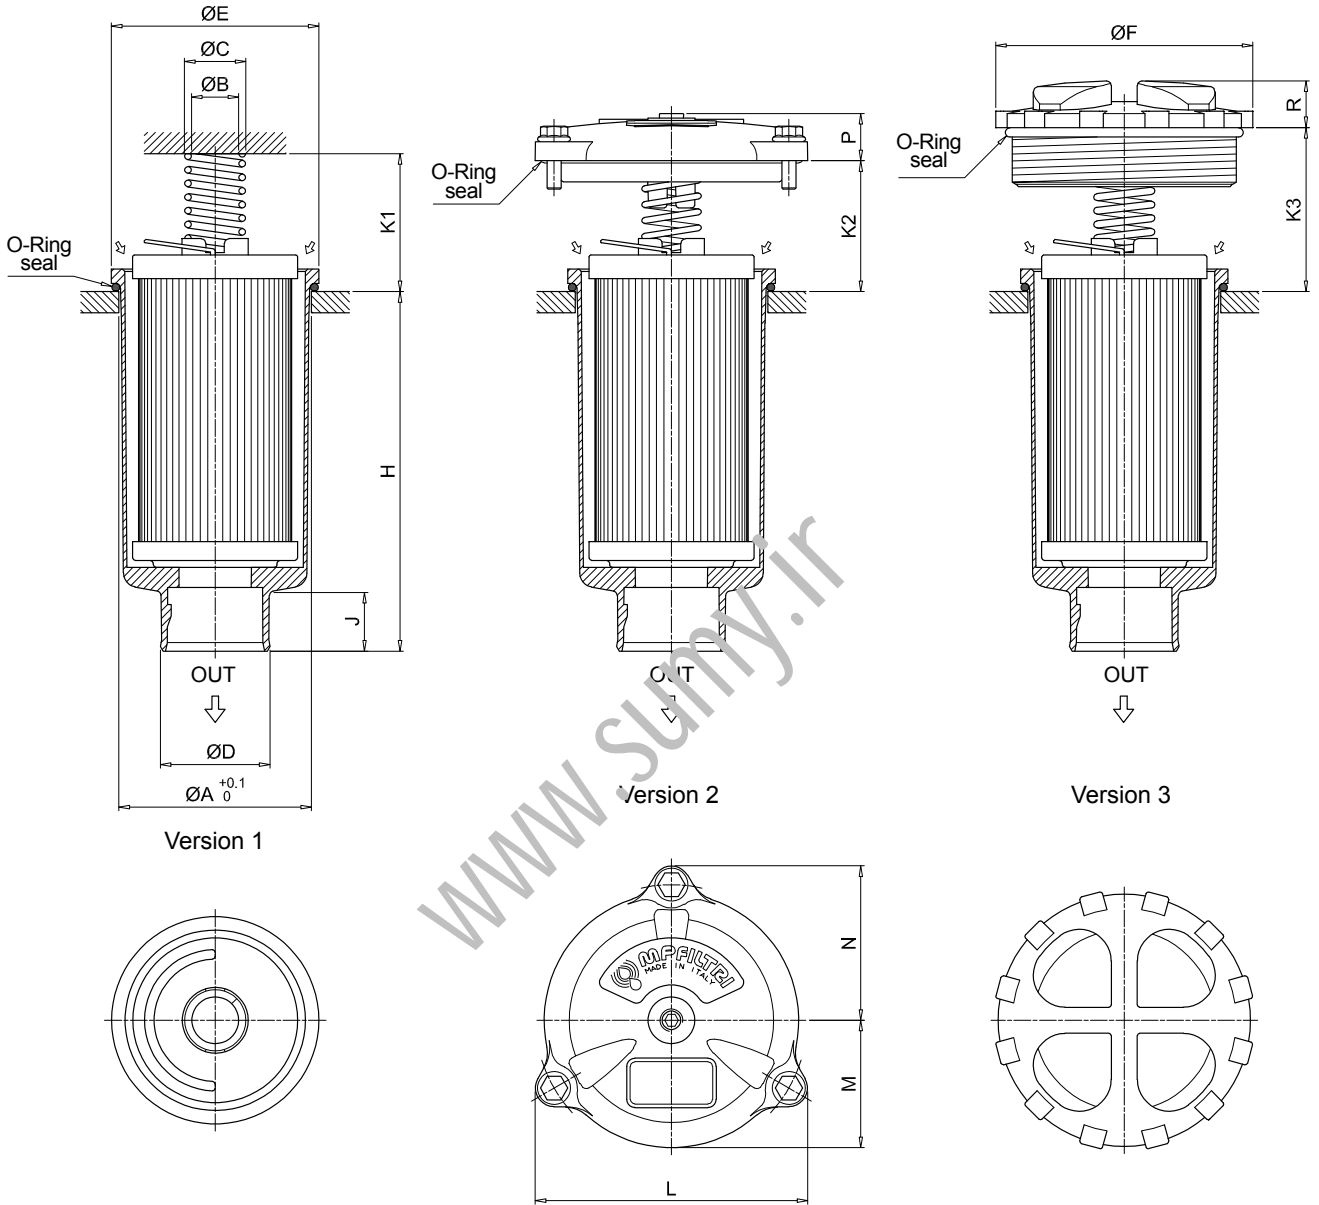

| Filter size | Filter Length | ø A [mm] | ø B [mm] | ø C [mm] | ø D [mm] | ø E [mm] | ø F [mm] | H [mm] | J [mm] | K1 [mm] | K2 [mm] | K3 [mm] | L [mm] | M [mm] | N [mm] | P [mm] | R [mm] |
|-------------|---------------|----------|----------|----------|----------|----------|----------|--------|--------|---------|---------|---------|--------|--------|--------|--------|--------|
| <b>020</b>  | 1             | 52       | 20.5     | 26       | 32       | 56       | 75       | 111    | 24     | 42      | -       | 36      | -      | -      | -      | -      | 18     |
|             | 2             | 52       | 20.5     | 26       | 32       | 56       | 75       | 175    | 24     | 42      | -       | 36      | -      | -      | -      | -      | 18     |
|             | 3             | 52       | 20.5     | 26       | 32       | 56       | 75       | 214    | 24     | 42      | -       | 36      | -      | -      | -      | -      | 18     |
| <b>030</b>  | 1             | 60.5     | 20       | 25.5     | 32       | 68       | -        | 93     | 21     | 33      | 35      | -       | 92     | 42     | 52     | 18     | -      |
|             | 2             | 80.5     | 20       | 26       | 47       | 88       | 111      | 109    | 24     | 58      | 55      | 69      | 116    | 54     | 66     | 20     | 20     |
| <b>100</b>  | 1             | 80.5     | 20       | 26       | 47       | 88       | 111      | 154    | 24     | 58      | 55      | 69      | 116    | 54     | 66     | 20     | 20     |
|             | 2             | 80.5     | 20       | 26       | 47       | 88       | 111      | 232    | 24     | 58      | 55      | 69      | 116    | 54     | 66     | 20     | 20     |
|             | 3             | 80.5     | 20       | 26       | 47       | 88       | 111      | 334    | 24     | 58      | 55      | 69      | 116    | 54     | 66     | 20     | 20     |
| <b>180</b>  | 1             | 112.5    | 26       | 33.5     | 47       | 121      | -        | 234    | 31     | 58      | 69      | -       | 159    | 76     | 95     | 21     | -      |
|             | 2             | 112.5    | 26       | 33.5     | 47       | 121      | -        | 447    | 31     | 58      | 69      | -       | 159    | 76     | 95     | 21     | -      |
| <b>190</b>  | 2             | 112.5    | 26       | 33.5     | 50       | 121      | -        | 454    | 38     | 58      | 69      | -       | 159    | 76     | 95     | 21     | -      |

# MFBX SPARE PARTS

Order number for spare parts

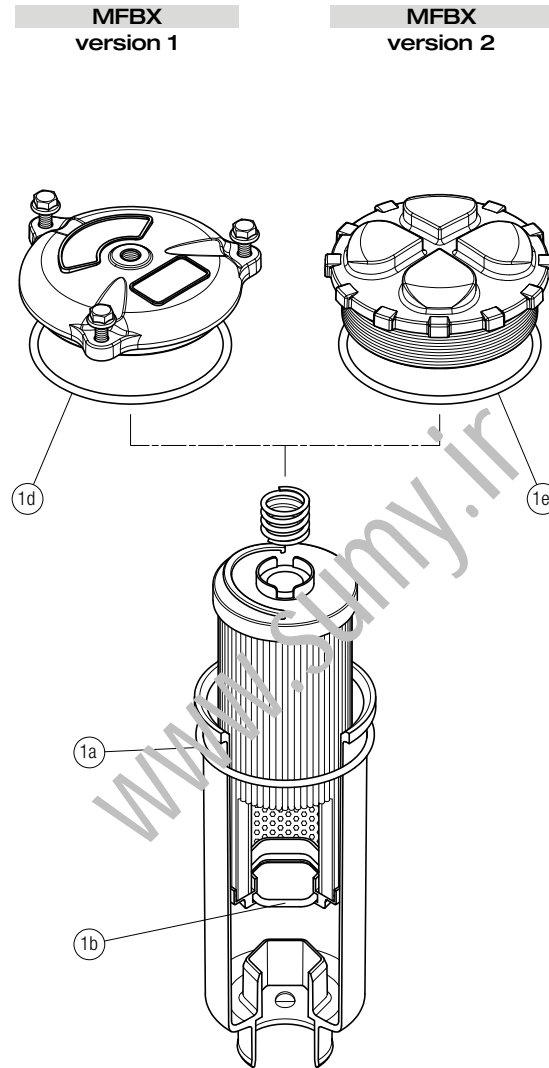

| Item: <b>1</b> (1a ÷ 1d) <span style="float: right;">Q.ty: 1 pc.</span> |                      |          |
|---|----------------------|----------|
| Filter series   | Seal Kit code number |          |
|   | NBR                  | FPM      |
| <b>MFBX 020</b>   | 02050713             | 02050714 |
| <b>MFBX 030</b>   | 02050715             | 02050716 |
| <b>MFBX 100</b>   | 02050717             | 02050718 |
| <b>MFBX 180-190</b>   | 02050719             | 02050720 |

www.sumy.ir

www.sumy.ir

# MPF series

Maximum working pressure up to 800 kPa (8 bar) - Flow rate up to 900 l/min



## Description

## Technical data

### Return filter

**Maximum working pressure up to 800 kPa (8 bar)**

**Flow rate up to 900 l/min**

MPF is a range of return filters for protection of the reservoir against the system contamination.

They are directly fixed to the reservoir, in immersed or semi-immersed position.

The filter output must be always immersed into the fluid to avoid aeration or foam generation into the reservoir.

### Available features:

- Female threaded connections up to 2" and flanged connections up to 2", for a maximum flow rate of 900 l/min
- Multiple connections, to connect several return lines or drains
- Fine filtration rating, to get a good cleanliness level into the reservoir
- Bypass valve integrated into the filter element, to relieve excessive pressure drop across the filter media
- 2, 3 or 4 fixing holes for installation, to suit a variety of reservoir surfaces
- O-ring or Flat Seal to suit a variety of reservoir surfaces
- Oil dipstick, to easily check the level of the fluid into the reservoir (sold as separate item)
- Extension tube, to be used in deep reservoirs (sold as separate item)
- Diffuser, to reduce the risk of aeration, foaming and noise (sold as separate item)
- Filler plug, to fill cleaned fluid into the tank without an additional connection
- Visual, electrical and electronic clogging indicators

### Common applications:

- Light industrial equipment
- Mobile application

### Filter housing materials

- Head: Aluminium

- Cover

Nylon: MPF 020-030-100-104-110

Aluminium: MPF 181-182-184-191-192-194-400-410-450-451-750

- Bowl: Nylon

### Bypass valve

- Opening pressure 175 kPa (1.75 bar)  $\pm 10\%$

- Opening pressure 300 kPa (3 bar)  $\pm 10\%$

### $\Delta p$ element type

- Microfibre filter elements - series H: 10 bar

- Fluid flow through the filter element from OUT to IN

### Seals

- Standard NBR series A

- Optional FPM series V

### Temperature

From -25 °C to +110 °C

### Note

MPF filters are provided for vertical mounting



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series      | Weights [kg] |      |      |      | Volumes [dm <sup>3</sup> ] |        |      |      |      |      |
|--------------------|--------------|------|------|------|----------------------------|--------|------|------|------|------|
|                    | Length       | 1    | 2    | 3    | 4                          | Length | 1    | 2    | 3    | 4    |
| <b>MPF 020</b>     |              | 0.30 | -    | -    | -                          |        | 0.26 | -    | -    | -    |
| <b>MPF 030</b>     |              | 0.40 | -    | -    | -                          |        | 0.29 | -    | -    | -    |
| <b>MPF 100</b>     |              | 0.61 | 0.64 | 0.67 | 0.74                       |        | 0.64 | 0.85 | 1.20 | 1.65 |
| <b>MPF 104</b>     |              | 0.82 | 0.96 | 1.02 | 1.25                       |        | 0.64 | 0.85 | 1.20 | 1.65 |
| <b>MPF 110</b>     |              | 0.64 | 0.68 | 0.71 | 0.78                       |        | -    | -    | -    | -    |
| <b>MPF 181</b>     |              | 2.20 | 3.00 | -    | -                          |        | 2.50 | 4.00 | -    | -    |
| <b>MPF 182</b>     |              | 2.30 | 3.10 | -    | -                          |        | 2.50 | 4.00 | -    | -    |
| <b>MPF 184</b>     |              | 2.55 | 3.45 | -    | -                          |        | 2.65 | 4.45 | -    | -    |
| <b>MPF 191</b>     |              | -    | 3.00 | -    | -                          |        | -    | 4.25 | -    | -    |
| <b>MPF 192</b>     |              | -    | 3.10 | -    | -                          |        | -    | 4.25 | -    | -    |
| <b>MPF 194</b>     |              | -    | 3.45 | -    | -                          |        | -    | 4.45 | -    | -    |
| <b>MPF 400</b>     |              | 3.35 | 3.65 | 3.90 | -                          |        | 3.70 | 4.60 | 5.40 | -    |
| <b>MPF 410</b>     |              | 3.55 | 3.85 | 4.10 | -                          |        | 3.70 | 4.60 | 5.40 | -    |
| <b>MPF 450-451</b> |              | 3.95 | 4.25 | 4.50 | -                          |        | 3.70 | 4.60 | 5.40 | -    |
| <b>MPF 750</b>     |              | 6.30 | -    | -    | -                          |        | 8.45 | -    | -    | -    |



| Filter series          | Length   | Filter element design - H series |     |     |     |     | Filter element design - N series |     |     |
|------------------------|----------|----------------------------------|-----|-----|-----|-----|----------------------------------|-----|-----|
|                        |          | A03                              | A06 | A10 | A16 | A25 | M25<br>M60<br>M90                | P10 | P25 |
| <b>MPF 020</b>         | <b>1</b> | 7                                | 10  | 23  | 28  | 42  | 59                               | 51  | 54  |
| <b>MPF 030</b>         | <b>1</b> | 7                                | 10  | 24  | 29  | 47  | 84                               | 60  | 66  |
| <b>MPF 100-104-110</b> | <b>1</b> | 18                               | 20  | 53  | 56  | 65  | 153                              | 87  | 96  |
|                        | <b>2</b> | 28                               | 38  | 65  | 75  | 95  | 158                              | 111 | 123 |
|                        | <b>3</b> | 48                               | 55  | 125 | 135 | 169 | 289                              | 224 | 251 |
|                        | <b>4</b> | 79                               | 89  | 180 | 185 | 198 | 306                              | 264 | 289 |
| <b>MPF 181-182-184</b> | <b>1</b> | 127                              | 148 | 235 | 243 | 278 | 441                              | 285 | 299 |
|                        | <b>2</b> | 231                              | 262 | 358 | 382 | 388 | 472                              | 404 | 412 |
| <b>MPF 191-192-194</b> | <b>2</b> | 261                              | 305 | 489 | 528 | 546 | 696                              | 583 | 598 |
| <b>MPF 400</b>         | <b>1</b> | 150                              | 171 | 294 | 304 | 350 | 585                              | 370 | 390 |
|                        | <b>2</b> | 237                              | 252 | 454 | 462 | 589 | 868                              | 619 | 645 |
|                        | <b>3</b> | 248                              | 288 | 553 | 609 | 621 | 885                              | 680 | 703 |
| <b>MPF 410</b>         | <b>1</b> | 146                              | 167 | 277 | 285 | 325 | 512                              | 341 | 357 |
|                        | <b>2</b> | 226                              | 239 | 396 | 402 | 485 | 644                              | 503 | 519 |
|                        | <b>3</b> | 236                              | 269 | 462 | 497 | 505 | 653                              | 539 | 553 |
| <b>MPF 450-451</b>     | <b>1</b> | 150                              | 171 | 294 | 304 | 350 | 585                              | 370 | 390 |
|                        | <b>2</b> | 237                              | 252 | 454 | 462 | 589 | 868                              | 619 | 645 |
|                        | <b>3</b> | 248                              | 288 | 553 | 609 | 621 | 885                              | 680 | 703 |
| <b>MPF 750</b>         | <b>1</b> | 392                              | 465 | 623 | 700 | 769 | 929                              | 804 | 819 |

### Maximum flow rate for a complete return filter with a pressure drop $\Delta p = 0.5$ bar.



The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.

## Hydraulic symbols







| Filter series  | Style 1 connection | Style 2 connections |
|----------------|--------------------|---------------------|
| <b>MPF 020</b> | •                  |                     |
| <b>MPF 030</b> | •                  |                     |
| <b>MPF 100</b> | •                  |                     |
| <b>MPF 104</b> | •                  |                     |
| <b>MPF 110</b> |                    | •                   |
| <b>MPF 181</b> | •                  |                     |
| <b>MPF 182</b> |                    | •                   |
| <b>MPF 184</b> | •                  | •                   |
| <b>MPF 191</b> | •                  |                     |
| <b>MPF 192</b> | •                  |                     |
| <b>MPF 194</b> | •                  | •                   |
| <b>MPF 400</b> | •                  |                     |
| <b>MPF 410</b> |                    | •                   |
| <b>MPF 450</b> | •                  |                     |
| <b>MPF 451</b> |                    | •                   |
| <b>MPF 750</b> | •                  |                     |







# MPF GENERAL INFORMATION

## Pressure drop

### Filter housings $\Delta p$ pressure drop

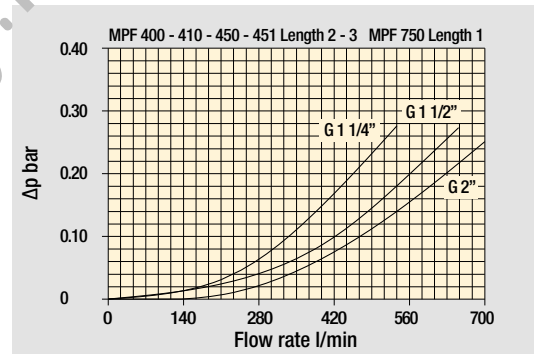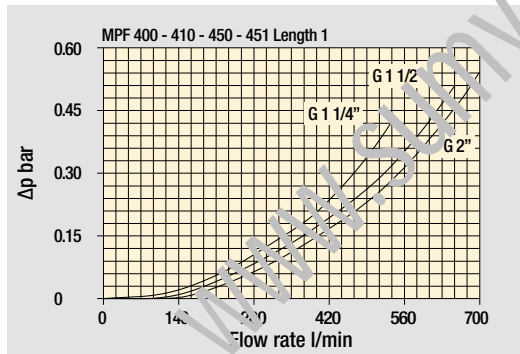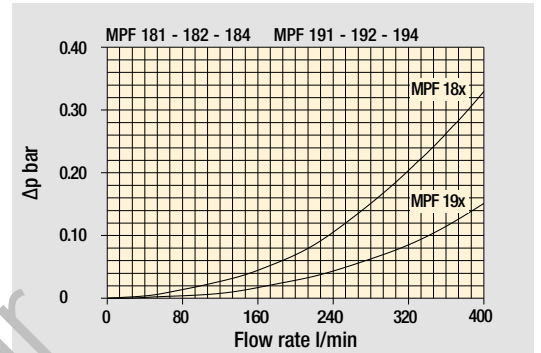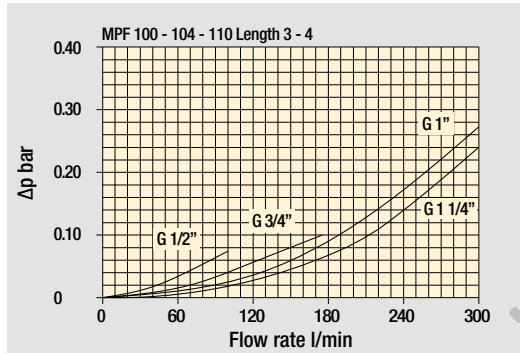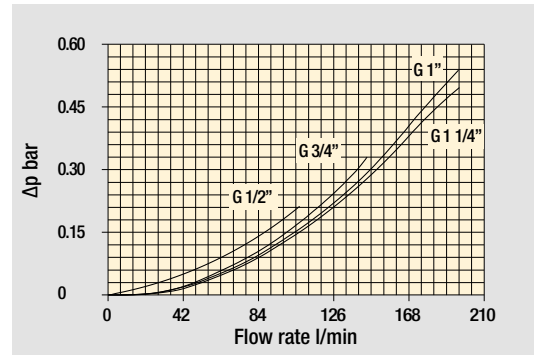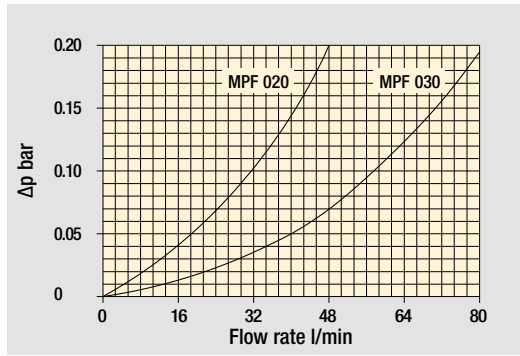

### Bypass valve pressure drop

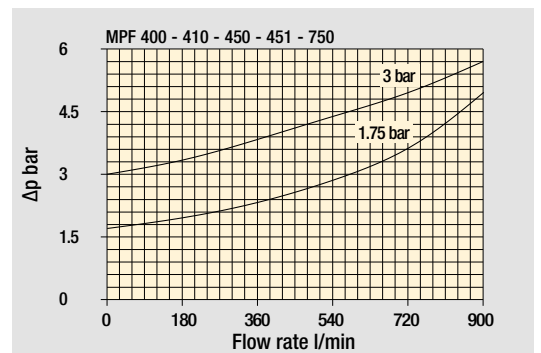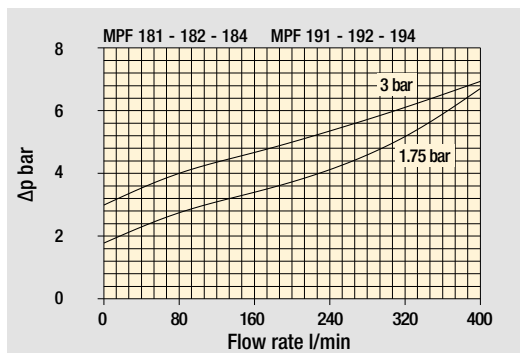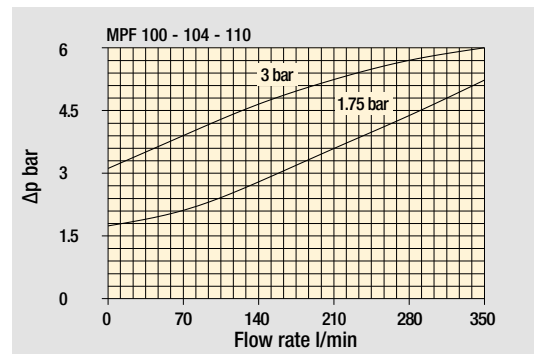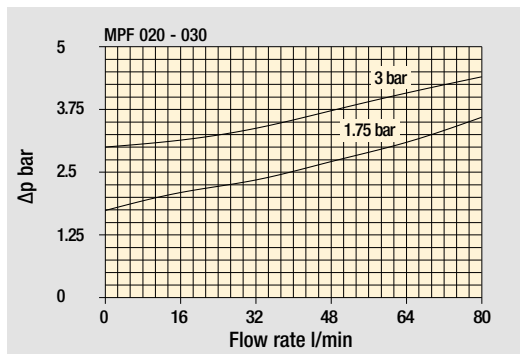

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

Standard - Single IN port



Double IN port  
Option: double indicator port





Double IN port - Drain port  
Option: indicator port



Double IN port - Double drain port





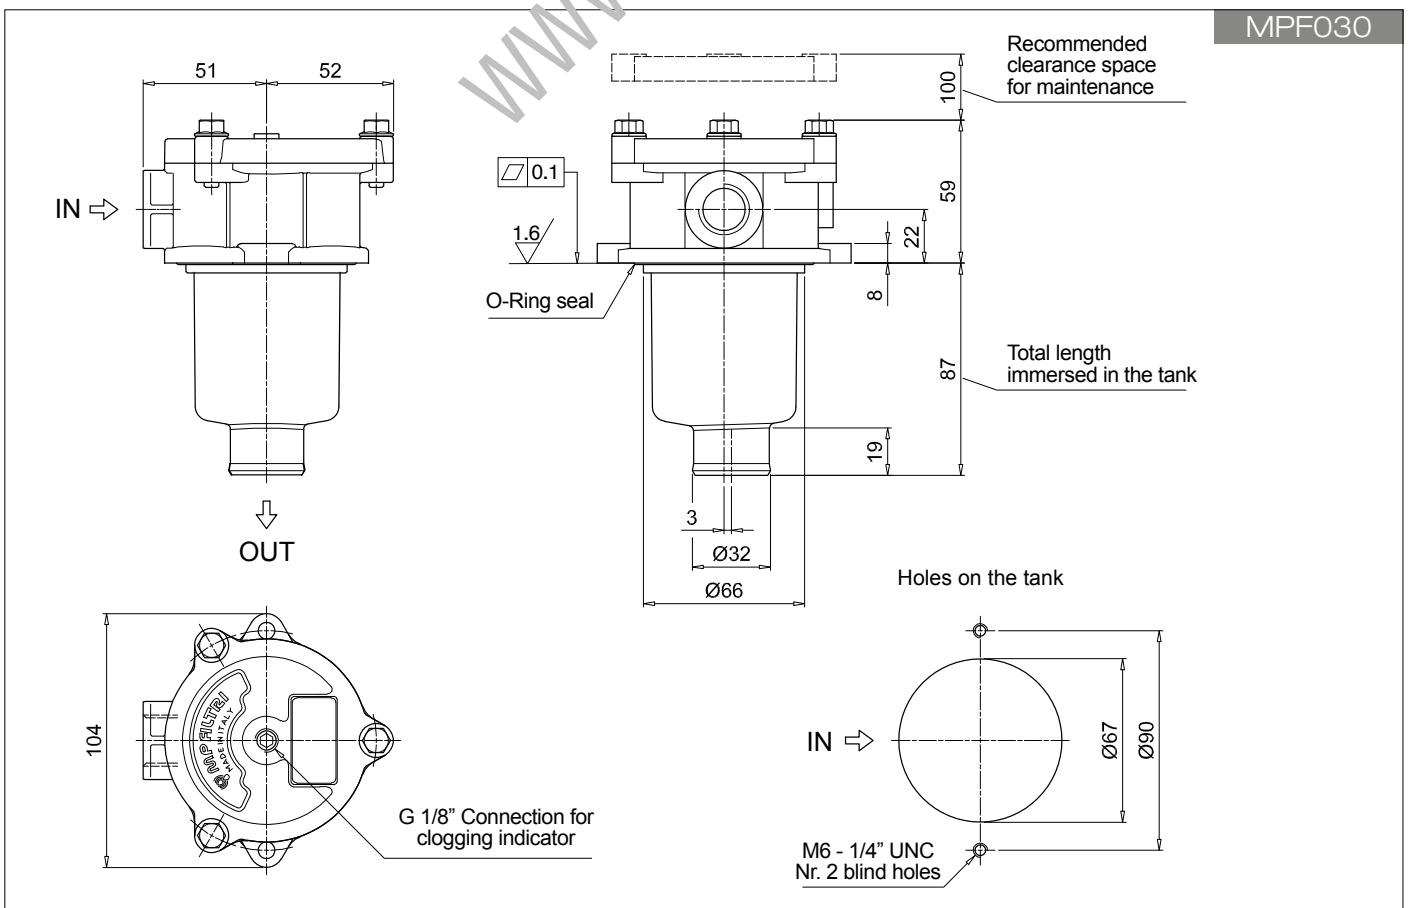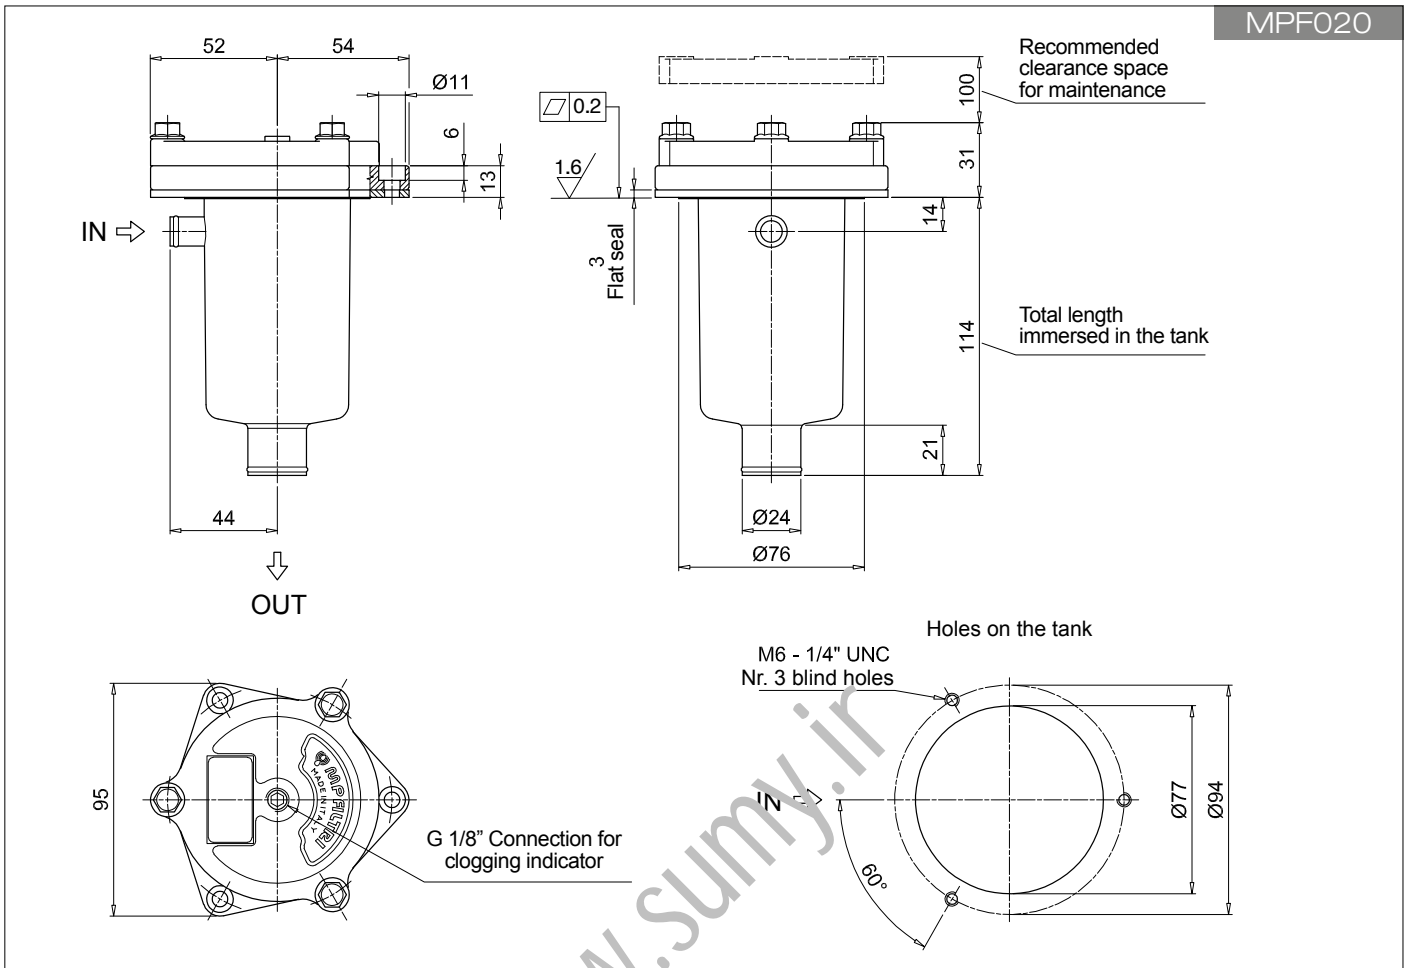

# MPF MPF100 - MPF104

## Designation & Ordering code

### COMPLETE FILTER



|   |  |  |  |                 |                     |                                    |                               |                 |  |                 |  |  |
|---|--|--|--|-----------------|---------------------|------------------------------------|-------------------------------|-----------------|--|-----------------|--|--|
| <b>Series and size</b>  |  | Configuration example 1: <b>MPF100</b>   <b>2</b>   <b>W</b>   <b>G3</b>   <b>A06</b>   <b>W</b>   <b>B</b>   <b>P01</b> |  |                 |                     |                                    |                               |                 |  |                 |  |  |
| <b>MPF100</b>   <b>MPF104</b> Filter element with standard spigot |  | Configuration example 2: <b>MPF104</b>   <b>4</b>   <b>A</b>   <b>G8</b>   <b>P10</b>   <b>N</b>   <b>E</b>   <b>P01</b> |  |                 |                     |                                    |                               |                 |  |                 |  |  |
| <b>Length</b>   |  |  |  |                 |                     |                                    |                               |                 |  |                 |  |  |
| <b>1</b>   <b>2</b>   <b>3</b>   <b>4</b>                         |  |  |  |                 |                     |                                    |                               |                 |  |                 |  |  |
| <b>Seals and treatments</b>                                       |  |  |  |                 |                     |                                    |                               |                 |  |                 |  |  |
| <b>A</b> NBR  |  |  |  |                 |                     |                                    |                               |                 |  |                 |  |  |
| <b>V</b> FPM  |  |  |  |                 |                     |                                    |                               |                 |  |                 |  |  |
| <b>W</b> NBR head anodized  |  |  |  |                 |                     |                                    |                               |                 |  |                 |  |  |
| <b>Z</b> FPM head anodized  |  |  |  |                 |                     |                                    |                               |                 |  |                 |  |  |
| <b>Connections</b>  |  | <b>Size 100</b>  |  | <b>Size 104</b> |                     | <b>Connections</b>                 |                               | <b>Size 100</b> |  | <b>Size 104</b> |  |  |
| <b>G1</b> G 1/2"  |  | •  |  | •               |                     | <b>G7</b> SAE 8 - 3/4" - 16 UNF    |                               | •               |  | •               |  |  |
| <b>G2</b> G 3/4"  |  | •  |  | •               |                     | <b>G8</b> SAE 12 - 1 1/16" - 12 UN |                               | •               |  | •               |  |  |
| <b>G3</b> G 1"  |  | •  |  | •               |                     | <b>G9</b> SAE 16 - 1 5/16" - 12 UN |                               | •               |  | •               |  |  |
| <b>G4</b> 1/2" NPT  |  | •  |  | •               |                     |                                    |                               |                 |  |                 |  |  |
| <b>G5</b> 3/4" NPT  |  | •  |  | •               |                     |                                    |                               |                 |  |                 |  |  |
| <b>G6</b> 1" NPT  |  | •  |  | •               |                     |                                    |                               |                 |  |                 |  |  |
| <b>Filtration rating (filter media)</b>                           |  |  |  |                 |                     |                                    |                               |                 |  |                 |  |  |
| <b>A03</b> Inorganic microfiber 3 µm                              |  |  |  |                 |                     |                                    |                               |                 |  |                 |  |  |
| <b>A06</b> Inorganic microfiber 6 µm                              |  |  |  |                 |                     |                                    |                               |                 |  |                 |  |  |
| <b>A10</b> Inorganic microfiber 10 µm                             |  |  |  |                 |                     |                                    |                               |                 |  |                 |  |  |
| <b>A16</b> Inorganic microfiber 16 µm                             |  |  |  |                 |                     |                                    |                               |                 |  |                 |  |  |
| <b>A25</b> Inorganic microfiber 25 µm                             |  |  |  |                 |                     |                                    |                               |                 |  |                 |  |  |
| <b>M25</b> Wire mesh 25 µm  |  |  |  |                 |                     |                                    |                               |                 |  |                 |  |  |
| <b>M60</b> Wire mesh 60 µm  |  |  |  |                 |                     |                                    |                               |                 |  |                 |  |  |
| <b>M90</b> Wire mesh 90 µm  |  |  |  |                 |                     |                                    |                               |                 |  |                 |  |  |
| <b>P10</b> Resin impregnated paper 10 µm                          |  |  |  |                 |                     |                                    |                               |                 |  |                 |  |  |
| <b>P25</b> Resin impregnated paper 25 µm                          |  |  |  |                 |                     |                                    |                               |                 |  |                 |  |  |
| <b>Element Δp</b>   |  | <b>Filter media</b>  |  |                 |                     |                                    |                               |                 |  |                 |  |  |
|   |  | <b>Axx</b>   <b>Mxx</b>   <b>Pxx</b>   |  |                 |                     |                                    |                               |                 |  |                 |  |  |
| <b>N</b> 10 bar   |  | •  |  |                 |                     |                                    |                               |                 |  |                 |  |  |
| <b>H</b> 10 bar   |  | •  |  |                 |                     |                                    |                               |                 |  |                 |  |  |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC          |  | •  |  |                 |                     |                                    |                               |                 |  |                 |  |  |
|   |  |  |  |                 | <b>Bypass valve</b> |                                    | <b>Execution</b>              |                 |  |                 |  |  |
|   |  |  |  |                 | <b>E</b> 3 bar      |                                    | <b>P01</b> MP Filtri standard |                 |  |                 |  |  |
|   |  |  |  |                 | <b>B</b> 1.75 bar   |                                    | <b>Pxx</b> Customized         |                 |  |                 |  |  |

### FILTER ELEMENT

|  |  |   |  |  |              |  |                     |  |                               |  |  |  |
|--|--|---|--|--|--------------|--|---------------------|--|-------------------------------|--|--|--|
| <b>Element series and size</b>                           |  | Configuration example 1: <b>MF100</b>   <b>2</b>   <b>A06</b>   <b>W</b>   <b>B</b>   <b></b>   <b>P01</b>  |  |  |              |  |                     |  |                               |  |  |  |
| <b>MF100</b> Filter element with standard spigot         |  | Configuration example 2: <b>MF100</b>   <b>4</b>   <b>P10</b>   <b>N</b>   <b>B</b>   <b>E</b>   <b>P01</b> |  |  |              |  |                     |  |                               |  |  |  |
| <b>Element length</b>                                    |  |   |  |  |              |  |                     |  |                               |  |  |  |
| <b>1</b>   <b>2</b>   <b>3</b>   <b>4</b>                |  |   |  |  |              |  |                     |  |                               |  |  |  |
| <b>Filtration rating (filter media)</b>                  |  |   |  |  |              |  |                     |  |                               |  |  |  |
| <b>A03</b> Inorganic microfiber 3 µm                     |  |   |  |  |              |  |                     |  |                               |  |  |  |
| <b>A06</b> Inorganic microfiber 6 µm                     |  |   |  |  |              |  |                     |  |                               |  |  |  |
| <b>A10</b> Inorganic microfiber 10 µm                    |  |   |  |  |              |  |                     |  |                               |  |  |  |
| <b>A16</b> Inorganic microfiber 16 µm                    |  |   |  |  |              |  |                     |  |                               |  |  |  |
| <b>A25</b> Inorganic microfiber 25 µm                    |  |   |  |  |              |  |                     |  |                               |  |  |  |
| <b>M25</b> Wire mesh 25 µm                               |  |   |  |  |              |  |                     |  |                               |  |  |  |
| <b>M60</b> Wire mesh 60 µm                               |  |   |  |  |              |  |                     |  |                               |  |  |  |
| <b>M90</b> Wire mesh 90 µm                               |  |   |  |  |              |  |                     |  |                               |  |  |  |
| <b>P10</b> Resin impregnated paper 10 µm                 |  |   |  |  |              |  |                     |  |                               |  |  |  |
| <b>P25</b> Resin impregnated paper 25 µm                 |  |   |  |  |              |  |                     |  |                               |  |  |  |
| <b>Element Δp</b>  |  | <b>Filter media</b>   |  |  |              |  |                     |  |                               |  |  |  |
|  |  | <b>Axx</b>   <b>Mxx</b>   <b>Pxx</b>  |  |  |              |  |                     |  |                               |  |  |  |
| <b>N</b> 10 bar  |  | •   |  |  |              |  |                     |  |                               |  |  |  |
| <b>H</b> 10 bar  |  | •   |  |  |              |  |                     |  |                               |  |  |  |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC |  | •   |  |  |              |  |                     |  |                               |  |  |  |
|  |  |   |  |  | <b>Seals</b> |  | <b>Bypass valve</b> |  | <b>Execution</b>              |  |  |  |
|  |  |   |  |  | <b>B</b> NBR |  | <b>E</b> 3 bar      |  | <b>P01</b> MP Filtri standard |  |  |  |
|  |  |   |  |  | <b>V</b> FPM |  | 1.75 bar            |  | <b>Pxx</b> Customized         |  |  |  |

### ACCESSORIES

|   |     |   |         |             |  |
|---|-----|---|---------|-------------|--|
| <b>Indicators</b>   |     | <b>page</b>                                       |         | <b>page</b> |  |
| <b>BVA</b> Axial pressure gauge                           | 240 | <b>BEA</b> Electrical pressure indicator          | 239     |             |  |
| <b>BVR</b> Radial pressure gauge                          | 240 | <b>BEM</b> Electrical pressure indicator          | 239     |             |  |
| <b>BVP</b> Visual pressure indicator with automatic reset | 241 | <b>BLA</b> Electrical / visual pressure indicator | 239-240 |             |  |
| <b>BVQ</b> Visual pressure indicator with manual reset    | 241 |   |         |             |  |
| <b>Additional features</b>                                |     | <b>page</b>                                       |         | <b>page</b> |  |
| <b>TE</b> Extension tube                                  | 248 | <b>T5</b> Filler plug M30x1.5                     | 249     |             |  |
| <b>DFS</b> Diffuser with fast lock connection             | 249 | <b>DPT</b> Dipstick                               | 249     |             |  |

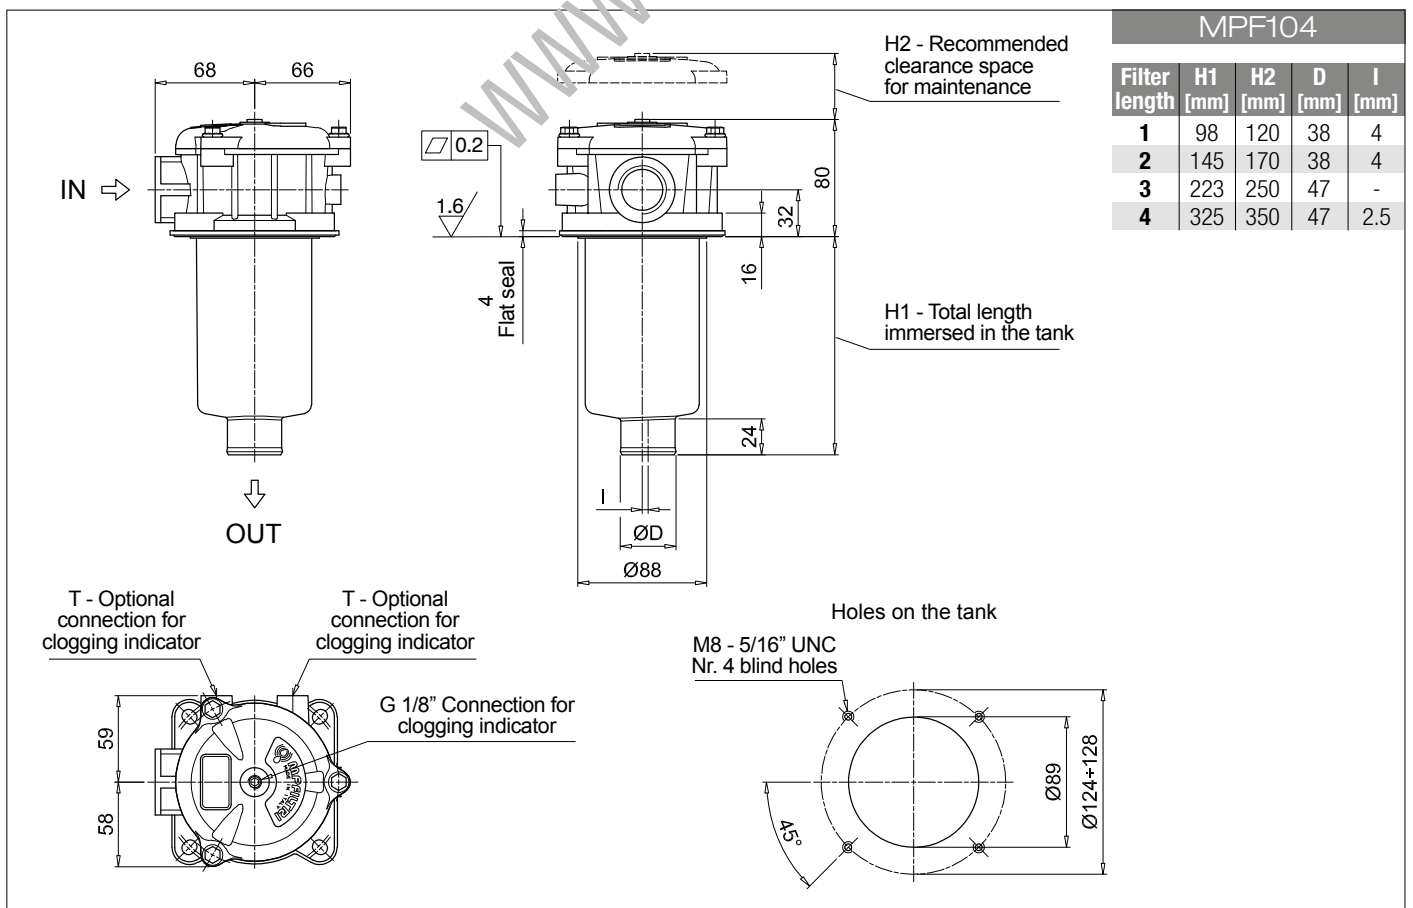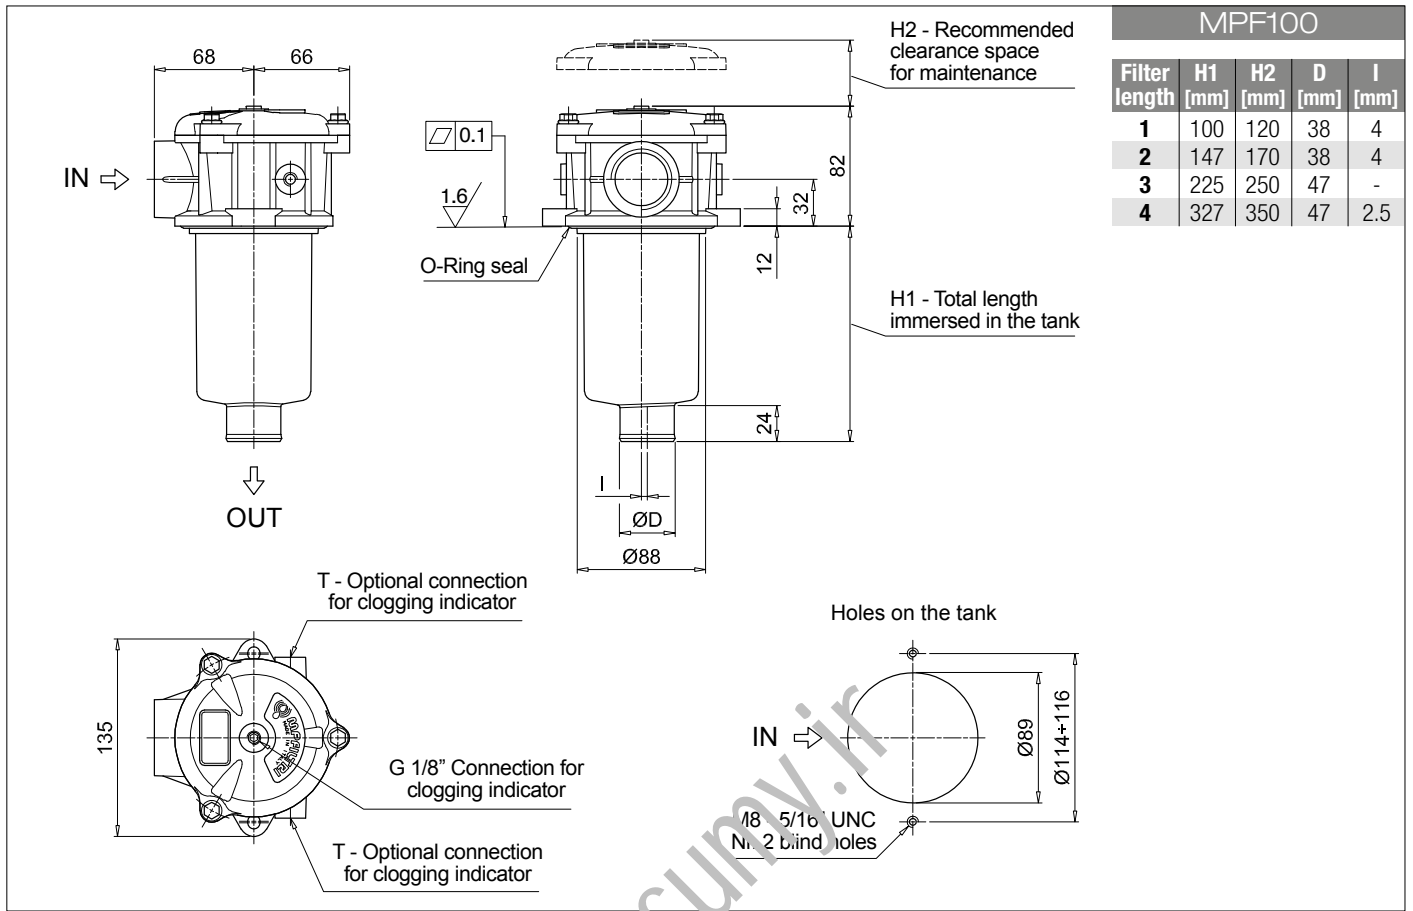

## Designation & Ordering code

### COMPLETE FILTER

|  |  |  |  |                     |  |                                    |  |                        |  |                       |  |
|--|--|--|--|---------------------|--|------------------------------------|--|------------------------|--|-----------------------|--|
| <b>Series and size</b>                                   |  | Configuration example 1: <b>MPF110</b>   <b>2</b>   <b>A</b>   <b>G2</b>   <b>1</b>   <b>A16</b>   <b>H</b>   <b>E</b>   <b>P01</b>  |  |                     |  |                                    |  |                        |  |                       |  |
| <b>MPF110</b> Filter element with standard spigot        |  | Configuration example 2: <b>MPF110</b>   <b>4</b>   <b>V</b>   <b>G12</b>   <b>1</b>   <b>M60</b>   <b>N</b>   <b>B</b>   <b>P01</b> |  |                     |  |                                    |  |                        |  |                       |  |
| <b>Length</b>  |  |  |  |                     |  |                                    |  |                        |  |                       |  |
| <b>1</b>   <b>2</b>   <b>3</b>   <b>4</b>                |  |  |  |                     |  |                                    |  |                        |  |                       |  |
| <b>Seals and treatments</b>                              |  |  |  |                     |  |                                    |  |                        |  |                       |  |
| <b>A</b> NBR   |  | <b>W</b> NBR head anodized   |  |                     |  |                                    |  |                        |  |                       |  |
| <b>V</b> FPM   |  | <b>Z</b> FPM head anodized   |  |                     |  |                                    |  |                        |  |                       |  |
| <b>Main Connections</b>                                  |  | <b>Aux size 1</b>  |  | <b>Aux size 2</b>   |  | <b>Main Connections</b>            |  | <b>Aux size 1</b>      |  | <b>Aux size 2</b>     |  |
| <b>G1</b> G 1/2"   |  | G 3/8"   |  | G 1/2"              |  | <b>G7</b> SAE 8 - 3/4" - 16 UNF    |  | SAE 6 - 9/16" - 18 UNF |  | SAE 8 - 3/4" - 16 UNF |  |
| <b>G2</b> G 3/4"   |  |  |  |                     |  | <b>G8</b> SAE 12 - 1 1/16" - 12 UN |  |                        |  |                       |  |
| <b>G3</b> G 1"   |  |  |  |                     |  | <b>G9</b> SAE 16 - 1 5/16" - 12 UN |  |                        |  |                       |  |
| <b>G4</b> 1/2" NPT                                       |  |  |  |                     |  | <b>G10</b> G 1 1/4"                |  | G 3/8"                 |  | G 1/2"                |  |
| <b>G5</b> 3/4" NPT                                       |  | 3/8" NPT   |  | 1/2" NPT            |  | <b>G11</b> 1 1/4" NPT              |  | 3/8" NPT               |  | 1/2" NPT              |  |
| <b>G6</b> 1" NPT   |  |  |  |                     |  | <b>G12</b> SAE 20 - 1 5/8" - 12 UN |  | SAE 6 - 9/16" - 18 UNF |  | SAE 8 - 3/4" - 16 UNF |  |
| <b>Aux connection</b> - see previous table               |  |  |  |                     |  |                                    |  |                        |  |                       |  |
| <b>1</b> Aux size 1                                      |  | <b>2</b> Aux size 2  |  |                     |  |                                    |  |                        |  |                       |  |
| <b>Filtration rating (filter media)</b>                  |  |  |  |                     |  |                                    |  |                        |  |                       |  |
| <b>A03</b> Inorganic microfiber 3 µm                     |  | <b>M25</b> Wire mesh 25 µm   |  |                     |  |                                    |  |                        |  |                       |  |
| <b>A06</b> Inorganic microfiber 6 µm                     |  | <b>M60</b> Wire mesh 60 µm   |  |                     |  |                                    |  |                        |  |                       |  |
| <b>A10</b> Inorganic microfiber 10 µm                    |  | <b>M90</b> Wire mesh 90 µm   |  |                     |  |                                    |  |                        |  |                       |  |
| <b>A16</b> Inorganic microfiber 16 µm                    |  | <b>P10</b> Resin impregnated paper 10 µm   |  |                     |  |                                    |  |                        |  |                       |  |
| <b>A25</b> Inorganic microfiber 25 µm                    |  | <b>P25</b> Resin impregnated paper 25 µm   |  |                     |  |                                    |  |                        |  |                       |  |
| <b>Element Δp</b>  |  | <b>Filter media</b>  |  |                     |  |                                    |  |                        |  |                       |  |
|  |  | <b>Axx</b>   <b>Mxx</b>   <b>Pxx</b>   |  |                     |  |                                    |  |                        |  |                       |  |
| <b>N</b> 10 bar  |  | • •  |  |                     |  |                                    |  |                        |  |                       |  |
| <b>H</b> 10 bar  |  | •  |  |                     |  |                                    |  |                        |  |                       |  |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC |  | • •  |  |                     |  |                                    |  |                        |  |                       |  |
|  |  |  |  | <b>Bypass valve</b> |  | <b>Execution</b>                   |  |                        |  |                       |  |
|  |  |  |  | <b>E</b> 3 bar      |  | <b>P01</b> MP Filtri standard      |  |                        |  |                       |  |
|  |  |  |  | <b>B</b> 1.75 bar   |  | <b>Pxx</b> Customized              |  |                        |  |                       |  |


### FILTER ELEMENT

|  |  |   |  |              |  |                     |  |                               |  |  |  |
|--|--|---|--|--------------|--|---------------------|--|-------------------------------|--|--|--|
| <b>Element series and size</b>                           |  | Configuration example 1: <b>MF100</b>   <b>2</b>   <b>A16</b>   <b>H</b>   <b>B</b>   <b>E</b>   <b>P01</b> |  |              |  |                     |  |                               |  |  |  |
| <b>MF100</b> Filter element with standard spigot         |  | Configuration example 2: <b>MF100</b>   <b>4</b>   <b>M60</b>   <b>N</b>   <b>V</b>   <b>P01</b>            |  |              |  |                     |  |                               |  |  |  |
| <b>Element length</b>                                    |  |   |  |              |  |                     |  |                               |  |  |  |
| <b>1</b>   <b>2</b>   <b>3</b>   <b>4</b>                |  |   |  |              |  |                     |  |                               |  |  |  |
| <b>Filtration rating (filter media)</b>                  |  |   |  |              |  |                     |  |                               |  |  |  |
| <b>A03</b> Inorganic microfiber 3 µm                     |  | <b>M25</b> Wire mesh 25 µm  |  |              |  |                     |  |                               |  |  |  |
| <b>A06</b> Inorganic microfiber 6 µm                     |  | <b>M60</b> Wire mesh 60 µm  |  |              |  |                     |  |                               |  |  |  |
| <b>A10</b> Inorganic microfiber 10 µm                    |  | <b>M90</b> Wire mesh 90 µm  |  |              |  |                     |  |                               |  |  |  |
| <b>A16</b> Inorganic microfiber 16 µm                    |  | <b>P10</b> Resin impregnated paper 10 µm  |  |              |  |                     |  |                               |  |  |  |
| <b>A25</b> Inorganic microfiber 25 µm                    |  | <b>P25</b> Resin impregnated paper 25 µm  |  |              |  |                     |  |                               |  |  |  |
| <b>Element Δp</b>  |  | <b>Filter media</b>   |  |              |  |                     |  |                               |  |  |  |
|  |  | <b>Axx</b>   <b>Mxx</b>   <b>Pxx</b>  |  |              |  |                     |  |                               |  |  |  |
| <b>N</b> 10 bar  |  | • •   |  |              |  |                     |  |                               |  |  |  |
| <b>H</b> 10 bar  |  | •   |  |              |  |                     |  |                               |  |  |  |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC |  | • •   |  |              |  |                     |  |                               |  |  |  |
|  |  |   |  | <b>Seals</b> |  | <b>Bypass valve</b> |  | <b>Execution</b>              |  |  |  |
|  |  |   |  | <b>B</b> NBR |  | <b>E</b> 3 bar      |  | <b>P01</b> MP Filtri standard |  |  |  |
|  |  |   |  | <b>V</b> FPM |  | <b>B</b> 1.75 bar   |  | <b>Pxx</b> Customized         |  |  |  |

### ACCESSORIES

|   |     |   |         |  |     |
|---|-----|---|---------|--|-----|
| <b>Indicators</b>   |     | page  |         | page                                     |     |
| <b>BVA</b> Axial pressure gauge                           | 240 | <b>BEA</b> Electrical pressure indicator          | 240     | <b>BEM</b> Electrical pressure indicator | 239 |
| <b>BVR</b> Radial pressure gauge                          | 240 | <b>BLA</b> Electrical / visual pressure indicator | 239-240 |  |     |
| <b>BVP</b> Visual pressure indicator with automatic reset | 241 |   |         |  |     |
| <b>BVQ</b> Visual pressure indicator with manual reset    | 241 |   |         |  |     |
| <b>Additional features</b>                                |     | page  |         | page                                     |     |
| <b>TE</b> Extension tube                                  | 248 | <b>T5</b> Filler plug M30x1.5                     | 249     | <b>DPT</b> Dipstick                      | 249 |
| <b>DFS</b> Diffuser with fast lock connection             | 249 |   |         |  |     |



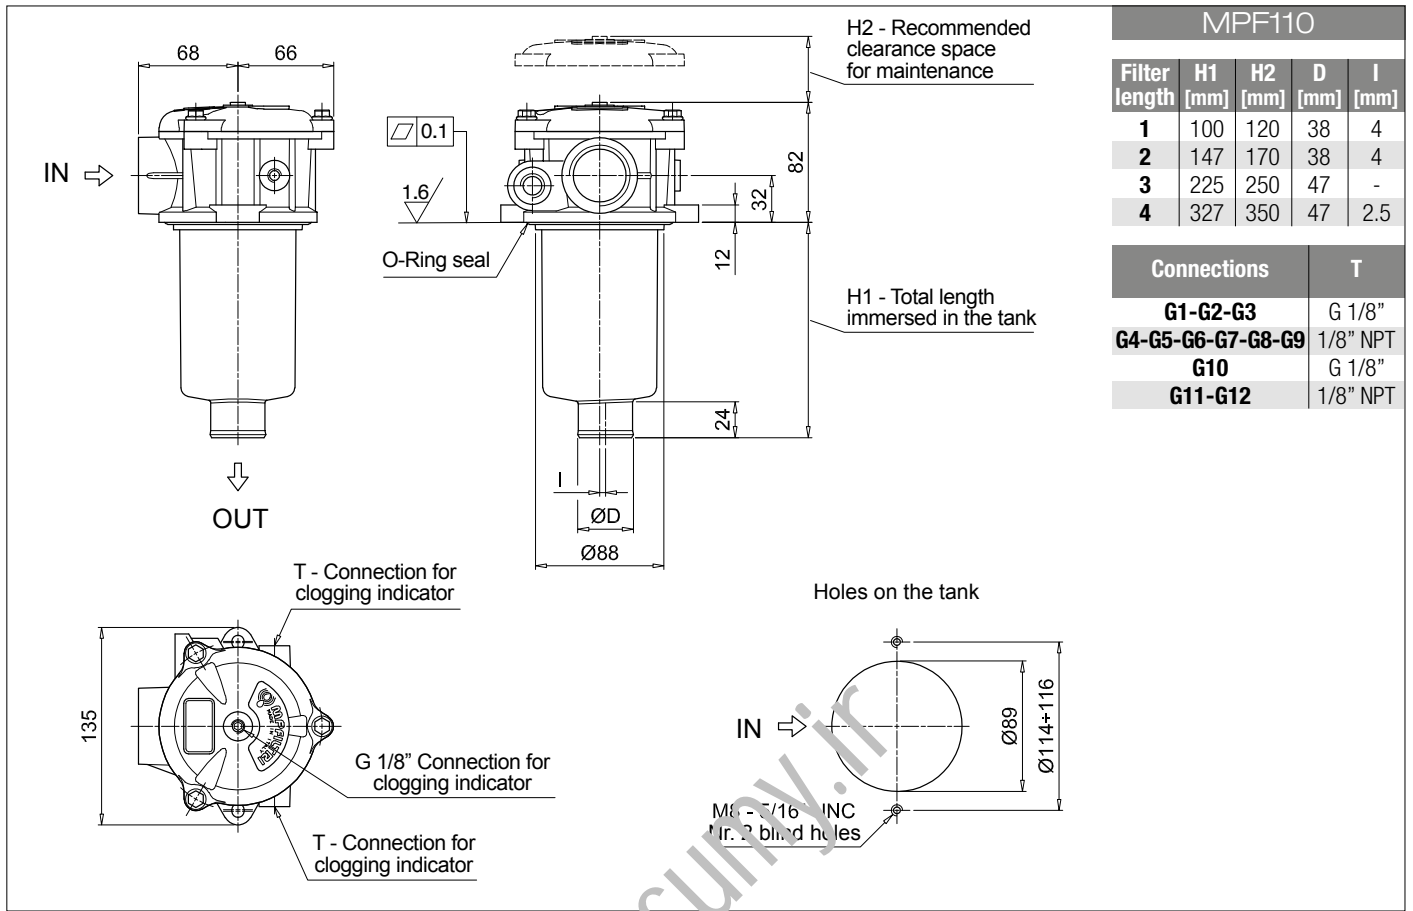

| MPF110        |         |         |        |        |
|---------------|---------|---------|--------|--------|
| Filter length | H1 [mm] | H2 [mm] | D [mm] | I [mm] |
| 1             | 100     | 120     | 38     | 4      |
| 2             | 147     | 170     | 38     | 4      |
| 3             | 225     | 250     | 47     | -      |
| 4             | 327     | 350     | 47     | 2.5    |

| Connections       | T        |
|-------------------|----------|
| G1-G2-G3          | G 1/8"   |
| G4-G5-G6-G7-G8-G9 | 1/8" NPT |
| G10               | G 1/8"   |
| G11-G12           | 1/8" NPT |

# MPF MPF181 - MPF191

## Designation & Ordering code

### COMPLETE FILTER



|   |   |                 |  |  |  |                               |  |  |  |  |  |
|---|---|-----------------|--|--|--|-------------------------------|--|--|--|--|--|
| <b>Series and size</b>  |   |                 | Configuration example 1: <b>MPF181</b>   <b>1</b>   <b>A</b>   <b>G1</b>   <b>A25</b>   <b>H</b>   <b>E</b>   <b>P01</b> |  |  |                               |  |  |  |  |  |
| <b>MPF181</b>   <b>MPF191</b> Filter element with standard spigot |   |                 | Configuration example 2: <b>MPF191</b>   <b>2</b>   <b>V</b>   <b>G2</b>   <b>P10</b>   <b>N</b>   <b>B</b>   <b>P01</b> |  |  |                               |  |  |  |  |  |
| <b>Length</b>   |   | <b>Size 181</b> | <b>Size 191</b>  |  |  |                               |  |  |  |  |  |
| <b>1</b>  |   | •               |  |  |  |                               |  |  |  |  |  |
| <b>2</b>  |   | •               | •  |  |  |                               |  |  |  |  |  |
| <b>Seals and treatments</b>                                       |   |                 |  |  |  |                               |  |  |  |  |  |
| <b>A</b> NBR  | <b>B</b> NBR flat seal on head                |                 |  |  |  |                               |  |  |  |  |  |
| <b>V</b> FPM  | <b>D</b> FPM flat seal on head                |                 |  |  |  |                               |  |  |  |  |  |
| <b>W</b> NBR head anodized  | <b>L</b> NBR head anodized, flat seal on head |                 |  |  |  |                               |  |  |  |  |  |
| <b>Z</b> FPM head anodized  | <b>M</b> FPM head anodized, flat seal on head |                 |  |  |  |                               |  |  |  |  |  |
| <b>Connections</b>  |   |                 |  |  |  |                               |  |  |  |  |  |
| <b>G1</b> G 1 1/4"  | <b>G5</b> 1 1/2" NPT                          |                 |  |  |  |                               |  |  |  |  |  |
| <b>G2</b> G 1 1/2"  | <b>G7</b> SAE 20 - 1 5/8" - 12 UN             |                 |  |  |  |                               |  |  |  |  |  |
| <b>G4</b> 1 1/4" NPT  | <b>G8</b> SAE 24 - 1 7/8" - 12 UN             |                 |  |  |  |                               |  |  |  |  |  |
| <b>Filtration rating (filter media)</b>                           |   |                 |  |  |  |                               |  |  |  |  |  |
| <b>A03</b> Inorganic microfiber 3 µm                              | <b>M25</b> Wire mesh 25 µm                    |                 |  |  |  |                               |  |  |  |  |  |
| <b>A06</b> Inorganic microfiber 6 µm                              | <b>M60</b> Wire mesh 60 µm                    |                 |  |  |  |                               |  |  |  |  |  |
| <b>A10</b> Inorganic microfiber 10 µm                             | <b>M90</b> Wire mesh 90 µm                    |                 |  |  |  |                               |  |  |  |  |  |
| <b>A16</b> Inorganic microfiber 16 µm                             | <b>P10</b> Resin impregnated paper 10 µm      |                 |  |  |  |                               |  |  |  |  |  |
| <b>A25</b> Inorganic microfiber 25 µm                             | <b>P25</b> Resin impregnated paper 25 µm      |                 |  |  |  |                               |  |  |  |  |  |
| <b>Element Δp</b>   |   |                 | <b>Filter media</b>  |  |  |                               |  |  |  |  |  |
| <b>N</b> 10 bar   | <b>Axx</b>                                    | <b>Mxx</b>      | <b>Pxx</b>   |  |  |                               |  |  |  |  |  |
| <b>H</b> 10 bar   |   | •               | •  |  |  |                               |  |  |  |  |  |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC          | •   | •               |  |  |  |                               |  |  |  |  |  |
|   |   |                 | <b>Bypass valve</b>  |  |  | <b>Execution</b>              |  |  |  |  |  |
|   |   |                 | <b>E</b> 3 bar   |  |  | <b>P01</b> MP Filtri standard |  |  |  |  |  |
|   |   |                 | <b>B</b> 1.75 bar  |  |  | <b>Pxx</b> Customized         |  |  |  |  |  |

### FILTER ELEMENT

|   |  |                 |   |  |  |                     |  |  |                               |  |  |
|---|--|-----------------|---|--|--|---------------------|--|--|-------------------------------|--|--|
| <b>Element series and size</b>                                  |  |                 | Configuration example 1: <b>MF180</b>   <b>1</b>   <b>A25</b>   <b>H</b>   <b>B</b>   <b>E</b>   <b>P01</b> |  |  |                     |  |  |                               |  |  |
| <b>MF180</b>   <b>MF190</b> Filter element with standard spigot |  |                 | Configuration example 2: <b>MF190</b>   <b>2</b>   <b>P10</b>   <b>N</b>   <b>V</b>   <b></b>   <b>P01</b>  |  |  |                     |  |  |                               |  |  |
| <b>Element length</b>   |  | <b>Size 180</b> | <b>Size 190</b>   |  |  |                     |  |  |                               |  |  |
| <b>1</b>  |  | •               |   |  |  |                     |  |  |                               |  |  |
| <b>2</b>  |  | •               | •   |  |  |                     |  |  |                               |  |  |
| <b>Filtration rating (filter media)</b>                         |  |                 |   |  |  |                     |  |  |                               |  |  |
| <b>A03</b> Inorganic microfiber 3 µm                            | <b>M25</b> Wire mesh 25 µm               |                 |   |  |  |                     |  |  |                               |  |  |
| <b>A06</b> Inorganic microfiber 6 µm                            | <b>M60</b> Wire mesh 60 µm               |                 |   |  |  |                     |  |  |                               |  |  |
| <b>A10</b> Inorganic microfiber 10 µm                           | <b>M90</b> Wire mesh 90 µm               |                 |   |  |  |                     |  |  |                               |  |  |
| <b>A16</b> Inorganic microfiber 16 µm                           | <b>P10</b> Resin impregnated paper 10 µm |                 |   |  |  |                     |  |  |                               |  |  |
| <b>A25</b> Inorganic microfiber 25 µm                           | <b>P25</b> Resin impregnated paper 25 µm |                 |   |  |  |                     |  |  |                               |  |  |
| <b>Element Δp</b>   |  |                 | <b>Filter media</b>   |  |  |                     |  |  |                               |  |  |
| <b>N</b> 10 bar   | <b>Axx</b>                               | <b>Mxx</b>      | <b>Pxx</b>  |  |  |                     |  |  |                               |  |  |
| <b>H</b> 10 bar   |  | •               | •   |  |  |                     |  |  |                               |  |  |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC        | •  | •               |   |  |  |                     |  |  |                               |  |  |
|   |  |                 | <b>Seals</b>  |  |  | <b>Bypass valve</b> |  |  | <b>Execution</b>              |  |  |
|   |  |                 | <b>B</b> NBR  |  |  | <b>E</b> 3 bar      |  |  | <b>P01</b> MP Filtri standard |  |  |
|   |  |                 | <b>V</b> FPM  |  |  | <b></b> 1.75 bar    |  |  | <b>Pxx</b> Customized         |  |  |

### ACCESSORIES

|   |     |      |   |         |      |
|---|-----|------|---|---------|------|
| <b>Indicators</b>   |     | page |   |         | page |
| <b>BVA</b> Axial pressure gauge                           | 240 |      | <b>BEA</b> Electrical pressure indicator          | 239     |      |
| <b>BVR</b> Radial pressure gauge                          | 240 |      | <b>BEM</b> Electrical pressure indicator          | 239     |      |
| <b>BVP</b> Visual pressure indicator with automatic reset | 241 |      | <b>BLA</b> Electrical / visual pressure indicator | 239-240 |      |
| <b>BVQ</b> Visual pressure indicator with manual reset    | 241 |      |   |         |      |
| <b>Additional features</b>                                |     | page |   |         |      |
| <b>TE</b> Extension tube                                  | 248 |      |   |         |      |
| <b>Sxx</b> Extension tube                                 | 248 |      |   |         |      |
| <b>T5</b> Filler plug M30x1.5                             | 249 |      |   |         |      |

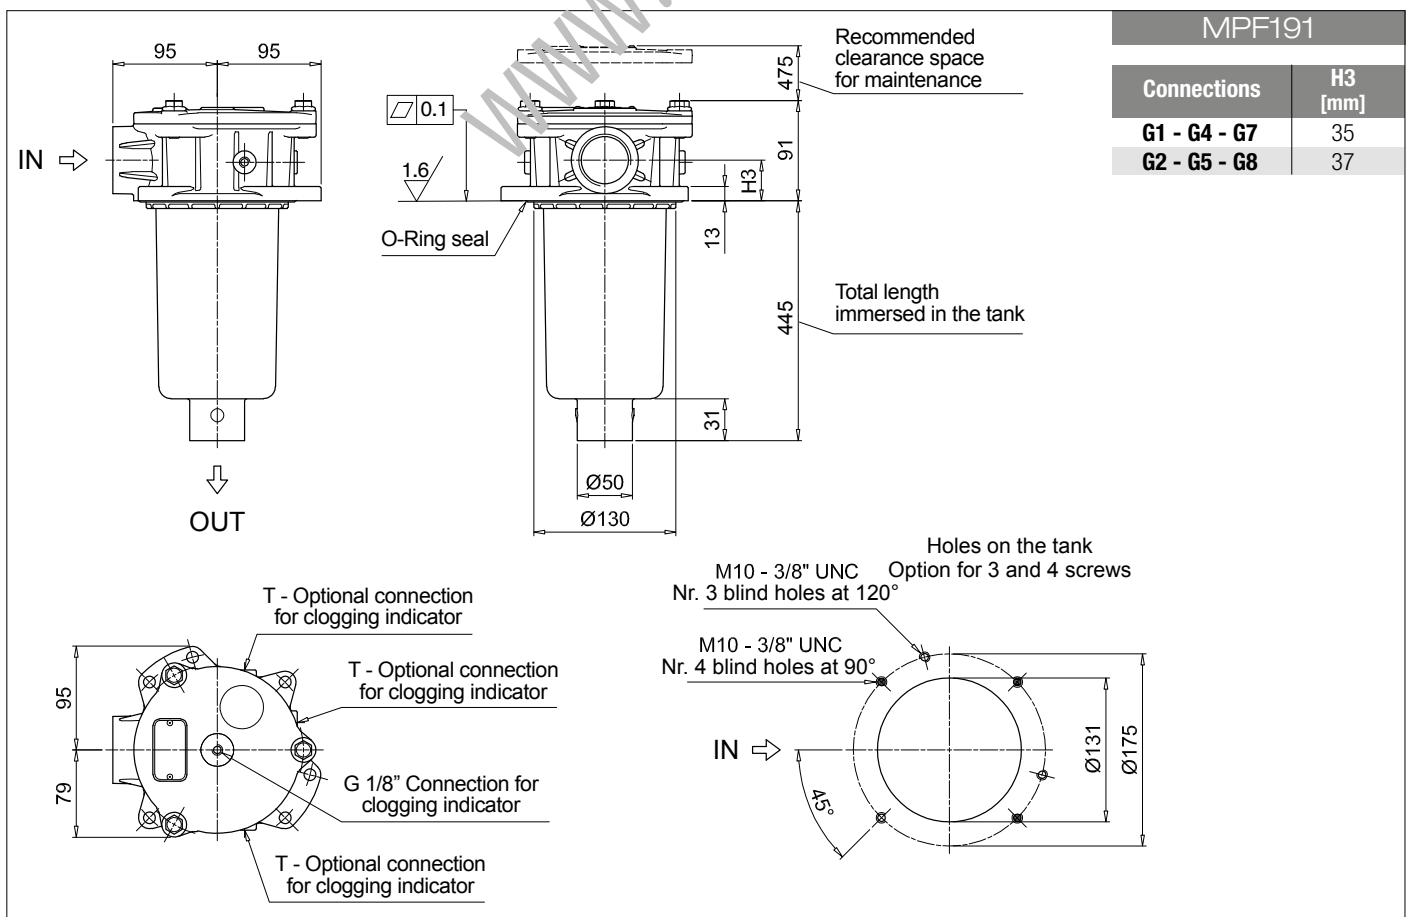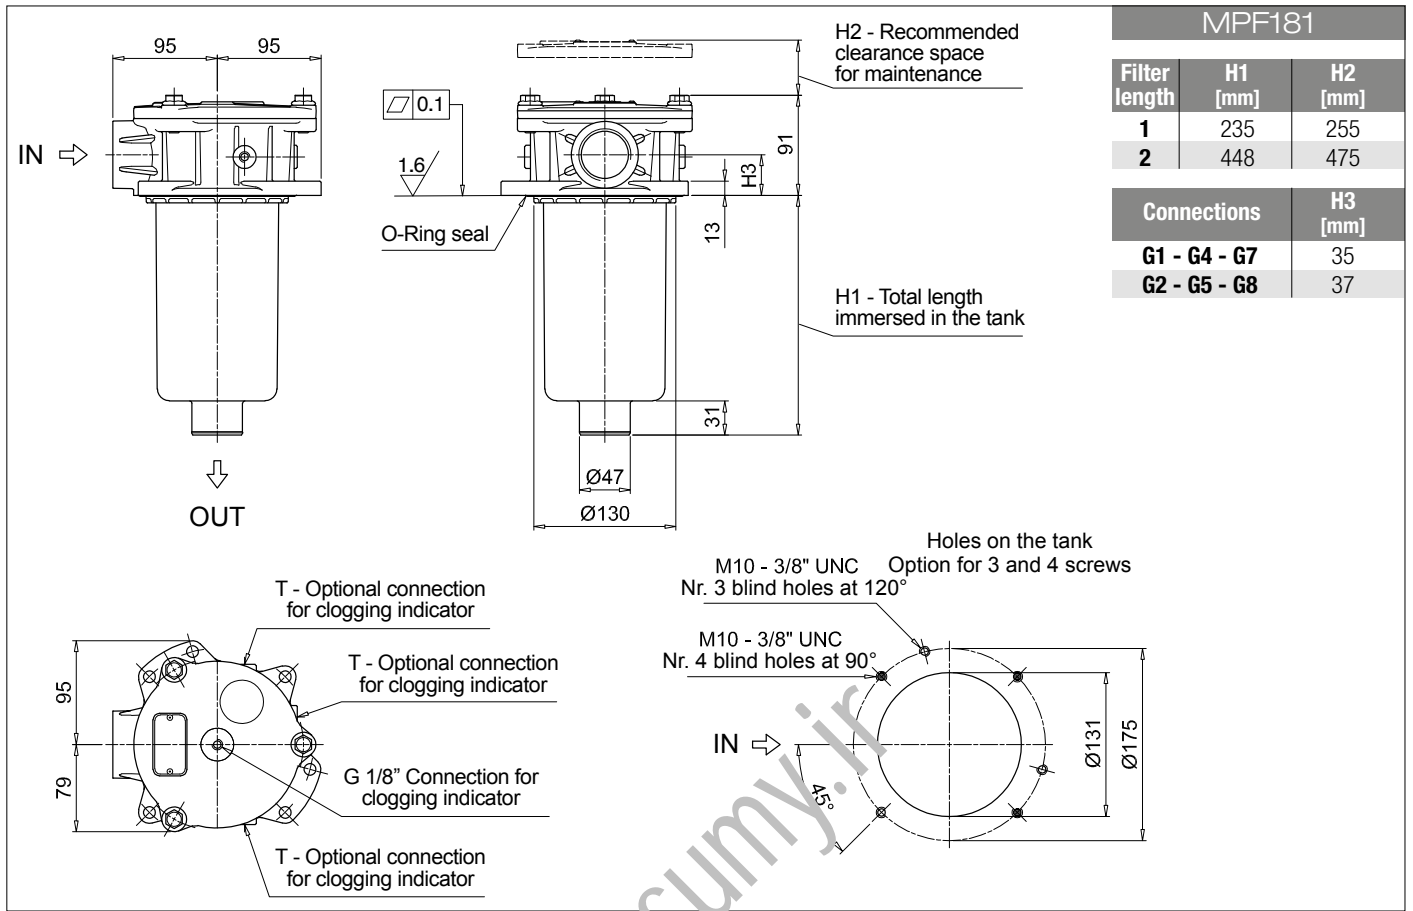

# MPF MPF182 - MPF192

## Designation & Ordering code

### COMPLETE FILTER



|   |  |   |  |          |  |                          |  |                        |  |  |  |
|---|--|---|--|----------|--|--------------------------|--|------------------------|--|--|--|
| <b>Series and size</b>  |  | Configuration example 1: <b>MPF182</b>   1   A   G1   1   A25   H   E   P01 |  |          |  |                          |  |                        |  |  |  |
| <b>MPF182</b>   <b>MPF192</b> Filter element with standard spigot |  | Configuration example 2: <b>MPF192</b>   2   V   G4   2   P10   N   B   P01 |  |          |  |                          |  |                        |  |  |  |
| <b>Length</b>   |  | Size 182  |  | Size 192 |  |                          |  |                        |  |  |  |
| 1   |  | •   |  |          |  |                          |  |                        |  |  |  |
| 2   |  | •   |  | •        |  |                          |  |                        |  |  |  |
| <b>Seals and treatments</b>                                       |  |   |  |          |  |                          |  |                        |  |  |  |
| <b>A</b> NBR  |  | <b>B</b> NBR flat seal on head  |  |          |  |                          |  |                        |  |  |  |
| <b>V</b> FPM  |  | <b>D</b> FPM flat seal on head  |  |          |  |                          |  |                        |  |  |  |
| <b>W</b> NBR head anodized  |  | <b>L</b> NBR head anodized, flat seal on head                               |  |          |  |                          |  |                        |  |  |  |
| <b>Z</b> FPM head anodized  |  | <b>M</b> FPM head anodized, flat seal on head                               |  |          |  |                          |  |                        |  |  |  |
| <b>Main Connections</b>   |  |   | Aux size 1                               |          |  | Aux size 2               |  |                        |  |  |  |
| <b>G1</b> G 1 1/4"  |  |   | G 1/2"                                   |          |  | G 3/4"                   |  |                        |  |  |  |
| <b>G4</b> 1 1/4" NPT  |  |   | 1/2" NPT                                 |          |  | 3/4" NPT                 |  |                        |  |  |  |
| <b>G7</b> SAE 20 - 1 5/8" - 12 UN                                 |  |   | SAE 8 - 3/16" - 16 UNF                   |          |  | SAE 12 - 1 1/16" - 12 UN |  |                        |  |  |  |
| <b>Aux connection</b> - see previous table                        |  |   |  |          |  |                          |  |                        |  |  |  |
| 1 Aux size 1  |  |   | 2 Aux size 2                             |          |  |                          |  |                        |  |  |  |
| <b>Filtration rating (filter media)</b>                           |  |   |  |          |  |                          |  |                        |  |  |  |
| <b>A03</b> Inorganic microfiber 3 µm                              |  |   | <b>M25</b> Wire mesh 25 µm               |          |  |                          |  |                        |  |  |  |
| <b>A06</b> Inorganic microfiber 6 µm                              |  |   | <b>M60</b> Wire mesh 60 µm               |          |  |                          |  |                        |  |  |  |
| <b>A10</b> Inorganic microfiber 10 µm                             |  |   | <b>M90</b> Wire mesh 90 µm               |          |  |                          |  |                        |  |  |  |
| <b>A16</b> Inorganic microfiber 16 µm                             |  |   | <b>P10</b> Resin impregnated paper 10 µm |          |  |                          |  |                        |  |  |  |
| <b>A25</b> Inorganic microfiber 25 µm                             |  |   | <b>P25</b> Resin impregnated paper 25 µm |          |  |                          |  |                        |  |  |  |
| <b>Element Δp</b>   |  |   | Filter media                             |          |  |                          |  |                        |  |  |  |
| N 10 bar  |  |   | Axx   Mxx   Pxx                          |          |  | •   •   •                |  |                        |  |  |  |
| H 10 bar  |  |   | •  |          |  | •                        |  |                        |  |  |  |
| W 10 bar, compatible with fluids HFA, HFB and HFC                 |  |   | •   •                                    |          |  | •                        |  |                        |  |  |  |
|   |  |   |  |          |  | <b>Bypass valve</b>      |  | <b>Execution</b>       |  |  |  |
|   |  |   |  |          |  | E 3 bar                  |  | P01 MP Filtri standard |  |  |  |
|   |  |   |  |          |  | B 1.75 bar               |  | Pxx Customized         |  |  |  |

### FILTER ELEMENT

|   |  |   |  |          |  |              |  |                     |  |                        |  |
|---|--|---|--|----------|--|--------------|--|---------------------|--|------------------------|--|
| <b>Element series and size</b>                                  |  | Configuration example 1: <b>MF180</b>   1   A25   H   B   E   P01 |  |          |  |              |  |                     |  |                        |  |
| <b>MF180</b>   <b>MF190</b> Filter element with standard spigot |  | Configuration example 2: <b>MF190</b>   2   P10   N   V     P01   |  |          |  |              |  |                     |  |                        |  |
| <b>Element length</b>   |  | Size 180  |  | Size 190 |  |              |  |                     |  |                        |  |
| 1   |  | •   |  |          |  |              |  |                     |  |                        |  |
| 2   |  | •   |  | •        |  |              |  |                     |  |                        |  |
| <b>Filtration rating (filter media)</b>                         |  |   |  |          |  |              |  |                     |  |                        |  |
| <b>A03</b> Inorganic microfiber 3 µm                            |  |   | <b>M25</b> Wire mesh 25 µm               |          |  |              |  |                     |  |                        |  |
| <b>A06</b> Inorganic microfiber 6 µm                            |  |   | <b>M60</b> Wire mesh 60 µm               |          |  |              |  |                     |  |                        |  |
| <b>A10</b> Inorganic microfiber 10 µm                           |  |   | <b>M90</b> Wire mesh 90 µm               |          |  |              |  |                     |  |                        |  |
| <b>A16</b> Inorganic microfiber 16 µm                           |  |   | <b>P10</b> Resin impregnated paper 10 µm |          |  |              |  |                     |  |                        |  |
| <b>A25</b> Inorganic microfiber 25 µm                           |  |   | <b>P25</b> Resin impregnated paper 25 µm |          |  |              |  |                     |  |                        |  |
| <b>Element Δp</b>   |  |   | Filter media                             |          |  |              |  |                     |  |                        |  |
| N 10 bar  |  |   | Axx   Mxx   Pxx                          |          |  | •   •   •    |  |                     |  |                        |  |
| H 10 bar  |  |   | •  |          |  | •            |  |                     |  |                        |  |
| W 10 bar, compatible with fluids HFA, HFB and HFC               |  |   | •   •                                    |          |  | •            |  |                     |  |                        |  |
|   |  |   |  |          |  | <b>Seals</b> |  | <b>Bypass valve</b> |  | <b>Execution</b>       |  |
|   |  |   |  |          |  | B NBR        |  | E 3 bar             |  | P01 MP Filtri standard |  |
|   |  |   |  |          |  | V FPM        |  | 1.75 bar            |  | Pxx Customized         |  |

### ACCESSORIES

|   |     |   |         |  |  |      |  |
|---|-----|---|---------|--|--|------|--|
| <b>Indicators</b>   |     | page  |         |  |  | page |  |
| <b>BVA</b> Axial pressure gauge                           | 240 | <b>BEA</b> Electrical pressure indicator          | 239     |  |  |      |  |
| <b>BVR</b> Radial pressure gauge                          | 240 | <b>BEM</b> Electrical pressure indicator          | 239     |  |  |      |  |
| <b>BVP</b> Visual pressure indicator with automatic reset | 241 | <b>BLA</b> Electrical / visual pressure indicator | 239-240 |  |  |      |  |
| <b>BVQ</b> Visual pressure indicator with manual reset    | 241 |   |         |  |  |      |  |
| <b>Additional features</b>                                |     | page  |         |  |  |      |  |
| <b>TE</b> Extension tube                                  | 248 |   |         |  |  |      |  |
| <b>Sxx</b> Extension tube                                 | 248 |   |         |  |  |      |  |
| <b>T5</b> Filler plug M30x1.5                             | 249 |   |         |  |  |      |  |

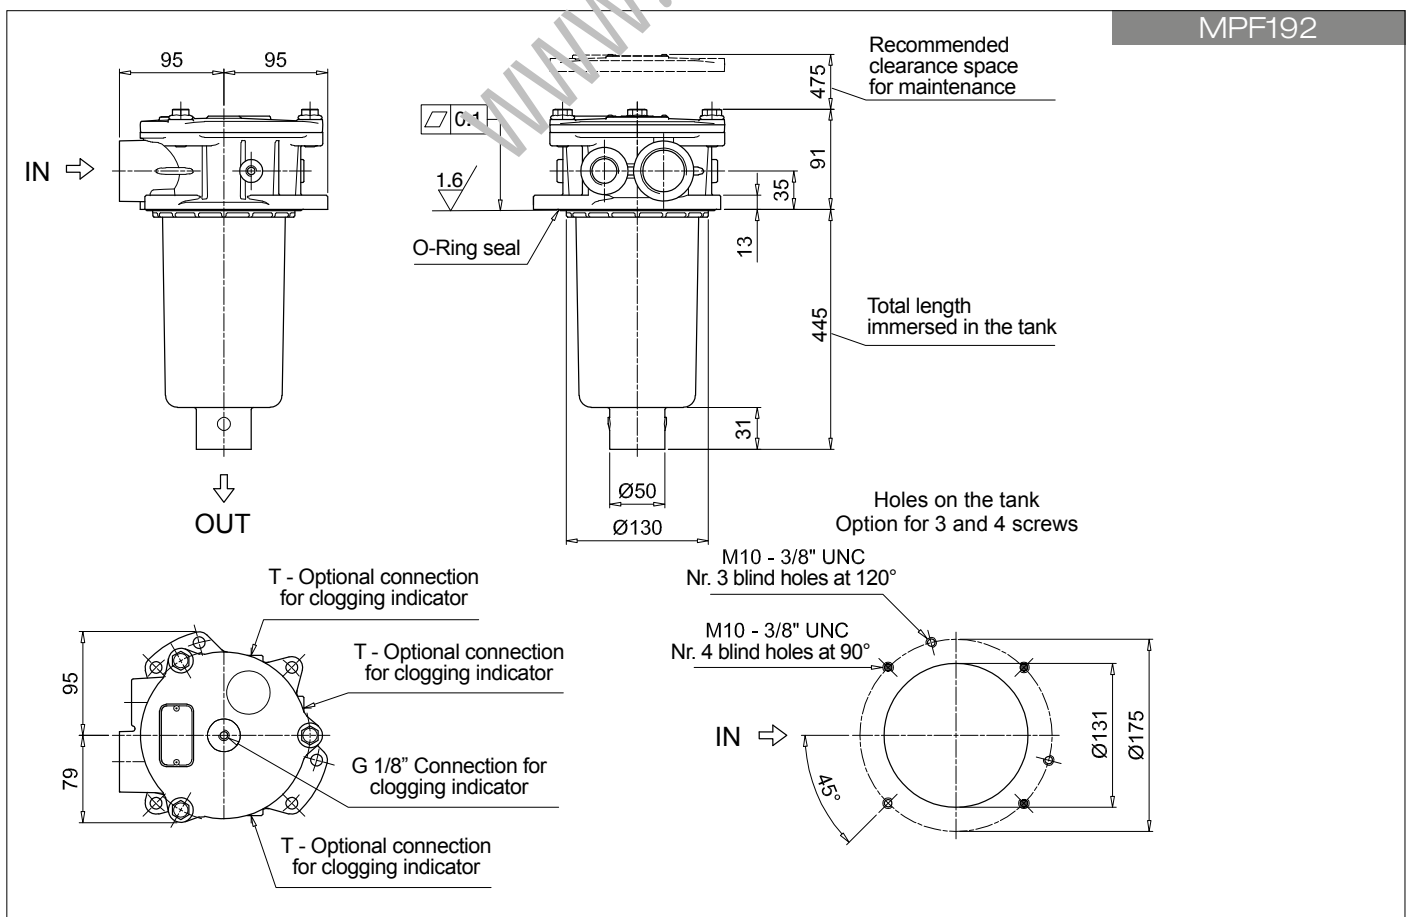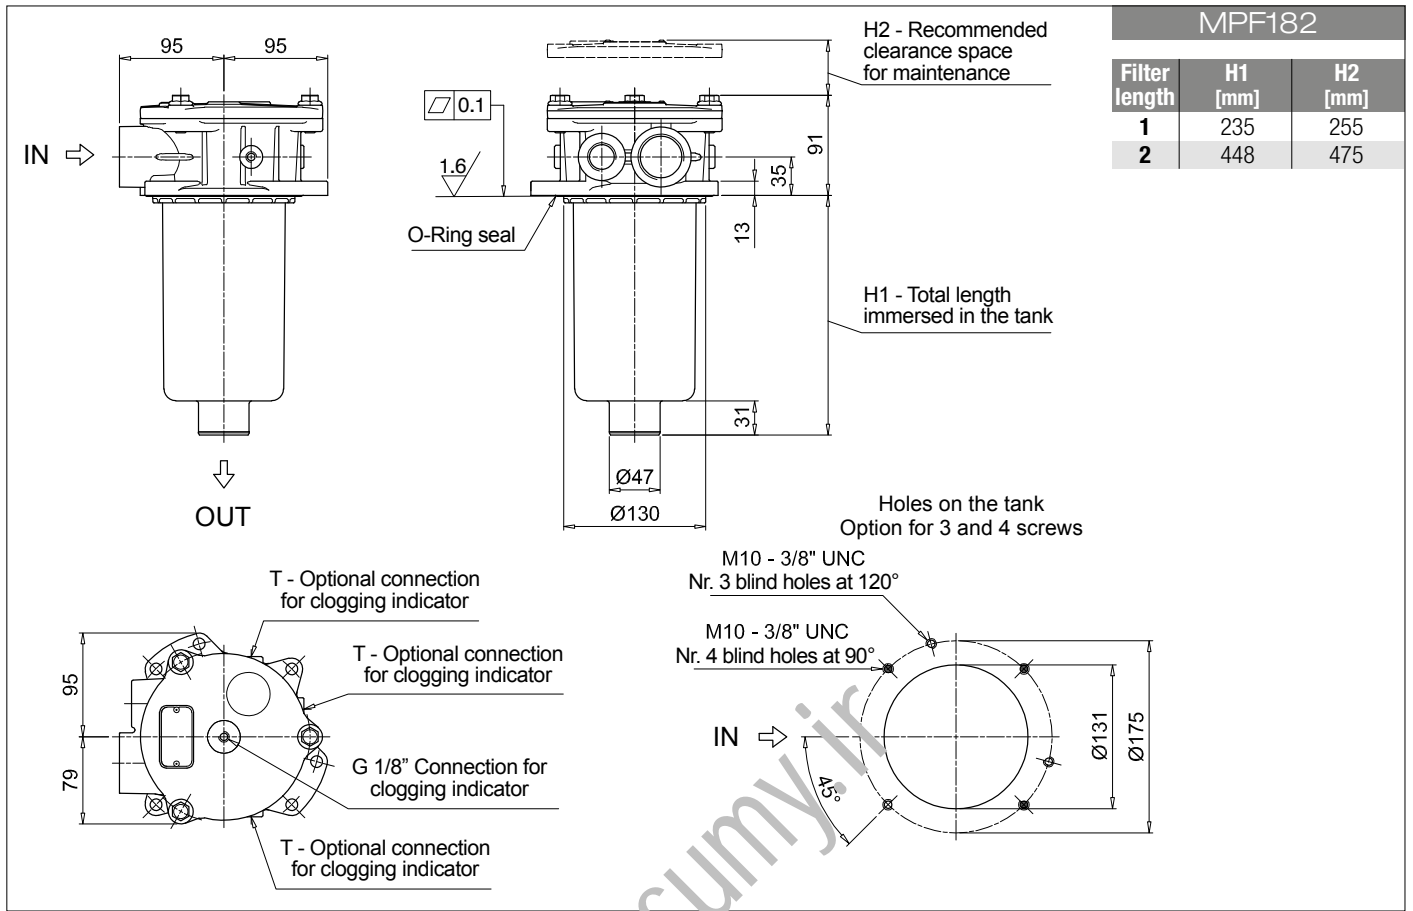

# MPF MPF184 - MPF194

## Designation & Ordering code

### COMPLETE FILTER



|   |  |  |   |                                   |            |                         |  |  |                               |  |  |
|---|--|--|---|-----------------------------------|------------|-------------------------|--|--|-------------------------------|--|--|
| <b>Series and size</b>  |  |  | Configuration example 1: <b>MPF184</b>   1   A   G1   A25   H   E   P01 |                                   |            |                         |  |  |                               |  |  |
| <b>MPF184</b>   <b>MPF194</b> Filter element with standard spigot |  |  | Configuration example 2: <b>MPF194</b>   2   V   F3   P10   N   B   P01 |                                   |            |                         |  |  |                               |  |  |
| <b>Length</b>   |  | <b>Size 184</b>                          | <b>Size 194</b>   |                                   |            |                         |  |  |                               |  |  |
| 1   |  | •  |   |                                   |            |                         |  |  |                               |  |  |
| 2   |  | •  | •   |                                   |            |                         |  |  |                               |  |  |
| <b>Seals and treatments</b>                                       |  |  |   |                                   |            |                         |  |  |                               |  |  |
| <b>A</b> NBR  |  | <b>W</b> NBR                             | head anodized   |                                   |            |                         |  |  |                               |  |  |
| <b>V</b> FPM  |  | <b>Z</b> FPM                             | head anodized   |                                   |            |                         |  |  |                               |  |  |
| <b>Main Connections</b>   |  | <b>Rear connections</b>                  |   | <b>Main Connections</b>           |            | <b>Rear connections</b> |  |  |                               |  |  |
| <b>G1</b> G 1 1/4"  |  | -  |   | <b>G13</b> G 1 1/2"               |            | -                       |  |  |                               |  |  |
| <b>G2</b> G 1 1/4"  |  | G 1 1/4"                                 |   | <b>G14</b> G 1 1/2"               |            | G 1 1/4"                |  |  |                               |  |  |
| <b>G4</b> 1 1/4" NPT  |  | -  |   | <b>G15</b> 1 1/2" NPT             |            | -                       |  |  |                               |  |  |
| <b>G5</b> 1 1/4" NPT  |  | 1 1/4" NPT                               |   | <b>G16</b> 1 1/2" NPT             |            | 1 1/4" NPT              |  |  |                               |  |  |
| <b>G7</b> SAE 20 - 1 5/8" - 12 UN                                 |  | -  |   | <b>F1</b> 1 1/2" SAE 3000 psi/M   |            | -                       |  |  |                               |  |  |
| <b>G8</b> SAE 20 - 1 5/8" - 12 UN                                 |  | SAE 20 - 1 5/8" - 12 UN                  |   | <b>F2</b> 1 1/2" SAE 3000 psi/UNC |            | -                       |  |  |                               |  |  |
| <b>G10</b> SAE 24 - 1 7/8" - 12 UN                                |  | -  |   | <b>F3</b> 1 1/2" SAE 3000 psi/M   |            | 1 1/2" SAE 3000 psi/M   |  |  |                               |  |  |
| <b>G11</b> SAE 24 - 1 7/8" - 12 UN                                |  | SAE 20 - 1 5/8" - 12 UN                  |   | <b>F4</b> 1 1/2" SAE 3000 psi/UNC |            | 1 1/2" SAE 3000 psi/UNC |  |  |                               |  |  |
| <b>Filtration rating (filter media)</b>                           |  |  |   |                                   |            |                         |  |  |                               |  |  |
| <b>A03</b> Inorganic microfiber 3 µm                              |  | <b>M25</b> Wire mesh 25 µm               |   |                                   |            |                         |  |  |                               |  |  |
| <b>A06</b> Inorganic microfiber 6 µm                              |  | <b>M60</b> Wire mesh 60 µm               |   |                                   |            |                         |  |  |                               |  |  |
| <b>A10</b> Inorganic microfiber 10 µm                             |  | <b>M90</b> Wire mesh 90 µm               |   |                                   |            |                         |  |  |                               |  |  |
| <b>A16</b> Inorganic microfiber 16 µm                             |  | <b>P10</b> Resin impregnated paper 10 µm |   |                                   |            |                         |  |  |                               |  |  |
| <b>A25</b> Inorganic microfiber 25 µm                             |  | <b>P25</b> Resin impregnated paper 25 µm |   |                                   |            |                         |  |  |                               |  |  |
| <b>Element Δp</b>   |  |  | <b>Filter media</b>   |                                   |            | <b>Bypass valve</b>     |  |  | <b>Execution</b>              |  |  |
| <b>N</b> 10 bar   |  |  | <b>Axx</b>  | <b>Mxx</b>                        | <b>Pxx</b> | <b>E</b> 3 bar          |  |  | <b>P01</b> MP Filtri standard |  |  |
| <b>H</b> 10 bar   |  |  | •   | •                                 | •          | <b>B</b> 1.75 bar       |  |  | <b>Pxx</b> Customized         |  |  |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC          |  |  | •   | •                                 |            |                         |  |  |                               |  |  |

### FILTER ELEMENT

|   |  |  |   |            |            |              |  |  |                     |  |  |                               |  |  |
|---|--|--|---|------------|------------|--------------|--|--|---------------------|--|--|-------------------------------|--|--|
| <b>Element series and size</b>                                  |  |  | Configuration example 1: <b>MF180</b>   1   A25   H   B   E   P01 |            |            |              |  |  |                     |  |  |                               |  |  |
| <b>MF180</b>   <b>MF190</b> Filter element with standard spigot |  |  | Configuration example 2: <b>MF190</b>   2   P10   N   V   P01     |            |            |              |  |  |                     |  |  |                               |  |  |
| <b>Element length</b>   |  | <b>Size 180</b>                          | <b>Size 190</b>   |            |            |              |  |  |                     |  |  |                               |  |  |
| 1   |  | •  |   |            |            |              |  |  |                     |  |  |                               |  |  |
| 2   |  | •  | •   |            |            |              |  |  |                     |  |  |                               |  |  |
| <b>Filtration rating (filter media)</b>                         |  |  |   |            |            |              |  |  |                     |  |  |                               |  |  |
| <b>A03</b> Inorganic microfiber 3 µm                            |  | <b>M25</b> Wire mesh 25 µm               |   |            |            |              |  |  |                     |  |  |                               |  |  |
| <b>A06</b> Inorganic microfiber 6 µm                            |  | <b>M60</b> Wire mesh 60 µm               |   |            |            |              |  |  |                     |  |  |                               |  |  |
| <b>A10</b> Inorganic microfiber 10 µm                           |  | <b>M90</b> Wire mesh 90 µm               |   |            |            |              |  |  |                     |  |  |                               |  |  |
| <b>A16</b> Inorganic microfiber 16 µm                           |  | <b>P10</b> Resin impregnated paper 10 µm |   |            |            |              |  |  |                     |  |  |                               |  |  |
| <b>A25</b> Inorganic microfiber 25 µm                           |  | <b>P25</b> Resin impregnated paper 25 µm |   |            |            |              |  |  |                     |  |  |                               |  |  |
| <b>Element Δp</b>   |  |  | <b>Filter media</b>   |            |            | <b>Seals</b> |  |  | <b>Bypass valve</b> |  |  | <b>Execution</b>              |  |  |
| <b>N</b> 10 bar   |  |  | <b>Axx</b>  | <b>Mxx</b> | <b>Pxx</b> | <b>B</b> NBR |  |  | <b>E</b> 3 bar      |  |  | <b>P01</b> MP Filtri standard |  |  |
| <b>H</b> 10 bar   |  |  | •   | •          | •          | <b>V</b> FPM |  |  | <b>B</b> 1.75 bar   |  |  | <b>Pxx</b> Customized         |  |  |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC        |  |  | •   | •          |            |              |  |  |                     |  |  |                               |  |  |



### ACCESSORIES

|   |     |      |   |         |      |
|---|-----|------|---|---------|------|
| <b>Indicators</b>   |     | page |   |         | page |
| <b>BVA</b> Axial pressure gauge                           | 240 |      | <b>BEA</b> Electrical pressure indicator          | 239     |      |
| <b>BVR</b> Radial pressure gauge                          | 240 |      | <b>BEM</b> Electrical pressure indicator          | 239     |      |
| <b>BVP</b> Visual pressure indicator with automatic reset | 241 |      | <b>BLA</b> Electrical / visual pressure indicator | 239-240 |      |
| <b>BVQ</b> Visual pressure indicator with manual reset    | 241 |      |   |         |      |
| <b>Additional features</b>                                |     | page |   |         |      |
| <b>TE</b> Extension tube                                  | 248 |      |   |         |      |
| <b>Sxx</b> Extension tube                                 | 248 |      |   |         |      |
| <b>T5</b> Filler plug M30x1.5                             | 249 |      |   |         |      |

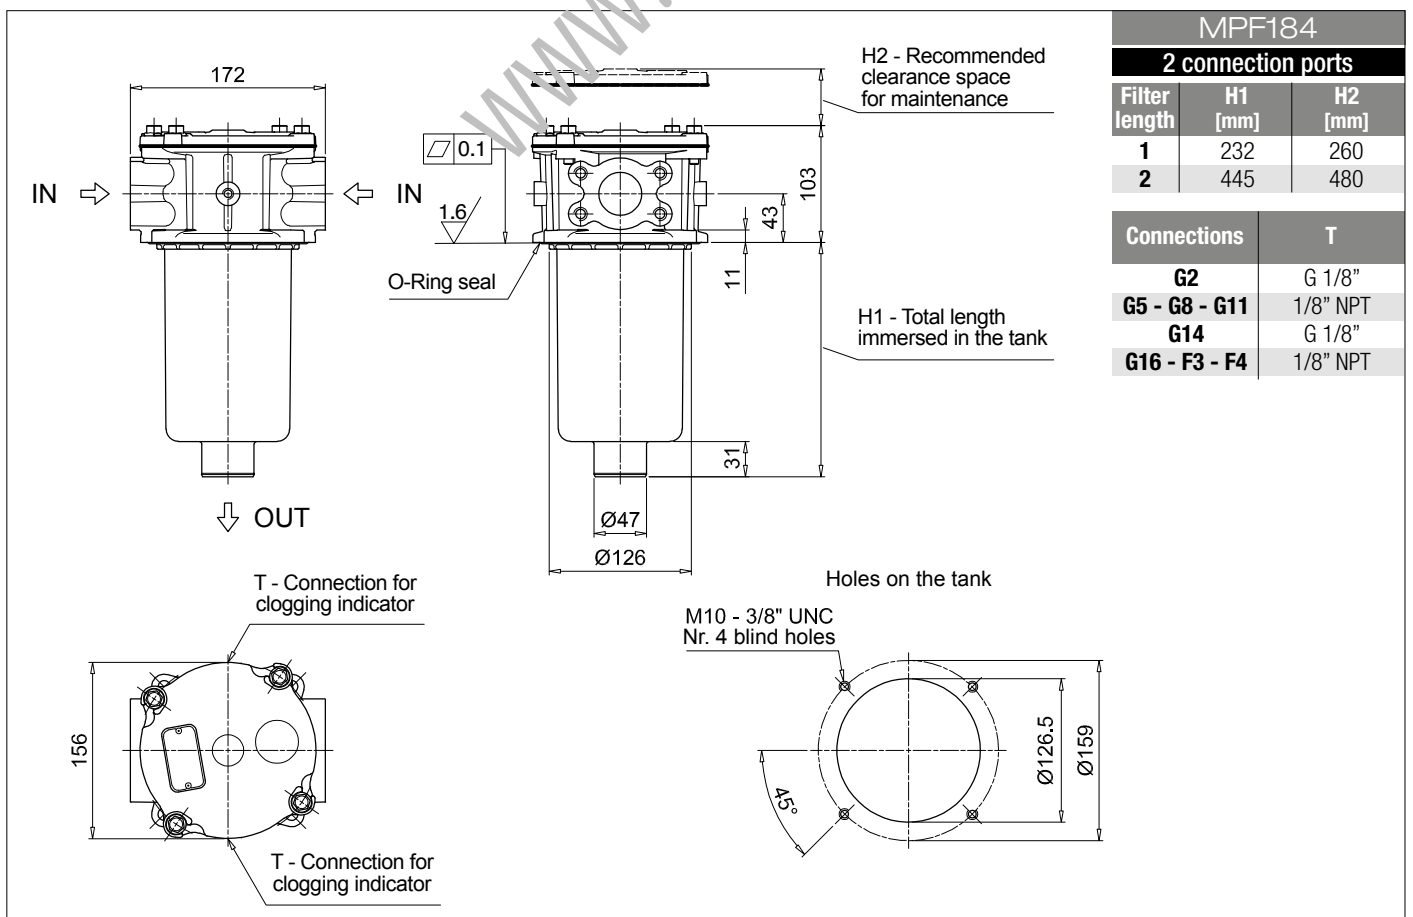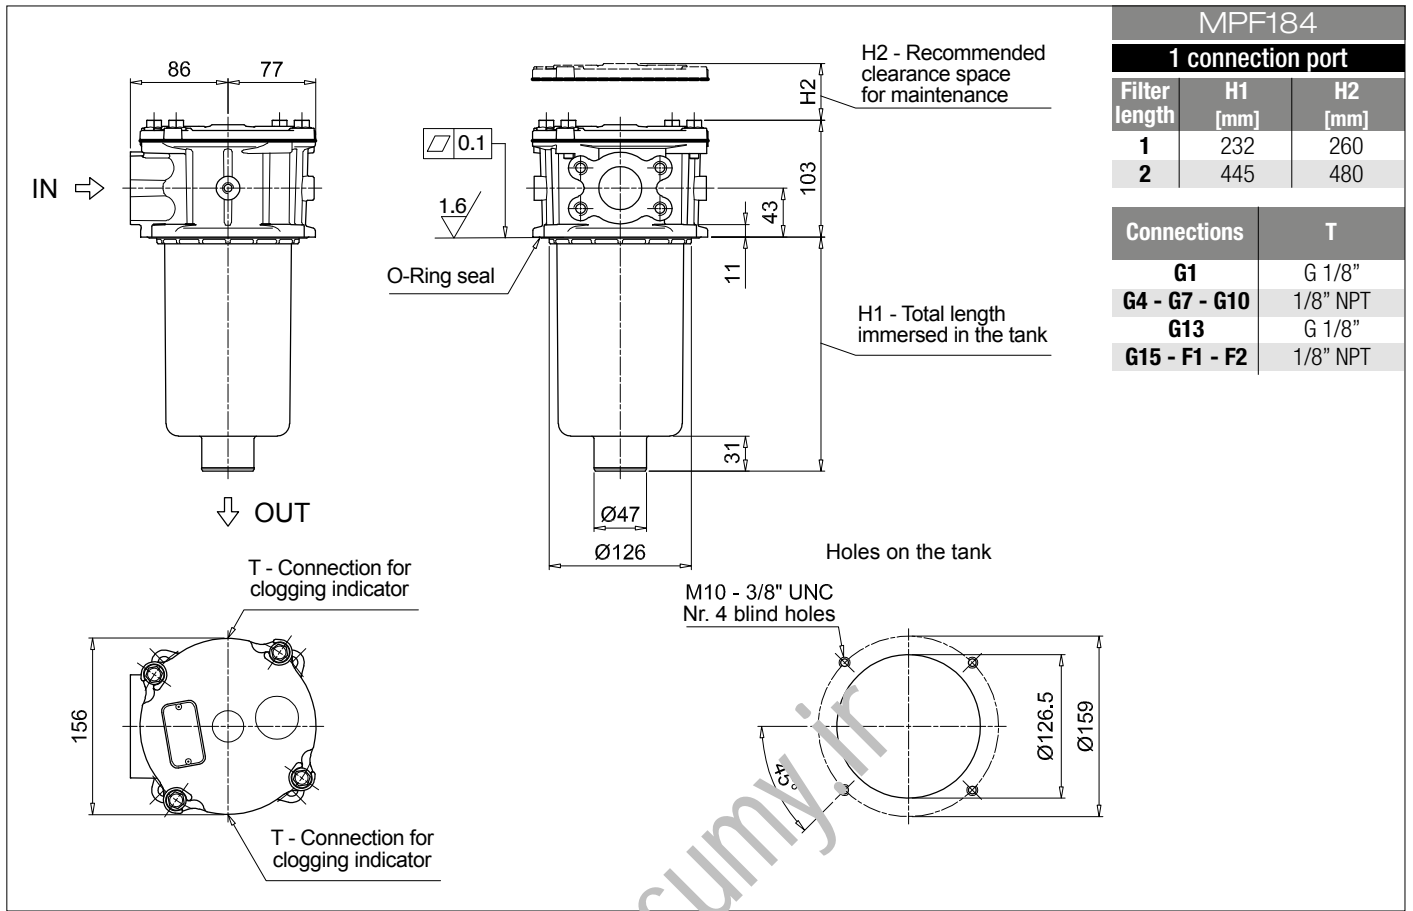

# MPF MPF184 - MPF194

## Dimensions

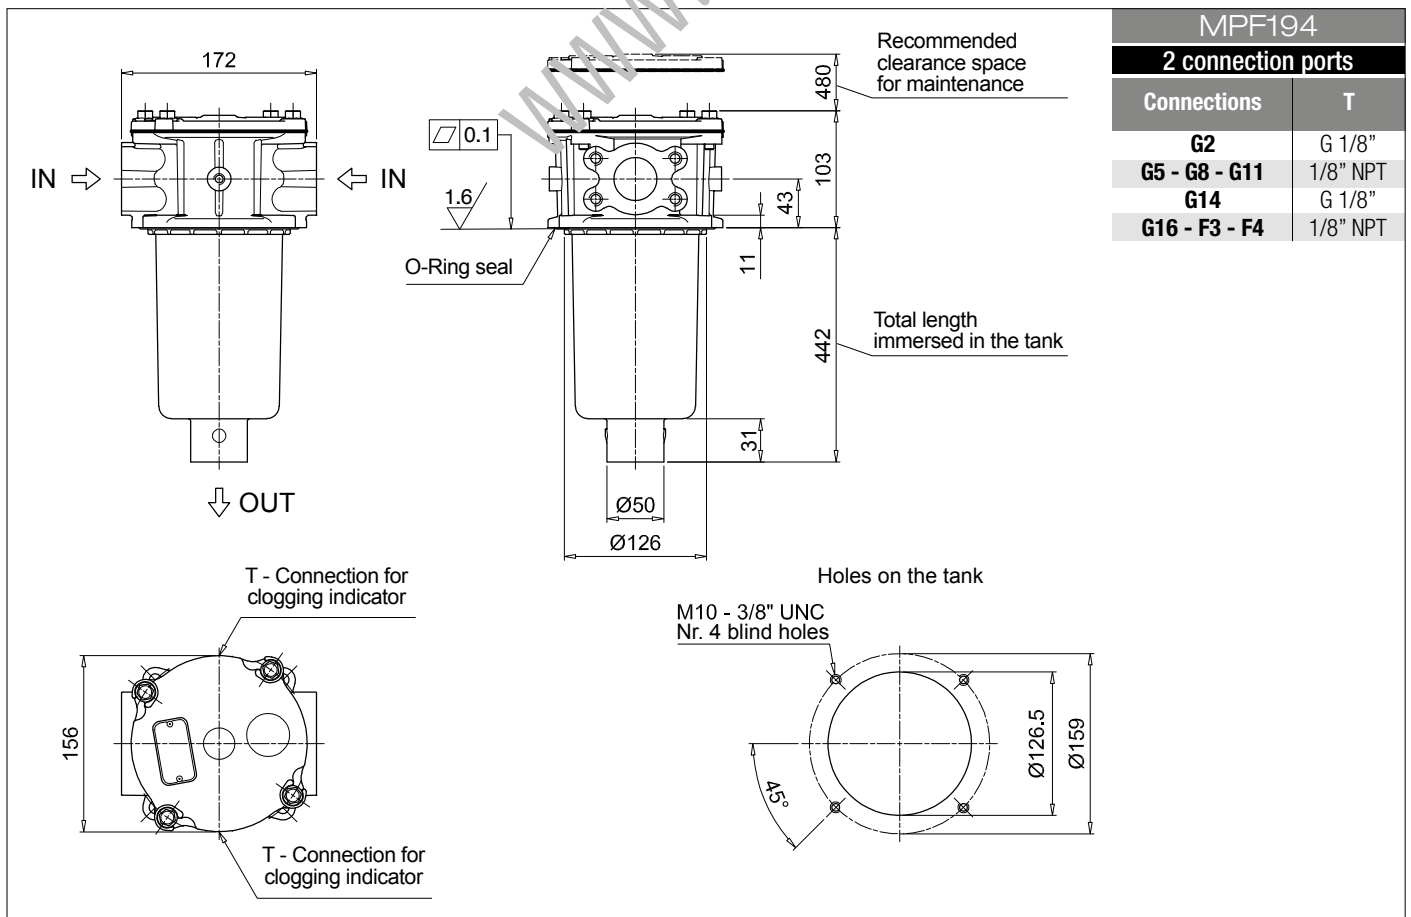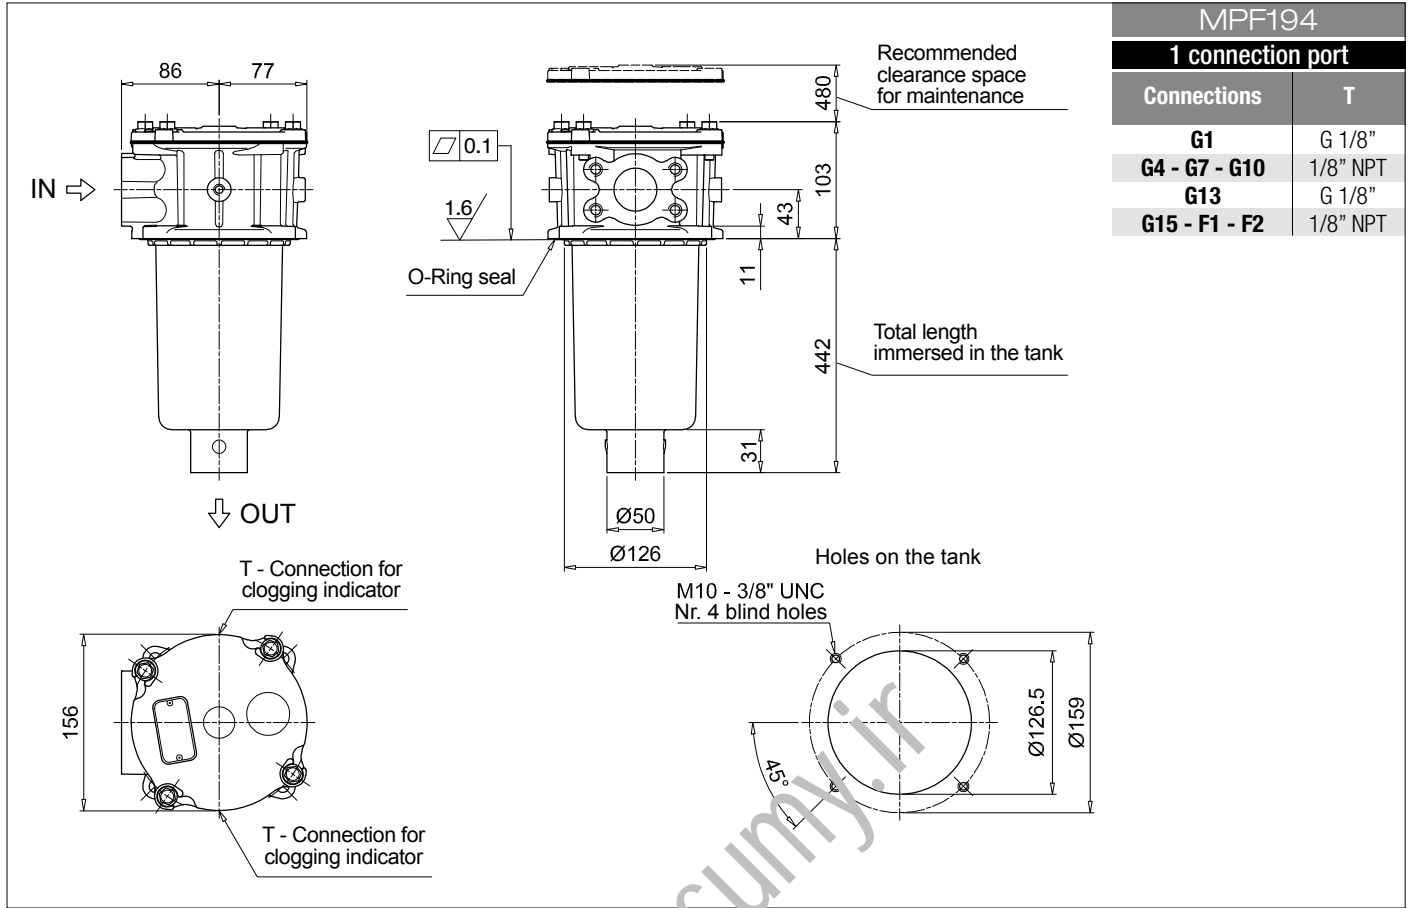



[www.sumy.ir](http://www.sumy.ir)

## Designation & Ordering code

### COMPLETE FILTER


|   |                                   |        |     |   |    |     |   |   |     |
|---|-----------------------------------|--------|-----|---|----|-----|---|---|-----|
| <b>Series and size</b>                            | Configuration example 1:          | MPF400 | 1   | A | G9 | A25 | H | B | P01 |
| <b>MPF400</b> Filter element with standard spigot | Configuration example 2:          | MPF400 | 2   | V | G4 | P10 | N | E | P01 |
| <b>Length</b>                                     |                                   |        |     |   |    |     |   |   |     |
| 1   2   3   |                                   |        |     |   |    |     |   |   |     |
| <b>Seals and treatments</b>                       |                                   |        |     |   |    |     |   |   |     |
| A NBR   |                                   |        |     |   |    |     |   |   |     |
| V FPM   |                                   |        |     |   |    |     |   |   |     |
| W NBR head anodized                               |                                   |        |     |   |    |     |   |   |     |
| Z FPM head anodized                               |                                   |        |     |   |    |     |   |   |     |
| <b>Connections</b>                                |                                   |        |     |   |    |     |   |   |     |
| G1 G 1 1/4"                                       | G6 2" NPT                         |        |     |   |    |     |   |   |     |
| G2 G 1 1/2"                                       | G7 SAE 20 - 1 5/8" - 12 UN        |        |     |   |    |     |   |   |     |
| G3 G 2"   | G8 SAE 24 - 1 7/8" - 12 UN        |        |     |   |    |     |   |   |     |
| G4 1 1/4" NPT                                     | G9 SAE 32 - 2 1/2" - 12 UN        |        |     |   |    |     |   |   |     |
| G5 1 1/2" NPT                                     |                                   |        |     |   |    |     |   |   |     |
| <b>Filtration rating (filter media)</b>           |                                   |        |     |   |    |     |   |   |     |
| A03 Inorganic microfiber 3 µm                     | M25 Wire mesh 25 µm               |        |     |   |    |     |   |   |     |
| A06 Inorganic microfiber 6 µm                     | M60 Wire mesh 60 µm               |        |     |   |    |     |   |   |     |
| A10 Inorganic microfiber 10 µm                    | M90 Wire mesh 90 µm               |        |     |   |    |     |   |   |     |
| A16 Inorganic microfiber 16 µm                    | P10 Resin impregnated paper 10 µm |        |     |   |    |     |   |   |     |
| A25 Inorganic microfiber 25 µm                    | P25 Resin impregnated paper 25 µm |        |     |   |    |     |   |   |     |
| <b>Element Δp</b>                                 | Filter media                      |        |     |   |    |     |   |   |     |
|   | Axx                               | Mxx    | Pxx |   |    |     |   |   |     |
| N 10 bar  |                                   | •      | •   |   |    |     |   |   |     |
| H 10 bar  |                                   | •      |     |   |    |     |   |   |     |
| W 10 bar, compatible with fluids HFA, HFB and HFC | •                                 | •      |     |   |    |     |   |   |     |
| <b>Bypass valve</b>                               |                                   |        |     |   |    |     |   |   |     |
| E 3 bar   |                                   |        |     |   |    |     |   |   |     |
| B 1.75 bar  |                                   |        |     |   |    |     |   |   |     |
| <b>Execution</b>                                  |                                   |        |     |   |    |     |   |   |     |
| P01 MP Filtri standard                            |                                   |        |     |   |    |     |   |   |     |
| Pxx Customized                                    |                                   |        |     |   |    |     |   |   |     |

### FILTER ELEMENT

|   |                                   |       |     |     |   |   |   |     |
|---|-----------------------------------|-------|-----|-----|---|---|---|-----|
| <b>Element series and size</b>                    | Configuration example 1:          | MF400 | 1   | A25 | H | B |   | P01 |
| <b>MF400</b> Filter element with standard spigot  | Configuration example 2:          | MF400 | 2   | P10 | N | V | E | P01 |
| <b>Element length</b>                             |                                   |       |     |     |   |   |   |     |
| 1   2   3   |                                   |       |     |     |   |   |   |     |
| <b>Filtration rating (filter media)</b>           |                                   |       |     |     |   |   |   |     |
| A03 Inorganic microfiber 3 µm                     | M25 Wire mesh 25 µm               |       |     |     |   |   |   |     |
| A06 Inorganic microfiber 6 µm                     | M60 Wire mesh 60 µm               |       |     |     |   |   |   |     |
| A10 Inorganic microfiber 10 µm                    | M90 Wire mesh 90 µm               |       |     |     |   |   |   |     |
| A16 Inorganic microfiber 16 µm                    | P10 Resin impregnated paper 10 µm |       |     |     |   |   |   |     |
| A25 Inorganic microfiber 25 µm                    | P25 Resin impregnated paper 25 µm |       |     |     |   |   |   |     |
| <b>Element Δp</b>                                 | Filter media                      |       |     |     |   |   |   |     |
|   | Axx                               | Mxx   | Pxx |     |   |   |   |     |
| N 10 bar  |                                   | •     | •   |     |   |   |   |     |
| H 10 bar  |                                   | •     |     |     |   |   |   |     |
| W 10 bar, compatible with fluids HFA, HFB and HFC | •                                 | •     |     |     |   |   |   |     |
| <b>Seals</b>                                      |                                   |       |     |     |   |   |   |     |
| B NBR   |                                   |       |     |     |   |   |   |     |
| V FPM   |                                   |       |     |     |   |   |   |     |
| <b>Bypass valve</b>                               |                                   |       |     |     |   |   |   |     |
| E 3 bar   |                                   |       |     |     |   |   |   |     |
| 1.75 bar  |                                   |       |     |     |   |   |   |     |
| <b>Execution</b>                                  |                                   |       |     |     |   |   |   |     |
| P01 MP Filtri standard                            |                                   |       |     |     |   |   |   |     |
| Pxx Customized                                    |                                   |       |     |     |   |   |   |     |

### ACCESSORIES

|  |      |  |         |
|--|------|--|---------|
| <b>Indicators</b>                                  | page |  | page    |
| BVA Axial pressure gauge                           | 240  | BEA Electrical pressure indicator          | 239     |
| BVR Radial pressure gauge                          | 240  | BEM Electrical pressure indicator          | 239     |
| BVP Visual pressure indicator with automatic reset | 241  | BLA Electrical / visual pressure indicator | 239-240 |
| BVQ Visual pressure indicator with manual reset    | 241  |  |         |
| <b>Additional features</b>                         | page |  |         |
| Sxx Extension tube                                 | 248  |  |         |
| T5 Filler plug M30x1.5                             | 249  |  |         |

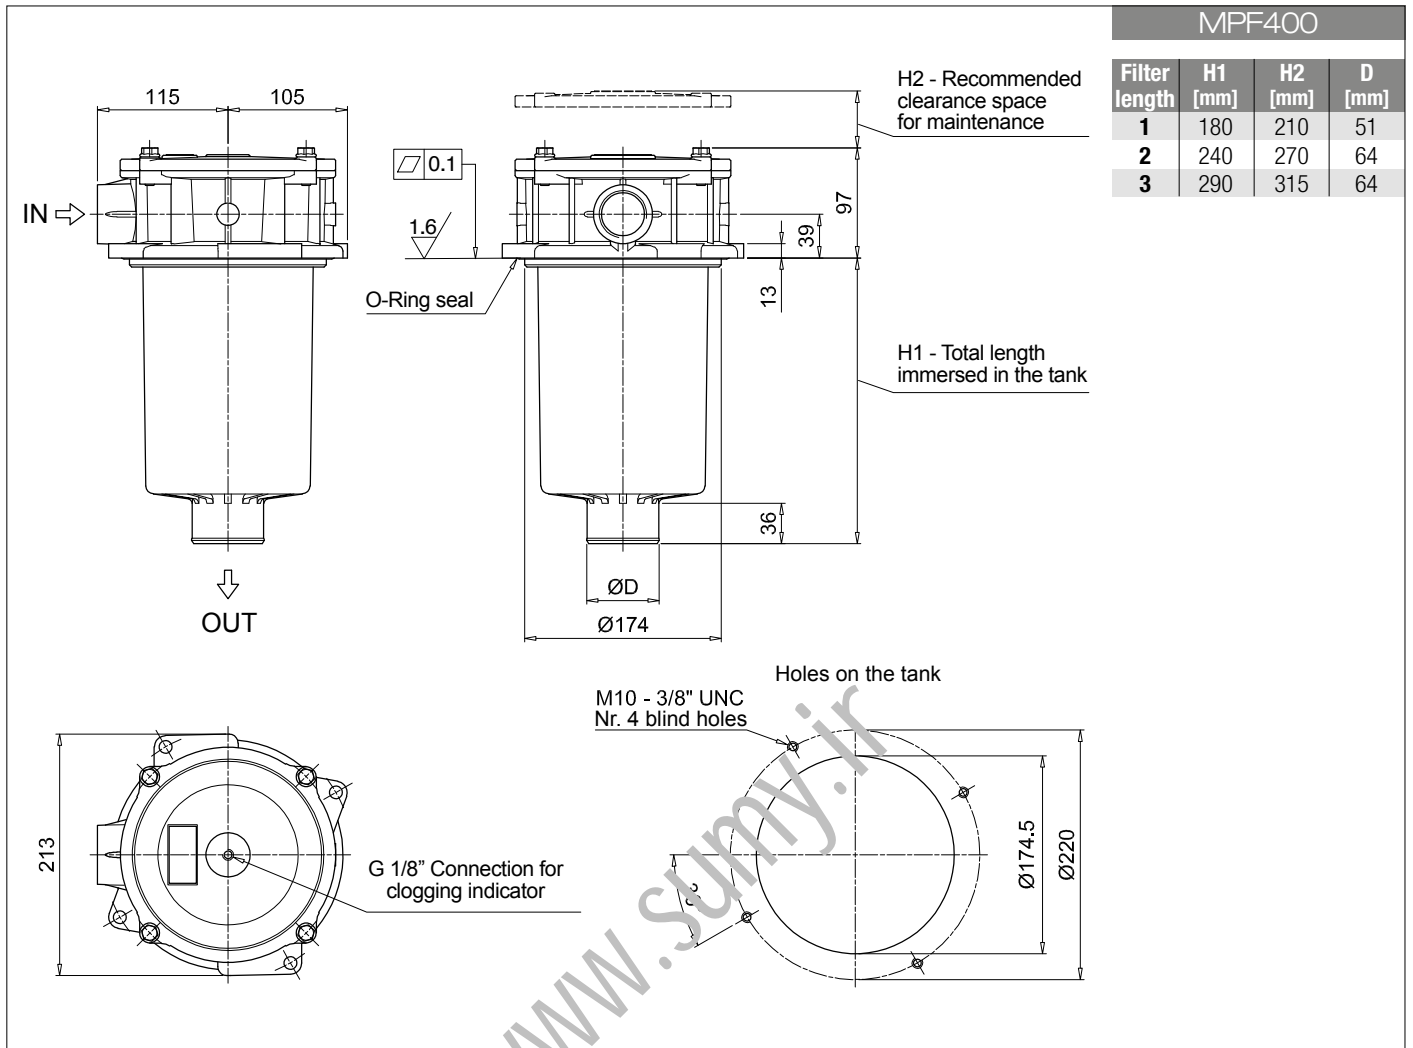

## Designation & Ordering code

### COMPLETE FILTER


|  |  |        |                               |   |    |   |     |   |   |     |
|--|--|--------|-------------------------------|---|----|---|-----|---|---|-----|
| <b>Series and size</b>                                   | Configuration example 1:                 | MPF410 | 1                             | A | G1 | 1 | A25 | H | B | P01 |
| <b>MPF410</b> Filter element with standard spigot        | Configuration example 2:                 | MPF410 | 1                             | V | G4 | 1 | P10 | N | E | P01 |
| <b>Length</b>  |  |        |                               |   |    |   |     |   |   |     |
| 1   2   3  |  |        |                               |   |    |   |     |   |   |     |
| <b>Seals and treatments</b>                              |  |        |                               |   |    |   |     |   |   |     |
| A NBR  |  |        |                               |   |    |   |     |   |   |     |
| V FPM  |  |        |                               |   |    |   |     |   |   |     |
| W NBR head anodized                                      |  |        |                               |   |    |   |     |   |   |     |
| Z FPM head anodized                                      |  |        |                               |   |    |   |     |   |   |     |
| <b>Main Connections</b>                                  |  |        |                               |   |    |   |     |   |   |     |
| <b>G1</b> G 1 1/4"                                       | Aux size 1                               |        |                               |   |    |   |     |   |   |     |
| <b>G4</b> 1 1/4" NPT                                     | G 1"                                     |        |                               |   |    |   |     |   |   |     |
| <b>G7</b> SAE 20 - 1 5/8" - 12 UN                        | 1" NPT                                   |        |                               |   |    |   |     |   |   |     |
|  | SAE 16 - 1 5/16" - 12 UN                 |        |                               |   |    |   |     |   |   |     |
| <b>Aux connection</b> - see previous table               |  |        |                               |   |    |   |     |   |   |     |
| 1 Aux size 1   |  |        |                               |   |    |   |     |   |   |     |
| <b>Filtration rating (filter media)</b>                  |  |        |                               |   |    |   |     |   |   |     |
| <b>A03</b> Inorganic microfiber 3 µm                     | <b>M25</b> Wire mesh 25 µm               |        |                               |   |    |   |     |   |   |     |
| <b>A06</b> Inorganic microfiber 6 µm                     | <b>M60</b> Wire mesh 60 µm               |        |                               |   |    |   |     |   |   |     |
| <b>A10</b> Inorganic microfiber 10 µm                    | <b>M90</b> Wire mesh 90 µm               |        |                               |   |    |   |     |   |   |     |
| <b>A16</b> Inorganic microfiber 16 µm                    | <b>P10</b> Resin impregnated paper 10 µm |        |                               |   |    |   |     |   |   |     |
| <b>A25</b> Inorganic microfiber 25 µm                    | <b>P25</b> Resin impregnated paper 25 µm |        |                               |   |    |   |     |   |   |     |
| <b>Element Δp</b>  | Filter media                             |        |                               |   |    |   |     |   |   |     |
|  | Axx                                      | Mxx    | Pxx                           |   |    |   |     |   |   |     |
| <b>N</b> 10 bar  |  | •      | •                             |   |    |   |     |   |   |     |
| <b>H</b> 10 bar  |  | •      |                               |   |    |   |     |   |   |     |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC | •  | •      |                               |   |    |   |     |   |   |     |
|  | <b>Bypass valve</b>                      |        | <b>Execution</b>              |   |    |   |     |   |   |     |
|  | <b>E</b> 3 bar                           |        | <b>P01</b> MP Filtri standard |   |    |   |     |   |   |     |
|  | <b>B</b> 1.75 bar                        |        | <b>Pxx</b> Customized         |   |    |   |     |   |   |     |

### FILTER ELEMENT

|  |  |       |                     |     |                               |   |   |     |
|--|--|-------|---------------------|-----|-------------------------------|---|---|-----|
| <b>Element series and size</b>                           | Configuration example 1:                 | MF400 | 1                   | A25 | H                             | B |   | P01 |
| <b>MF400</b> Filter element with standard spigot         | Configuration example 2:                 | MF400 | 1                   | P10 | N                             | V | E | P01 |
| <b>Element length</b>                                    |  |       |                     |     |                               |   |   |     |
| 1   2   3  |  |       |                     |     |                               |   |   |     |
| <b>Filtration rating (filter media)</b>                  |  |       |                     |     |                               |   |   |     |
| <b>A03</b> Inorganic microfiber 3 µm                     | <b>M25</b> Wire mesh 25 µm               |       |                     |     |                               |   |   |     |
| <b>A06</b> Inorganic microfiber 6 µm                     | <b>M60</b> Wire mesh 60 µm               |       |                     |     |                               |   |   |     |
| <b>A10</b> Inorganic microfiber 10 µm                    | <b>M90</b> Wire mesh 90 µm               |       |                     |     |                               |   |   |     |
| <b>A16</b> Inorganic microfiber 16 µm                    | <b>P10</b> Resin impregnated paper 10 µm |       |                     |     |                               |   |   |     |
| <b>A25</b> Inorganic microfiber 25 µm                    | <b>P25</b> Resin impregnated paper 25 µm |       |                     |     |                               |   |   |     |
| <b>Element Δp</b>  | Filter media                             |       |                     |     |                               |   |   |     |
|  | Axx                                      | Mxx   | Pxx                 |     |                               |   |   |     |
| <b>N</b> 10 bar  |  | •     | •                   |     |                               |   |   |     |
| <b>H</b> 10 bar  |  | •     |                     |     |                               |   |   |     |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC | •  | •     |                     |     |                               |   |   |     |
|  | <b>Seals</b>                             |       | <b>Bypass valve</b> |     | <b>Execution</b>              |   |   |     |
|  | <b>B</b> NBR                             |       | <b>E</b> 3 bar      |     | <b>P01</b> MP Filtri standard |   |   |     |
|  | <b>V</b> FPM                             |       | 1.75 bar            |     | <b>Pxx</b> Customized         |   |   |     |

### ACCESSORIES

|   |      |   |         |
|---|------|---|---------|
| <b>Indicators</b>   | page |   | page    |
| <b>BVA</b> Axial pressure gauge                           | 240  | <b>BEA</b> Electrical pressure indicator          | 239     |
| <b>BVR</b> Radial pressure gauge                          | 240  | <b>BEM</b> Electrical pressure indicator          | 239     |
| <b>BVP</b> Visual pressure indicator with automatic reset | 241  | <b>BLA</b> Electrical / visual pressure indicator | 239-240 |
| <b>BVQ</b> Visual pressure indicator with manual reset    | 241  |   |         |
| <b>Additional features</b>                                | page |   |         |
| <b>Sxx</b> Extension tube                                 | 248  |   |         |
| <b>T5</b> Filler plug M30x1.5                             | 249  |   |         |

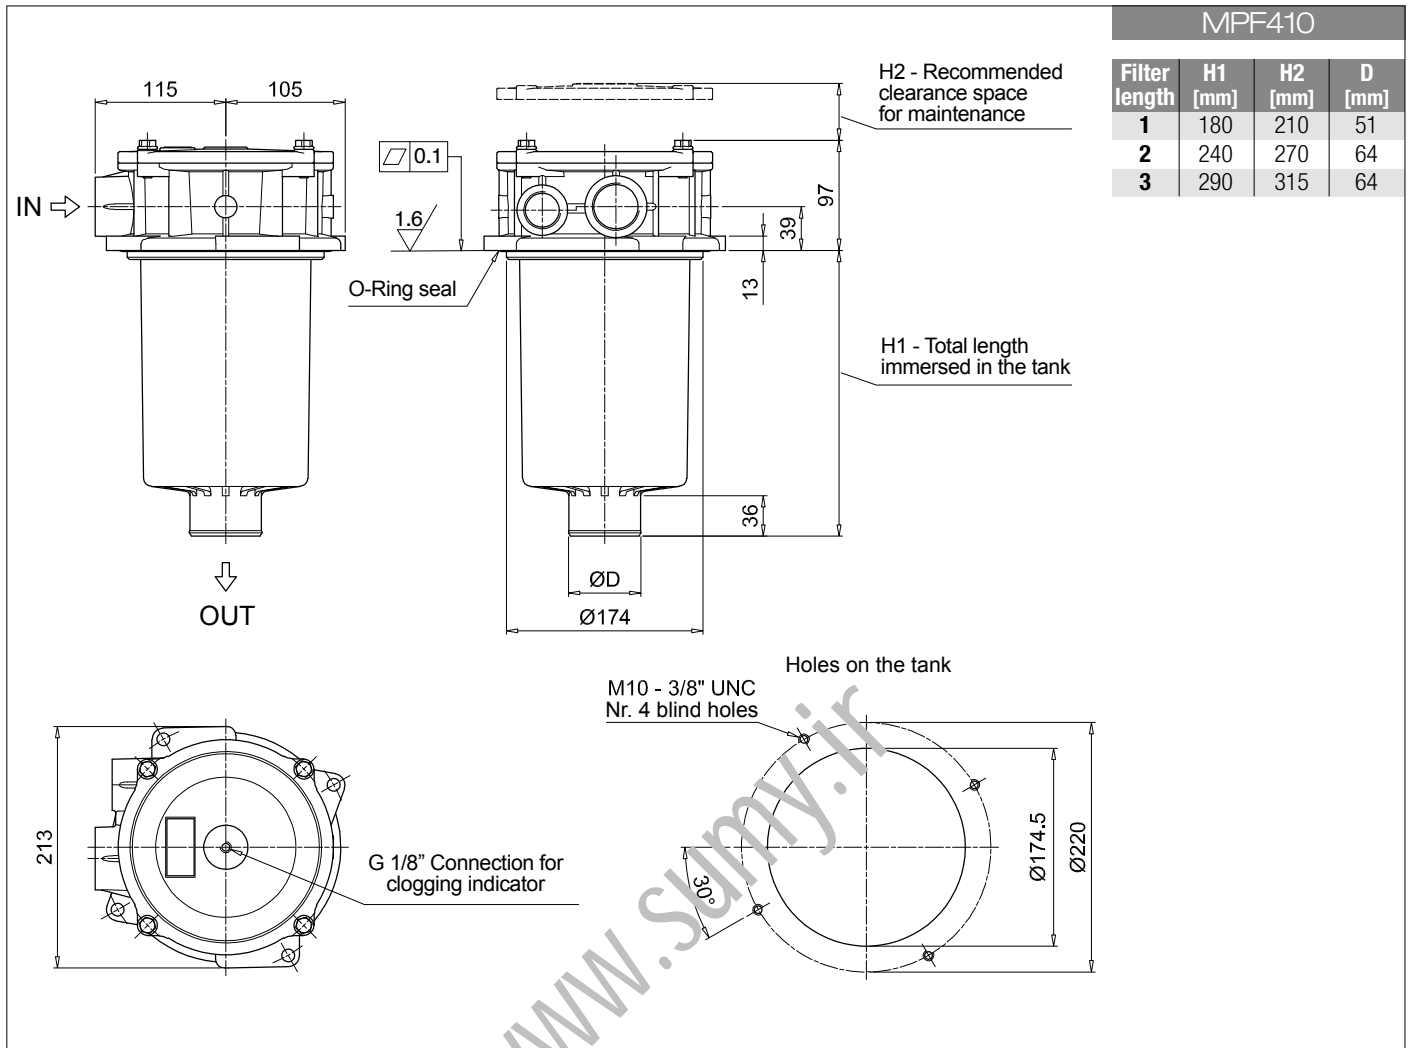

Holes on the tank  
M10 - 3/8" UNC  
Nr. 4 blind holes

G 1/8" Connection for  
clogging indicator

# MPF MPF450 - MPF451 - MPF750

## Designation & Ordering code

### COMPLETE FILTER


|  |                                     |               |  |                |                |                     |  |                               |  |  |  |
|--|-------------------------------------|---------------|--|----------------|----------------|---------------------|--|-------------------------------|--|--|--|
| <b>Series and size</b>                                   |                                     |               | Configuration example 1: <b>MPF450</b>   <b>1</b>   <b>A</b>   <b>G1</b>   <b>A25</b>   <b>H</b>   <b>B</b>   <b>P01</b> |                |                |                     |  |                               |  |  |  |
| <b>MPF450</b>   <b>MPF451</b>   <b>MPF750</b>            | Filter element with standard spigot |               | Configuration example 2: <b>MPF750</b>   <b>1</b>   <b>V</b>   <b>F2</b>   <b>P10</b>   <b>N</b>   <b>E</b>   <b>P01</b> |                |                |                     |  |                               |  |  |  |
| <b>Length</b>  |                                     |               | <b>MPF 450</b>   | <b>MPF 451</b> | <b>MPF 750</b> |                     |  |                               |  |  |  |
| <b>1</b>   |                                     |               | •  | •              | •              |                     |  |                               |  |  |  |
| <b>2</b>   |                                     |               | •  | •              |                |                     |  |                               |  |  |  |
| <b>3</b>   |                                     |               | •  | •              |                |                     |  |                               |  |  |  |
| <b>Seals and treatments</b>                              |                                     |               |  |                |                |                     |  |                               |  |  |  |
| <b>A</b> NBR   | <b>W</b> NBR                        | head anodized |  |                |                |                     |  |                               |  |  |  |
| <b>V</b> FPM   | <b>Z</b> FPM                        | head anodized |  |                |                |                     |  |                               |  |  |  |
| <b>Connections</b>                                       |                                     |               | <b>Aux (only size 451)</b>   |                |                |                     |  |                               |  |  |  |
| <b>G1</b> G 2"   |                                     |               | G 3/4"   |                |                |                     |  |                               |  |  |  |
| <b>G4</b> 2" NPT   |                                     |               | 3/4" NPT   |                |                |                     |  |                               |  |  |  |
| <b>G7</b> SAE 32 - 2 1/2" - 12 UN                        |                                     |               | SAE 12 - 1 1/16" - 12 UN   |                |                |                     |  |                               |  |  |  |
| <b>F1</b> 2" SAE 3000 psi/M                              |                                     |               | G 3/4"   |                |                |                     |  |                               |  |  |  |
| <b>F2</b> 2" SAE 3000 psi/UN                             |                                     |               | 3/4" NPT   |                |                |                     |  |                               |  |  |  |
| <b>Filtration rating (filter media)</b>                  |                                     |               |  |                |                |                     |  |                               |  |  |  |
| <b>A03</b> Inorganic microfiber 3 µm                     |                                     |               | <b>M25</b> Wire mesh 25 µm   |                |                |                     |  |                               |  |  |  |
| <b>A06</b> Inorganic microfiber 6 µm                     |                                     |               | <b>M60</b> Wire mesh 60 µm   |                |                |                     |  |                               |  |  |  |
| <b>A10</b> Inorganic microfiber 10 µm                    |                                     |               | <b>M90</b> Wire mesh 90 µm   |                |                |                     |  |                               |  |  |  |
| <b>A16</b> Inorganic microfiber 16 µm                    |                                     |               | <b>P10</b> Resin impregnated paper 10 µm   |                |                |                     |  |                               |  |  |  |
| <b>A25</b> Inorganic microfiber 25 µm                    |                                     |               | <b>P25</b> Resin impregnated paper 25 µm   |                |                |                     |  |                               |  |  |  |
| <b>Element Δp</b>  |                                     |               | <b>Filter media</b>  |                |                |                     |  |                               |  |  |  |
| <b>N</b> 10 bar  | <b>Axx</b>                          | <b>Mxx</b>    | <b>Pxx</b>   |                |                |                     |  |                               |  |  |  |
| <b>H</b> 10 bar  |                                     | •             | •  |                |                |                     |  |                               |  |  |  |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC | •                                   | •             |  |                |                |                     |  |                               |  |  |  |
|  |                                     |               |  |                |                | <b>Bypass valve</b> |  | <b>Execution</b>              |  |  |  |
|  |                                     |               |  |                |                | <b>E</b> 3 bar      |  | <b>P01</b> MP Filtri standard |  |  |  |
|  |                                     |               |  |                |                | <b>B</b> 1.75 bar   |  | <b>Pxx</b> Customized         |  |  |  |

### FILTER ELEMENT

|  |                                     |            |  |                |                |              |  |                     |  |                               |  |
|--|-------------------------------------|------------|--|----------------|----------------|--------------|--|---------------------|--|-------------------------------|--|
| <b>Element series and size</b>                           |                                     |            | Configuration example 1: <b>MF400</b>   <b>1</b>   <b>A25</b>   <b>H</b>   <b>B</b>   <b>P01</b>             |                |                |              |  |                     |  |                               |  |
| <b>MF400</b>   <b>MF750</b>                              | Filter element with standard spigot |            | Configuration example 2: <b>MFX750</b>   <b>1</b>   <b>P10</b>   <b>N</b>   <b>V</b>   <b>E</b>   <b>P01</b> |                |                |              |  |                     |  |                               |  |
| <b>Element length</b>                                    |                                     |            | <b>MPF 450</b>   | <b>MPF 451</b> | <b>MPF 750</b> |              |  |                     |  |                               |  |
| <b>1</b>   |                                     |            | •  | •              | •              |              |  |                     |  |                               |  |
| <b>2</b>   |                                     |            | •  | •              |                |              |  |                     |  |                               |  |
| <b>3</b>   |                                     |            | •  | •              |                |              |  |                     |  |                               |  |
| <b>Filtration rating (filter media)</b>                  |                                     |            |  |                |                |              |  |                     |  |                               |  |
| <b>A03</b> Inorganic microfiber 3 µm                     |                                     |            | <b>M25</b> Wire mesh 25 µm   |                |                |              |  |                     |  |                               |  |
| <b>A06</b> Inorganic microfiber 6 µm                     |                                     |            | <b>M60</b> Wire mesh 60 µm   |                |                |              |  |                     |  |                               |  |
| <b>A10</b> Inorganic microfiber 10 µm                    |                                     |            | <b>M90</b> Wire mesh 90 µm   |                |                |              |  |                     |  |                               |  |
| <b>A16</b> Inorganic microfiber 16 µm                    |                                     |            | <b>P10</b> Resin impregnated paper 10 µm   |                |                |              |  |                     |  |                               |  |
| <b>A25</b> Inorganic microfiber 25 µm                    |                                     |            | <b>P25</b> Resin impregnated paper 25 µm   |                |                |              |  |                     |  |                               |  |
| <b>Element Δp</b>  |                                     |            | <b>Filter media</b>  |                |                |              |  |                     |  |                               |  |
| <b>N</b> 10 bar  | <b>Axx</b>                          | <b>Mxx</b> | <b>Pxx</b>   |                |                |              |  |                     |  |                               |  |
| <b>H</b> 10 bar  |                                     | •          | •  |                |                |              |  |                     |  |                               |  |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC | •                                   | •          |  |                |                |              |  |                     |  |                               |  |
|  |                                     |            |  |                |                | <b>Seals</b> |  | <b>Bypass valve</b> |  | <b>Execution</b>              |  |
|  |                                     |            |  |                |                | <b>B</b> NBR |  | <b>E</b> 3 bar      |  | <b>P01</b> MP Filtri standard |  |
|  |                                     |            |  |                |                | <b>V</b> FPM |  | <b>B</b> 1.75 bar   |  | <b>Pxx</b> Customized         |  |

### ACCESSORIES


|   |  |      |   |  |         |
|---|--|------|---|--|---------|
| <b>Indicators</b>   |  | page |   |  | page    |
| <b>BVA</b> Axial pressure gauge                           |  | 240  | <b>BEA</b> Electrical pressure indicator          |  | 239     |
| <b>BVR</b> Radial pressure gauge                          |  | 240  | <b>BEM</b> Electrical pressure indicator          |  | 239     |
| <b>BVP</b> Visual pressure indicator with automatic reset |  | 241  | <b>BLA</b> Electrical / visual pressure indicator |  | 239-240 |
| <b>BVQ</b> Visual pressure indicator with manual reset    |  | 241  |   |  |         |
| <b>Additional features</b>                                |  | page |   |  |         |
| <b>Sxx</b> Extension tube                                 |  | 248  |   |  |         |
| <b>T5</b> Filler plug M30x1.5                             |  | 249  |   |  |         |

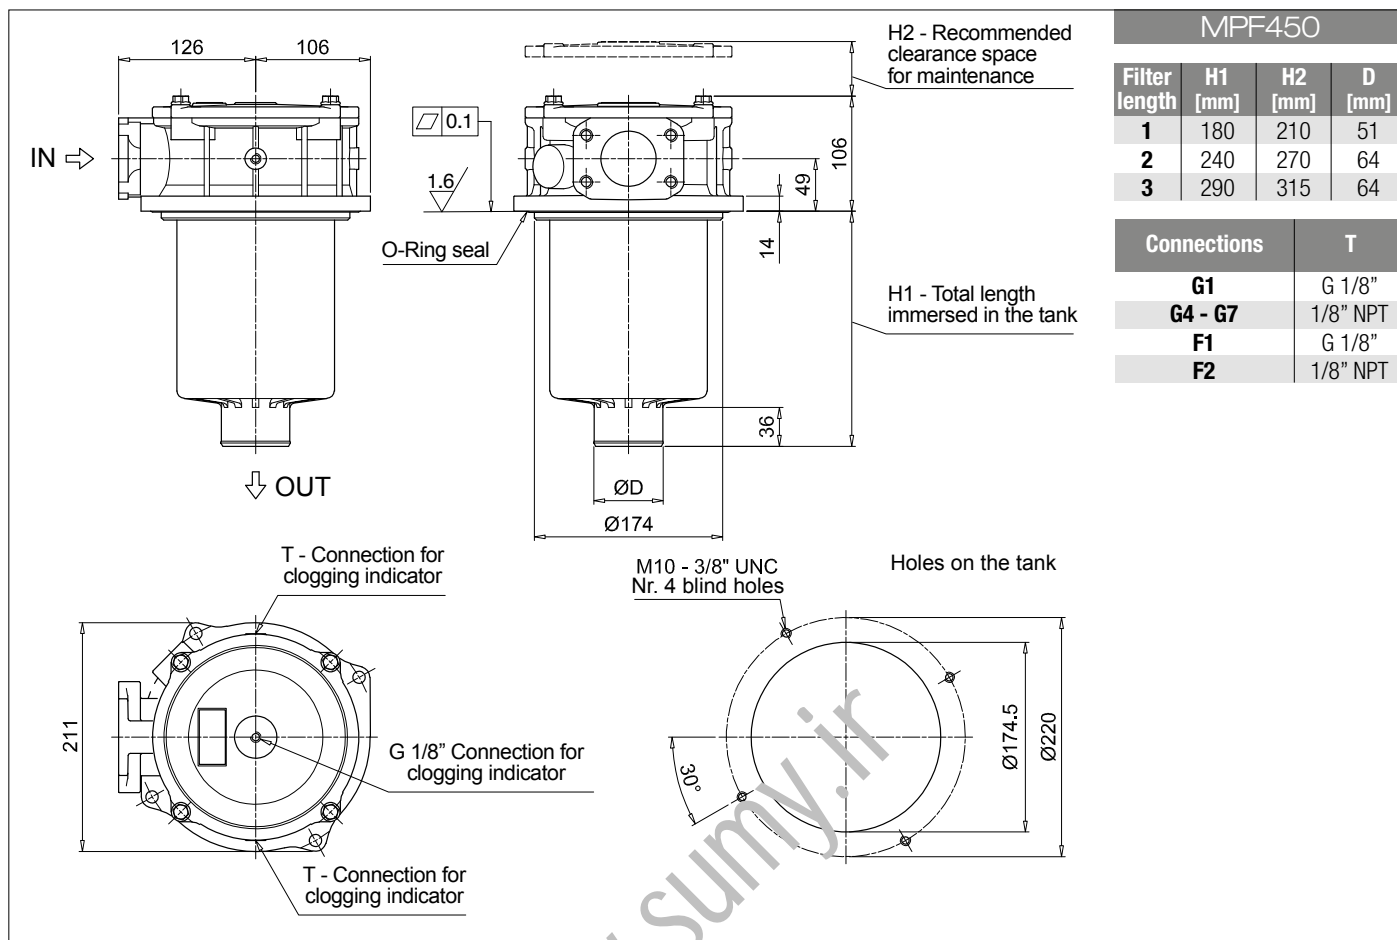

| MPF450        |         |         |        |
|---------------|---------|---------|--------|
| Filter length | H1 [mm] | H2 [mm] | D [mm] |
| 1             | 180     | 210     | 51     |
| 2             | 240     | 270     | 64     |
| 3             | 290     | 315     | 64     |

| Connections | T        |
|-------------|----------|
| G1          | G 1/8"   |
| G4 - G7     | 1/8" NPT |
| F1          | G 1/8"   |
| F2          | 1/8" NPT |

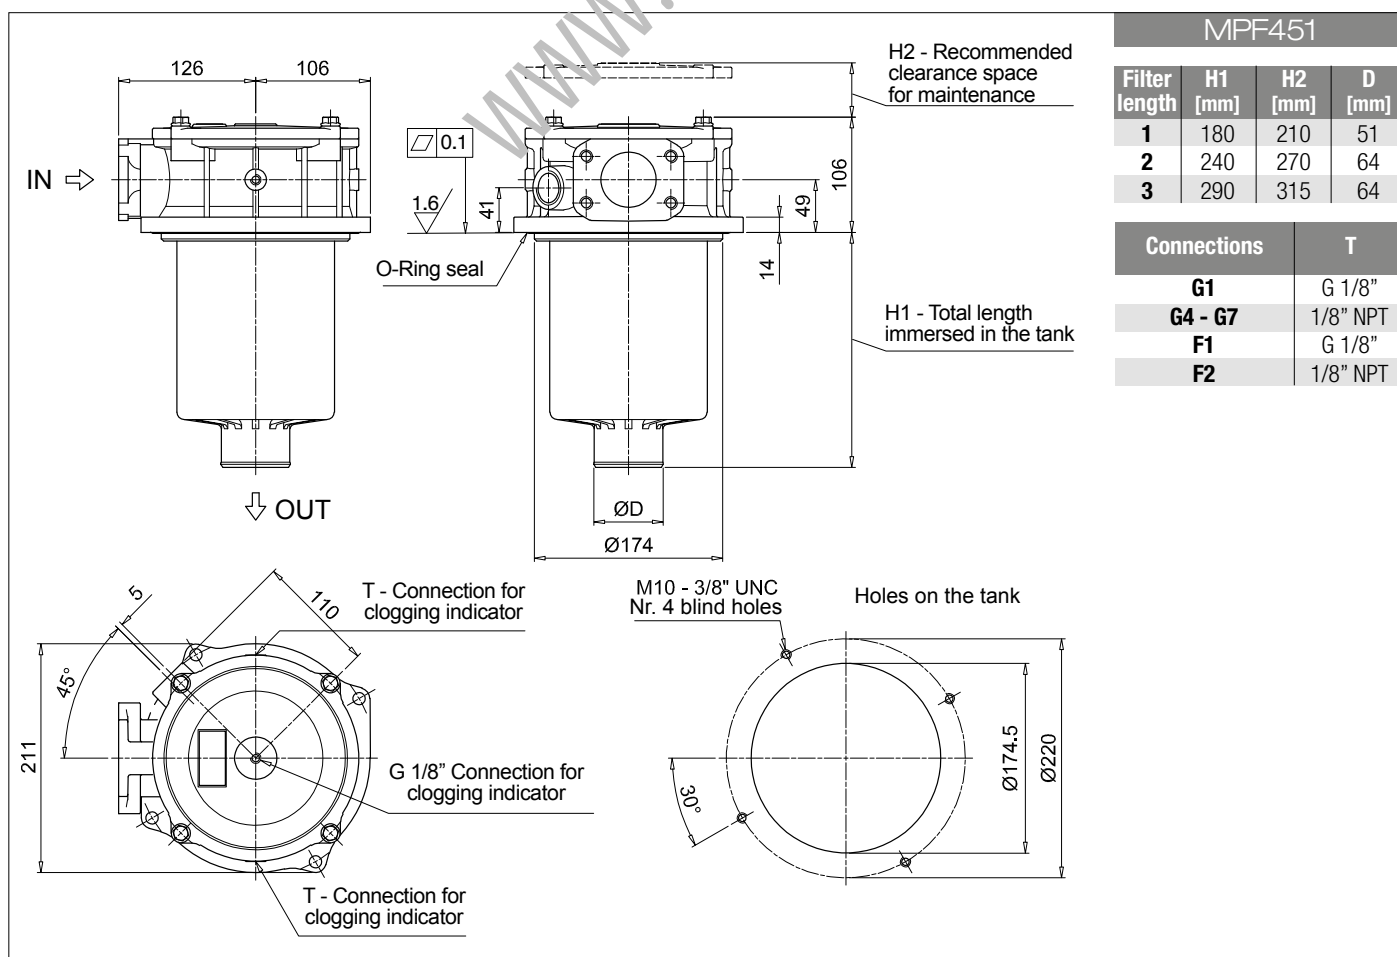


| MPF451        |         |         |        |
|---------------|---------|---------|--------|
| Filter length | H1 [mm] | H2 [mm] | D [mm] |
| 1             | 180     | 210     | 51     |
| 2             | 240     | 270     | 64     |
| 3             | 290     | 315     | 64     |

| Connections | T        |
|-------------|----------|
| G1          | G 1/8"   |
| G4 - G7     | 1/8" NPT |
| F1          | G 1/8"   |
| F2          | 1/8" NPT |

MPF750



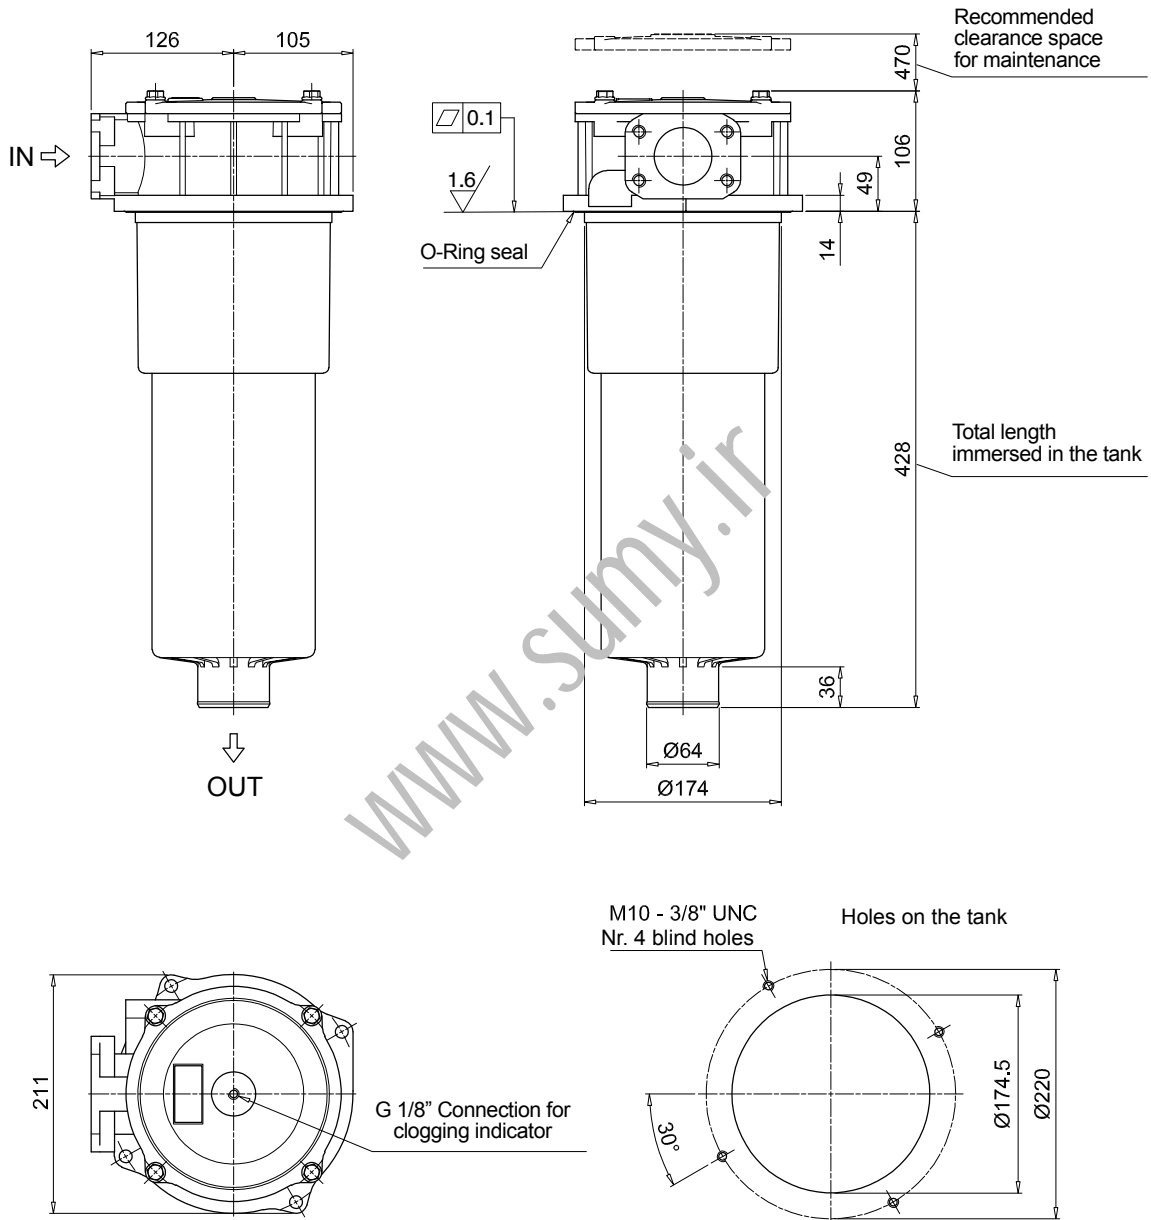

**MPF 100**

**MPF 181**

**O-RING SEAL**

| Item:              | Q.ty: 1 pc.<br><b>2</b> | Q.ty: 1 pc.<br><b>3</b> (3a ÷ 3d) |                                      |          |
|--------------------|-------------------------|-----------------------------------|--------------------------------------|----------|
|                    | Filter series           | Filter element                    | Seal Kit code number<br>NBR      FPM |          |
| <b>MPF 030</b>     |                         |                                   | 02050055                             | 02050056 |
| <b>MPF 100-110</b> |                         |                                   | 02050057                             | 02050058 |
| <b>MPF 181-182</b> |                         |                                   | 02050059                             | 02050060 |
| <b>MPF 184</b>     |                         | See<br>order<br>table             | 02050455                             | 02050456 |
| <b>MPF 191-192</b> |                         |                                   | 02050457                             | 02050458 |
| <b>MPF 194</b>     |                         |                                   | 02050459                             | 02050460 |
| <b>MPF 400-410</b> |                         |                                   | 02050061                             | 02050062 |
| <b>MPF 450-451</b> |                         |                                   | 02050461                             | 02050462 |
| <b>MPF 750</b>     |                         |                                   | 02050106                             | 02050107 |

**MPF 104**

**MPF 181**

**FLAT SEAL**

| Item:              | Q.ty: 1 pc.<br><b>2</b> | Q.ty: 1 pc.<br><b>3</b> (3a ÷ 3d) |                                      |          |
|--------------------|-------------------------|-----------------------------------|--------------------------------------|----------|
|                    | Filter series           | Filter element                    | Seal Kit code number<br>NBR      FPM |          |
| <b>MPF 020</b>     |                         |                                   | 02050438                             | 02050439 |
| <b>MPF 104</b>     |                         | See<br>order<br>table             | 02050350                             | 02050408 |
| <b>MPF 181-182</b> |                         |                                   | 02050659                             | 02050660 |
| <b>MPF 191-192</b> |                         |                                   | 02050661                             | 02050662 |

www.sumy.ir

# MPT series

Maximum working pressure up to 800 kPa (8 bar) - Flow rate up to 300 l/min



## Description

## Technical data

### Return filter

**Maximum working pressure up to 800 kPa (8 bar)**  
**Flow rate up to 300 l/min**

MPT is a range of return filters with integrated breather filter, for protection of the reservoir against the system contamination.

They are directly fixed to the reservoir, in immersed or semi-immersed position.

The filter output must be always immersed into the fluid to avoid aeration or foam generation into the reservoir.

### Available features:

- Female threaded connections up to 1 1/4", for a maximum flow rate of 300 l/min
- Multiple connections, to connect several return lines or drains
- Fine filtration rating, to get a good cleanliness level into the reservoir
- Bypass valve integrated into the filter element, to relieve excessive pressure drop across the filter media
- 2, 3 or 6 fixing holes for installation, to suit a variety of reservoir surfaces
- O-ring or Flat Seal to suit a variety of reservoir surfaces
- Screw-in cover with a special shape, to allow the filter element replacement without the use of specific tools
- Oil dipstick, to easily check the level of the fluid into the reservoir (sold as separate item)
- Extension tube, to be used in deep reservoirs (sold as separate item)
- Diffuser, to reduce the risk of aeration, foaming and noise (sold as separate item)
- Integrated breather filter, to clean the air that moves into the reservoir as result of the oil level fluctuation
- Integrated breather filter with pressurization valve, to clean the air that moves into the reservoir as result of the oil level fluctuation and to guarantee the pressurization into the reservoir
- Visual, electrical and electronic clogging indicators

### Common applications:

- Light industrial equipment
- Mobile application

### Filter housing materials

- Head: Aluminium
- Cover: Nylon
- Bowl: Nylon

### Bypass valve

- Opening pressure 175 kPa (1.75 bar)  $\pm 10\%$
- Opening pressure 300 kPa (3 bar)  $\pm 10\%$

### $\Delta p$ element type

- Microfibre filter elements - series H: 10 bar
- Fluid flow through the filter element from OUT to IN

### Seals

- Standard NBR series A
- Optional FPM series V

### Temperature

From -25 °C to +110 °C

### Note

MPT filters are provided for vertical mounting



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series  | Weights [kg] |      |      |      |      | Volumes [dm <sup>3</sup> ] |      |      |      |      |
|----------------|--------------|------|------|------|------|----------------------------|------|------|------|------|
|                | Length       | 1    | 2    | 3    | 4    | Length                     | 1    | 2    | 3    | 4    |
| <b>MPT 025</b> |              | 0.41 | 0.45 | 0.50 | -    |                            | 0.24 | 0.35 | 0.42 | -    |
| <b>MPT 027</b> |              | 0.44 | 0.48 | 0.55 | -    |                            | 0.24 | 0.35 | 0.42 | -    |
| <b>MPT 110</b> |              | 1.00 | 1.05 | 1.15 | 1.40 |                            | 0.72 | 0.93 | 1.28 | 1.74 |
| <b>MPT 114</b> |              | 1.10 | 1.15 | 1.25 | 1.50 |                            | 0.72 | 0.93 | 1.28 | 1.74 |
| <b>MPT 116</b> |              | 1.10 | 1.15 | 1.25 | 1.50 |                            | 0.72 | 0.93 | 1.28 | 1.74 |
| <b>MPT 120</b> |              | 1.00 | 1.05 | 1.15 | 1.40 |                            | 0.72 | 0.93 | 1.28 | 1.74 |

| Filter series                      | Length   | Filter element design - H series |     |     |     |     | Filter element design - N series |     |     |
|------------------------------------|----------|----------------------------------|-----|-----|-----|-----|----------------------------------|-----|-----|
|                                    |          | A03                              | A06 | A10 | A16 | A25 | M25<br>M60<br>M90                | P10 | P25 |
| <b>MPT<br/>025-027</b>             | <b>1</b> | 7                                | 10  | 23  | 28  | 42  | 59                               | 51  | 54  |
|                                    | <b>2</b> | 17                               | 20  | 45  | 48  | 56  | 72                               | 64  | 67  |
|                                    | <b>3</b> | 21                               | 24  | 50  | 55  | 59  | 76                               | 74  | 75  |
| <b>MPT<br/>110-114<br/>116-120</b> | <b>1</b> | 18                               | 20  | 53  | 56  | 65  | 153                              | 87  | 96  |
|                                    | <b>2</b> | 28                               | 38  | 65  | 75  | 95  | 158                              | 111 | 123 |
|                                    | <b>3</b> | 48                               | 55  | 125 | 135 | 169 | 289                              | 224 | 251 |
|                                    | <b>4</b> | 79                               | 89  | 180 | 185 | 198 | 306                              | 264 | 289 |

### Maximum flow rate for a complete return filter with a pressure drop $\Delta p = 0.5$ bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.


For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).


You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.


## Hydraulic symbols

| Filter series  | Style 1 connection | Style 2 connections | Style 3 connections |
|----------------|--------------------|---------------------|---------------------|
| <b>MPT 025</b> | •                  |                     |                     |
| <b>MPT 027</b> | •                  |                     |                     |
| <b>MPT 110</b> |                    | •                   |                     |
| <b>MPT 114</b> | •                  |                     |                     |
| <b>MPT 116</b> | •                  |                     |                     |
| <b>MPT 120</b> |                    |                     | •                   |












## Pressure drop



### Filter housings $\Delta p$ pressure drop

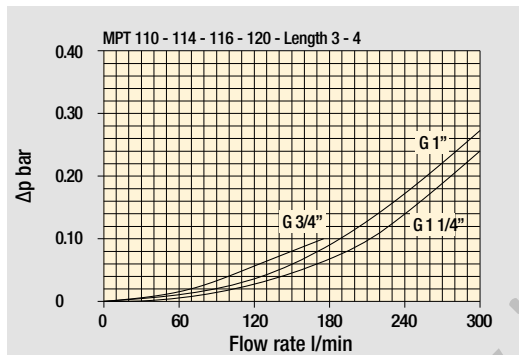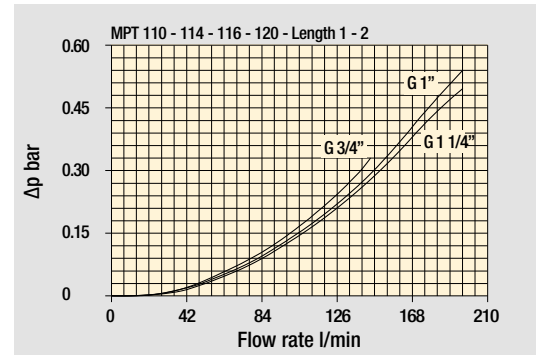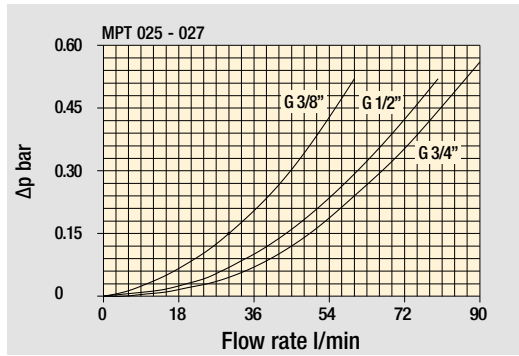

### Bypass valve pressure drop

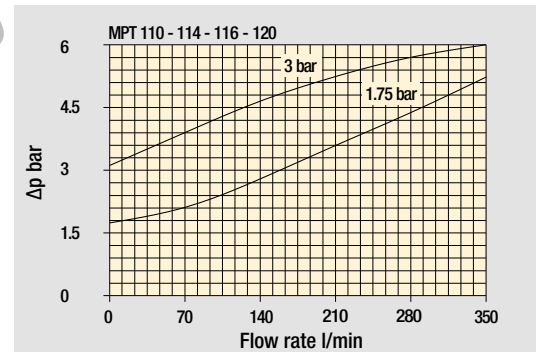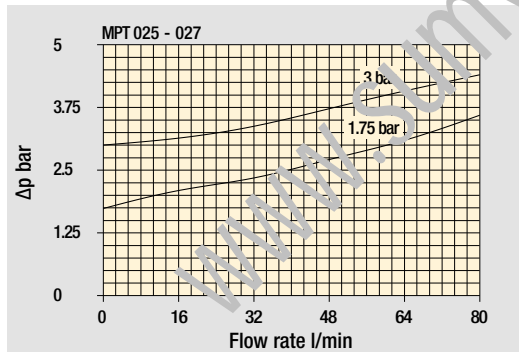

### Air breather pressure drop

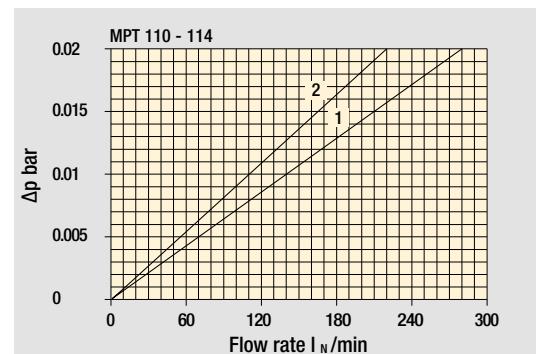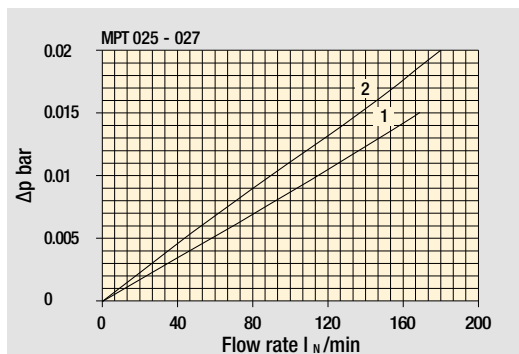





- 1  C With air breather 10  $\mu$ m
- 2  D With anti-splash and SAP50 10  $\mu$ m

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

| MPT 025 -027  |  |   |
|---|--|---|
| Air breather port plugged<br>Indicator port                                       | Air breather standard<br>Indicator port  | Anti-splash air breather & pressurized<br>Double indicator port                     |
|  |  |  |

Multiport - Multifunction

| MPT 110   |  |
|---|--|
| Standard - Single IN Port   | Double IN Port - Double indicator port   |
|   |   |
| Double IN Port<br>Option: double drain port   | Double IN Port - Indicator port<br>Option: drain port                                |
|  |  |

MPT 120  
Triple IN port  
Option: double drain port



# MPT MPT025 - MPT027

## Designation & Ordering code

### COMPLETE FILTER

|   |  |  |     |                     |   |                               |   |    |     |   |     |
|---|--|--|-----|---------------------|---|-------------------------------|---|----|-----|---|-----|
| <b>Series and size</b>  |  | Configuration example 1:                 |     | MPT025              | 1   | S                             | A | G3 | A10 | E | P01 |
| <b>MPT025   MPT027</b> Filter element with standard spigot                      |  | Configuration example 2:                 |     | MPT027              | 3   | C                             | W | G6 | A03 | B | P01 |
| <b>Length</b>   |  |  |     |                     |   |                               |   |    |     |   |     |
| 1   2   3   |  |  |     |                     |   |                               |   |    |     |   |     |
| <b>Air breather</b>   |  |  |     |                     |   |                               |   |    |     |   |     |
| <b>S</b> Without air breather   |  |  |     |                     |   |                               |   |    |     |   |     |
| <b>C</b> With air breather 10 µm  |  |  |     |                     |   |                               |   |    |     |   |     |
| <b>D</b> With anti-splash and air breather SAP050 10 µm                         |  |  |     |                     |   |                               |   |    |     |   |     |
| <b>P</b> With anti-splash and air breather SAP050 10 µm, pressurization 0.5 bar |  |  |     |                     |   |                               |   |    |     |   |     |
| <b>Seals and treatments</b>   |  | Filtration rating                        |     |                     |   |                               |   |    |     |   |     |
|   |  | Axx                                      | Mxx | Pxx                 |   |                               |   |    |     |   |     |
| <b>A</b> NBR  |  | •  | •   | •                   |   |                               |   |    |     |   |     |
| <b>V</b> FPM  |  | •  | •   | •                   |   |                               |   |    |     |   |     |
| <b>W</b> NBR head anodized  |  | •  | •   |                     | filter element compatible with fluids HFA-HFB-HFC |                               |   |    |     |   |     |
| <b>Z</b> FPM head anodized  |  | •  | •   |                     |   |                               |   |    |     |   |     |
| <b>Connections</b>  |  |  |     |                     |   |                               |   |    |     |   |     |
| <b>G1</b> G 3/8"  |  | <b>G6</b> 3/4" NPT                       |     |                     |   |                               |   |    |     |   |     |
| <b>G2</b> G 1/2"  |  | <b>G7</b> SAE 6 - 9/16" - 18 UNF         |     |                     |   |                               |   |    |     |   |     |
| <b>G3</b> G 3/4"  |  | <b>G8</b> SAE 8 - 3/4" - 16 UNF          |     |                     |   |                               |   |    |     |   |     |
| <b>G4</b> 3/8" NPT  |  | <b>G9</b> SAE 12 - 1 1/16" - 12 UN       |     |                     |   |                               |   |    |     |   |     |
| <b>G5</b> 1/2" NPT  |  |  |     |                     |   |                               |   |    |     |   |     |
| <b>Filtration rating (filter media)</b>   |  |  |     |                     |   |                               |   |    |     |   |     |
| <b>A03</b> Inorganic microfiber 3 µm  |  | <b>M25</b> Wire mesh 25 µm               |     |                     |   |                               |   |    |     |   |     |
| <b>A06</b> Inorganic microfiber 6 µm  |  | <b>M60</b> Wire mesh 60 µm               |     |                     |   |                               |   |    |     |   |     |
| <b>A10</b> Inorganic microfiber 10 µm   |  | <b>M90</b> Wire mesh 90 µm               |     |                     |   |                               |   |    |     |   |     |
| <b>A16</b> Inorganic microfiber 16 µm   |  | <b>P10</b> Resin impregnated paper 10 µm |     |                     |   |                               |   |    |     |   |     |
| <b>A25</b> Inorganic microfiber 25 µm   |  | <b>P25</b> Resin impregnated paper 25 µm |     |                     |   |                               |   |    |     |   |     |
|   |  |  |     | <b>Bypass valve</b> |   | <b>Execution</b>              |   |    |     |   |     |
|   |  |  |     | <b>E</b> 3 bar      |   | <b>P01</b> MP Filtri standard |   |    |     |   |     |
|   |  |  |     | <b>B</b> 1.75 bar   |   | <b>Pxx</b> Customized         |   |    |     |   |     |



### FILTER ELEMENT

|  |  |  |     |                     |   |                               |   |   |   |     |  |
|--|--|--|-----|---------------------|---|-------------------------------|---|---|---|-----|--|
| <b>Element series and size</b>                           |  | Configuration example 1:                 |     | MF020               | 1 | A10                           | H | B | E | P01 |  |
| <b>MF020</b> Filter element with standard spigot         |  | Configuration example 2:                 |     | MF020               | 3 | A03                           | W | B |   | P01 |  |
| <b>Element length</b>                                    |  |  |     |                     |   |                               |   |   |   |     |  |
| 1   2   3  |  |  |     |                     |   |                               |   |   |   |     |  |
| <b>Filtration rating (filter media)</b>                  |  |  |     |                     |   |                               |   |   |   |     |  |
| <b>A03</b> Inorganic microfiber 3 µm                     |  | <b>M25</b> Wire mesh 25 µm               |     |                     |   |                               |   |   |   |     |  |
| <b>A06</b> Inorganic microfiber 6 µm                     |  | <b>M60</b> Wire mesh 60 µm               |     |                     |   |                               |   |   |   |     |  |
| <b>A10</b> Inorganic microfiber 10 µm                    |  | <b>M90</b> Wire mesh 90 µm               |     |                     |   |                               |   |   |   |     |  |
| <b>A16</b> Inorganic microfiber 16 µm                    |  | <b>P10</b> Resin impregnated paper 10 µm |     |                     |   |                               |   |   |   |     |  |
| <b>A25</b> Inorganic microfiber 25 µm                    |  | <b>P25</b> Resin impregnated paper 25 µm |     |                     |   |                               |   |   |   |     |  |
| <b>Element Δp</b>  |  | Filter media                             |     |                     |   |                               |   |   |   |     |  |
|  |  | Axx                                      | Mxx | Pxx                 |   |                               |   |   |   |     |  |
| <b>N</b> 10 bar  |  |  | •   | •                   |   |                               |   |   |   |     |  |
| <b>H</b> 10 bar  |  | •  |     |                     |   |                               |   |   |   |     |  |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC |  | •  | •   |                     |   |                               |   |   |   |     |  |
|  |  | <b>Seals</b>                             |     | <b>Bypass valve</b> |   | <b>Execution</b>              |   |   |   |     |  |
|  |  | <b>B</b> NBR                             |     | <b>E</b> 3 bar      |   | <b>P01</b> MP Filtri standard |   |   |   |     |  |
|  |  | <b>V</b> FPM                             |     | <b></b> 1.75 bar    |   | <b>Pxx</b> Customized         |   |   |   |     |  |

### ACCESSORIES

|   |     |      |   |         |      |
|---|-----|------|---|---------|------|
| <b>Indicators</b>   |     | page |   |         | page |
| <b>BVA</b> Axial pressure gauge                           | 240 |      | <b>BEA</b> Electrical pressure indicator          | 239     |      |
| <b>BVR</b> Radial pressure gauge                          | 240 |      | <b>BEM</b> Electrical pressure indicator          | 239     |      |
| <b>BVP</b> Visual pressure indicator with automatic reset | 241 |      | <b>BLA</b> Electrical / visual pressure indicator | 239-240 |      |
| <b>BVQ</b> Visual pressure indicator with manual reset    | 241 |      |   |         |      |
| <b>Additional features</b>                                |     | page |   |         |      |
| <b>TE</b> Extension tube                                  | 248 |      |   |         |      |
| <b>DPT</b> Dipstick                                       | 249 |      |   |         |      |



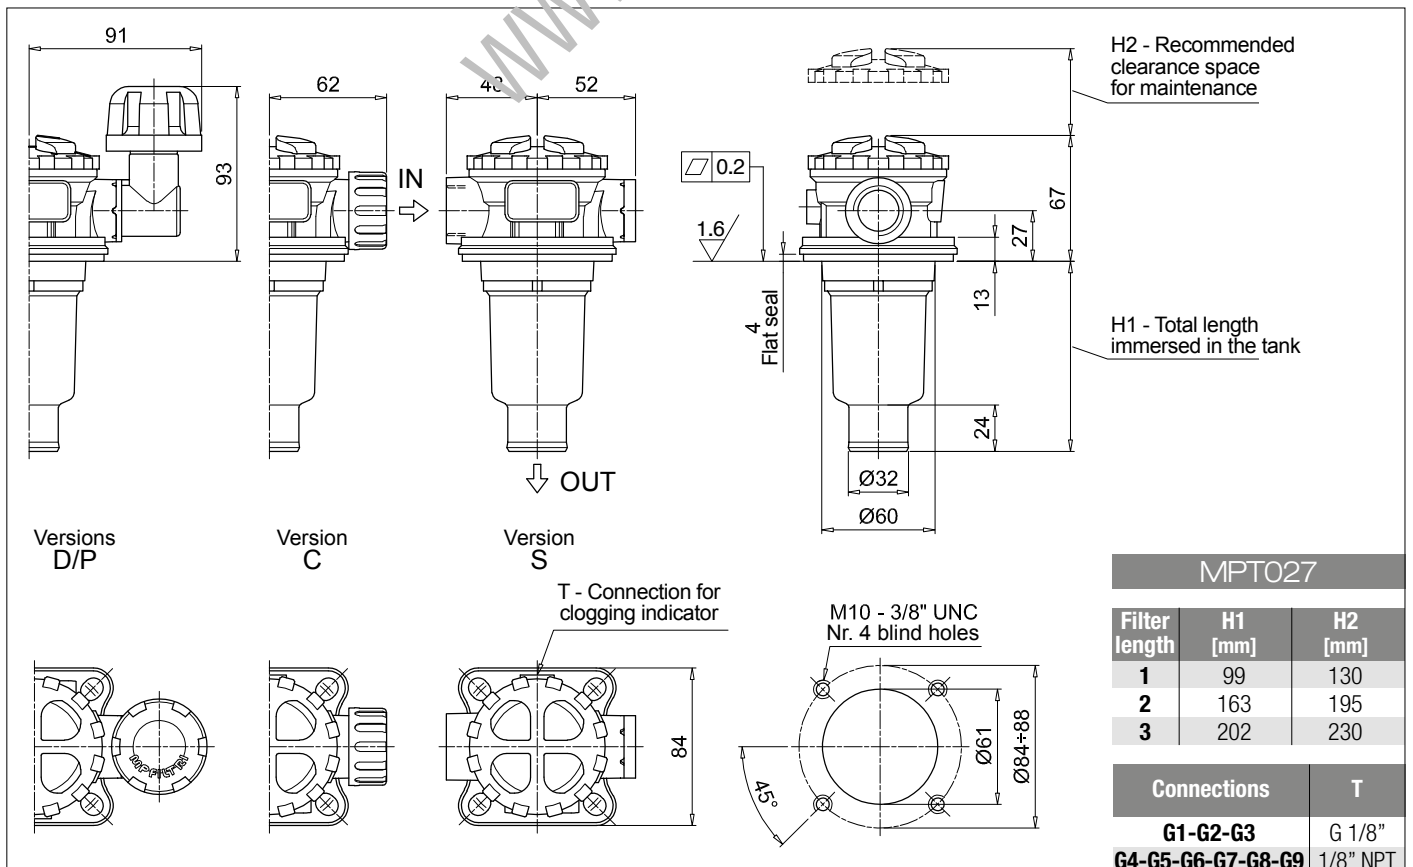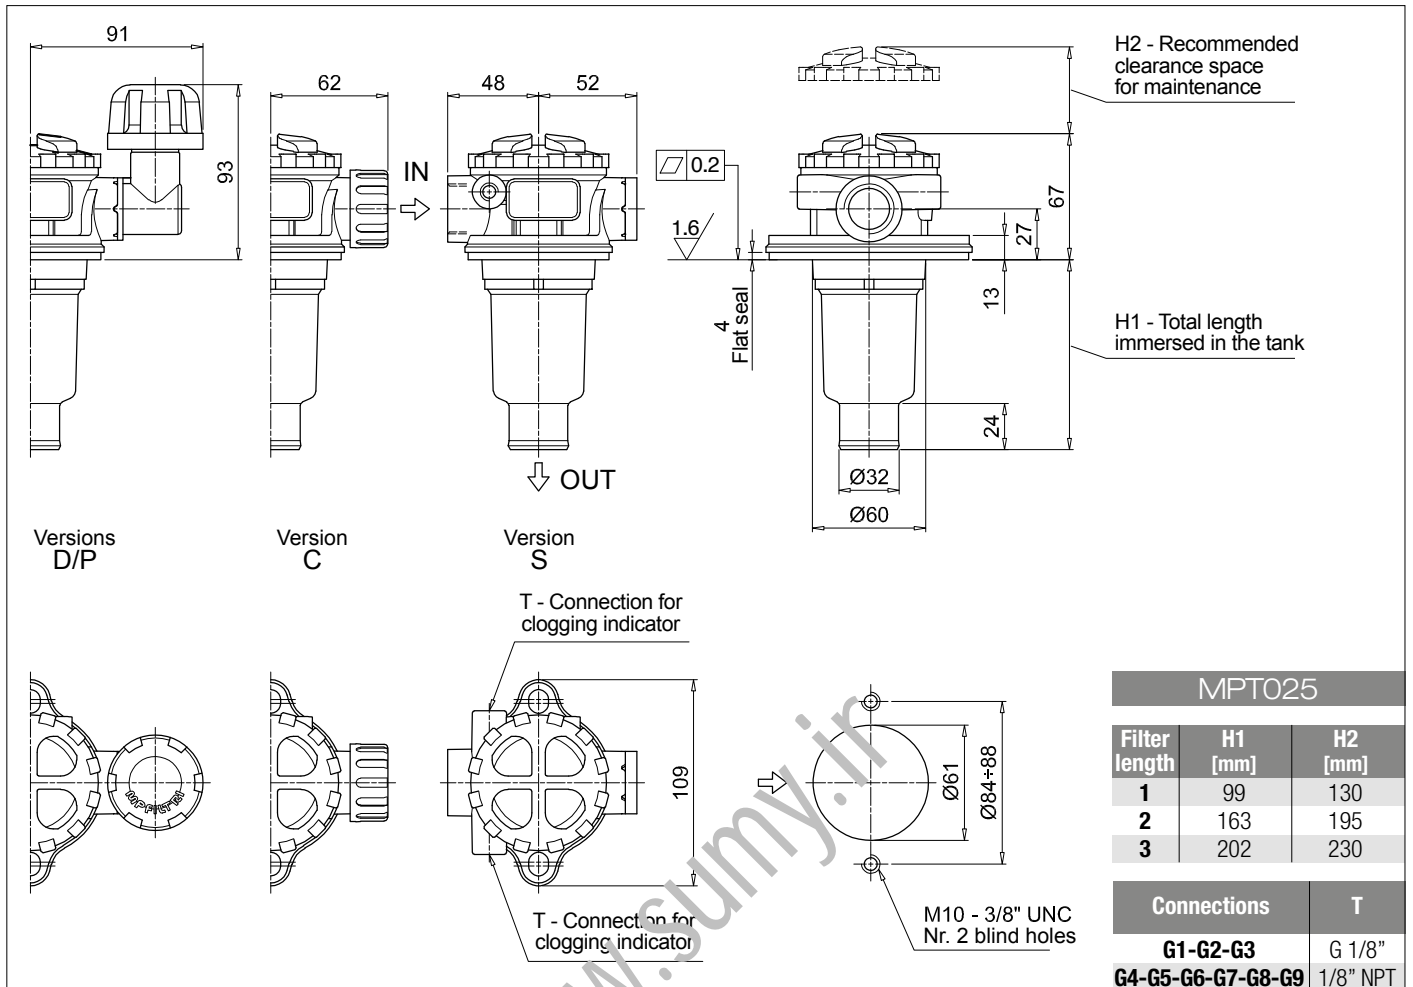

## Designation & Ordering code

### COMPLETE FILTER

|   |  |                   |   |                                    |     |   |                       |                               |  |  |  |
|---|--|-------------------|---|------------------------------------|-----|---|-----------------------|-------------------------------|--|--|--|
| <b>Series and size</b>  |  |                   | Configuration example 1: <b>MPT110</b>   <b>1</b>   <b>S</b>   <b>A</b>   <b>G1</b>   <b>0</b>   <b>A06</b>   <b>E</b>   <b>P01</b> |                                    |     |   |                       |                               |  |  |  |
| <b>MPT110</b> Filter element with standard spigot                               |  |                   | Configuration example 2: <b>MPT110</b>   <b>3</b>   <b>P</b>   <b>V</b>   <b>G4</b>   <b>1</b>   <b>M25</b>   <b>B</b>   <b>P01</b> |                                    |     |   |                       |                               |  |  |  |
| <b>Length</b>   |  |                   |   |                                    |     |   |                       |                               |  |  |  |
| 1   2   <b>3</b>   4  |  |                   |   |                                    |     |   |                       |                               |  |  |  |
| <b>Air breather</b>   |  |                   |   |                                    |     |   |                       |                               |  |  |  |
| <b>S</b> Without air breather   |  |                   |   |                                    |     |   |                       |                               |  |  |  |
| <b>C</b> With air breather 10 µm  |  |                   |   |                                    |     |   |                       |                               |  |  |  |
| <b>D</b> With anti-splash and air breather SAP050 10 µm                         |  |                   |   |                                    |     |   |                       |                               |  |  |  |
| <b>P</b> With anti-splash and air breather SAP050 10 µm, pressurization 0.5 bar |  |                   |   |                                    |     |   |                       |                               |  |  |  |
| <b>Seals and treatments</b>   |  |                   | Filtration rating   |                                    |     |   |                       |                               |  |  |  |
|   |  |                   | Axx   | Mxx                                | Pxx |   |                       |                               |  |  |  |
| <b>A</b> NBR  |  |                   | •   | •                                  | •   |   |                       |                               |  |  |  |
| <b>V</b> FPM  |  |                   | •   | •                                  | •   |   |                       |                               |  |  |  |
| <b>W</b> NBR head anodized  |  |                   | •   | •                                  |     | filter element compatible with fluids HFA-HFB-HFC |                       |                               |  |  |  |
| <b>Z</b> FPM head anodized  |  |                   | •   | •                                  |     |   |                       |                               |  |  |  |
| <b>Main Connections</b>   |  | <b>Aux size 1</b> | <b>Aux size 2</b>   | <b>Main Connections</b>            |     | <b>Aux size 2</b>                                 | <b>Aux size 2</b>     |                               |  |  |  |
| <b>G1</b> G 3/4"  |  | G 3/8"            | G 1/2"  | <b>G6</b> 1 1/4" NPT               |     | 3/8" NPT  | 1/2" NPT              |                               |  |  |  |
| <b>G2</b> G 1"  |  |                   |   | <b>G7</b> SAE 12 - 1 1/16" - 12 UN |     | SAE 6 - 9/16" - 18 UNF                            | SAE 8 - 3/4" - 16 UNF |                               |  |  |  |
| <b>G3</b> G 1 1/4"  |  |                   |   | <b>G8</b> SAE 16 - 1 5/16" - 12 UN |     |   |                       |                               |  |  |  |
| <b>G4</b> 3/4" NPT  |  | 3/8" NPT          | 1/2" NPT  | <b>G9</b> SAE 20 - 1 5/8" - 12 UN  |     |   |                       |                               |  |  |  |
| <b>G5</b> 1" NPT  |  |                   |   |                                    |     |   |                       |                               |  |  |  |
| <b>Aux connection - see previous table</b>                                      |  |                   |   |                                    |     |   |                       |                               |  |  |  |
| <b>0</b> Not machined   |  |                   | <b>1</b> Aux size 1   | <b>2</b> Aux size 2                |     |   |                       |                               |  |  |  |
| <b>Filtration rating (filter media)</b>   |  |                   |   |                                    |     |   |                       |                               |  |  |  |
| <b>A03</b> Inorganic microfiber 3 µm  |  |                   | <b>M25</b> Wire mesh 25 µm  |                                    |     |   |                       |                               |  |  |  |
| <b>A06</b> Inorganic microfiber 6 µm  |  |                   | <b>M60</b> Wire mesh 60 µm  |                                    |     |   |                       |                               |  |  |  |
| <b>A10</b> Inorganic microfiber 10 µm   |  |                   | <b>M90</b> Wire mesh 90 µm  |                                    |     |   |                       |                               |  |  |  |
| <b>A16</b> Inorganic microfiber 16 µm   |  |                   | <b>P10</b> Resin impregnated paper 10 µm  |                                    |     |   |                       |                               |  |  |  |
| <b>A25</b> Inorganic microfiber 25 µm   |  |                   | <b>P25</b> Resin impregnated paper 25 µm  |                                    |     |   |                       |                               |  |  |  |
|   |  |                   |   |                                    |     | <b>Bypass valve</b>                               |                       | <b>Execution</b>              |  |  |  |
|   |  |                   |   |                                    |     | <b>E</b> 3 bar                                    |                       | <b>P01</b> MP Filtri standard |  |  |  |
|   |  |                   |   |                                    |     | <b>B</b> 1.75 bar                                 |                       | <b>Pxx</b> Customized         |  |  |  |

### FILTER ELEMENT

|  |  |  |   |     |     |              |  |                     |  |                               |  |
|--|--|--|---|-----|-----|--------------|--|---------------------|--|-------------------------------|--|
| <b>Element series and size</b>                           |  |  | Configuration example 1: <b>MF100</b>   <b>1</b>   <b>A06</b>   <b>H</b>   <b>B</b>   <b>E</b>   <b>P01</b> |     |     |              |  |                     |  |                               |  |
| <b>MF100</b> Filter element with standard spigot         |  |  | Configuration example 2: <b>MF100</b>   <b>3</b>   <b>M25</b>   <b>N</b>   <b>V</b>   <b>P01</b>            |     |     |              |  |                     |  |                               |  |
| <b>Element length</b>                                    |  |  |   |     |     |              |  |                     |  |                               |  |
| 1   2   <b>3</b>   4                                     |  |  |   |     |     |              |  |                     |  |                               |  |
| <b>Filtration rating (filter media)</b>                  |  |  |   |     |     |              |  |                     |  |                               |  |
| <b>A03</b> Inorganic microfiber 3 µm                     |  |  | <b>M25</b> Wire mesh 25 µm  |     |     |              |  |                     |  |                               |  |
| <b>A06</b> Inorganic microfiber 6 µm                     |  |  | <b>M60</b> Wire mesh 60 µm  |     |     |              |  |                     |  |                               |  |
| <b>A10</b> Inorganic microfiber 10 µm                    |  |  | <b>M90</b> Wire mesh 90 µm  |     |     |              |  |                     |  |                               |  |
| <b>A16</b> Inorganic microfiber 16 µm                    |  |  | <b>P10</b> Resin impregnated paper 10 µm  |     |     |              |  |                     |  |                               |  |
| <b>A25</b> Inorganic microfiber 25 µm                    |  |  | <b>P25</b> Resin impregnated paper 25 µm  |     |     |              |  |                     |  |                               |  |
| <b>Element Δp</b>  |  |  | Filter media  |     |     |              |  |                     |  |                               |  |
|  |  |  | Axx   | Mxx | Pxx |              |  |                     |  |                               |  |
| <b>N</b> 10 bar  |  |  | •   | •   | •   |              |  |                     |  |                               |  |
| <b>H</b> 10 bar  |  |  | •   |     |     |              |  |                     |  |                               |  |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC |  |  | •   | •   |     | <b>Seals</b> |  | <b>Bypass valve</b> |  | <b>Execution</b>              |  |
|  |  |  |   |     |     | <b>B</b> NBR |  | <b>E</b> 3 bar      |  | <b>P01</b> MP Filtri standard |  |
|  |  |  |   |     |     | <b>V</b> FPM |  | <b>B</b> 1.75 bar   |  | <b>Pxx</b> Customized         |  |


### ACCESSORIES

|   |     |      |   |         |      |
|---|-----|------|---|---------|------|
| <b>Indicators</b>   |     | page |   |         | page |
| <b>BVA</b> Axial pressure gauge                           | 240 |      | <b>BEA</b> Electrical pressure indicator          | 239     |      |
| <b>BVR</b> Radial pressure gauge                          | 240 |      | <b>BEM</b> Electrical pressure indicator          | 239     |      |
| <b>BVP</b> Visual pressure indicator with automatic reset | 241 |      | <b>BLA</b> Electrical / visual pressure indicator | 239-240 |      |
| <b>BVQ</b> Visual pressure indicator with manual reset    | 241 |      |   |         |      |
| <b>Additional features</b>                                |     | page |   |         | page |
| <b>TE</b> Extension tube                                  | 248 |      | <b>DPT</b> Dipstick                               | 249     |      |
| <b>DFS</b> Diffuser with fast lock connection             | 249 |      |   |         |      |


| MPT110        |         |         |        |        |
|---------------|---------|---------|--------|--------|
| Filter length | H1 [mm] | H2 [mm] | D [mm] | I [mm] |
| 1             | 97      | 120     | 38     | 4      |
| 2             | 144     | 170     | 38     | 4      |
| 3             | 222     | 250     | 47     | -      |
| 4             | 324     | 350     | 47     | 2.5    |


| Connections       | T        |
|-------------------|----------|
| G1-G2-G3          | G 1/8"   |
| G4-G5-G6-G7-G8-G9 | 1/8" NPT |

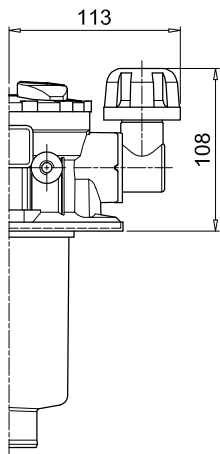






Versions D/P

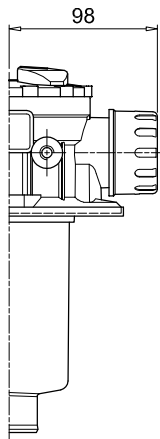

Version C

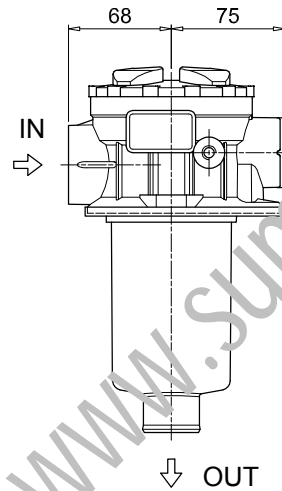

Version S

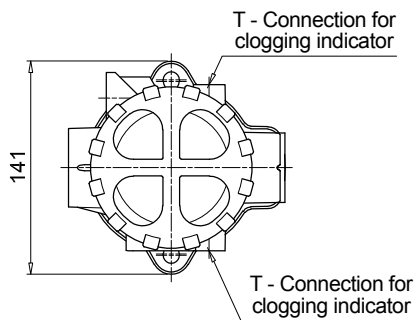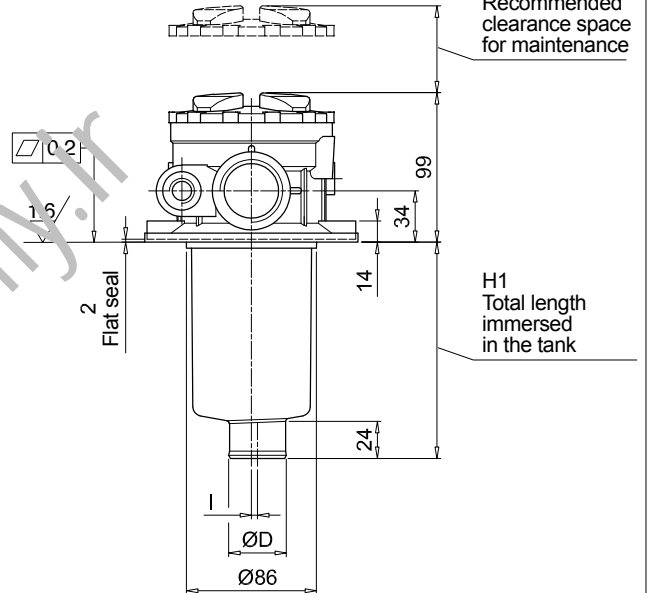

## Designation & Ordering code

### COMPLETE FILTER

|   |                          |        |   |   |   |    |     |   |     |
|---|--------------------------|--------|---|---|---|----|-----|---|-----|
| <b>Series and size</b>                            | Configuration example 1: | MPT114 | 4 | S | A | G3 | A10 | E | P01 |
| <b>MPT114</b> Filter element with standard spigot | Configuration example 2: | MPT114 | 3 | C | W | G6 | A03 | B | P01 |

|               |  |
|---------------|--|
| <b>Length</b> |  |
| 1   2   3   4 |  |

|  |  |
|--|--|
| <b>Air breather</b>  |  |
| <b>S</b> Without air breather  |  |
| <b>C</b> With air breather 10 µm   |  |
| <b>D</b> With anti-splash and air breather SAP050 10 µm                        |  |
| <b>P</b> With anti-splash and air breather SAP050 10 µm pressurization 0.5 bar |  |

| <b>Seals and treatments</b> | Filtration rating |     |     |
|-----------------------------|-------------------|-----|-----|
|                             | Axx               | Mxx | Pxx |
| <b>A</b> NBR                | •                 | •   | •   |
| <b>V</b> FPM                | •                 | •   | •   |
| <b>W</b> NBR head anodized  | •                 | •   |     |
| <b>Z</b> FPM head anodized  | •                 | •   |     |

filter element compatible with fluids HFA-HFB-HFC

|                    |                                    |
|--------------------|------------------------------------|
| <b>Connections</b> |                                    |
| <b>G1</b> G 3/4"   | <b>G6</b> 1 1/4" NPT               |
| <b>G2</b> G 1"     | <b>G7</b> SAE 12 - 1 1/16" - 12 UN |
| <b>G3</b> G 1 1/4" | <b>G8</b> SAE 16 - 1 5/16" - 12 UN |
| <b>G4</b> 3/4" NPT | <b>G9</b> SAE 20 - 1 5/8" - 12 UN  |
| <b>G5</b> 1" NPT   |                                    |

|   |  |
|---|--|
| <b>Filtration rating (filter media)</b> |  |
| <b>A03</b> Inorganic microfiber 3 µm    | <b>M25</b> Wire mesh 25 µm               |
| <b>A06</b> Inorganic microfiber 6 µm    | <b>M60</b> Wire mesh 60 µm               |
| <b>A10</b> Inorganic microfiber 10 µm   | <b>M90</b> Wire mesh 90 µm               |
| <b>A16</b> Inorganic microfiber 16 µm   | <b>P10</b> Resin impregnated paper 10 µm |
| <b>A25</b> Inorganic microfiber 25 µm   | <b>P25</b> Resin impregnated paper 25 µm |

|                     |                               |
|---------------------|-------------------------------|
| <b>Bypass valve</b> | <b>Execution</b>              |
| <b>E</b> 3 bar      | <b>P01</b> MP Filtri standard |
| <b>B</b> 1.75 bar   | <b>Pxx</b> Customized         |

### FILTER ELEMENT

|  |                          |       |   |     |   |   |   |     |
|--|--------------------------|-------|---|-----|---|---|---|-----|
| <b>Element series and size</b>                   | Configuration example 2: | MF100 | 4 | A10 | H | B | E | P01 |
| <b>MF100</b> Filter element with standard spigot | Configuration example 1: | MF100 | 3 | A03 | W | B |   | P01 |

|                       |  |
|-----------------------|--|
| <b>Element length</b> |  |
| 1   2   3   4         |  |

|   |  |
|---|--|
| <b>Filtration rating (filter media)</b> |  |
| <b>A03</b> Inorganic microfiber 3 µm    | <b>M25</b> Wire mesh 25 µm               |
| <b>A06</b> Inorganic microfiber 6 µm    | <b>M60</b> Wire mesh 60 µm               |
| <b>A10</b> Inorganic microfiber 10 µm   | <b>M90</b> Wire mesh 90 µm               |
| <b>A16</b> Inorganic microfiber 16 µm   | <b>P10</b> Resin impregnated paper 10 µm |
| <b>A25</b> Inorganic microfiber 25 µm   | <b>P25</b> Resin impregnated paper 25 µm |

| <b>Element Δp</b>  | Filter media |     |     |
|--|--------------|-----|-----|
|  | Axx          | Mxx | Pxx |
| <b>N</b> 10 bar  |              | •   | •   |
| <b>H</b> 10 bar  | •            |     |     |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC | •            | •   |     |

|              |                     |                               |
|--------------|---------------------|-------------------------------|
| <b>Seals</b> | <b>Bypass valve</b> | <b>Execution</b>              |
| <b>B</b> NBR | <b>E</b> 3 bar      | <b>P01</b> MP Filtri standard |
| <b>V</b> FPM | 1.75 bar            | <b>Pxx</b> Customized         |


### ACCESSORIES

| <b>Indicators</b>   | page |   | page    |
|---|------|---|---------|
| <b>BVA</b> Axial pressure gauge                           | 240  | <b>BEA</b> Electrical pressure indicator          | 239     |
| <b>BVR</b> Radial pressure gauge                          | 240  | <b>BEM</b> Electrical pressure indicator          | 239     |
| <b>BVP</b> Visual pressure indicator with automatic reset | 241  | <b>BLA</b> Electrical / visual pressure indicator | 239-240 |
| <b>BVQ</b> Visual pressure indicator with manual reset    | 241  |   |         |
| <b>Additional features</b>                                | page |   | page    |
| <b>TE</b> Extension tube                                  | 248  | <b>DPT</b> Dipstick                               | 249     |
| <b>DFS</b> Diffuser with fast lock connection             | 249  |   |         |


| MPT114        |         |         |        |        |
|---------------|---------|---------|--------|--------|
| Filter length | H1 [mm] | H2 [mm] | D [mm] | I [mm] |
| 1             | 97      | 120     | 38     | 4      |
| 2             | 144     | 170     | 38     | 4      |
| 3             | 222     | 250     | 47     | -      |
| 4             | 324     | 350     | 47     | 2.5    |


| Connections       | T        |
|-------------------|----------|
| G1-G2-G3          | G 1/8"   |
| G4-G5-G6-G7-G8-G9 | 1/8" NPT |

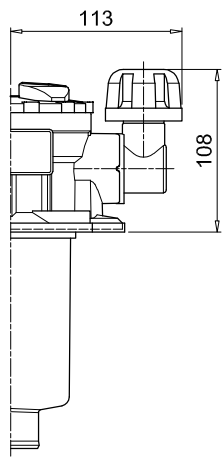


Versions D/P

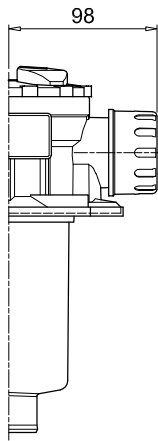





Version C

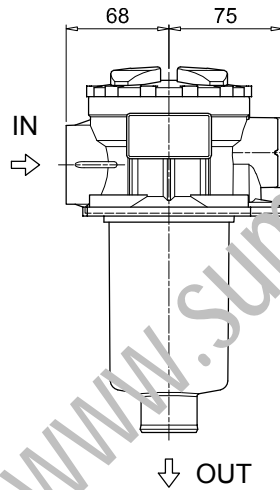

Version S

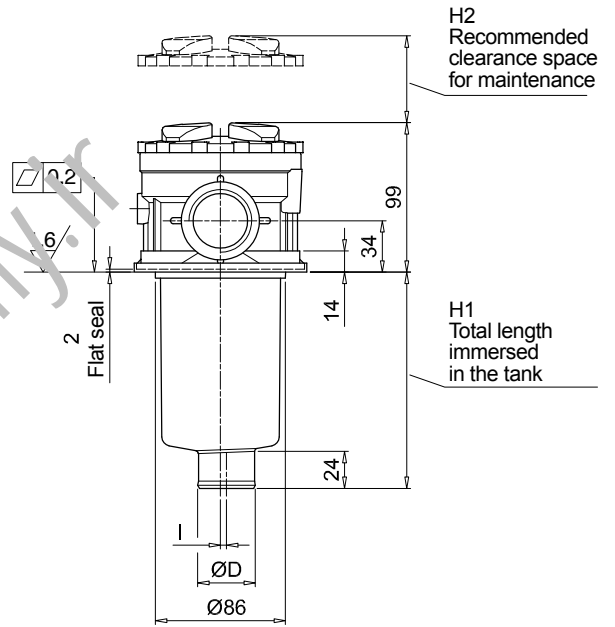

Holes on the tank



## Designation & Ordering code

### COMPLETE FILTER

|   |                          |        |   |   |   |    |     |   |     |
|---|--------------------------|--------|---|---|---|----|-----|---|-----|
| <b>Series and size</b>                            | Configuration example 1: | MPT116 | 1 | S | A | G1 | M90 | E | P01 |
| <b>MPT116</b> Filter element with standard spigot | Configuration example 2: | MPT116 | 2 | S | Z | G9 | A03 | B | P01 |

|               |  |
|---------------|--|
| <b>Length</b> |  |
| 1   2   3   4 |  |

|                        |  |
|------------------------|--|
| <b>Air breather</b>    |  |
| S Without air breather |  |

| Seals and treatments | Filtration rating |     |     |
|----------------------|-------------------|-----|-----|
|                      | Axx               | Mxx | Pxx |
| A NBR                | •                 | •   | •   |
| V FPM                | •                 | •   | •   |
| W NBR head anodized  | •                 | •   |     |
| Z FPM head anodized  | •                 | •   |     |

filter element compatible with fluids HFA-HFB-HFC

Flat seal on the head on request

|                    |                             |
|--------------------|-----------------------------|
| <b>Connections</b> |                             |
| G1 G 3/4"          | G6 1 1/4" NPT               |
| G2 G 1"            | G7 SAE 12 - 1 1/16" - 12 UN |
| G3 G 1 1/4"        | G8 SAE 16 - 1 5/16" - 12 UN |
| G4 3/4" NPT        | G9 SAE 20 - 1 5/8" - 12 UN  |
| G5 1" NPT          |                             |

|   |                                   |
|---|-----------------------------------|
| <b>Filtration rating (filter media)</b> |                                   |
| A03 Inorganic microfiber 3 µm           | M25 Wire mesh 25 µm               |
| A06 Inorganic microfiber 6 µm           | M60 Wire mesh 60 µm               |
| A10 Inorganic microfiber 10 µm          | M90 Wire mesh 90 µm               |
| A16 Inorganic microfiber 16 µm          | P10 Resin impregnated paper 10 µm |
| A25 Inorganic microfiber 25 µm          | P25 Resin impregnated paper 25 µm |

|                     |                        |
|---------------------|------------------------|
| <b>Bypass valve</b> | <b>Execution</b>       |
| E 3 bar             | P01 MP Filtri standard |
| B 1.75 bar          | Pxx Customized         |

### FILTER ELEMENT

|  |                          |       |   |     |   |   |   |     |
|--|--------------------------|-------|---|-----|---|---|---|-----|
| <b>Element series and size</b>                   | Configuration example 2: | MF100 | 1 | M90 | N | B | E | P01 |
| <b>MF100</b> Filter element with standard spigot | Configuration example 1: | MF100 | 2 | A03 | W | V |   | P01 |

|                       |  |
|-----------------------|--|
| <b>Element length</b> |  |
| 1   2   3   4         |  |

|   |                                   |
|---|-----------------------------------|
| <b>Filtration rating (filter media)</b> |                                   |
| A03 Inorganic microfiber 3 µm           | M25 Wire mesh 25 µm               |
| A06 Inorganic microfiber 6 µm           | M60 Wire mesh 60 µm               |
| A10 Inorganic microfiber 10 µm          | M90 Wire mesh 90 µm               |
| A16 Inorganic microfiber 16 µm          | P10 Resin impregnated paper 10 µm |
| A25 Inorganic microfiber 25 µm          | P25 Resin impregnated paper 25 µm |

| Element Δp  | Filter media |     |     |
|---|--------------|-----|-----|
|   | Axx          | Mxx | Pxx |
| N 10 bar  |              | •   | •   |
| H 10 bar  | •            |     |     |
| W 10 bar, compatible with fluids HFA, HFB and HFC | •            | •   |     |

|              |                     |                        |
|--------------|---------------------|------------------------|
| <b>Seals</b> | <b>Bypass valve</b> | <b>Execution</b>       |
| B NBR        | E 3 bar             | P01 MP Filtri standard |
| V FPM        | 1.75 bar            | Pxx Customized         |


### ACCESSORIES

| Indicators   | page |  | page    |
|--|------|--|---------|
| BVA Axial pressure gauge                           | 240  | BEA Electrical pressure indicator          | 239     |
| BVR Radial pressure gauge                          | 240  | BEM Electrical pressure indicator          | 239     |
| BVP Visual pressure indicator with automatic reset | 241  | BLA Electrical / visual pressure indicator | 239-240 |
| BVQ Visual pressure indicator with manual reset    | 241  |  |         |
| Additional features                                | page |  | page    |
| TE Extension tube                                  | 248  | DPT Dipstick                               | 249     |
| DFS Diffuser with fast lock connection             | 249  |  |         |

| MPT116        |         |         |        |        |
|---------------|---------|---------|--------|--------|
| Filter length | H1 [mm] | H2 [mm] | D [mm] | I [mm] |
| 1             | 99      | 120     | 38     | 4      |
| 2             | 146     | 170     | 38     | 4      |
| 3             | 224     | 250     | 47     | -      |
| 4             | 326     | 350     | 47     | 2.5    |

| Connections       | T        |
|-------------------|----------|
| G1-G2-G3          | G 1/8"   |
| G4-G5-G6-G7-G8-G9 | 1/8" NPT |

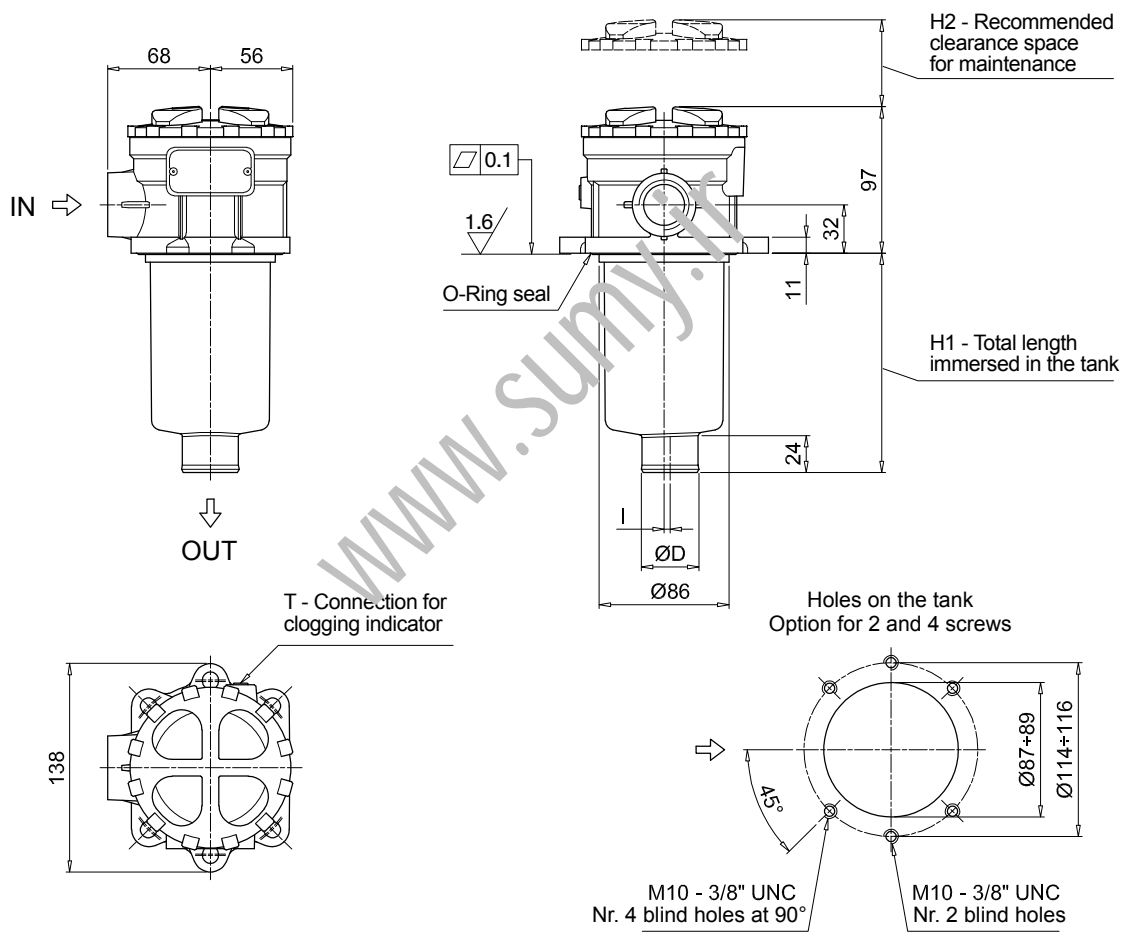

## Designation & Ordering code

### COMPLETE FILTER

|   |                          |        |   |   |    |   |     |   |     |
|---|--------------------------|--------|---|---|----|---|-----|---|-----|
| <b>Series and size</b>                            | Configuration example 1: | MPT120 | 1 | A | G1 | 0 | A06 | E | P01 |
| <b>MPT120</b> Filter element with standard spigot | Configuration example 2: | MPT120 | 3 | V | G4 | 1 | M25 | B | P01 |

|               |  |
|---------------|--|
| <b>Length</b> |  |
| 1   2   3   4 |  |

| Seals and treatments       | Filtration rating |     |     |
|----------------------------|-------------------|-----|-----|
|                            | Axx               | Mxx | Pxx |
| <b>A</b> NBR               | •                 | •   | •   |
| <b>V</b> FPM               | •                 | •   | •   |
| <b>W</b> NBR head anodized | •                 | •   |     |
| <b>Z</b> FPM head anodized | •                 | •   |     |

| Main Connections                   | Rear connections         | Aux size 1             | Aux size 2            |
|------------------------------------|--------------------------|------------------------|-----------------------|
| <b>G1</b> G 3/4"                   | G 3/4"                   | G 3/8"                 | G 1/2"                |
| <b>G2</b> G 1"                     | G 1"                     |                        |                       |
| <b>G3</b> G 1 1/4"                 | G 3/4"                   | 3/8" NPT               | 1/2" NPT              |
| <b>G4</b> 3/4" NPT                 | 3/4" NPT                 |                        |                       |
| <b>G5</b> 1" NPT                   | 1" NPT                   | SAE 6 - 9/16" - 18 UNF | SAE 8 - 3/4" - 16 UNF |
| <b>G6</b> 1 1/4" NPT               | 3/4" NPT                 |                        |                       |
| <b>G7</b> SAE 12 - 1 1/16" - 12 UN | SAE 12 - 1 1/16" - 12 UN |                        |                       |
| <b>G8</b> SAE 16 - 1 5/16" - 12 UN | SAE 16 - 1 5/16" - 12 UN |                        |                       |
| <b>G9</b> SAE 20 - 1 5/8" - 12 UN  | SAE 12 - 1 1/16" - 12 UN |                        |                       |

|  |
|--|
| <b>Aux connection</b> - see previous table   |
| 0 Not machined   1 Aux size 1   2 Aux size 2 |

| Filtration rating (filter media)      |  |
|---------------------------------------|--|
| <b>A03</b> Inorganic microfiber 3 µm  | <b>M25</b> Wire mesh 25 µm               |
| <b>A06</b> Inorganic microfiber 6 µm  | <b>M60</b> Wire mesh 60 µm               |
| <b>A10</b> Inorganic microfiber 10 µm | <b>M90</b> Wire mesh 90 µm               |
| <b>A16</b> Inorganic microfiber 16 µm | <b>P10</b> Resin impregnated paper 10 µm |
| <b>A25</b> Inorganic microfiber 25 µm | <b>P25</b> Resin impregnated paper 25 µm |

| Bypass valve      | Execution                     |
|-------------------|-------------------------------|
| <b>E</b> 3 bar    | <b>P01</b> MP Filtri standard |
| <b>B</b> 1.75 bar | <b>Pxx</b> Customized         |

### FILTER ELEMENT

|  |                          |       |   |     |   |   |   |     |
|--|--------------------------|-------|---|-----|---|---|---|-----|
| <b>Element series and size</b>                   | Configuration example 1: | MF100 | 1 | A06 | H | B | E | P01 |
| <b>MF100</b> Filter element with standard spigot | Configuration example 2: | MF100 | 3 | M25 | N | V |   | P01 |

|                       |  |
|-----------------------|--|
| <b>Element length</b> |  |
| 1   2   3   4         |  |

| Filtration rating (filter media)      |  |
|---------------------------------------|--|
| <b>A03</b> Inorganic microfiber 3 µm  | <b>M25</b> Wire mesh 25 µm               |
| <b>A06</b> Inorganic microfiber 6 µm  | <b>M60</b> Wire mesh 60 µm               |
| <b>A10</b> Inorganic microfiber 10 µm | <b>M90</b> Wire mesh 90 µm               |
| <b>A16</b> Inorganic microfiber 16 µm | <b>P10</b> Resin impregnated paper 10 µm |
| <b>A25</b> Inorganic microfiber 25 µm | <b>P25</b> Resin impregnated paper 25 µm |

| Element Δp   | Filter media |     |     |
|--|--------------|-----|-----|
|  | Axx          | Mxx | Pxx |
| <b>N</b> 10 bar  |              | •   | •   |
| <b>H</b> 10 bar  | •            |     |     |
| <b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC | •            | •   |     |

| Seals        | Bypass valve   | Execution                     |
|--------------|----------------|-------------------------------|
| <b>B</b> NBR | <b>E</b> 3 bar | <b>P01</b> MP Filtri standard |
| <b>V</b> FPM | 1.75 bar       | <b>Pxx</b> Customized         |

### ACCESSORIES


| Indicators  | page |   | page    |
|---|------|---|---------|
| <b>BVA</b> Axial pressure gauge                           | 240  | <b>BEA</b> Electrical pressure indicator          | 239     |
| <b>BVR</b> Radial pressure gauge                          | 240  | <b>BEM</b> Electrical pressure indicator          | 239     |
| <b>BVP</b> Visual pressure indicator with automatic reset | 241  | <b>BLA</b> Electrical / visual pressure indicator | 239-240 |
| <b>BVQ</b> Visual pressure indicator with manual reset    | 241  |   |         |
| Additional features                                       | page |   | page    |
| <b>TE</b> Extension tube                                  | 248  | <b>DPT</b> Dipstick                               | 249     |
| <b>DFS</b> Diffuser with fast lock connection             | 249  |   |         |



| MPT120        |         |         |        |        |
|---------------|---------|---------|--------|--------|
| Filter length | H1 [mm] | H2 [mm] | D [mm] | I [mm] |
| <b>1</b>      | 97      | 120     | 38     | 4      |
| <b>2</b>      | 147     | 170     | 38     | 4      |
| <b>3</b>      | 222     | 250     | 47     | -      |
| <b>4</b>      | 324     | 350     | 47     | 2.5    |


| Connections              | T        |
|--------------------------|----------|
| <b>G1-G2-G3</b>          | G 1/8"   |
| <b>G4-G5-G6-G7-G8-G9</b> | 1/8" NPT |

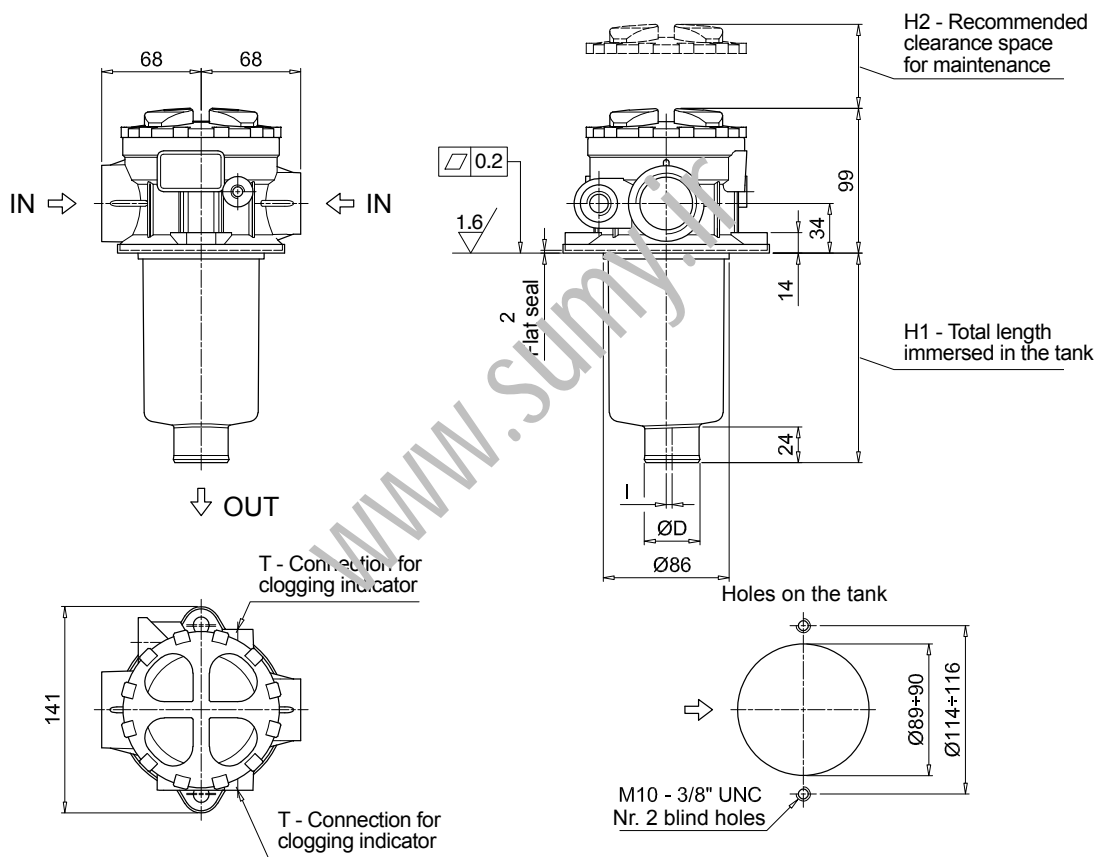


# MPT SPARE PARTS

Order number for spare parts

MPT 025 - 027 - 110

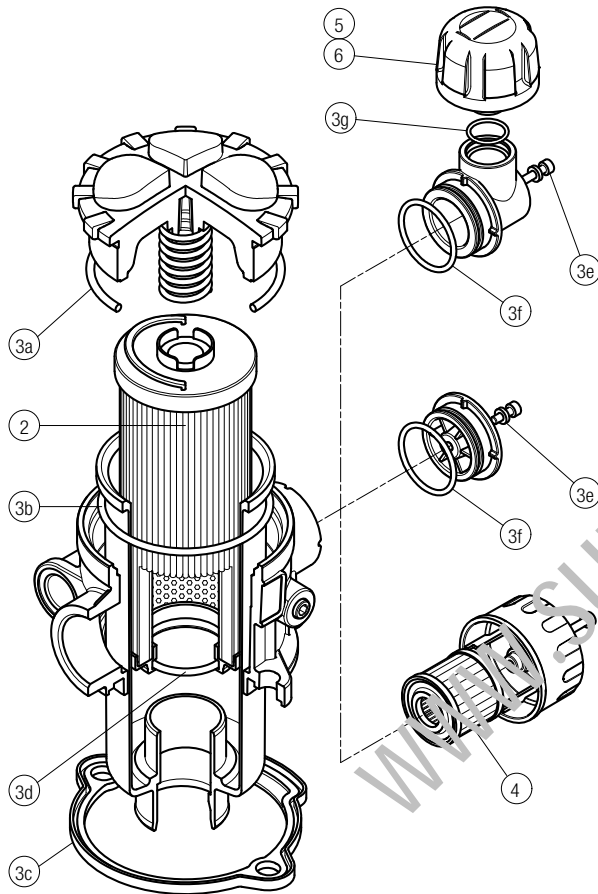


MPT 116

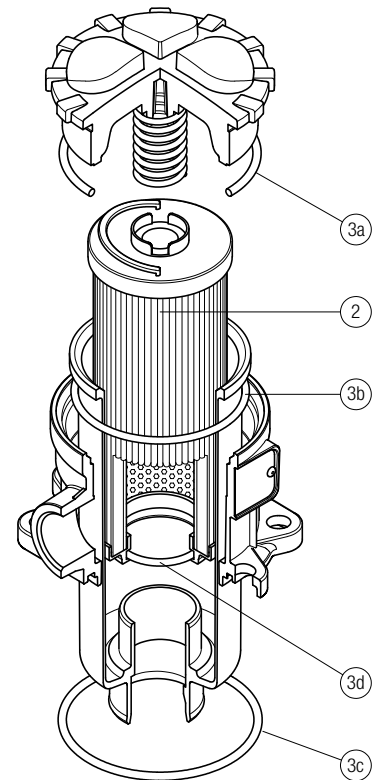


| Item:         | Q.ty: 1 pc.     | Q.ty: 1 pc.          | Q.ty: 1 pc. | Q.ty: 1 pc. | Q.ty: 1 pc.           |                       |
|---------------|-----------------|----------------------|-------------|-------------|-----------------------|-----------------------|
| Filter series | Filter element  | Seal Kit code number |             | C           | D                     | P                     |
|               |                 | NBR                  | FPM         |             |                       |                       |
| MPT 025       | See order table | 02050557             | 02050558    | 10 µm A3L03 | 10 µm SAP50G3L03A0P01 | 10 µm SAP50G3L03A1P01 |
| MPT 027       |                 | 02050559             | 02050560    | 10 µm A3L03 | 10 µm SAP50G3L03A0P01 | 10 µm SAP50G3L03A1P01 |
| MPT 110       |                 | 02050561             | 02050562    | 10 µm A5L03 | 10 µm SAP50G3L03A0P01 | 10 µm SAP50G3L03A1P01 |

| Item:         | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          |
|---------------|-----------------|----------------------|----------|
| Filter series | Filter element  | Seal Kit code number |          |
|               |                 | NBR                  | FPM      |
| MPT 116       | See order table | 02050466             | 02050467 |

**MPT 114**

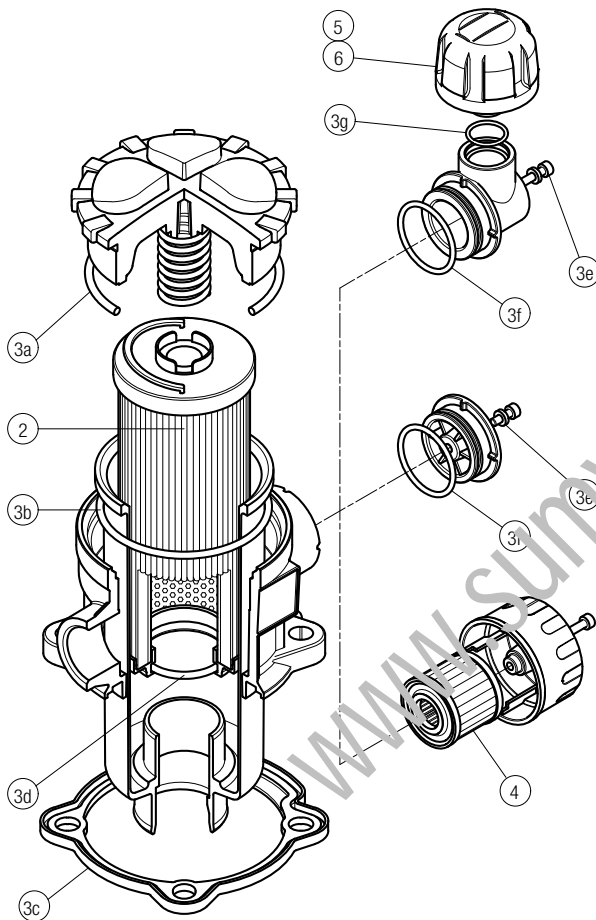

**MPT 120**

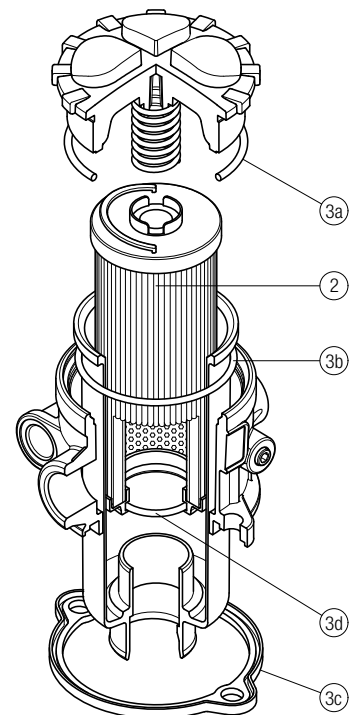

| Item:          | Q.ty: 1 pc.     | Q.ty: 1 pc.          | Q.ty: 1 pc.                            | Q.ty: 1 pc. | Q.ty: 1 pc.           |                       |
|----------------|-----------------|----------------------|--|-------------|-----------------------|-----------------------|
| Filter series  | Filter element  | Seal Kit code number | Air breather filter element - version: |             |                       |                       |
|                |                 | NBR                  | FPM                                    | C           | D                     | P                     |
| <b>MPT 114</b> | See order table | 02050580             | 02050581                               | 10 µm A5L03 | 10 µm SAP50G3L03A0P01 | 10 µm SAP50G3L03A1P01 |

| Item:          | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          |
|----------------|-----------------|----------------------|----------|
| Filter series  | Filter element  | Seal Kit code number |          |
|                |                 | NBR                  | FPM      |
| <b>MPT 120</b> | See order table | 02050563             | 02050564 |

[www.sumy.ir](http://www.sumy.ir)

# MFB series

BOWL ASSEMBLY

Maximum working pressure up to 800 kPa (8 bar) - Flow rate up to 700 l/min



# MFB GENERAL INFORMATION

## Description

## Technical data

### Return filter Bowl assembly

**Maximum working pressure up to 800 kPa (8 bar)**

**Flow rate up to 700 l/min**

MFB is a range of return filter kits for protection of the reservoir against the system contamination.

They are directly integrated in the moulded reservoir in immersed or semi-immersed position to save space into the tank.

Treaded or flanged covers can be provided.

The filter output must be always immersed into the fluid to avoid aeration or foam generation into the reservoir.

#### Available features:

- Fine filtration rating, to get a good cleanliness level into the reservoir
- Bypass valve integrated into the filter element, to relieve excessive pressure drop across the filter media
- Extension tube, to be used in deep reservoirs (sold as separate item)
- Diffuser, to reduce the risk of aeration, foaming and noise (sold as separate item)

#### Common applications:

Mobile machines

#### Bowl assembly materials

- Cover  
Nylon: MFB 020-030-100  
Aluminium: MFB 180-190

- Bowl: Nylon

#### Filter element materials

- Caps: Nylon
- Spring: Spring steel

#### Bypass valve

- Opening pressure 175 kPa (1.75 bar)  $\pm 10\%$
- Opening pressure 300 kPa (3 bar)  $\pm 10\%$

#### $\Delta p$ element type

- Microfibre filter elements - series H: 10 bar
- Fluid flow through the filter element from OUT to IN

#### Seals

- Standard NBR Series A
- Optional FPM Series V

#### Temperature

From -25 °C to +110 °C

#### Note

MFB filters are provided for vertical mounting



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series  | Weights [kg] |      |      |      | Volumes [dm <sup>3</sup> ] |        |      |      |      |      |
|----------------|--------------|------|------|------|----------------------------|--------|------|------|------|------|
|                | Length       | 1    | 2    | 3    | 4                          | Length | 1    | 2    | 3    | 4    |
| <b>MFB 020</b> |              | 0.25 | 0.35 | 0.40 | -                          |        | 0.10 | 0.15 | 0.20 | -    |
| <b>MFB 030</b> |              | 0.25 | -    | -    | -                          |        | 0.15 | -    | -    | -    |
| <b>MFB 100</b> |              | 0.50 | 0.60 | 0.75 | 0.95                       |        | 0.35 | 0.50 | 0.80 | 1.10 |
| <b>MFB 180</b> |              | 1.60 | 2.40 | -    | -                          |        | 1.50 | 2.90 | -    | -    |
| <b>MFB 190</b> |              | -    | 2.40 | -    | -                          |        | -    | 3.00 | -    | -    |

| Filter series | Length | Filter element design - H series |     |     |     |     | Filter element design - N series |     |     |
|---------------|--------|----------------------------------|-----|-----|-----|-----|----------------------------------|-----|-----|
|               |        | A03                              | A06 | A10 | A16 | A25 | M25<br>M60<br>M90                | P10 | P25 |
| MFB 020       | 1      | 7                                | 10  | 23  | 28  | 42  | 59                               | 51  | 54  |
|               | 2      | 17                               | 20  | 45  | 48  | 56  | 72                               | 64  | 67  |
|               | 3      | 21                               | 24  | 50  | 55  | 59  | 76                               | 74  | 75  |
| MFB 030       | 1      | 7                                | 10  | 24  | 29  | 47  | 84                               | 60  | 66  |
| MFB 100       | 1      | 18                               | 20  | 53  | 56  | 65  | 153                              | 87  | 96  |
|               | 2      | 28                               | 38  | 65  | 75  | 95  | 158                              | 111 | 123 |
|               | 3      | 48                               | 55  | 125 | 135 | 169 | 289                              | 224 | 251 |
|               | 4      | 79                               | 89  | 180 | 185 | 198 | 306                              | 264 | 289 |
| MFB 180       | 1      | 127                              | 148 | 235 | 243 | 278 | 441                              | 285 | 299 |
|               | 2      | 231                              | 262 | 358 | 382 | 388 | 472                              | 404 | 412 |
| MFB 190       | 2      | 261                              | 305 | 489 | 528 | 546 | 696                              | 583 | 598 |

### Maximum flow rate for a complete return filter with a pressure drop $\Delta p = 0.5$ bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.


For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure.

Please, contact our Sales Department for further additional information.

### Hydraulic symbols

| Filter series | Style 1 connection |
|---------------|--------------------|
| MFB 020       | •                  |
| MFB 030       | •                  |
| MFB 100       | •                  |
| MFB 180       | •                  |
| MFB 190       | •                  |



# MFB MFB020 - MFB030 - MFB100 - MFB180 - MFB190

## Designation & Ordering code

### COMPLETE FILTER

|   |   |  |        |        |        |   |  |                     |  |                               |  |  |  |  |
|---|---|--|--------|--------|--------|---|--|---------------------|--|-------------------------------|--|--|--|--|
| <b>Series and size</b>  |   |  |        |        |        | Configuration example 1: <b>MFB100</b>   <b>1</b>   <b>A</b>   <b>2</b>   <b>A10</b>   <b>H</b>   <b>E</b>   <b>P01</b> |  |                     |  |                               |  |  |  |  |
| <b>MFB020</b>   <b>MFB030</b>   <b>MFB100</b>   <b>MFB180</b>   <b>MFB190</b> |   |  |        |        |        | Configuration example 2: <b>MFB180</b>   <b>2</b>   <b>V</b>   <b>1</b>   <b>M25</b>   <b>N</b>   <b>B</b>   <b>P01</b> |  |                     |  |                               |  |  |  |  |
| Filter element with private spigot  |   |  |        |        |        |   |  |                     |  |                               |  |  |  |  |
| <b>Length</b>   |   | MFB020                                   | MFB030 | MFB100 | MFB180 | MFB190  |  |                     |  |                               |  |  |  |  |
| 1   |   | •  | •      | •      | •      |   |  |                     |  |                               |  |  |  |  |
| 2   |   | •  |        | •      | •      | •   |  |                     |  |                               |  |  |  |  |
| 3   |   | •  |        | •      |        |   |  |                     |  |                               |  |  |  |  |
| 4   |   |  |        | •      |        |   |  |                     |  |                               |  |  |  |  |
| <b>Seals</b>  |   |  |        |        |        |   |  |                     |  |                               |  |  |  |  |
| <b>A</b> NBR  |   |  |        |        |        |   |  |                     |  |                               |  |  |  |  |
| <b>V</b> FPM  |   |  |        |        |        |   |  |                     |  |                               |  |  |  |  |
| <b>Version</b>  |   | MFB020                                   | MFB030 | MFB100 | MFB180 | MFB190  |  |                     |  |                               |  |  |  |  |
| 1   | Without cover                                   | •  | •      | •      | •      | •   |  |                     |  |                               |  |  |  |  |
| 2   | With flanged cover type MPF                     |  | •      | •      | •      | •   |  |                     |  |                               |  |  |  |  |
| 3   | With threaded cover type MPT                    | •  |        | •      |        |   |  |                     |  |                               |  |  |  |  |
| <b>Filtration rating (filter media)</b>                                       |   |  |        |        |        |   |  |                     |  |                               |  |  |  |  |
| <b>A03</b> Inorganic microfiber 3 µm  |   | <b>M25</b> Wire mesh 25 µm               |        |        |        |   |  |                     |  |                               |  |  |  |  |
| <b>A06</b> Inorganic microfiber 6 µm  |   | <b>M60</b> Wire mesh 60 µm               |        |        |        |   |  |                     |  |                               |  |  |  |  |
| <b>A10</b> Inorganic microfiber 10 µm   |   | <b>M90</b> Wire mesh 90 µm               |        |        |        |   |  |                     |  |                               |  |  |  |  |
| <b>A16</b> Inorganic microfiber 16 µm   |   | <b>P10</b> Resin impregnated paper 10 µm |        |        |        |   |  |                     |  |                               |  |  |  |  |
| <b>A25</b> Inorganic microfiber 25 µm   |   | <b>P25</b> Resin impregnated paper 25 µm |        |        |        |   |  |                     |  |                               |  |  |  |  |
| <b>Element Δp</b>   |   |  |        |        |        |   |  |                     |  |                               |  |  |  |  |
| Filter media  |   |  |        |        |        |   |  |                     |  |                               |  |  |  |  |
|   |   | Axx                                      |        |        | Mxx    |   |  | Pxx                 |  |                               |  |  |  |  |
| <b>N</b>  | 10 bar  |  |        |        |        | •   |  | •                   |  |                               |  |  |  |  |
| <b>H</b>  | 10 bar  |  |        |        | •      |   |  |                     |  |                               |  |  |  |  |
| <b>W</b>  | 10 bar, compatible with fluids HFA, HFB and HFC |  |        |        | •      | •   |  |                     |  |                               |  |  |  |  |
|   |   |  |        |        |        |   |  | <b>Bypass valve</b> |  | <b>Execution</b>              |  |  |  |  |
|   |   |  |        |        |        |   |  | <b>E</b> 3 bar      |  | <b>P01</b> MP Filtri standard |  |  |  |  |
|   |   |  |        |        |        |   |  | <b>B</b> 1.75 bar   |  | <b>Pxx</b> Customized         |  |  |  |  |

### FILTER ELEMENT


|  |        |  |       |       |       |   |  |              |  |                     |  |                               |  |  |  |
|--|--------|--|-------|-------|-------|---|--|--------------|--|---------------------|--|-------------------------------|--|--|--|
| <b>Element series and size</b>   |        |  |       |       |       | Configuration example 1: <b>MF100</b>   <b>1</b>   <b>A10</b>   <b>H</b>   <b>B</b>   <b>E</b>   <b>P01</b> |  |              |  |                     |  |                               |  |  |  |
| <b>MF020</b>   <b>MF030</b>   <b>MF100</b>   <b>MF180</b>   <b>MF190</b> |        |  |       |       |       | Configuration example 2: <b>MF180</b>   <b>2</b>   <b>M25</b>   <b>N</b>   <b>V</b>   <b></b>   <b>P01</b>  |  |              |  |                     |  |                               |  |  |  |
| Filter element with private spigot                                       |        |  |       |       |       |   |  |              |  |                     |  |                               |  |  |  |
| <b>Element length</b>  |        | MF020                                    | MF030 | MF100 | MF180 | MF190   |  |              |  |                     |  |                               |  |  |  |
| 1  |        | •  | •     | •     | •     |   |  |              |  |                     |  |                               |  |  |  |
| 2  |        | •  |       | •     | •     | •   |  |              |  |                     |  |                               |  |  |  |
| 3  |        | •  |       | •     |       |   |  |              |  |                     |  |                               |  |  |  |
| 4  |        |  |       | •     |       |   |  |              |  |                     |  |                               |  |  |  |
| <b>Filtration rating (filter media)</b>                                  |        |  |       |       |       |   |  |              |  |                     |  |                               |  |  |  |
| <b>A03</b> Inorganic microfiber 3 µm                                     |        | <b>M25</b> Wire mesh 25 µm               |       |       |       |   |  |              |  |                     |  |                               |  |  |  |
| <b>A06</b> Inorganic microfiber 6 µm                                     |        | <b>M60</b> Wire mesh 60 µm               |       |       |       |   |  |              |  |                     |  |                               |  |  |  |
| <b>A10</b> Inorganic microfiber 10 µm                                    |        | <b>M90</b> Wire mesh 90 µm               |       |       |       |   |  |              |  |                     |  |                               |  |  |  |
| <b>A16</b> Inorganic microfiber 16 µm                                    |        | <b>P10</b> Resin impregnated paper 10 µm |       |       |       |   |  |              |  |                     |  |                               |  |  |  |
| <b>A25</b> Inorganic microfiber 25 µm                                    |        | <b>P25</b> Resin impregnated paper 25 µm |       |       |       |   |  |              |  |                     |  |                               |  |  |  |
| <b>Element Δp</b>  |        |  |       |       |       |   |  |              |  |                     |  |                               |  |  |  |
| Filter media   |        |  |       |       |       |   |  |              |  |                     |  |                               |  |  |  |
|  |        | Axx                                      |       |       | Mxx   |   |  | Pxx          |  |                     |  |                               |  |  |  |
| <b>N</b>   | 10 bar |  |       |       |       | •   |  | •            |  |                     |  |                               |  |  |  |
| <b>H</b>   | 10 bar |  |       |       | •     |   |  |              |  |                     |  |                               |  |  |  |
|  |        |  |       |       |       |   |  | <b>Seals</b> |  | <b>Bypass valve</b> |  | <b>Execution</b>              |  |  |  |
|  |        |  |       |       |       |   |  | <b>B</b> NBR |  | <b>E</b> 3 bar      |  | <b>P01</b> MP Filtri standard |  |  |  |
|  |        |  |       |       |       |   |  | <b>V</b> FPM |  | 1.75 bar            |  | <b>Pxx</b> Customized         |  |  |  |

### ACCESSORIES

|                            |                                    |        |        |        |        |        |  |  |  |  |      |     |
|----------------------------|------------------------------------|--------|--------|--------|--------|--------|--|--|--|--|------|-----|
| <b>Additional features</b> |                                    |        |        |        |        |        |  |  |  |  | page |     |
|                            |                                    | MFB020 | MFB030 | MFB100 | MFB180 | MFB190 |  |  |  |  |      |     |
| <b>TE</b>                  | Extension tube                     | •      | •      | •      | •      | •      |  |  |  |  |      | 248 |
| <b>DFS</b>                 | Diffuser with fast lock connection |        |        | •      |        |        |  |  |  |  |      | 249 |




MFB

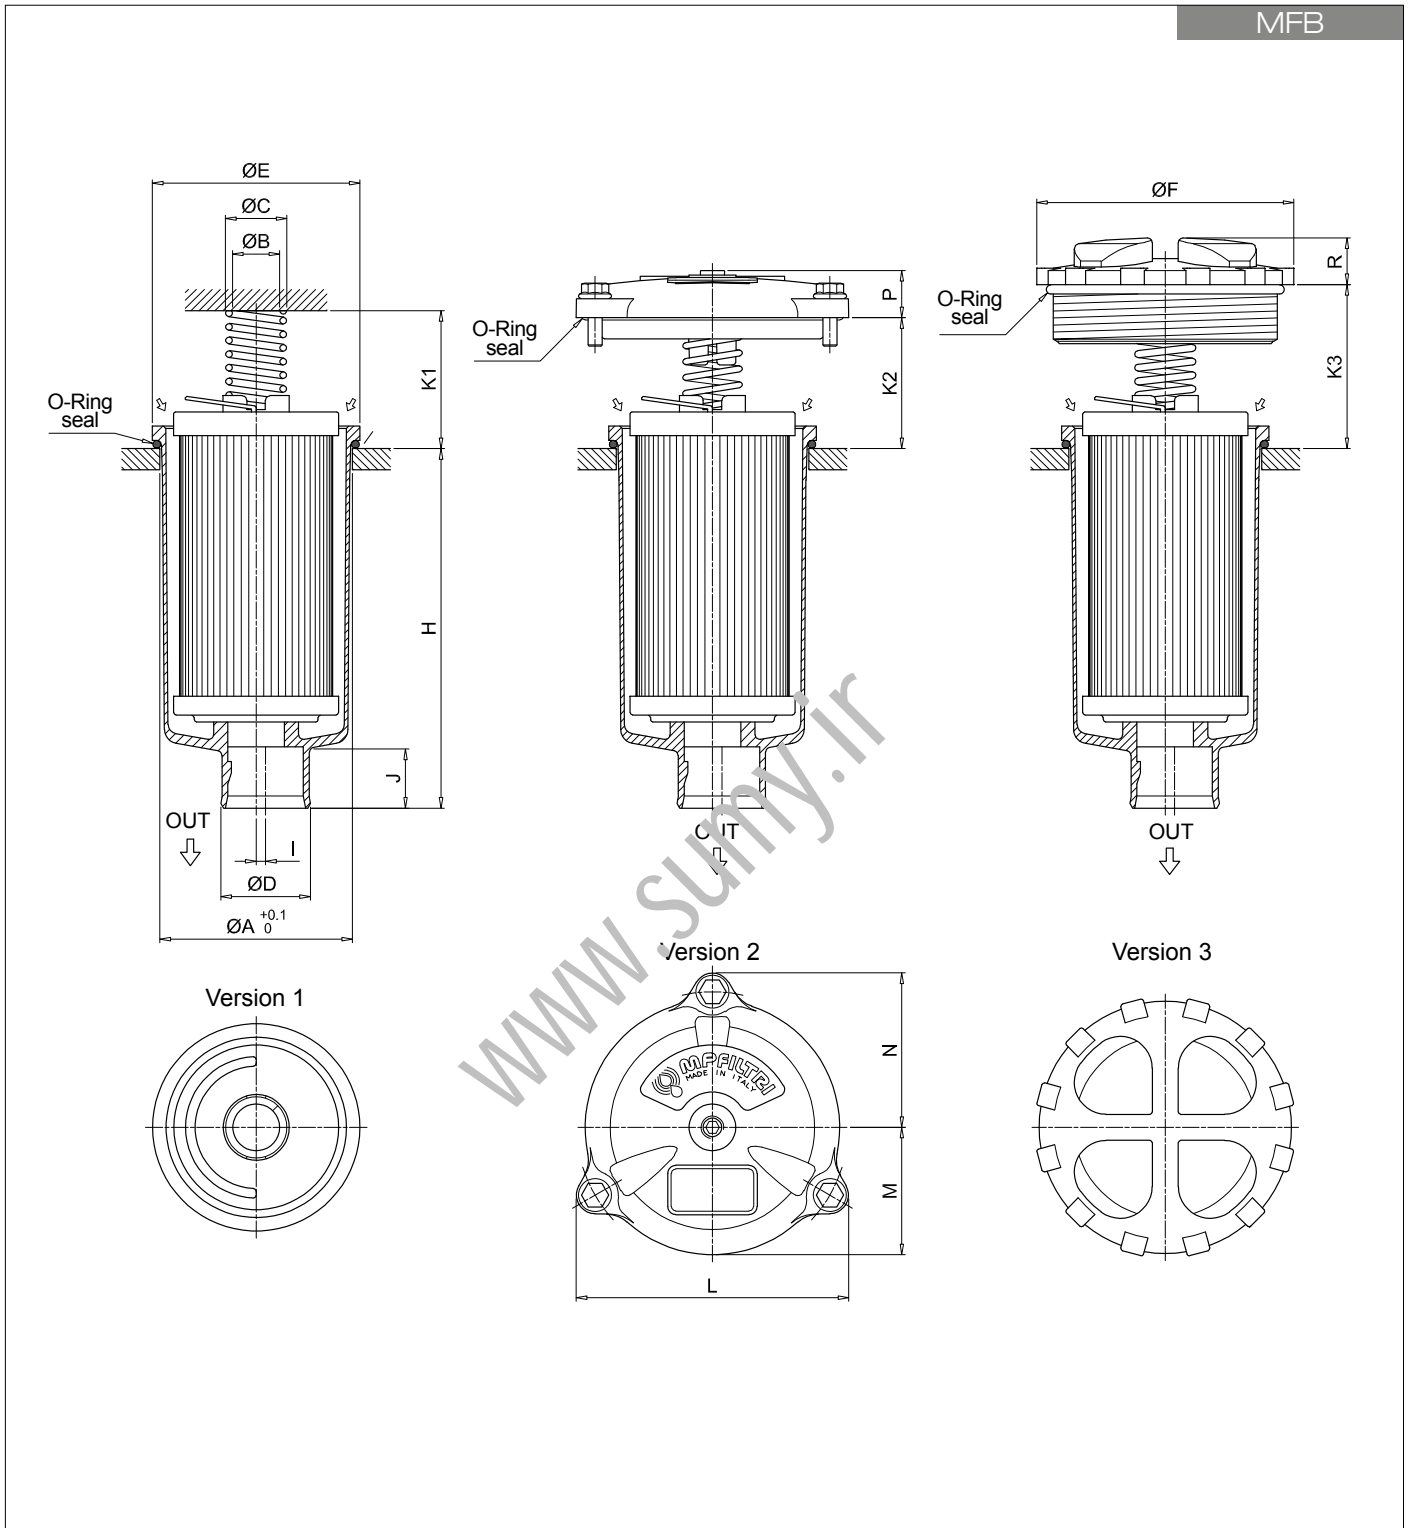

| Filter size | Filter Length | ø A [mm] | ø B [mm] | ø C [mm] | ø D [mm] | ø E [mm] | ø F [mm] | H [mm] | I [mm] | J [mm] | K1 [mm] | K2 [mm] | K3 [mm] | L [mm] | M [mm] | N [mm] | P [mm] | R [mm] |
|-------------|---------------|----------|----------|----------|----------|----------|----------|--------|--------|--------|---------|---------|---------|--------|--------|--------|--------|--------|
| <b>020</b>  | 1             | 52       | 20.5     | 26       | 32       | 56       | 75       | 111    | 0      | 24     | 42      | -       | 36      | -      | -      | -      | -      | 18     |
|             | 2             | 52       | 20.5     | 26       | 32       | 56       | 75       | 175    | 0      | 24     | 42      | -       | 36      | -      | -      | -      | -      | 18     |
|             | 3             | 52       | 20.5     | 26       | 32       | 56       | 75       | 214    | 0      | 24     | 42      | -       | 36      | -      | -      | -      | -      | 18     |
| <b>030</b>  | 1             | 60.5     | 20       | 25.5     | 32       | 68       | -        | 92     | 3      | 21     | 33      | 35      | -       | 92     | 42     | 52     | 18     | -      |
|             | 1             | 80.5     | 20       | 26       | 38       | 88       | 111      | 107    | 4      | 24     | 58      | 55      | 69      | 116    | 54     | 66     | 20     | 20     |
|             | 2             | 80.5     | 20       | 26       | 38       | 88       | 111      | 154    | 4      | 24     | 58      | 55      | 69      | 116    | 54     | 66     | 20     | 20     |
|             | 3             | 80.5     | 20       | 26       | 47       | 88       | 111      | 232    | 0      | 24     | 58      | 55      | 69      | 116    | 54     | 66     | 20     | 20     |
| <b>100</b>  | 4             | 80.5     | 20       | 26       | 47       | 88       | 111      | 334    | 2.5    | 24     | 58      | 55      | 69      | 116    | 54     | 66     | 20     | 20     |
|             | 1             | 112.5    | 26       | 33.5     | 47       | 121      | -        | 234    | 0      | 31     | 58      | 58      | 69      | 159    | 76     | 95     | 21     | -      |
|             | 2             | 112.5    | 26       | 33.5     | 47       | 121      | -        | 447    | 0      | 31     | 58      | 58      | 69      | 159    | 76     | 95     | 21     | -      |
|             | 2             | 112.5    | 26       | 33.5     | 50       | 121      | -        | 454    | 0      | 38     | 58      | 58      | 69      | 159    | 76     | 95     | 21     | -      |

# MFB SPARE PARTS

Order number for spare parts

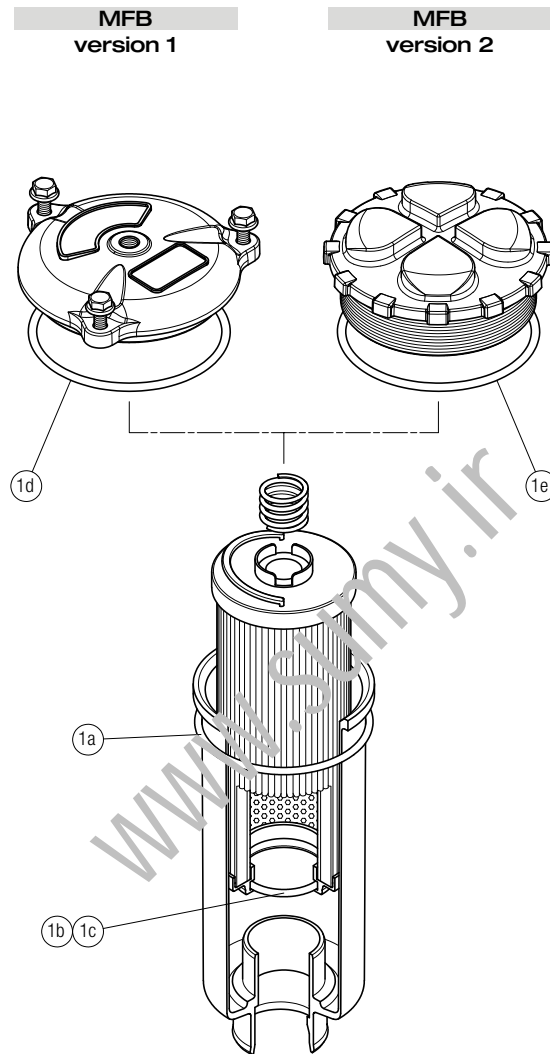

| Q.ty: 1 pc.              |                      |          |
|--------------------------|----------------------|----------|
| Item: <b>1</b> (1a ÷ 1e) |                      |          |
| Filter series            | Seal Kit code number |          |
|                          | NBR                  | FPM      |
| <b>MFB 020</b>           | 02050572             | 02050573 |
| <b>MFB 030</b>           | 02050574             | 02050575 |
| <b>MFB 100</b>           | 02050555             | 02050556 |
| <b>MFB 180</b>           | 02050576             | 02050577 |
| <b>MFB 190</b>           | 02050578             | 02050579 |

www.sumy.ir

[www.sumy.ir](http://www.sumy.ir)

# MPH series

Maximum working pressure up to 1 MPa (10 bar) - Flow rate up to 3500 l/min



# MPH GENERAL INFORMATION

## Description

## Technical data

### Return filter

**Maximum working pressure up to 1 MPa (10 bar)**  
**Flow rate up to 3500 l/min**

MPH is a range of return filters for protection of the reservoir against the system contamination.

They are directly fixed to the reservoir, in immersed or semi-immersed position.

The use of the diffuser is recommended, to place the filter output always immersed into the fluid to avoid aeration or foam generation into the reservoir.

The filtration from inside to outside allows a cleaner filter element replacement, the dirty remains into the filter element.

### Available features:

- Female threaded connections up to 1 1/2" and flanged connections up to 4", for a maximum flow rate of 3500 l/min
- Multiple connections, to connect several return lines or drains
- Fine filtration rating, to get a good cleanliness level into the reservoir
- Bypass valve, to relieve excessive pressure drop across the filter media
- Magnetic filter, to hold the ferrous particles
- 2, 3, 4 or 8 fixing holes for installation, to suit a variety of reservoir surfaces
- Flat Seal to suit a variety of reservoir surfaces
- Oil dipstick, to easily check the level of the fluid into the reservoir (separate item)
- Diffuser, to reduce the risk of aeration, foaming and noise
- Filler plug, to fill cleaned fluid into the tank without an additional plug
- Integrated breather filter, to clean the air that moves into the reservoir as result of the oil level fluctuation (MPH110/114)
- Integrated breather filter with pressurization valve, to clean the air that moves into the reservoir as result of the oil level fluctuation and to guarantee the pressurization into the reservoir (MPH110/114)
- Visual, electrical and electronic clogging indicators

### Common applications:

Heavy duty industrial equipment

### Filter housing materials

- Head
  - Aluminium: MPH 110-114-116-120-250
  - Anodized Aluminium: MPH 630-850
  - Painted Aluminium: MPH 660
- Cover
  - Nylon: MPH 110-114-116-120
  - Aluminium: MPH 250
  - Anodized Aluminium: MPH 630
  - Painted Aluminium: MPH 660
  - Steel: MPH 850
- Insert assembly
  - Nylon: MPH 110-114-116-120
  - Aluminium: MPH 250-630-660-850
- Diffuser: Tinned Steel
- Valve: Phosphatized Steel

### Bypass valve

- Opening pressure 175 kPa (1.75 bar) ±10%
- Opening pressure 250 kPa (2.5 bar) ±10%, except for MPH 850

### Filter element type

- Microfibre filter elements - series MR: 10 bar
- Fluid flow through the filter element from IN to OUT

### Seals

- Standard NBR series A
- Optional FPM series V

### Temperature

From -25 °C to +110 °C

### Note

MPH filters are provided for vertical mounting



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series  | Weights [kg] |       |       |       |       | Volumes [dm <sup>3</sup> ] |        |       |       |       |   |   |
|----------------|--------------|-------|-------|-------|-------|----------------------------|--------|-------|-------|-------|---|---|
|                | Length       | 1     | 2     | 3     | 4     | 5                          | Length | 1     | 2     | 3     | 4 | 5 |
| <b>MPH 110</b> | 1.60         | 1.70  | 1.80  | 2.20  | 2.60  | 1.60                       | 1.70   | 1.80  | 2.20  | 2.60  |   |   |
| <b>MPH 114</b> | 1.60         | 1.70  | 1.80  | 2.20  | 2.60  | 1.60                       | 1.70   | 1.80  | 2.20  | 2.60  |   |   |
| <b>MPH 116</b> | 1.60         | 1.70  | 1.80  | 2.20  | 2.60  | 1.60                       | 1.70   | 1.80  | 2.20  | 2.60  |   |   |
| <b>MPH 120</b> | 1.60         | 1.70  | 1.80  | 2.20  | 2.60  | 1.60                       | 1.70   | 1.80  | 2.20  | 2.60  |   |   |
| <b>MPH 250</b> | 3.60         | 3.90  | 4.20  | 5.60  | -     | 4.40                       | 4.40   | 5.40  | 8.00  | -     |   |   |
| <b>MPH 630</b> | 6.50         | 7.00  | 7.40  | 8.50  | 10.50 | 7.30                       | 9.00   | 11.00 | 13.00 | 19.20 |   |   |
| <b>MPH 660</b> | -            | -     | -     | 11.50 | 14.00 | -                          | -      | -     | 14.60 | 21.00 |   |   |
| <b>MPH 850</b> | 32.00        | 35.00 | 38.00 | 42.00 | -     | 13.00                      | 16.50  | 21.00 | 25.00 | -     |   |   |

| Filter series                      | Length | A03  | A06  | A10  | A16  | A25  | M25<br>M60<br>M90 | P10  | P25  |
|------------------------------------|--------|------|------|------|------|------|-------------------|------|------|
| <b>MPH<br/>110-114<br/>116-120</b> | 1      | 26   | 29   | 72   | 79   | 107  | 282               | 164  | 190  |
|                                    | 2      | 43   | 46   | 112  | 114  | 161  | 318               | 164  | 190  |
|                                    | 3      | 64   | 72   | 132  | 156  | 178  | 324               | 219  | 251  |
|                                    | 4      | 90   | 99   | 184  | 198  | 216  | 324               | 266  | 302  |
|                                    | 5      | 117  | 128  | 201  | 219  | 244  | 324               | 282  | 318  |
| <b>MPH 250</b>                     | 1      | 93   | 102  | 210  | 251  | 315  | 1093              | 339  | 383  |
|                                    | 2      | 124  | 151  | 327  | 412  | 421  | 1122              | 460  | 514  |
|                                    | 3      | 189  | 221  | 418  | 445  | 500  | 1137              | 544  | 616  |
|                                    | 4      | 261  | 304  | 592  | 670  | 766  | 1166              | 832  | 923  |
| <b>MPH 630</b>                     | 1      | 160  | 200  | 369  | 423  | 518  | 1894              | 565  | 632  |
|                                    | 2      | 240  | 257  | 571  | 611  | 1045 | 1929              | 1137 | 1285 |
|                                    | 3      | 330  | 374  | 745  | 788  | 1308 | 1938              | 1416 | 1577 |
|                                    | 4      | 374  | 403  | 887  | 1010 | 1348 | 1956              | 1448 | 1612 |
|                                    | 5      | 625  | 698  | 1210 | 1257 | 1723 | 2121              | 1839 | 1929 |
| <b>MPH 660</b>                     | 4      | 370  | 399  | 903  | 1042 | 1460 | 2376              | 1596 | 1830 |
|                                    | 5      | 624  | 699  | 1282 | 1343 | 1997 | 2663              | 2182 | 2331 |
| <b>MPH 850</b>                     | 1      | 775  | 1041 | 1246 | 1568 | 2242 | 3311              | 2371 | 2625 |
|                                    | 2      | 1176 | 1522 | 1682 | 1747 | 2449 | 3378              | 2684 | 2886 |
|                                    | 3      | 1490 | 1914 | 1995 | 2014 | 3035 | 3405              | 3144 | 3220 |
|                                    | 4      | 1668 | 2088 | 2305 | 2363 | 3169 | 3517              | 3272 | 3378 |

### Maximum flow rate for a complete return filter with a pressure drop $\Delta p = 0.5$ bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.




For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.

### Hydraulic symbols

| Filter series  | Style 1 connection | Style 2 connections | Style 3 connections |
|----------------|--------------------|---------------------|---------------------|
| <b>MPH 110</b> |                    | •                   |                     |
| <b>MPH 114</b> | •                  |                     |                     |
| <b>MPH 116</b> | •                  |                     |                     |
| <b>MPH 120</b> |                    |                     | •                   |
| <b>MPH 250</b> | •                  | •                   |                     |
| <b>MPH 630</b> | •                  | •                   |                     |
| <b>MPH 660</b> | •                  |                     |                     |
| <b>MPH 850</b> |                    | •                   |                     |






  

|   |   |   |
|---|---|---|
|  |  |  |
|---|---|---|





# MPH GENERAL INFORMATION

## Pressure drop


### Filter housings $\Delta p$ pressure drop

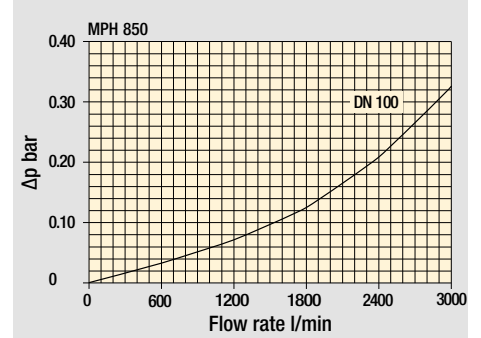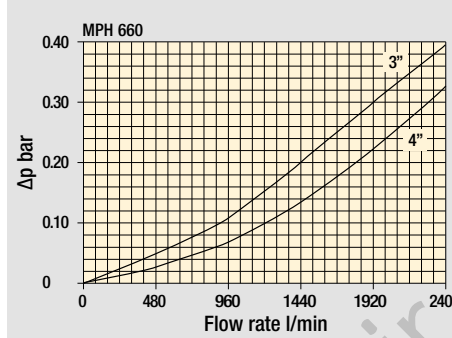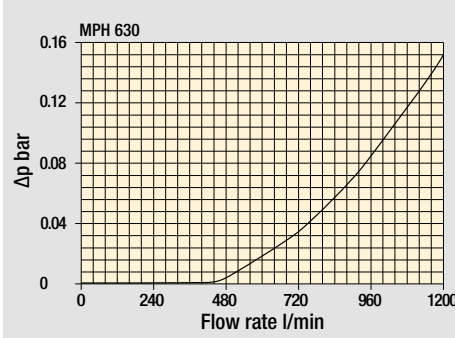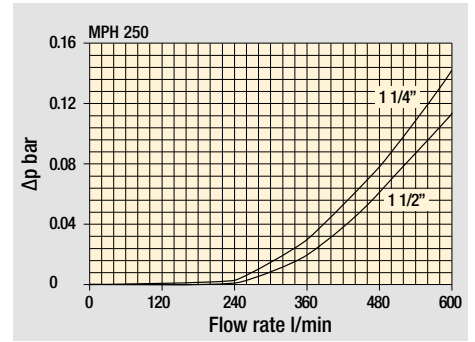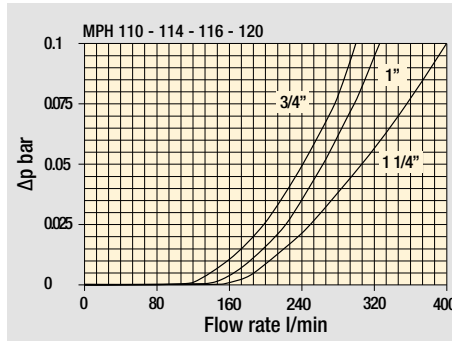

### Bypass valve pressure drop

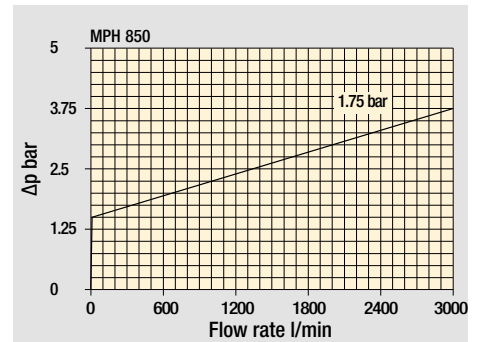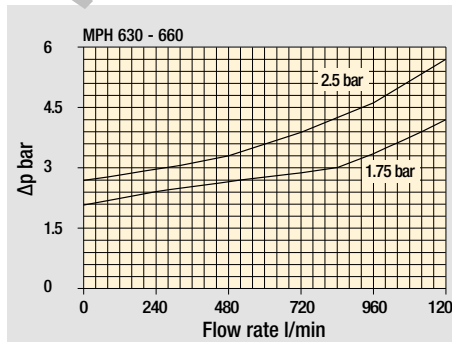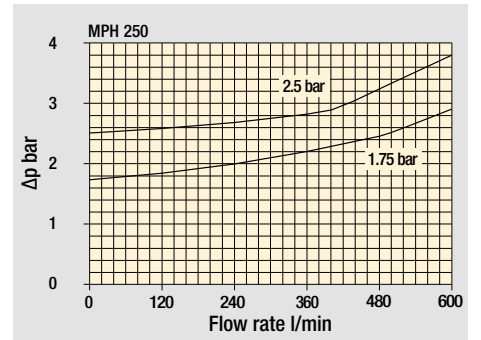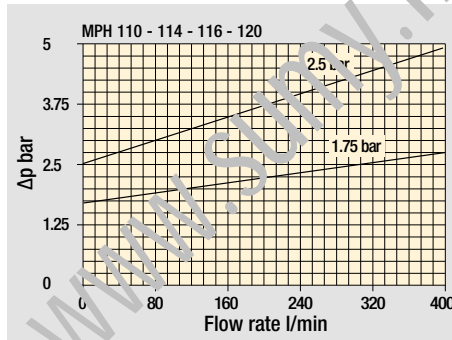

### Air breather pressure drop

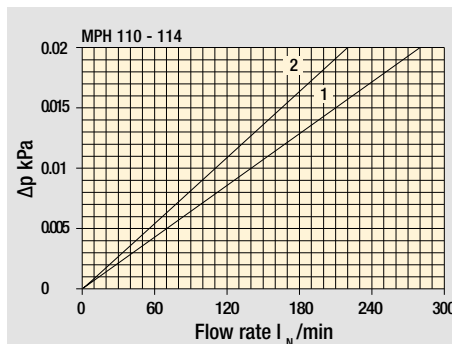

- 1  C With air breather 10  $\mu$ m
- 2  D With anti-splash and SAP50 10  $\mu$ m

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.



[www.sumy.ir](http://www.sumy.ir)

## Designation & Ordering code

### COMPLETE FILTER



|                                     |  |  |     |              |   |                             |  |                        |  |                        |  |
|-------------------------------------|--|--|-----|--------------|---|-----------------------------|--|------------------------|--|------------------------|--|
| Series and size                     |  | Configuration example: MPH110 1 S D S A G1 1 A10 P01   |     |              |   |                             |  |                        |  |                        |  |
| <b>MPH110</b>                       |  |  |     |              |   |                             |  |                        |  |                        |  |
| Length                              |  | 1   2   3   4   5  |     |              |   |                             |  |                        |  |                        |  |
| Bypass valve                        |  | S Without bypass C 1.75 bar E 2.5 bar  |     |              |   |                             |  |                        |  |                        |  |
| Diffuser and magnetic filter        |  | D With diffuser, with magnetic filter<br>F With diffuser, without magnetic filter<br>O Without diffuser, with magnetic filter<br>E Without diffuser, without magnetic filter       |     |              |   |                             |  |                        |  |                        |  |
| Air breather                        |  | S Without air breather<br>C With air breather 10 µm<br>D With anti-splash and air breather SAP050 10 µm<br>P With anti-splash and air breather SAP050 10 µm pressurization 0.5 bar |     |              |   |                             |  |                        |  |                        |  |
| Seals and treatments                |  | Filtration rating  |     |              |   |                             |  |                        |  |                        |  |
|                                     |  | Axx  | Mxx | Pxx          |   |                             |  |                        |  |                        |  |
| A NBR                               |  | •  | •   | •            |   |                             |  |                        |  |                        |  |
| V FPM                               |  | •  | •   | •            |   |                             |  |                        |  |                        |  |
| W NBR head anodized                 |  | •  | •   |              | filter element compatible with fluids HFA-HFB-HFC |                             |  |                        |  |                        |  |
| Z FPM head anodized                 |  | •  | •   |              |   |                             |  |                        |  |                        |  |
| Main Connections                    |  | Aux size 1   |     | Aux size 2   |   | Main Connections            |  | Aux size 1             |  | Aux size 2             |  |
| G1 G 3/4"                           |  | G 3/8"   |     | G 1/2"       |   | G7 SAE 12 - 1 1/16" - 12 UN |  | SAE 6 - 9/16" - 18 UNF |  | SAE 8 - 3/4" - 16 UNF  |  |
| G2 G 1"                             |  |  |     |              |   | G8 SAE 16 - 1 5/16" - 12 UN |  |                        |  |                        |  |
| G3 G 1 1/4"                         |  |  |     |              |   | G9 SAE 20 - 1 5/8" - 12 UN  |  |                        |  |                        |  |
| G4 3/4" NPT                         |  | 3/8" NPT   |     | 1/2" NPT     |   |                             |  |                        |  |                        |  |
| G5 1" NPT                           |  |  |     |              |   |                             |  |                        |  |                        |  |
| G6 1 1/4" NPT                       |  |  |     |              |   |                             |  |                        |  |                        |  |
| Aux connection - see previous table |  |  |     |              |   |                             |  |                        |  |                        |  |
| 0 Not machined                      |  | 1 Aux size 1   |     | 2 Aux size 2 |   |                             |  |                        |  |                        |  |
| Filtration rating (filter media)    |  |  |     |              |   |                             |  |                        |  |                        |  |
| A03 Inorganic microfiber 3 µm       |  | M25 Wire mesh 25 µm  |     |              |   |                             |  |                        |  |                        |  |
| A06 Inorganic microfiber 6 µm       |  | M60 Wire mesh 60 µm  |     |              |   |                             |  |                        |  |                        |  |
| A10 Inorganic microfiber 10 µm      |  | M90 Wire mesh 90 µm  |     |              |   |                             |  |                        |  |                        |  |
| A16 Inorganic microfiber 16 µm      |  | P10 Resin impregnated paper 10 µm  |     |              |   |                             |  |                        |  |                        |  |
| A25 Inorganic microfiber 25 µm      |  | P25 Resin impregnated paper 25 µm  |     |              |   |                             |  |                        |  |                        |  |
|                                     |  |  |     |              |   |                             |  |                        |  | Execution              |  |
|                                     |  |  |     |              |   |                             |  |                        |  | P01 MP Filtri standard |  |
|                                     |  |  |     |              |   |                             |  |                        |  | Pxx Customized         |  |

### FILTER ELEMENT

|                                  |  |  |  |  |  |  |  |  |  |                        |  |
|----------------------------------|--|--|--|--|--|--|--|--|--|------------------------|--|
| Element series and size          |  | Configuration example: MR100 1 A10 A P01 |  |  |  |  |  |  |  |                        |  |
| <b>MR100</b>                     |  |  |  |  |  |  |  |  |  |                        |  |
| Element length                   |  | 1   2   3   4   5                        |  |  |  |  |  |  |  |                        |  |
| Filtration rating (filter media) |  |  |  |  |  |  |  |  |  |                        |  |
| A03 Inorganic microfiber 3 µm    |  | M25 Wire mesh 25 µm                      |  |  |  |  |  |  |  |                        |  |
| A06 Inorganic microfiber 6 µm    |  | M60 Wire mesh 60 µm                      |  |  |  |  |  |  |  |                        |  |
| A10 Inorganic microfiber 10 µm   |  | M90 Wire mesh 90 µm                      |  |  |  |  |  |  |  |                        |  |
| A16 Inorganic microfiber 16 µm   |  | P10 Resin impregnated paper 10 µm        |  |  |  |  |  |  |  |                        |  |
| A25 Inorganic microfiber 25 µm   |  | P25 Resin impregnated paper 25 µm        |  |  |  |  |  |  |  |                        |  |
|                                  |  |  |  |  |  |  |  |  |  | Seals                  |  |
|                                  |  |  |  |  |  |  |  |  |  | A NBR                  |  |
|                                  |  |  |  |  |  |  |  |  |  | V FPM                  |  |
|                                  |  |  |  |  |  |  |  |  |  | Execution              |  |
|                                  |  |  |  |  |  |  |  |  |  | P01 MP Filtri standard |  |
|                                  |  |  |  |  |  |  |  |  |  | Pxx Customized         |  |

### ACCESSORIES

|                     |  |      |     |  |         |
|---------------------|--|------|-----|--|---------|
| Indicators          |  | page |     | page                                   |         |
| BVA                 | Axial pressure gauge                           | 240  | BEA | Electrical pressure indicator          | 239     |
| BVR                 | Radial pressure gauge                          | 240  | BEM | Electrical pressure indicator          | 239     |
| BVP                 | Visual pressure indicator with automatic reset | 241  | BLA | Electrical / visual pressure indicator | 239-240 |
| BVQ                 | Visual pressure indicator with manual reset    | 241  |     |  |         |
| Additional features |  | page |     |  |         |
| DPT                 | Dipstick                                       | 249  |     |  |         |

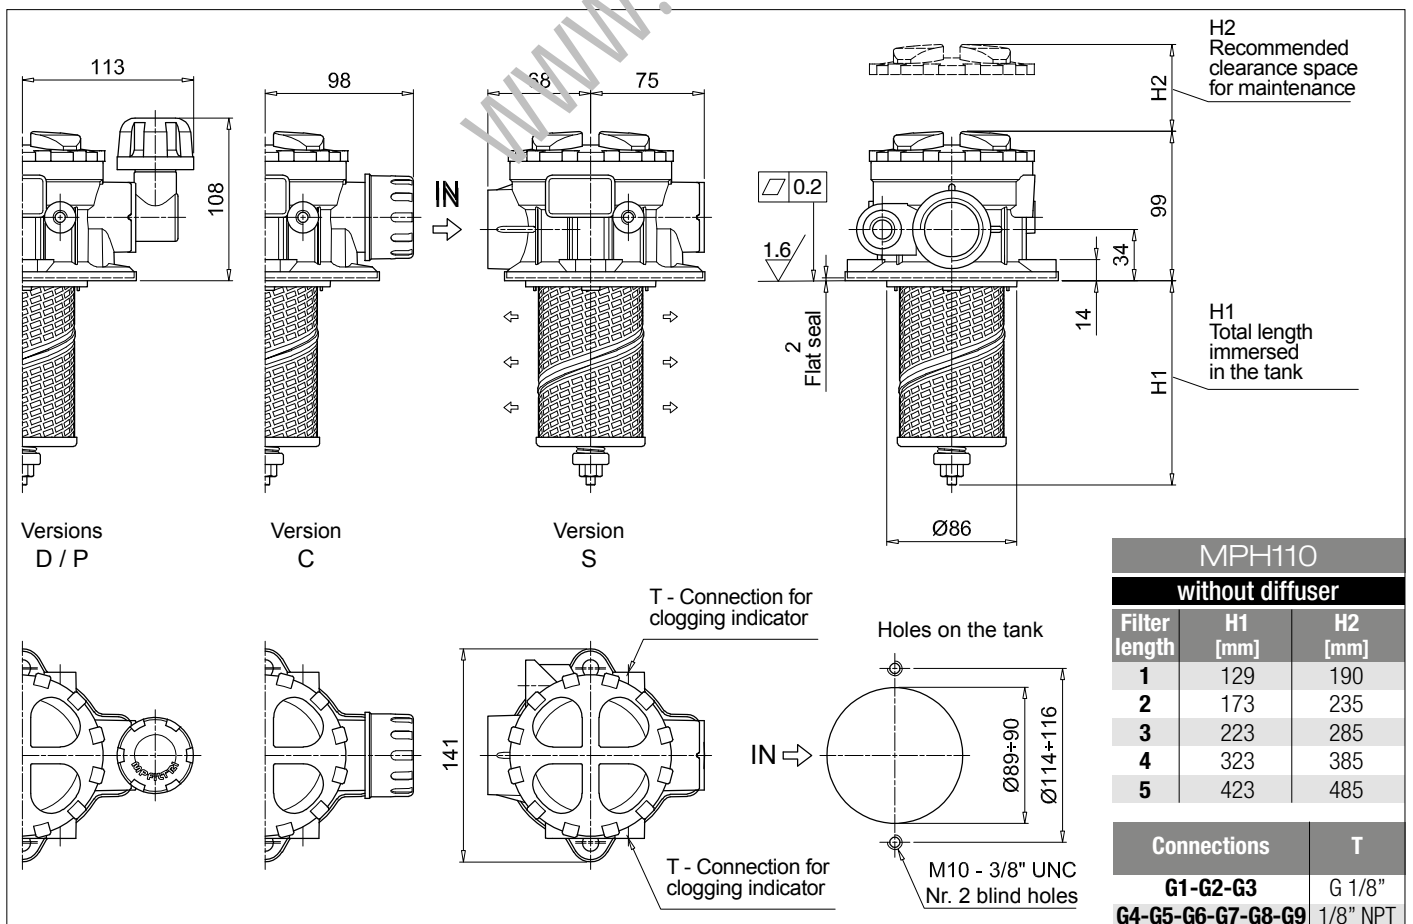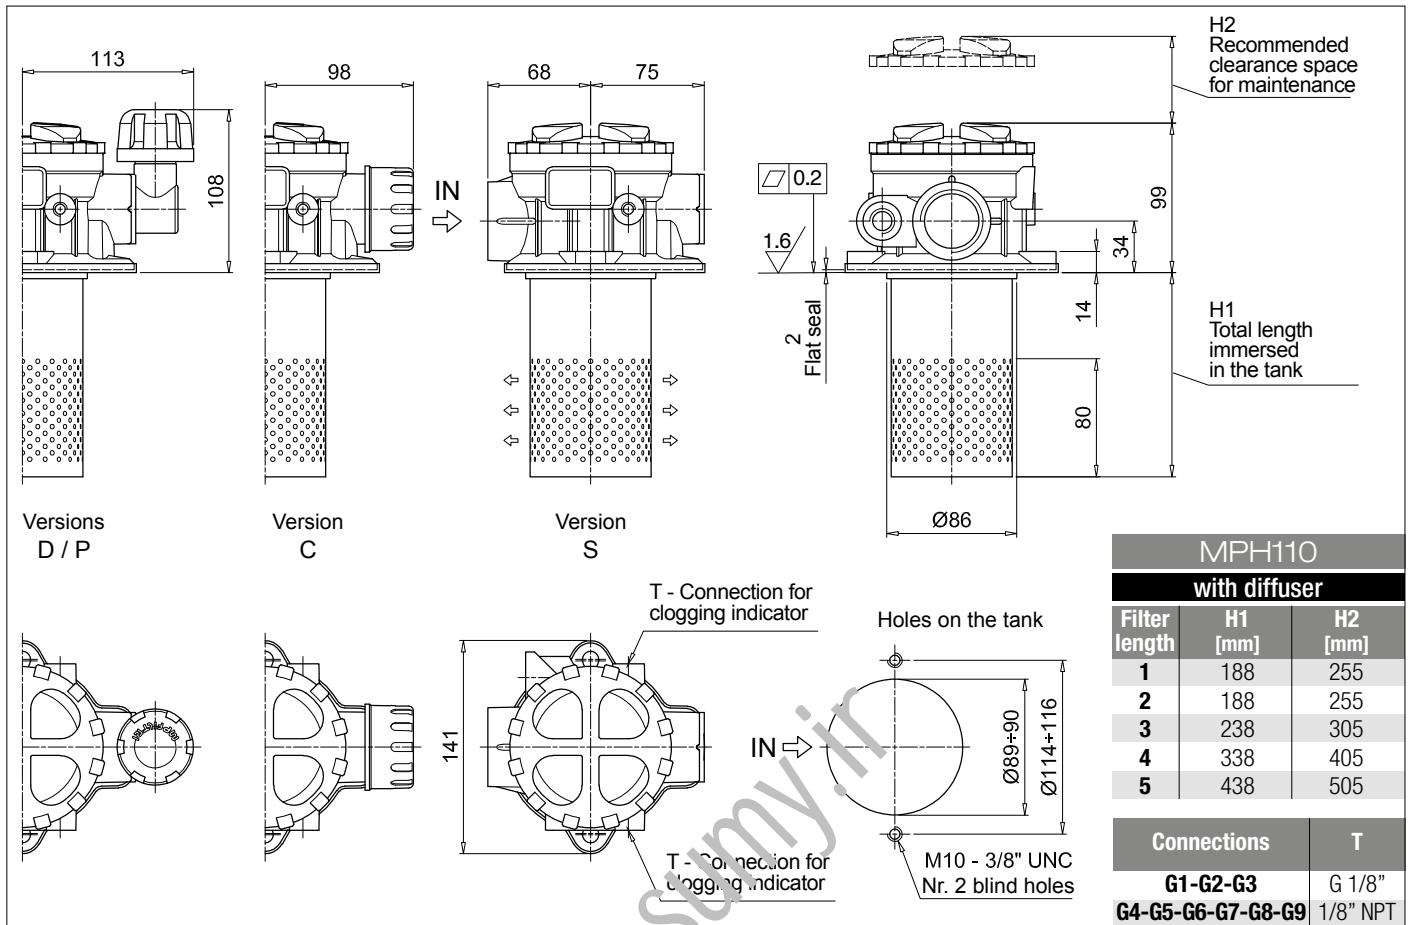

## Designation & Ordering code

### COMPLETE FILTER

Series and size **MPH114** Configuration example: **MPH114** **3** **C** **E** **C** **Z** **G6** **M60** **P01**

**Length**  
1 | 2 | **3** | 4 | 5

**Bypass valve**  
**S** Without bypass | **C** 1.75 bar | **E** 2.5 bar

**Diffuser and magnetic filter**  
**D** With diffuser, with magnetic filter  
**F** With diffuser, without magnetic filter  
**O** Without diffuser, with magnetic filter  
**E** Without diffuser, without magnetic filter

**Air breather**  
**S** Without air breather  
**C** With air breather 10 µm  
**D** With anti-splash and air breather SAP050 10 µm  
**P** With anti-splash and air breather SAP050 10 µm pressurization 0.5 bar

| Seals and treatments       | Filtration rating |     |     |
|----------------------------|-------------------|-----|-----|
|                            | Axx               | Mxx | Pxx |
| <b>A</b> NBR               | •                 | •   | •   |
| <b>V</b> FPM               | •                 | •   | •   |
| <b>W</b> NBR head anodized | •                 | •   |     |
| <b>Z</b> FPM head anodized | •                 | •   |     |

**Connections**

|                    |                                    |
|--------------------|------------------------------------|
| <b>G1</b> G 3/4"   | <b>G6</b> 1 1/4" NPT               |
| <b>G2</b> G 1"     | <b>G7</b> SAE 12 - 1 1/16" - 12 UN |
| <b>G3</b> G 1 1/4" | <b>G8</b> SAE 16 - 1 5/16" - 12 UN |
| <b>G4</b> 3/4" NPT | <b>G9</b> SAE 20 - 1 5/8" - 12 UN  |
| <b>G5</b> 1" NPT   |                                    |

**Filtration rating (filter media)**

|                                       |  |
|---------------------------------------|--|
| <b>A03</b> Inorganic microfiber 3 µm  | <b>M25</b> Wire mesh 25 µm               |
| <b>A06</b> Inorganic microfiber 6 µm  | <b>M60</b> Wire mesh 60 µm               |
| <b>A10</b> Inorganic microfiber 10 µm | <b>M90</b> Wire mesh 90 µm               |
| <b>A16</b> Inorganic microfiber 16 µm | <b>P10</b> Resin impregnated paper 10 µm |
| <b>A25</b> Inorganic microfiber 25 µm | <b>P25</b> Resin impregnated paper 25 µm |

**Execution**  
**P01** MP Filtri standard  
**Pxx** Customized

### FILTER ELEMENT

Element series and size **MR100** Configuration example: **MR100** **3** **M60** **V** **P01**

**Element length**  
1 | 2 | **3** | 4 | 5

**Filtration rating (filter media)**



|                                       |  |
|---------------------------------------|--|
| <b>A03</b> Inorganic microfiber 3 µm  | <b>M25</b> Wire mesh 25 µm               |
| <b>A06</b> Inorganic microfiber 6 µm  | <b>M60</b> Wire mesh 60 µm               |
| <b>A10</b> Inorganic microfiber 10 µm | <b>M90</b> Wire mesh 90 µm               |
| <b>A16</b> Inorganic microfiber 16 µm | <b>P10</b> Resin impregnated paper 10 µm |
| <b>A25</b> Inorganic microfiber 25 µm | <b>P25</b> Resin impregnated paper 25 µm |

**Seals**  
**A** NBR  
**V** FPM

**Execution**  
**P01** MP Filtri standard  
**Pxx** Customized

### ACCESSORIES

| Indicators  | page |   | page    |
|---|------|---|---------|
| <b>BVA</b> Axial pressure gauge                           | 240  | <b>BEA</b> Electrical pressure indicator          | 239     |
| <b>BVR</b> Radial pressure gauge                          | 240  | <b>BEM</b> Electrical pressure indicator          | 239     |
| <b>BVP</b> Visual pressure indicator with automatic reset | 241  | <b>BLA</b> Electrical / visual pressure indicator | 239-240 |
| <b>BVQ</b> Visual pressure indicator with manual reset    | 241  |   |         |
| Additional features                                       | page |   |         |
| <b>DPT</b> Dipstick                                       | 249  |   |         |

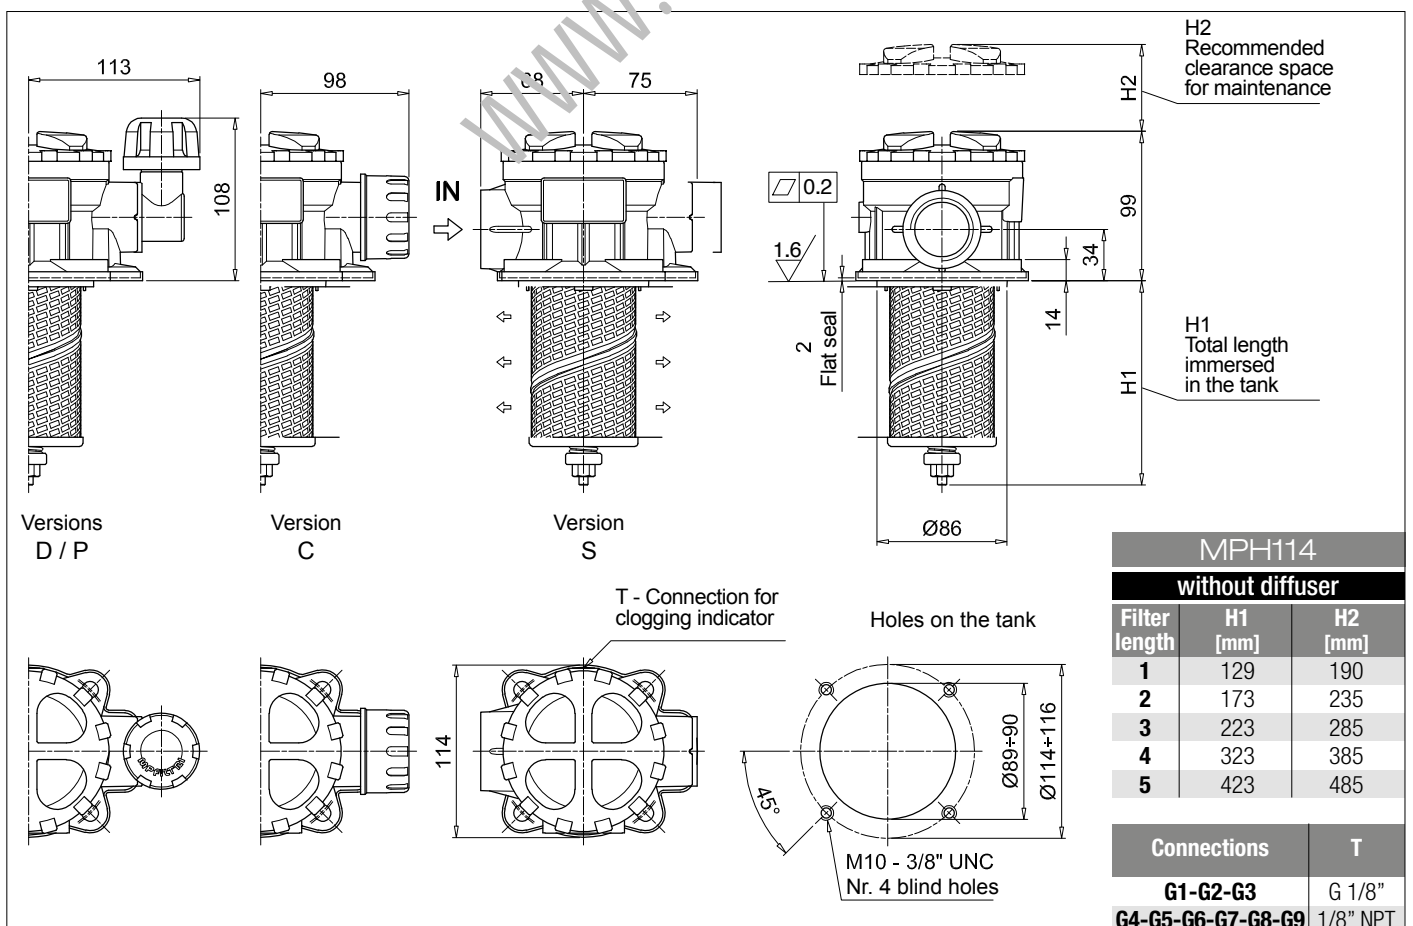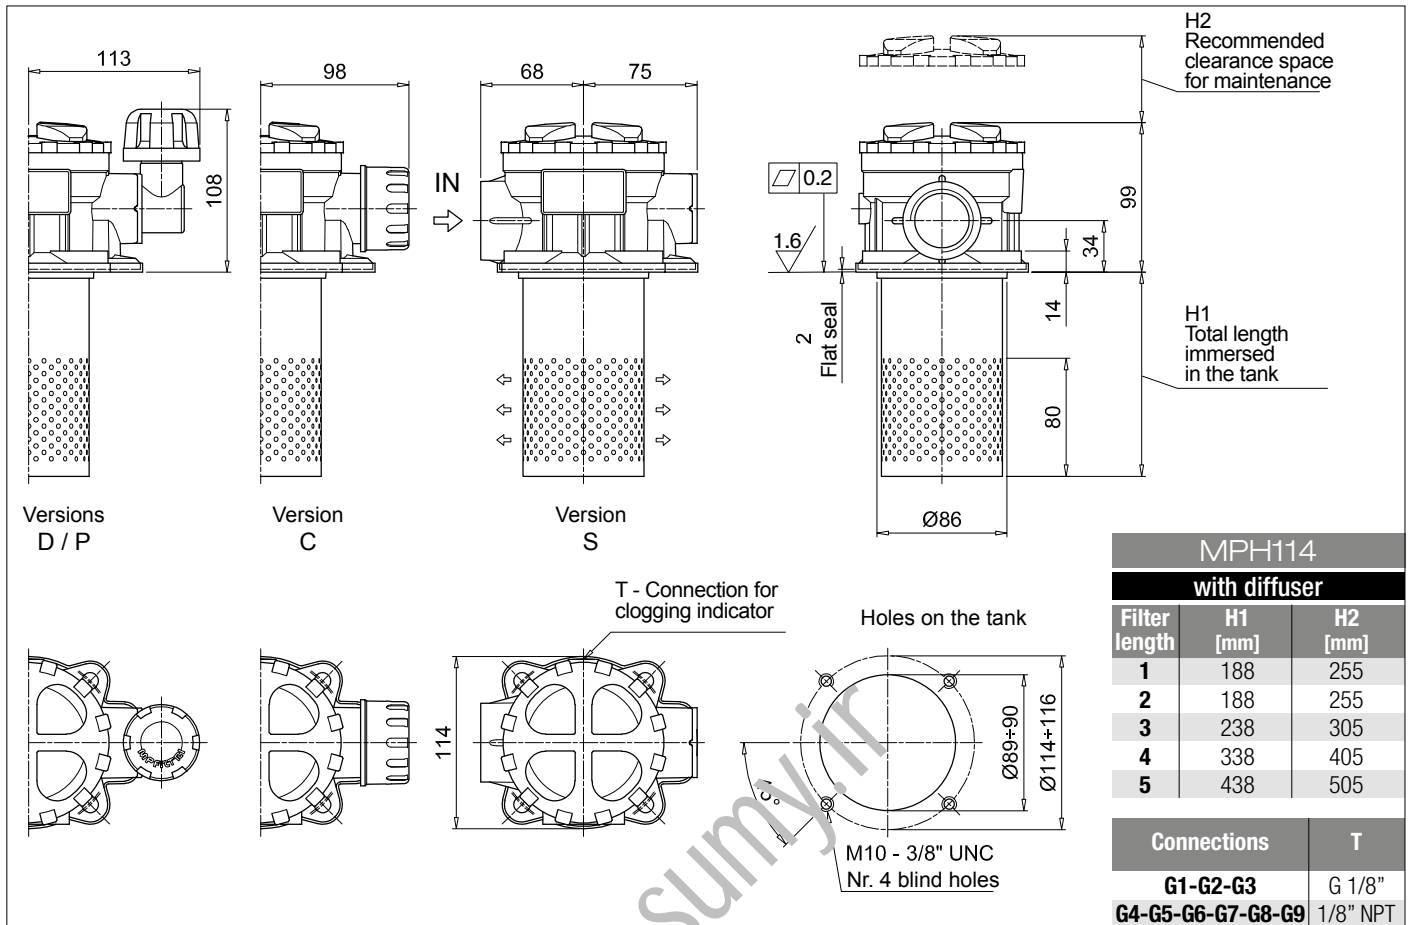

## Designation & Ordering code

### COMPLETE FILTER



|   |   |            |                               |   |  |  |  |  |  |  |
|---|---|------------|-------------------------------|---|--|--|--|--|--|--|
| <b>Series and size</b><br><b>MPH116</b>   | Configuration example: <b>MPH116</b>   <b>5</b>   <b>S</b>   <b>D</b>   <b>S</b>   <b>A</b>   <b>G1</b>   <b>A10</b>   <b>P01</b> |            |                               |   |  |  |  |  |  |  |
| <b>Length</b><br><b>1</b>   <b>2</b>   <b>3</b>   <b>4</b>   <b>5</b>   |   |            |                               |   |  |  |  |  |  |  |
| <b>Bypass valve</b><br><b>S</b> Without bypass   <b>C</b> 1.75 bar   <b>E</b> 2.5 bar   |   |            |                               |   |  |  |  |  |  |  |
| <b>Diffuser and magnetic filter</b><br><b>D</b> With diffuser, with magnetic filter<br><b>F</b> With diffuser, without magnetic filter<br><b>O</b> Without diffuser, with magnetic filter<br><b>E</b> Without diffuser, without magnetic filter |   |            |                               |   |  |  |  |  |  |  |
| <b>Air breather</b><br><b>S</b> Without air breather  |   |            |                               |   |  |  |  |  |  |  |
| <b>Seals and treatments</b>   | Filtration rating   |            |                               |   |  |  |  |  |  |  |
|   | <b>Axx</b>  | <b>Mxx</b> | <b>Pxx</b>                    |   |  |  |  |  |  |  |
| <b>A</b> NBR  | •   | •          | •                             |   |  |  |  |  |  |  |
| <b>V</b> FPM  | •   | •          | •                             |   |  |  |  |  |  |  |
| <b>W</b> NBR head anodized  | •   | •          |                               | filter element compatible with fluids HFA-HFB-HFC |  |  |  |  |  |  |
| <b>Z</b> FPM head anodized  | •   | •          |                               |   |  |  |  |  |  |  |
| Flat seal on the head on request  |   |            |                               |   |  |  |  |  |  |  |
| <b>Connections</b>  |   |            |                               |   |  |  |  |  |  |  |
| <b>G1</b> G 3/4"  | <b>G6</b> 1 1/4" NPT  |            |                               |   |  |  |  |  |  |  |
| <b>G2</b> G 1"  | <b>G7</b> SAE 12 - 1 1/16" - 12 UN  |            |                               |   |  |  |  |  |  |  |
| <b>G3</b> G 1 1/4"  | <b>G8</b> SAE 16 - 1 5/16" - 12 UN  |            |                               |   |  |  |  |  |  |  |
| <b>G4</b> 3/4" NPT  | <b>G9</b> SAE 20 - 1 5/8" - 12 UN   |            |                               |   |  |  |  |  |  |  |
| <b>G5</b> 1" NPT  |   |            |                               |   |  |  |  |  |  |  |
| <b>Filtration rating (filter media)</b>   |   |            |                               |   |  |  |  |  |  |  |
| <b>A03</b> Inorganic microfiber 3 µm  | <b>M25</b> Wire mesh 25 µm  |            |                               |   |  |  |  |  |  |  |
| <b>A06</b> Inorganic microfiber 6 µm  | <b>M60</b> Wire mesh 60 µm  |            |                               |   |  |  |  |  |  |  |
| <b>A10</b> Inorganic microfiber 10 µm   | <b>M90</b> Wire mesh 90 µm  |            |                               |   |  |  |  |  |  |  |
| <b>A16</b> Inorganic microfiber 16 µm   | <b>P10</b> Resin impregnated paper 10 µm  |            |                               |   |  |  |  |  |  |  |
| <b>A25</b> Inorganic microfiber 25 µm   | <b>P25</b> Resin impregnated paper 25 µm  |            |                               |   |  |  |  |  |  |  |
|   |   |            | <b>Execution</b>              |   |  |  |  |  |  |  |
|   |   |            | <b>P01</b> MP Filtri standard |   |  |  |  |  |  |  |
|   |   |            | <b>Pxx</b> Customized         |   |  |  |  |  |  |  |

### FILTER ELEMENT

|   |   |              |  |                               |  |
|---|---|--------------|--|-------------------------------|--|
| <b>Element series and size</b><br><b>MR100</b>                                | Configuration example: <b>MR100</b>   <b>5</b>   <b>A10</b>   <b>A</b>   <b>P01</b> |              |  |                               |  |
| <b>Element length</b><br><b>1</b>   <b>2</b>   <b>3</b>   <b>4</b>   <b>5</b> |   |              |  |                               |  |
| <b>Filtration rating (filter media)</b>                                       |   |              |  |                               |  |
| <b>A03</b> Inorganic microfiber 3 µm  | <b>M25</b> Wire mesh 25 µm  |              |  |                               |  |
| <b>A06</b> Inorganic microfiber 6 µm  | <b>M60</b> Wire mesh 60 µm  |              |  |                               |  |
| <b>A10</b> Inorganic microfiber 10 µm   | <b>M90</b> Wire mesh 90 µm  |              |  |                               |  |
| <b>A16</b> Inorganic microfiber 16 µm   | <b>P10</b> Resin impregnated paper 10 µm  |              |  |                               |  |
| <b>A25</b> Inorganic microfiber 25 µm   | <b>P25</b> Resin impregnated paper 25 µm  |              |  |                               |  |
|   |   | <b>Seals</b> |  | <b>Execution</b>              |  |
|   |   | <b>A</b> NBR |  | <b>P01</b> MP Filtri standard |  |
|   |   | <b>V</b> FPM |  | <b>Pxx</b> Customized         |  |

### ACCESSORIES

|   |      |   |         |
|---|------|---|---------|
| <b>Indicators</b>   | page |   | page    |
| <b>BVA</b> Axial pressure gauge                           | 240  | <b>BEA</b> Electrical pressure indicator          | 239     |
| <b>BVR</b> Radial pressure gauge                          | 240  | <b>BEM</b> Electrical pressure indicator          | 239     |
| <b>BVP</b> Visual pressure indicator with automatic reset | 241  | <b>BLA</b> Electrical / visual pressure indicator | 239-240 |
| <b>BVQ</b> Visual pressure indicator with manual reset    | 241  |   |         |
| <b>Additional features</b>                                | page |   |         |
| <b>DPT</b> Dipstick                                       | 249  |   |         |

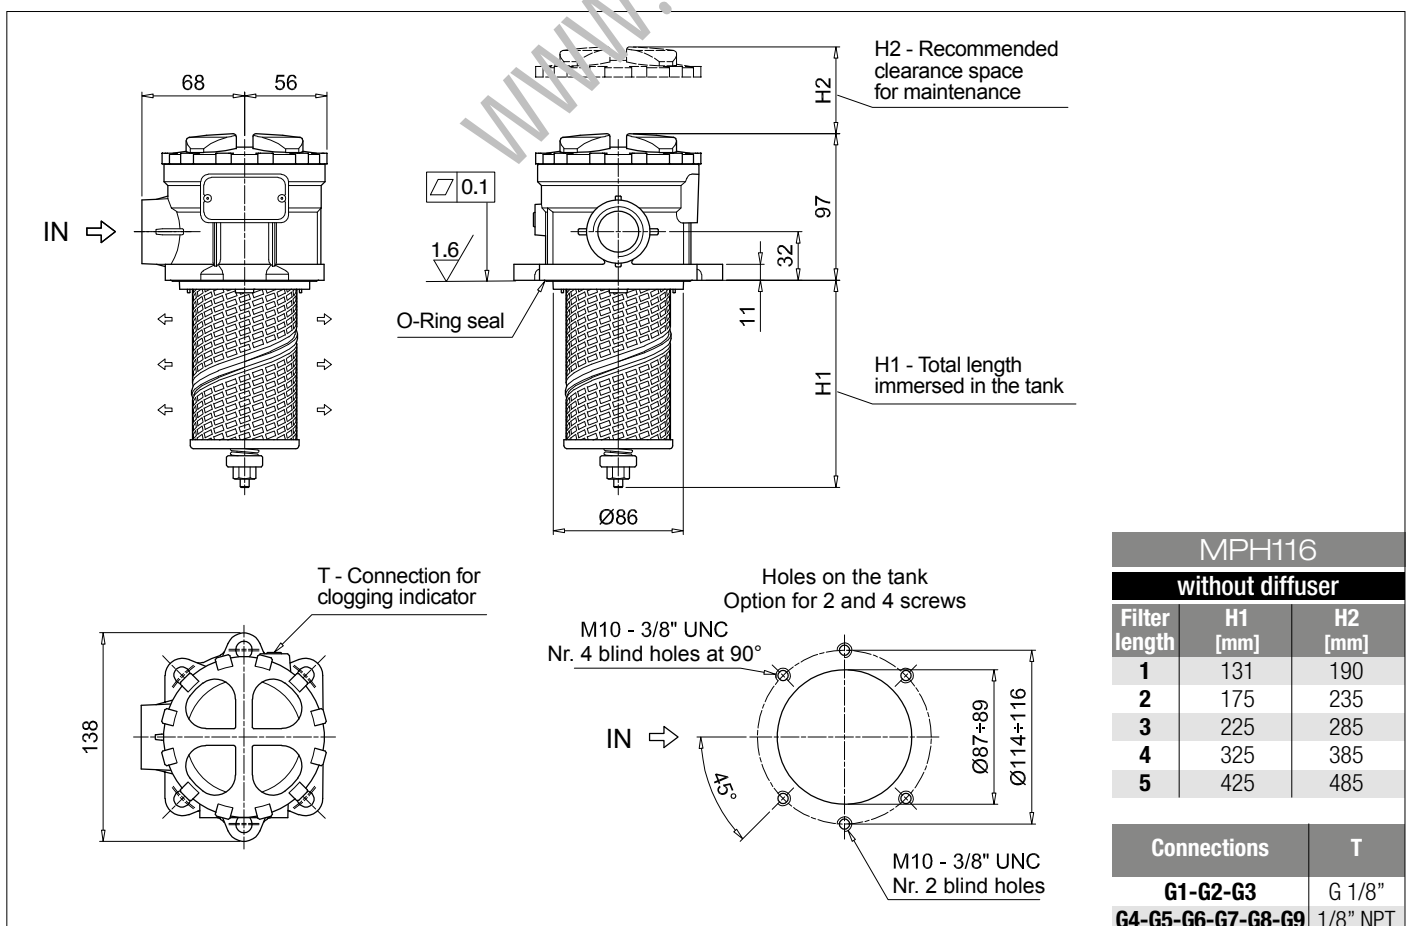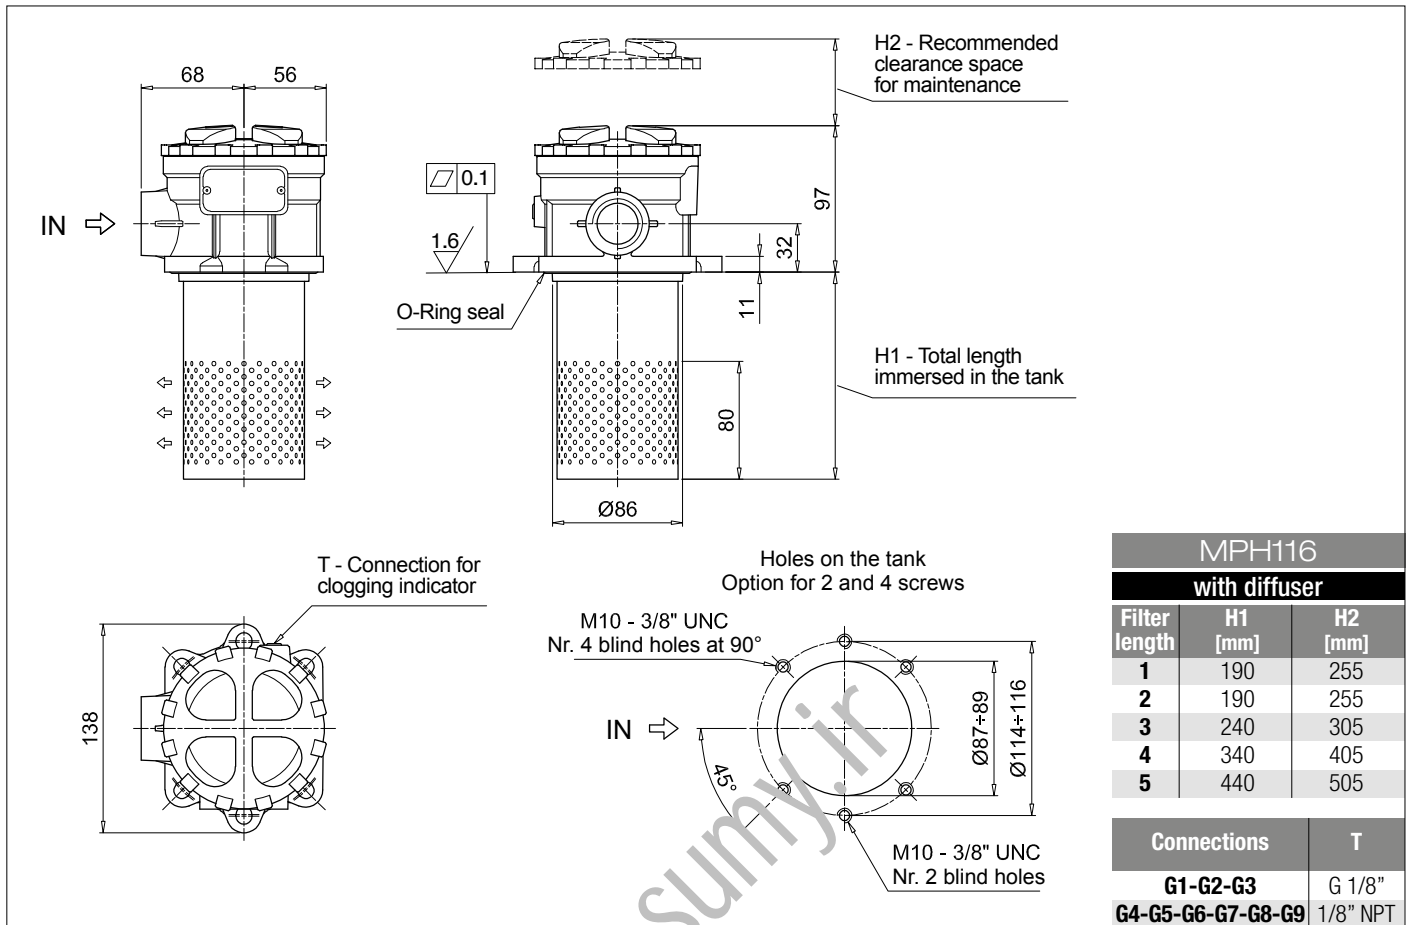

## Designation & Ordering code

### COMPLETE FILTER

Configuration example: **MPH120** | **1** | **S** | **D** | **A** | **G1** | **1** | **A10** | **P01**

**Series and size**  
**MPH120**

**Length**  
**1** | **2** | **3** | **4** | **5** |

**Bypass valve**  
**S** Without bypass | **C** 1.75 bar | **E** 2.5 bar

**Diffuser and magnetic filter**  
**D** With diffuser, with magnetic filter  
**F** With diffuser, without magnetic filter  
**O** Without diffuser, with magnetic filter  
**E** Without diffuser, without magnetic filter

| Seals and treatments       | Filtration rating |     |     |
|----------------------------|-------------------|-----|-----|
|                            | Axx               | Mxx | Pxx |
| <b>A</b> NBR               | •                 | •   | •   |
| <b>V</b> FPM               | •                 | •   | •   |
| <b>W</b> NBR head anodized | •                 | •   |     |
| <b>Z</b> FPM head anodized | •                 | •   |     |

| Main Connections                   | Rear connections         | Aux size 1             | Aux size 2            |
|------------------------------------|--------------------------|------------------------|-----------------------|
| <b>G1</b> G 3/4"                   | G 3/4"                   |                        |                       |
| <b>G2</b> G 1"                     | G 1"                     | G 3/8"                 | G 1/2"                |
| <b>G3</b> G 1 1/4"                 | G 3/4"                   |                        |                       |
| <b>G4</b> 3/4" NPT                 | 3/4" NPT                 |                        |                       |
| <b>G5</b> 1" NPT                   | 1" NPT                   | 3/8" NPT               | 1/2" NPT              |
| <b>G6</b> 1 1/4" NPT               | 3/4" NPT                 |                        |                       |
| <b>G7</b> SAE 12 - 1 1/16" - 12 UN | SAE 12 - 1 1/16" - 12 UN |                        |                       |
| <b>G8</b> SAE 16 - 1 5/16" - 12 UN | SAE 16 - 1 5/16" - 12 UN | SAE 6 - 9/16" - 18 UNF | SAE 6 - 3/4" - 16 UNF |
| <b>G9</b> SAE 20 - 1 5/8" - 12 UN  | SAE 12 - 1 1/16" - 12 UN |                        |                       |

**Aux connection** - see previous table  
**0** Not machined | **1** Aux size 1 | **2** Aux size 2

| Filtration rating (filter media)      |  |
|---------------------------------------|--|
| <b>A03</b> Inorganic microfiber 3 µm  | <b>M25</b> Wire mesh 25 µm               |
| <b>A06</b> Inorganic microfiber 6 µm  | <b>M60</b> Wire mesh 60 µm               |
| <b>A10</b> Inorganic microfiber 10 µm | <b>M90</b> Wire mesh 90 µm               |
| <b>A16</b> Inorganic microfiber 16 µm | <b>P10</b> Resin impregnated paper 10 µm |
| <b>A25</b> Inorganic microfiber 25 µm | <b>P25</b> Resin impregnated paper 25 µm |

| Execution                     |  |
|-------------------------------|--|
| <b>P01</b> MP Filtri standard |  |
| <b>Pxx</b> Customized         |  |

### FILTER ELEMENT

Configuration example: **MR100** | **1** | **A10** | **A** | **P01**

**Element series and size**  
**MR100**

**Element length**  
**1** | **2** | **3** | **4** | **5** |

| Filtration rating (filter media)      |  |
|---------------------------------------|--|
| <b>A03</b> Inorganic microfiber 3 µm  | <b>M25</b> Wire mesh 25 µm               |
| <b>A06</b> Inorganic microfiber 6 µm  | <b>M60</b> Wire mesh 60 µm               |
| <b>A10</b> Inorganic microfiber 10 µm | <b>M90</b> Wire mesh 90 µm               |
| <b>A16</b> Inorganic microfiber 16 µm | <b>P10</b> Resin impregnated paper 10 µm |
| <b>A25</b> Inorganic microfiber 25 µm | <b>P25</b> Resin impregnated paper 25 µm |



| Seals        |  |
|--------------|--|
| <b>A</b> NBR |  |
| <b>V</b> FPM |  |

| Execution                     |  |
|-------------------------------|--|
| <b>P01</b> MP Filtri standard |  |
| <b>Pxx</b> Customized         |  |



### ACCESSORIES

| Indicators  | page |   | page    |
|---|------|---|---------|
| <b>BVA</b> Axial pressure gauge                           | 240  | <b>BEA</b> Electrical pressure indicator          | 239     |
| <b>BVR</b> Radial pressure gauge                          | 240  | <b>BEM</b> Electrical pressure indicator          | 239     |
| <b>BVP</b> Visual pressure indicator with automatic reset | 241  | <b>BLA</b> Electrical / visual pressure indicator | 239-240 |
| <b>BVQ</b> Visual pressure indicator with manual reset    | 241  |   |         |
| Additional features                                       |      | page  |         |
| <b>DPT</b> Dipstick                                       | 249  |   |         |



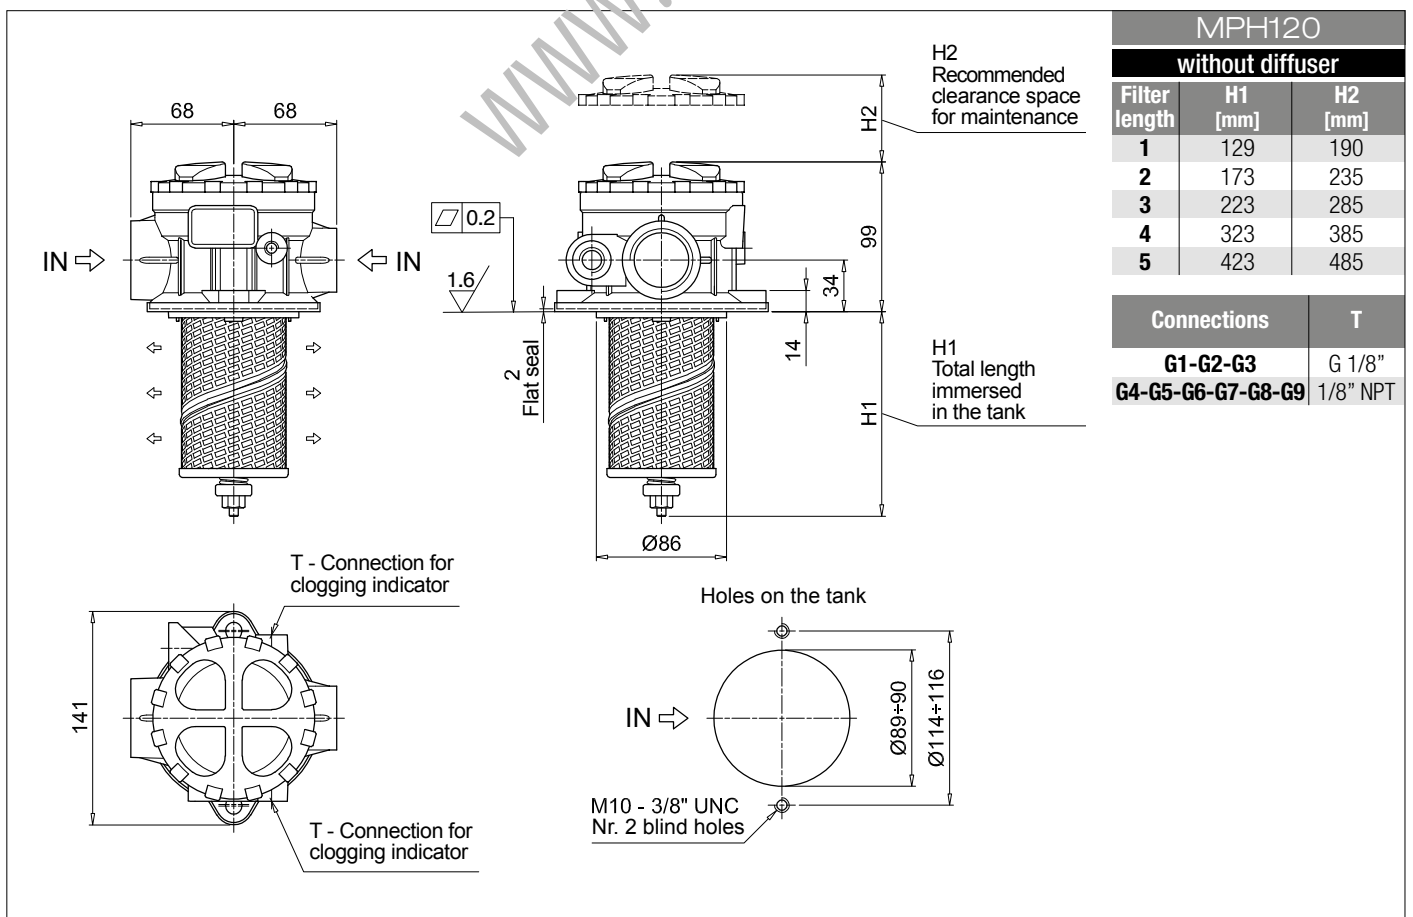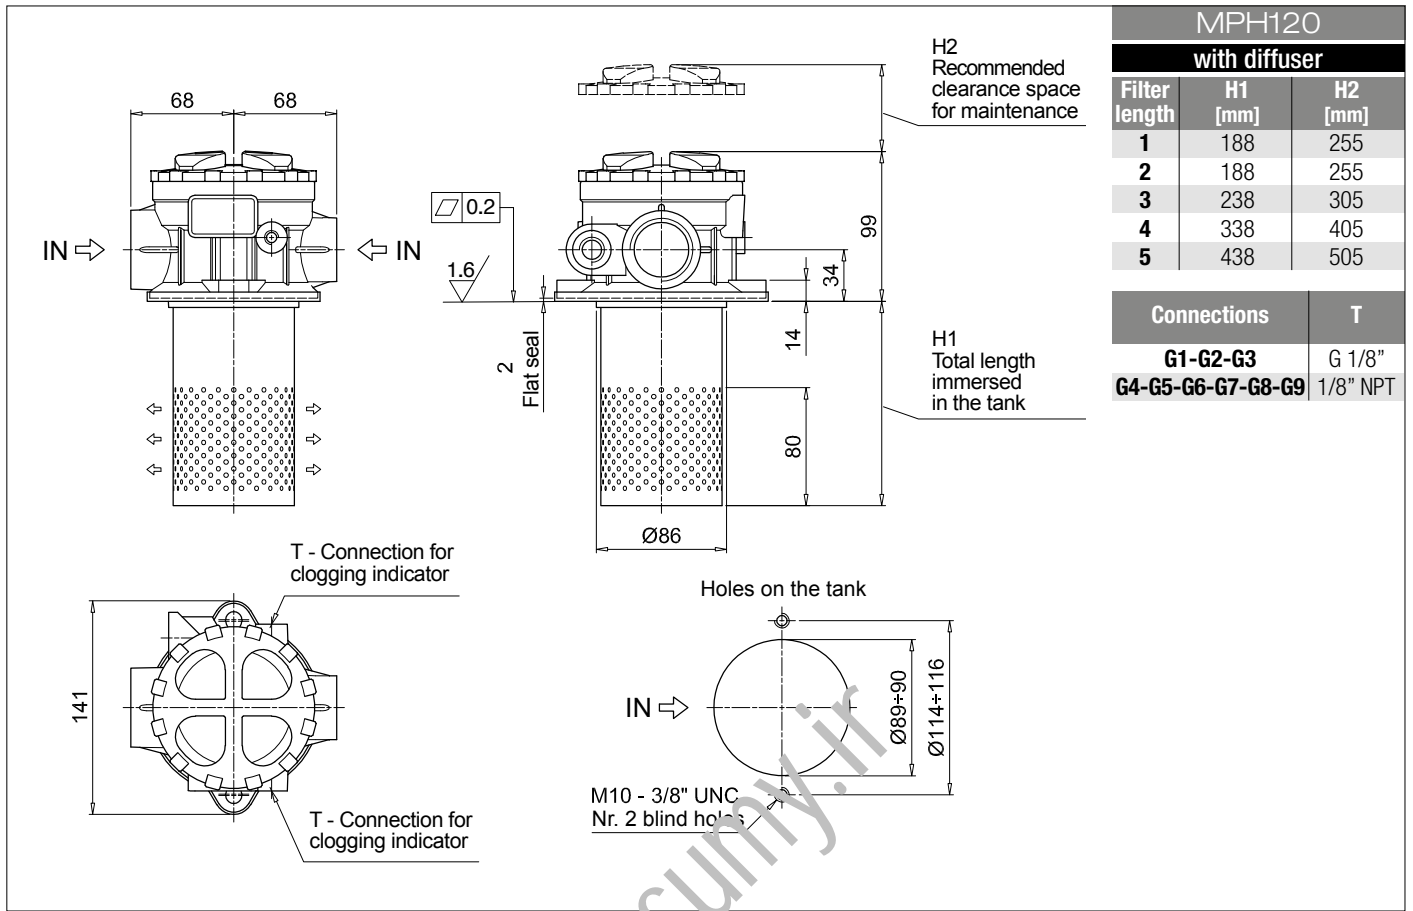



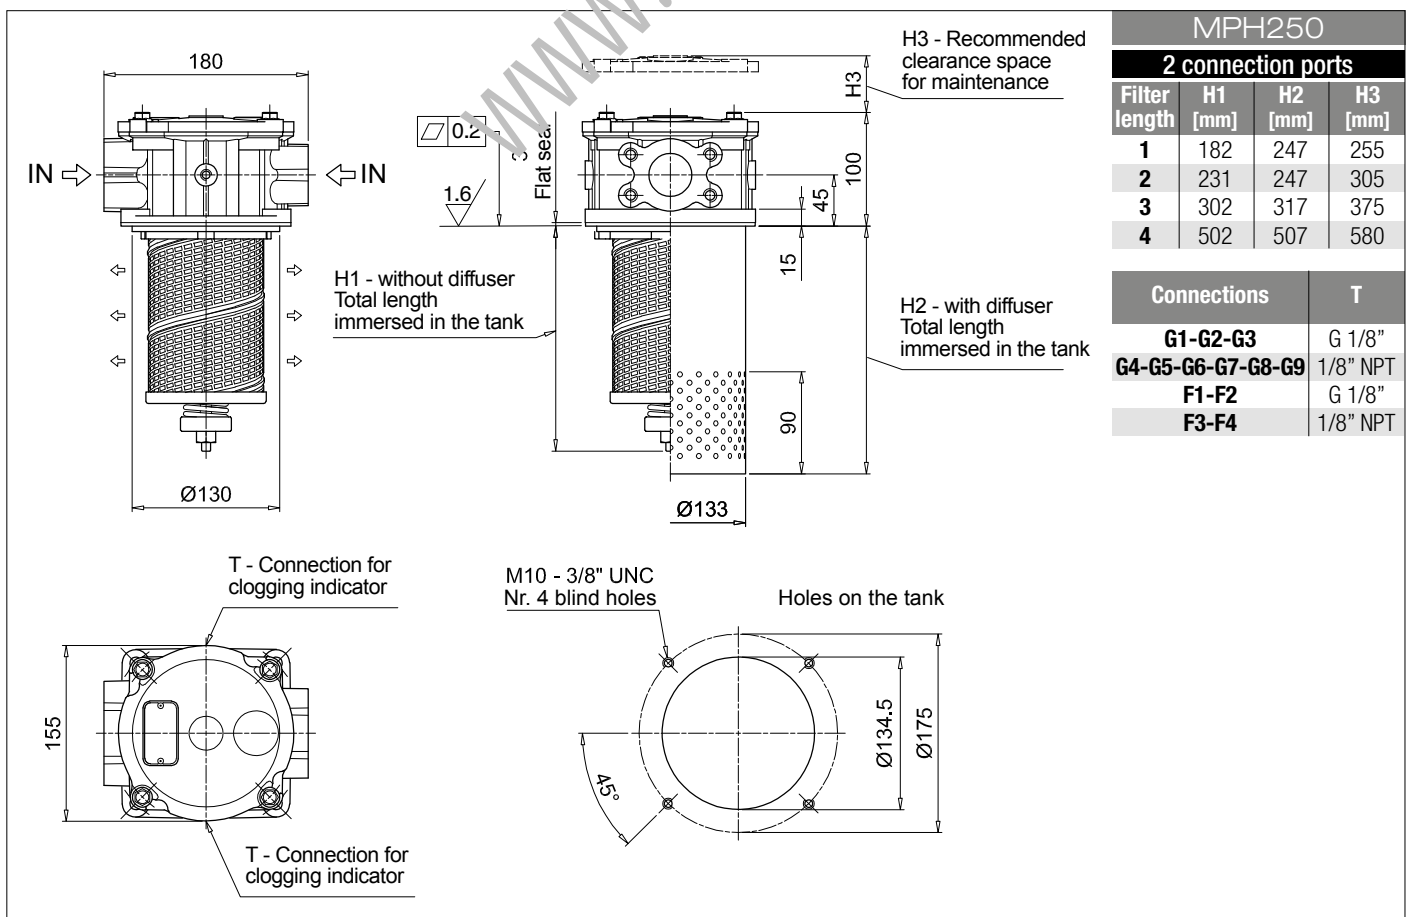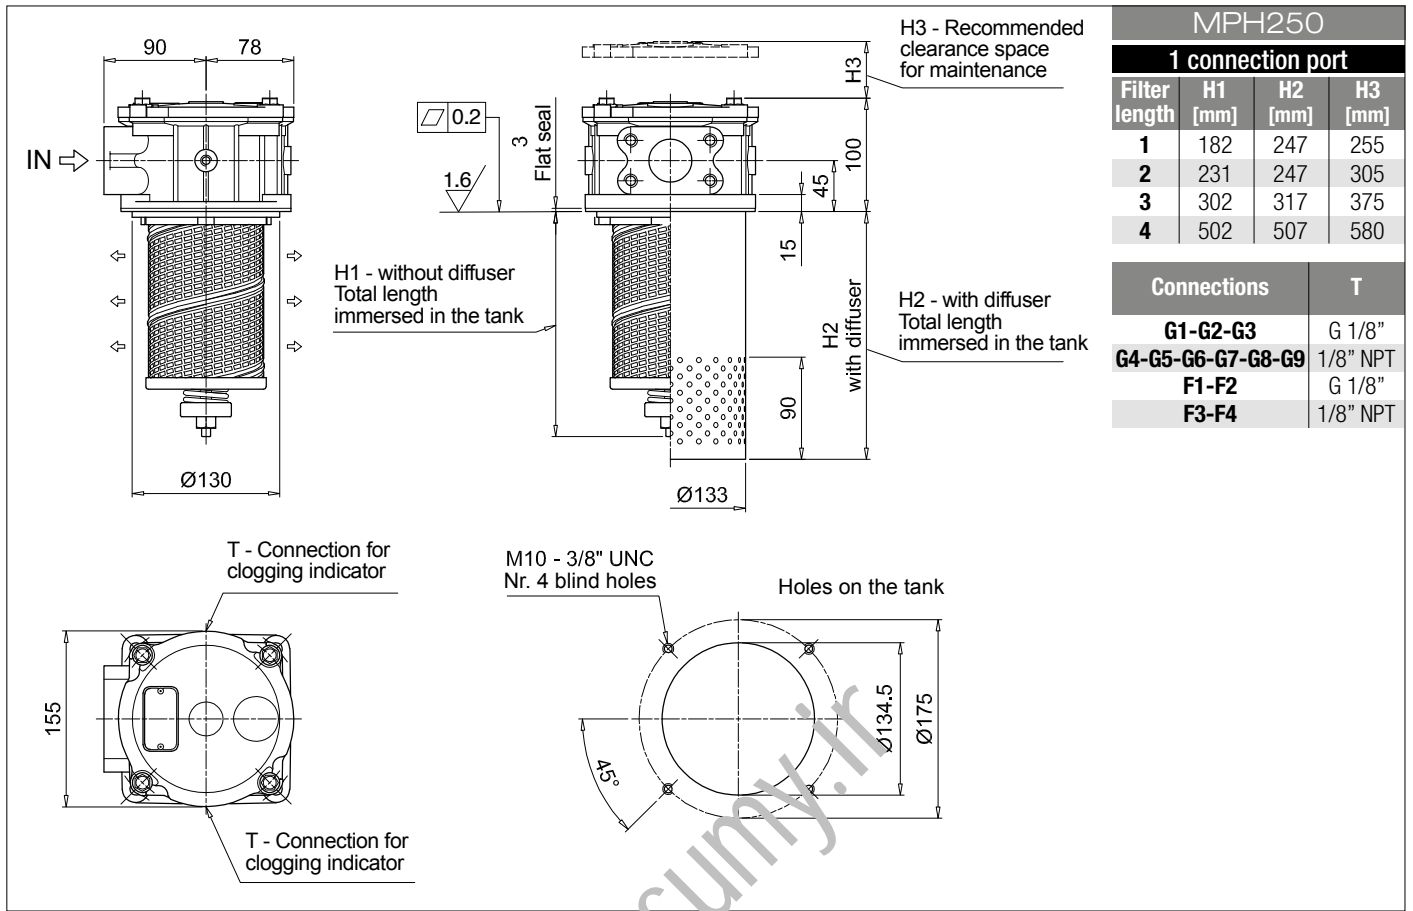

## Designation & Ordering code

### COMPLETE FILTER

Configuration example: **MPH630** | **1** | **S** | **E** | **S** | **W** | **F1** | **M25** | **P01**

**Series and size**  
**MPH630**

**Length**  
**1** | **2** | **3** | **4** | **5**

**Bypass valve**  
**S** Without bypass | **C** 1.75 bar | **E** 2.5 bar

**Diffuser and magnetic filter**  
**D** With diffuser, with magnetic filter  
**F** With diffuser, without magnetic filter  
**O** Without diffuser, with magnetic filter  
**E** Without diffuser, without magnetic filter

**Air breather**  
**S** Without air breather

| Seals and treatments  | Filtration rating |     |     |
|---|-------------------|-----|-----|
|   | Axx               | Mxx | Pxx |
| <b>A</b> NBR  | •                 | •   | •   |
| <b>V</b> FPM  | •                 | •   | •   |
| <b>W</b> NBR head anodized<br>filter element compatible with fluids HFA-HFB-HFC | •                 | •   |     |
| <b>Z</b> FPM head anodized  | •                 | •   |     |

| Main Connections                  | Rear connections    |
|-----------------------------------|---------------------|
| <b>F1</b> 2 1/2" SAE 3000 psi/M   | -                   |
| <b>F2</b> 2 1/2" SAE 3000 psi/M   | 2" SAE 3000 psi/M   |
| <b>F3</b> 2 1/2" SAE 3000 psi/UNC | -                   |
| <b>F4</b> 2 1/2" SAE 3000 psi/UNC | 2" SAE 3000 psi/UNC |

| Filtration rating (filter media)      |  |
|---------------------------------------|--|
| <b>A03</b> Inorganic microfiber 3 µm  | <b>M25</b> Wire mesh 25 µm               |
| <b>A06</b> Inorganic microfiber 6 µm  | <b>M60</b> Wire mesh 60 µm               |
| <b>A10</b> Inorganic microfiber 10 µm | <b>M90</b> Wire mesh 90 µm               |
| <b>A16</b> Inorganic microfiber 16 µm | <b>P10</b> Resin impregnated paper 10 µm |
| <b>A25</b> Inorganic microfiber 25 µm | <b>P25</b> Resin impregnated paper 25 µm |

| Execution  |                    |
|------------|--------------------|
| <b>P01</b> | MP Filtri standard |
| <b>Pxx</b> | Customized         |

### FILTER ELEMENT

Configuration example: **MR630** | **1** | **M25** | **A** | **P01**

**Element series and size**  
**MR630**



**Element length**  
**1** | **2** | **3** | **4** | **5**

| Filtration rating (filter media)      |  |
|---------------------------------------|--|
| <b>A03</b> Inorganic microfiber 3 µm  | <b>M25</b> Wire mesh 25 µm               |
| <b>A06</b> Inorganic microfiber 6 µm  | <b>M60</b> Wire mesh 60 µm               |
| <b>A10</b> Inorganic microfiber 10 µm | <b>M90</b> Wire mesh 90 µm               |
| <b>A16</b> Inorganic microfiber 16 µm | <b>P10</b> Resin impregnated paper 10 µm |
| <b>A25</b> Inorganic microfiber 25 µm | <b>P25</b> Resin impregnated paper 25 µm |

| Seals        | Execution                     |
|--------------|-------------------------------|
| <b>A</b> NBR | <b>P01</b> MP Filtri standard |
| <b>V</b> FPM | <b>Pxx</b> Customized         |

### ACCESSORIES

| Indicators  | page |   | page    |
|---|------|---|---------|
| <b>BVA</b> Axial pressure gauge                           | 240  | <b>BEA</b> Electrical pressure indicator          | 239     |
| <b>BVR</b> Radial pressure gauge                          | 240  | <b>BEM</b> Electrical pressure indicator          | 239     |
| <b>BVP</b> Visual pressure indicator with automatic reset | 241  | <b>BLA</b> Electrical / visual pressure indicator | 239-240 |
| <b>BVQ</b> Visual pressure indicator with manual reset    | 241  |   |         |

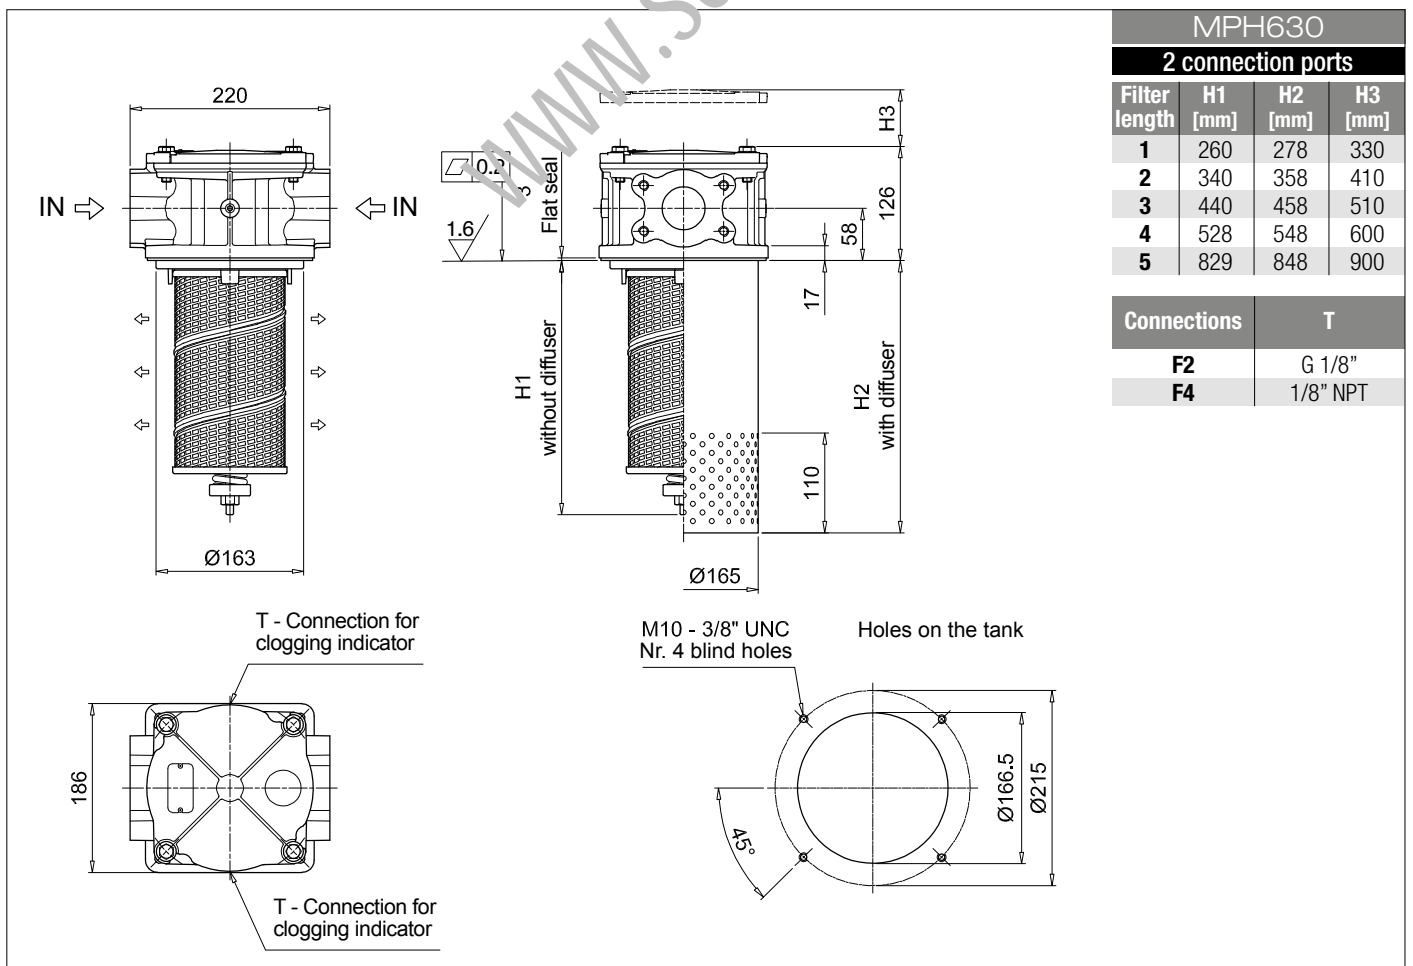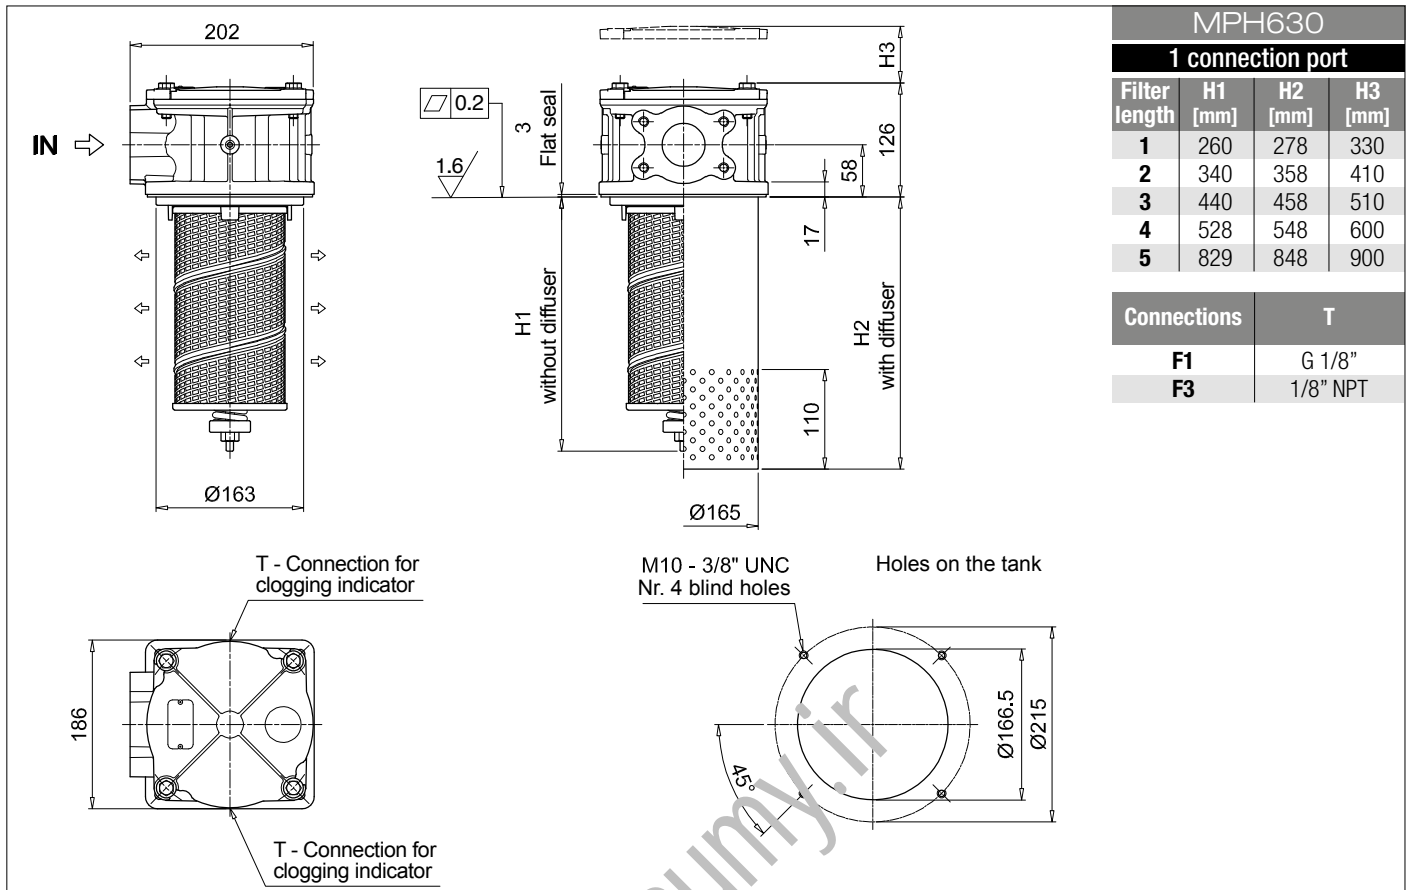

## Designation & Ordering code

### COMPLETE FILTER


|   |                                   |           |     |   |   |    |     |     |  |  |  |
|---|-----------------------------------|-----------|-----|---|---|----|-----|-----|--|--|--|
| <b>Series and size</b>                      | Configuration example: MPH660     |           |     |   |   |    |     |     |  |  |  |
| <b>MPH660</b>                               | 4                                 | C         | D   | S   | A | F2 | A10 | P01 |  |  |  |
| <b>Length</b>                               |                                   |           |     |   |   |    |     |     |  |  |  |
| 4   5                                       |                                   |           |     |   |   |    |     |     |  |  |  |
| <b>Bypass valve</b>                         |                                   |           |     |   |   |    |     |     |  |  |  |
| S Without bypass                            | C 1.75 bar                        | E 2.5 bar |     |   |   |    |     |     |  |  |  |
| <b>Diffuser and magnetic filter</b>         |                                   |           |     |   |   |    |     |     |  |  |  |
| D With diffuser, with magnetic filter       |                                   |           |     |   |   |    |     |     |  |  |  |
| F With diffuser, without magnetic filter    |                                   |           |     |   |   |    |     |     |  |  |  |
| O Without diffuser, with magnetic filter    |                                   |           |     |   |   |    |     |     |  |  |  |
| E Without diffuser, without magnetic filter |                                   |           |     |   |   |    |     |     |  |  |  |
| <b>Air breather</b>                         |                                   |           |     |   |   |    |     |     |  |  |  |
| S Without air breather                      |                                   |           |     |   |   |    |     |     |  |  |  |
| <b>Seals and treatments</b>                 | Filtration rating                 |           |     |   |   |    |     |     |  |  |  |
|   | Axx                               | Mxx       | Pxx |   |   |    |     |     |  |  |  |
| A NBR                                       | •                                 | •         | •   |   |   |    |     |     |  |  |  |
| V FPM                                       | •                                 | •         | •   |   |   |    |     |     |  |  |  |
| W NBR head anodized                         | •                                 | •         |     | filter element compatible with fluids HFA-HFB-HFC |   |    |     |     |  |  |  |
| Z FPM head anodized                         | •                                 | •         |     |   |   |    |     |     |  |  |  |
| <b>Main Connections</b>                     |                                   |           |     |   |   |    |     |     |  |  |  |
| F1 3" SAE 3000 psi/M                        |                                   |           |     |   |   |    |     |     |  |  |  |
| F2 4" SAE 3000 psi/M                        |                                   |           |     |   |   |    |     |     |  |  |  |
| <b>Filtration rating (filter media)</b>     |                                   |           |     |   |   |    |     |     |  |  |  |
| A03 Inorganic microfiber 3 µm               | M25 Wire mesh 25 µm               |           |     |   |   |    |     |     |  |  |  |
| A06 Inorganic microfiber 6 µm               | M60 Wire mesh 60 µm               |           |     |   |   |    |     |     |  |  |  |
| A10 Inorganic microfiber 10 µm              | M90 Wire mesh 90 µm               |           |     |   |   |    |     |     |  |  |  |
| A16 Inorganic microfiber 16 µm              | P10 Resin impregnated paper 10 µm |           |     |   |   |    |     |     |  |  |  |
| A25 Inorganic microfiber 25 µm              | P25 Resin impregnated paper 25 µm |           |     |   |   |    |     |     |  |  |  |
|   | <b>Execution</b>                  |           |     |   |   |    |     |     |  |  |  |
|   | P01 MP Filtri standard            |           |     |   |   |    |     |     |  |  |  |
|   | Pxx Customized                    |           |     |   |   |    |     |     |  |  |  |

### FILTER ELEMENT

|   |                                   |                        |   |     |
|---|-----------------------------------|------------------------|---|-----|
| <b>Element series and size</b>          | Configuration example: MR630      |                        |   |     |
| <b>MR630</b>                            | 5                                 | M25                    | A | P01 |
| <b>Element length</b>                   |                                   |                        |   |     |
| 4   5                                   |                                   |                        |   |     |
| <b>Filtration rating (filter media)</b> |                                   |                        |   |     |
| A03 Inorganic microfiber 3 µm           | M25 Wire mesh 25 µm               |                        |   |     |
| A06 Inorganic microfiber 6 µm           | M60 Wire mesh 60 µm               |                        |   |     |
| A10 Inorganic microfiber 10 µm          | M90 Wire mesh 90 µm               |                        |   |     |
| A16 Inorganic microfiber 16 µm          | P10 Resin impregnated paper 10 µm |                        |   |     |
| A25 Inorganic microfiber 25 µm          | P25 Resin impregnated paper 25 µm |                        |   |     |
|   | <b>Seals</b>                      | <b>Execution</b>       |   |     |
|   | A NBR                             | P01 MP Filtri standard |   |     |
|   | V FPM                             | Pxx Customized         |   |     |

### ACCESSORIES

| Indicators   | page |  | page    |
|--|------|--|---------|
| BVA Axial pressure gauge                           | 240  | BEA Electrical pressure indicator          | 239     |
| BVR Radial pressure gauge                          | 240  | BEM Electrical pressure indicator          | 239     |
| BVP Visual pressure indicator with automatic reset | 241  | BLA Electrical / visual pressure indicator | 239-240 |
| BVQ Visual pressure indicator with manual reset    | 241  |  |         |

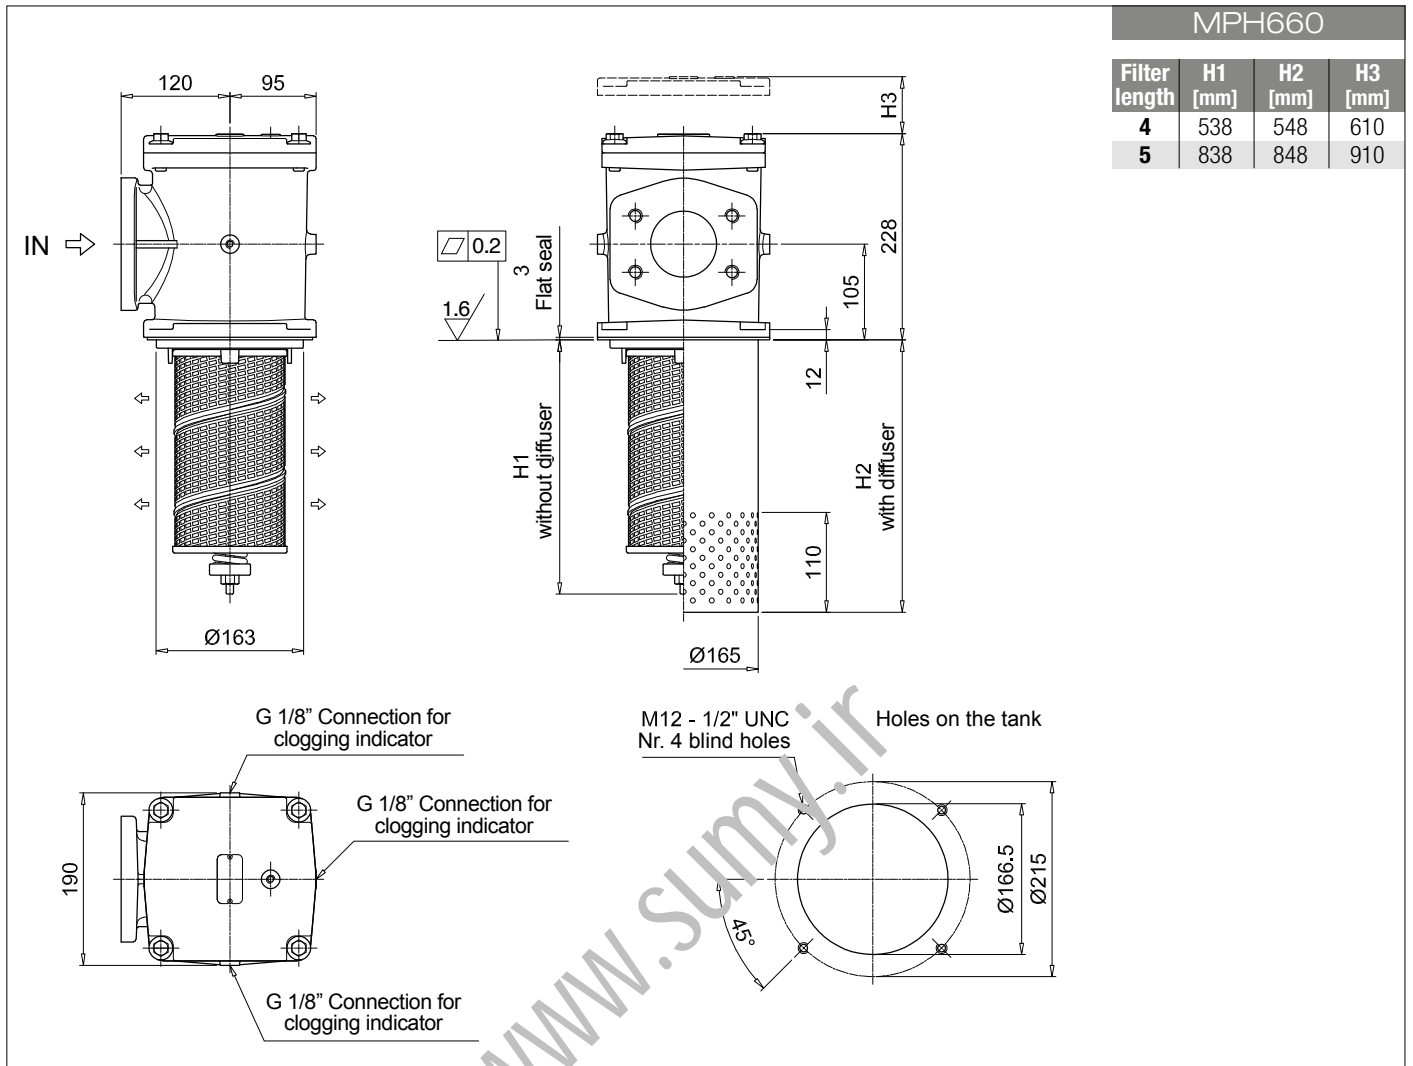

## Designation & Ordering code

### COMPLETE FILTER

Series and size **MPH850** Configuration example: **MPH850** | **1** | **C** | **D** | **S** | **A** | **F1** | **A10** | **P01**

Length **1** | **2** | **3** | **4**

Bypass valve **S** Without bypass | **C** 1.75 bar

Diffuser and magnetic filter  
**D** With diffuser, with magnetic filter  
**F** With diffuser, without magnetic filter  
**O** Without diffuser, with magnetic filter  
**E** Without diffuser, without magnetic filter

Air breather **S** Without air breather

| Seals and treatments       | Filtration rating |     |     |
|----------------------------|-------------------|-----|-----|
|                            | Axx               | Mxx | Pxx |
| <b>A</b> NBR               | •                 | •   | •   |
| <b>V</b> FPM               | •                 | •   | •   |
| <b>W</b> NBR head anodized | •                 | •   |     |
| <b>Z</b> FPM head anodized | •                 | •   |     |

| Main Connections                   | Rear connections    |
|------------------------------------|---------------------|
| <b>F1</b> UNI 2223 DN 100 PN 10/16 | 3" SAE 3000 psi/M   |
| <b>F2</b> UNI 2223 DN 100 PN 10/16 | 3" SAE 3000 psi/UNC |
| <b>F5</b> Not machined             | 3" SAE 3000 psi/M   |
| <b>F6</b> Not machined             | 3" SAE 3000 psi/UNC |
| <b>F7</b> 4" SAE 3000 psi/M        | 3" SAE 3000 psi/M   |
| <b>F8</b> 4" SAE 3000 psi/UNC      | 3" SAE 3000 psi/UNC |

| Filtration rating (filter media)      |  |
|---------------------------------------|--|
| <b>A03</b> Inorganic microfiber 3 µm  | <b>M25</b> Wire mesh 25 µm               |
| <b>A06</b> Inorganic microfiber 6 µm  | <b>M60</b> Wire mesh 60 µm               |
| <b>A10</b> Inorganic microfiber 10 µm | <b>M90</b> Wire mesh 90 µm               |
| <b>A16</b> Inorganic microfiber 16 µm | <b>P10</b> Resin impregnated paper 10 µm |
| <b>A25</b> Inorganic microfiber 25 µm | <b>P25</b> Resin impregnated paper 25 µm |

| Execution  |                    |
|------------|--------------------|
| <b>P01</b> | MP Filtri standard |
| <b>Pxx</b> | Customized         |

### FILTER ELEMENT

Element series and size **MR850** Configuration example: **MR850** | **1** | **A10** | **A** | **P01**

Element length **1** | **2** | **3** | **4**

| Filtration rating (filter media)      |  |
|---------------------------------------|--|
| <b>A03</b> Inorganic microfiber 3 µm  | <b>M25</b> Wire mesh 25 µm               |
| <b>A06</b> Inorganic microfiber 6 µm  | <b>M60</b> Wire mesh 60 µm               |
| <b>A10</b> Inorganic microfiber 10 µm | <b>M90</b> Wire mesh 90 µm               |
| <b>A16</b> Inorganic microfiber 16 µm | <b>P10</b> Resin impregnated paper 10 µm |
| <b>A25</b> Inorganic microfiber 25 µm | <b>P25</b> Resin impregnated paper 25 µm |



| Seals    |     |
|----------|-----|
| <b>A</b> | NBR |
| <b>V</b> | FPM |

| Execution  |                    |
|------------|--------------------|
| <b>P01</b> | MP Filtri standard |
| <b>Pxx</b> | Customized         |

### ACCESSORIES

| Indicators  | page |   | page    |
|---|------|---|---------|
| <b>BVA</b> Axial pressure gauge                           | 240  | <b>BEA</b> Electrical pressure indicator          | 239     |
| <b>BVR</b> Radial pressure gauge                          | 240  | <b>BEM</b> Electrical pressure indicator          | 239     |
| <b>BVP</b> Visual pressure indicator with automatic reset | 241  | <b>BLA</b> Electrical / visual pressure indicator | 239-240 |
| <b>BVQ</b> Visual pressure indicator with manual reset    | 241  |   |         |




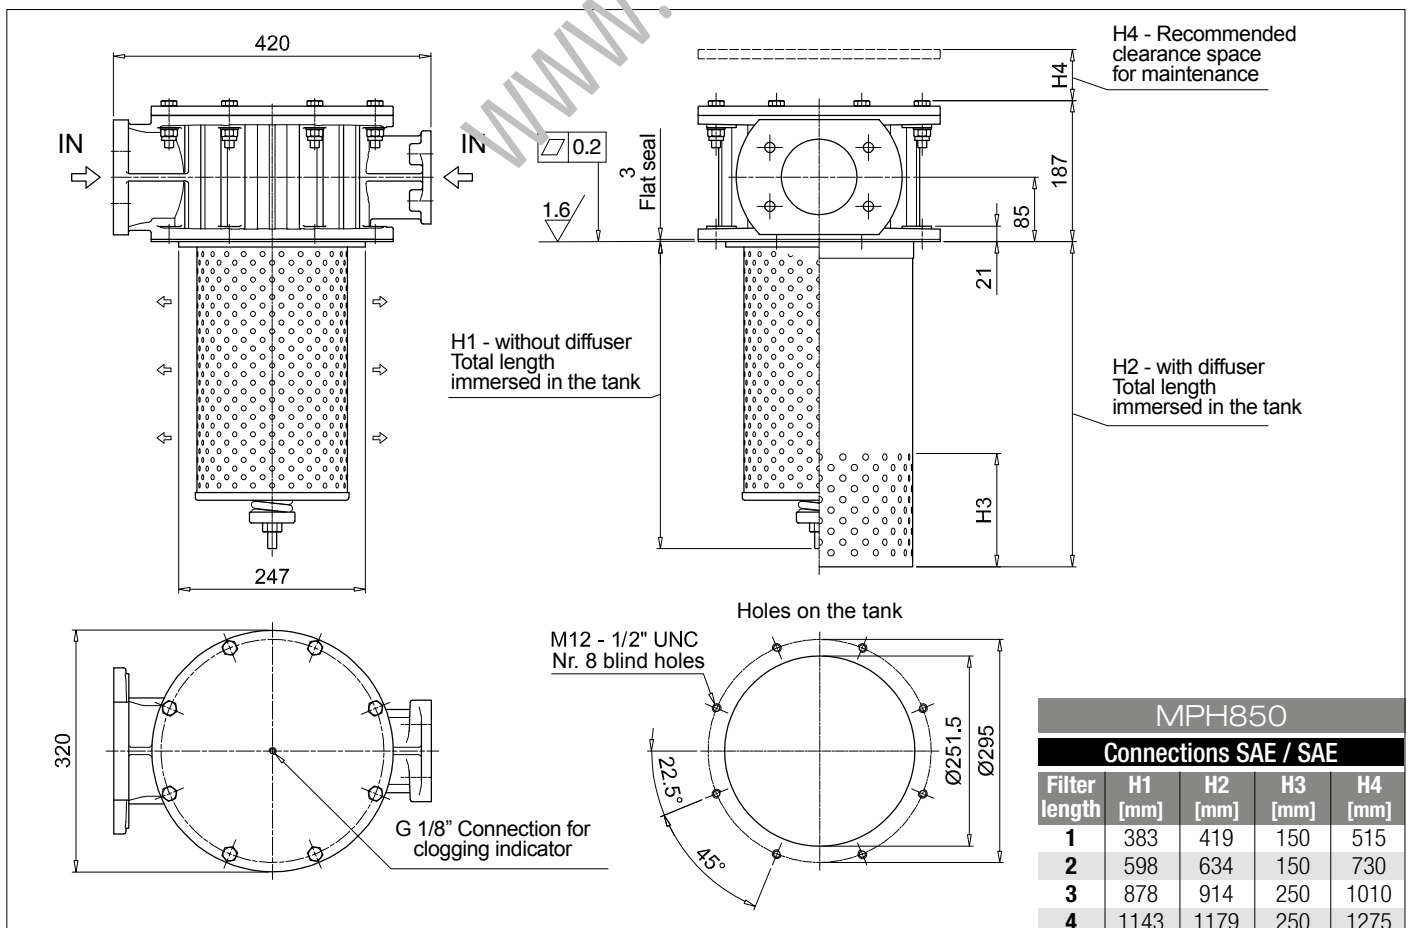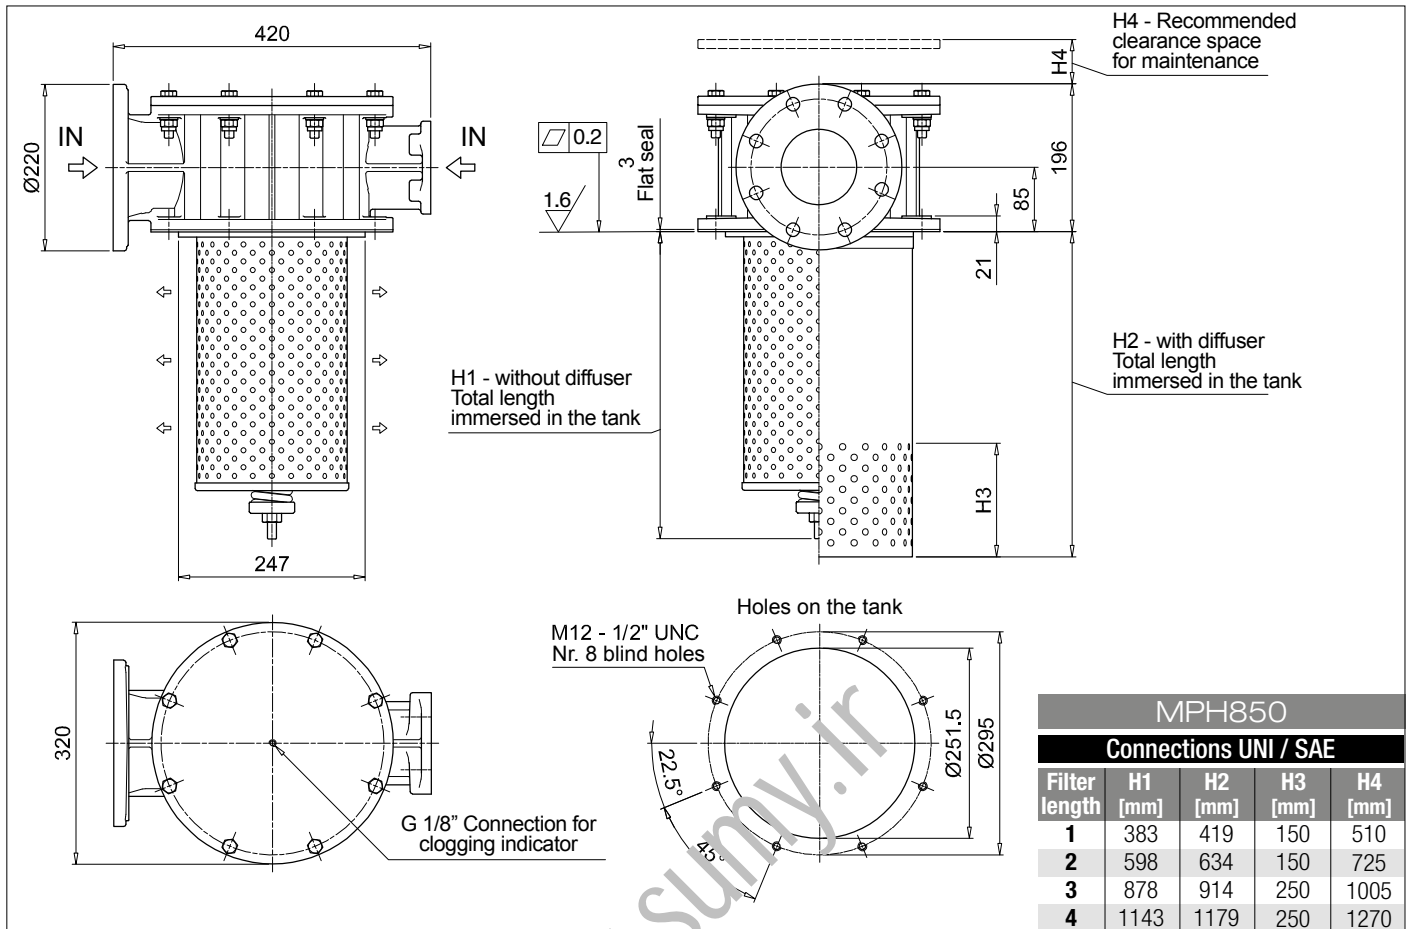

# MPH SPARE PARTS


Order number for spare parts

## MPH 110 - 114

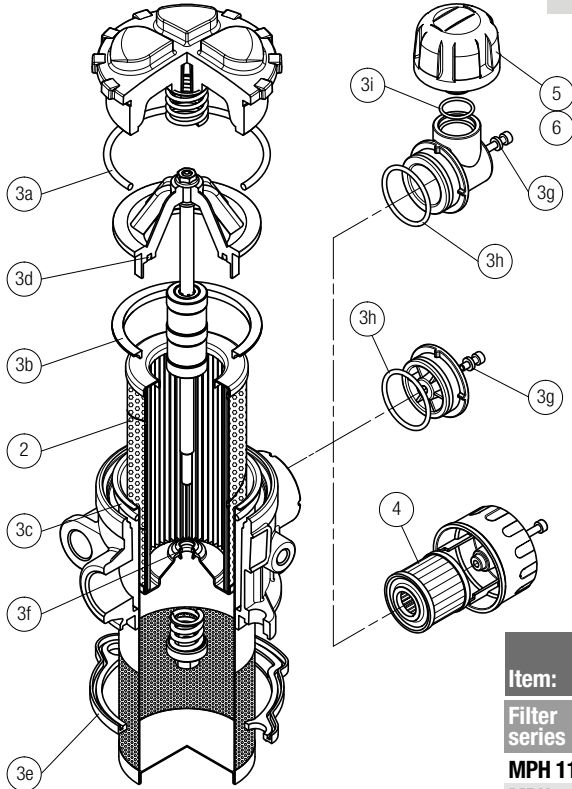


| Item:         | Q.ty: 1 pc.     |                      | Q.ty: 1 pc. |  | Q.ty: 1 pc.           |                       | Q.ty: 1 pc. |  |
|---------------|-----------------|----------------------|-------------|--|-----------------------|-----------------------|-------------|--|
| Filter series | Filter element  | Seal Kit code number |             | Air breather filter element - version: |                       |                       |             |  |
| MPH 110       | MPH 114         | NBR                  | FPM         | C                                      | D                     | P                     |             |  |
|               | See order table | 02050565             | 02050566    | 10 µm A3L03                            | 10 µm SAP50G3L03A0P01 | 10 µm SAP50G3L03A1P01 |             |  |

## MPH 116

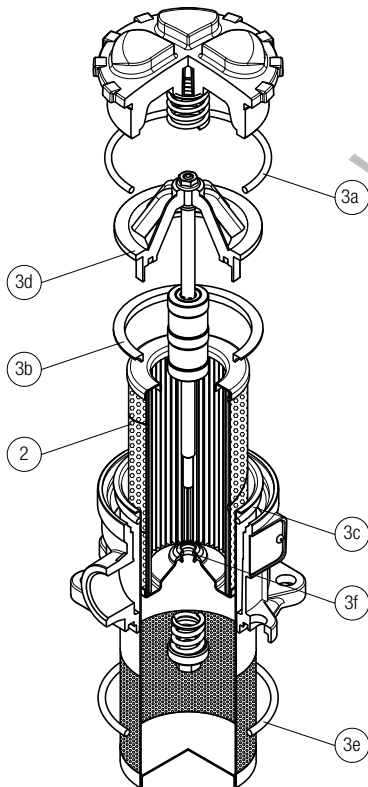


| Item:         | Q.ty: 1 pc.     |                      | Q.ty: 1 pc. |  |
|---------------|-----------------|----------------------|-------------|--|
| Filter series | Filter element  | Seal Kit code number |             |  |
| MPH 116       | See order table | NBR                  | FPM         |  |
|               |                 | 02050741             | 02050742    |  |

## MPH 120

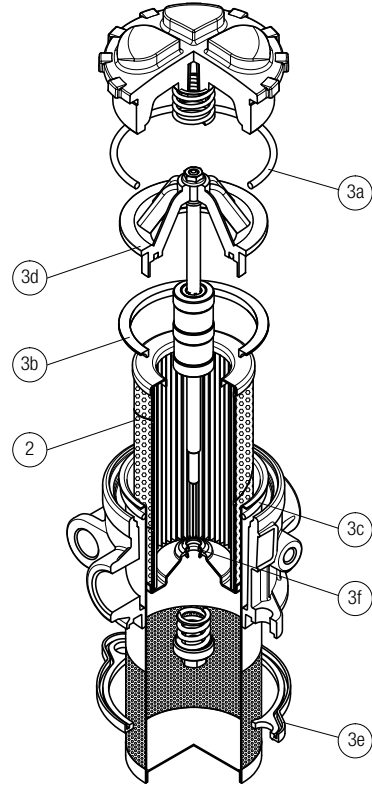


| Item:         | Q.ty: 1 pc.     |                      | Q.ty: 1 pc. |  |
|---------------|-----------------|----------------------|-------------|--|
| Filter series | Filter element  | Seal Kit code number |             |  |
| MPH 120       | See order table | NBR                  | FPM         |  |
|               |                 | 02050567             | 02050568    |  |

**MPH 250 - 630**

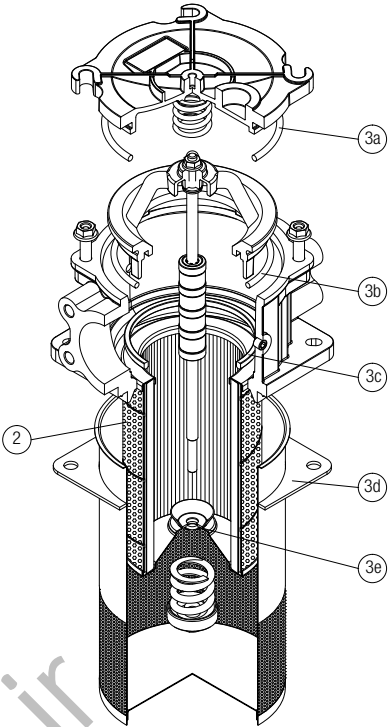


| Item:         | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          |
|---------------|-----------------|----------------------|----------|
| Filter series | Filter element  | Seal Kit code number |          |
| MPH 250       | MPH 630         | NBR                  | FPM      |
|               | 2               | 3 (3a ÷ 3e)          |          |
|               | See order table | 02050151             | 02050152 |
|               | See order table | 02050153             | 02050154 |

**MPH 660**

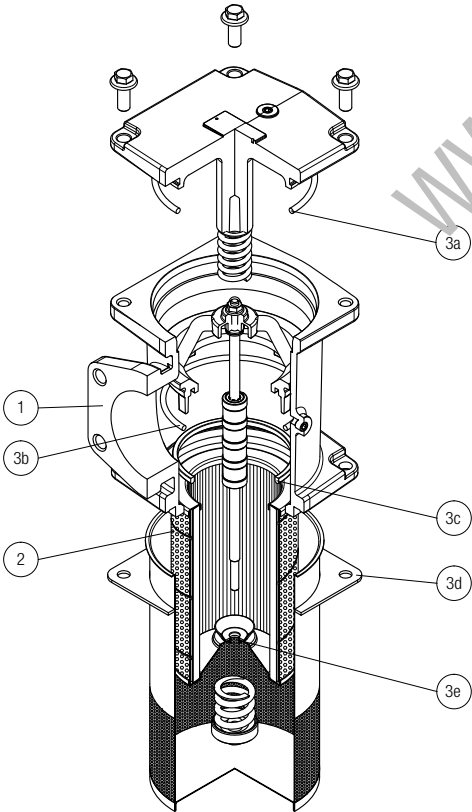

**MPH 850**

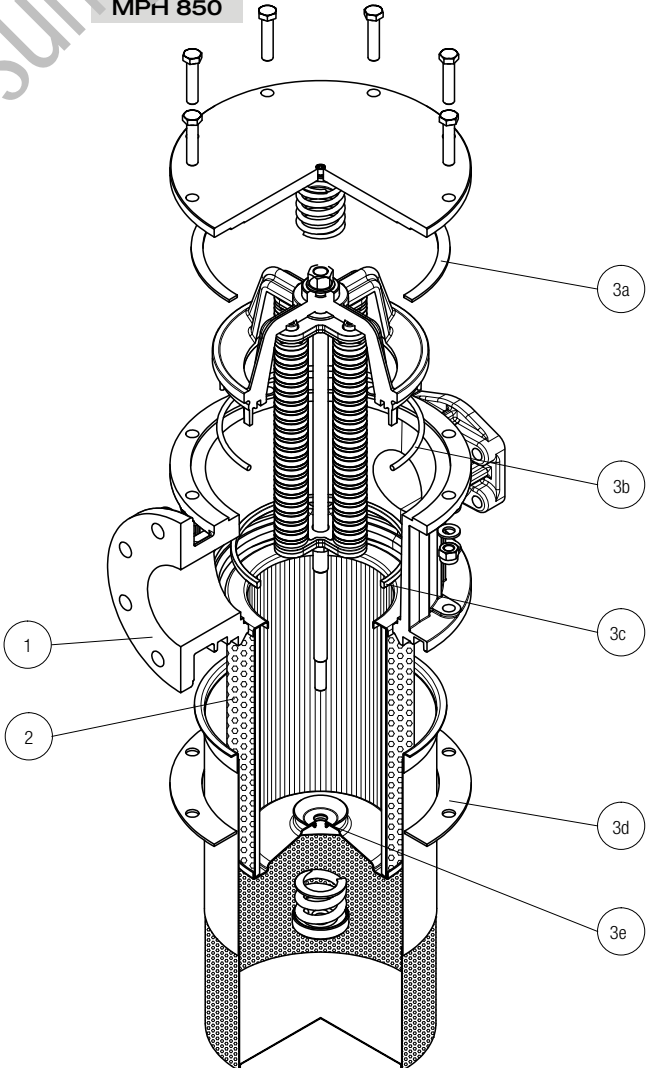

| Item:         | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          |
|---------------|-----------------|----------------------|----------|
| Filter series | Filter element  | Seal Kit code number |          |
| MPH 660       | MPH 850         | NBR                  | FPM      |
|               | 2               | 3 (3a ÷ 3e)          |          |
|               | See order table | 02050153             | 02050154 |
|               | See order table | 02050155             | 02050156 |

www.sumy.ir

# MPI series

Maximum working pressure up to 1 MPa (10 bar) - Flow rate up to 3500 l/min



## Description

## Technical data

### Return filter

**Maximum working pressure up to 1 MPa (10 bar)**

**Flow rate up to 3500 l/min**

MPI is a range of return filter kits for protection of the reservoir against the system contamination.

They are directly integrated in the reservoir in immersed or semi-immersed position to save space into the tank.

The use of the diffuser is recommended, to place the filter output always immersed into the fluid to avoid aeration or foam generation into the reservoir.

The filtration from inside to outside allows a cleaner filter element replacement, the dirty remains into the filter element.

### Available features:

- Fine filtration rating, to get a good cleanliness level into the reservoir
- Bypass valve, to relieve excessive pressure drop across the filter media
- Magnetic filter, to hold the ferrous particles
- Oil dipstick, to easily check the level of the fluid into the reservoir (separate item)
- Diffuser, to reduce the risk of aeration, foaming and noise

### Common applications:

Heavy duty industrial equipment

### Filter housing materials

- Insert assembly  
Polyamide, GF reinforced: MPI 100  
Aluminium: MPI 250-630-850

- Diffuser: Tinned Steel

- Valve: Steel

### Bypass valve

- Opening pressure 175 kPa (1.75 bar)  $\pm 10\%$
- Opening pressure 250 kPa (2.5 bar)  $\pm 10\%$ , except for MPI 850

### $\Delta p$ element type

- Microfibre filter elements - series MR: 10 bar
- Fluid flow through the filter element from IN to OUT

### Seals

- Standard VBR series A
- Optional FPIV series V

### Temperature

From -25 °C to +110 °C

### Note

MPI filters are provided for vertical mounting



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series  | Weights [kg] |       |       |       |       | Volumes [dm <sup>3</sup> ] |        |      |       |       |       |       |
|----------------|--------------|-------|-------|-------|-------|----------------------------|--------|------|-------|-------|-------|-------|
|                | Length       | 1     | 2     | 3     | 4     | 5                          | Length | 1    | 2     | 3     | 4     | 5     |
| <b>MPI 100</b> |              | 0.90  | 1.00  | 1.20  | 1.50  | 1.80                       |        | 0.90 | 0.90  | 1.20  | 1.60  | 1.80  |
| <b>MPI 250</b> |              | 2.20  | 2.50  | 2.90  | 4.30  | -                          |        | 3.50 | 3.50  | 4.50  | 7.00  | -     |
| <b>MPI 630</b> |              | 3.40  | 3.90  | 4.30  | 5.40  | 6.60                       |        | 5.80 | 7.40  | 9.50  | 11.40 | 13.50 |
| <b>MPI 850</b> |              | 15.20 | 18.20 | 21.20 | 25.20 | -                          |        | 8.80 | 12.20 | 16.70 | 20.80 | -     |

## FILTER ASSEMBLY SIZING Flow rates [l/min]

| Filters series | Length   | A03  | A06  | A10  | A16  | A25  | M25<br>M60<br>M90 | P10  | P25  |
|----------------|----------|------|------|------|------|------|-------------------|------|------|
| <b>MPI 100</b> | <b>1</b> | 26   | 29   | 72   | 79   | 107  | 282               | 164  | 190  |
|                | <b>2</b> | 43   | 46   | 112  | 114  | 161  | 318               | 164  | 190  |
|                | <b>3</b> | 64   | 72   | 132  | 156  | 178  | 324               | 219  | 251  |
|                | <b>4</b> | 90   | 99   | 184  | 198  | 216  | 324               | 266  | 302  |
|                | <b>5</b> | 117  | 128  | 201  | 219  | 244  | 324               | 282  | 318  |
| <b>MPI 250</b> | <b>1</b> | 93   | 102  | 210  | 251  | 315  | 1093              | 339  | 383  |
|                | <b>2</b> | 124  | 151  | 327  | 412  | 421  | 1122              | 460  | 514  |
|                | <b>3</b> | 189  | 221  | 418  | 445  | 500  | 1137              | 544  | 616  |
|                | <b>4</b> | 261  | 304  | 592  | 670  | 766  | 1166              | 832  | 923  |
| <b>MPI 630</b> | <b>1</b> | 160  | 200  | 369  | 423  | 518  | 1894              | 565  | 632  |
|                | <b>2</b> | 240  | 257  | 571  | 611  | 1045 | 1929              | 1137 | 1285 |
|                | <b>3</b> | 330  | 374  | 745  | 788  | 1308 | 1938              | 1416 | 1577 |
|                | <b>4</b> | 374  | 403  | 887  | 1010 | 1348 | 1956              | 1448 | 1612 |
|                | <b>5</b> | 625  | 698  | 1210 | 1257 | 1723 | 2121              | 1839 | 1929 |
| <b>MPI 850</b> | <b>1</b> | 775  | 1041 | 1246 | 1568 | 2242 | 3311              | 2371 | 2625 |
|                | <b>2</b> | 1176 | 1522 | 1682 | 1747 | 2449 | 3378              | 2684 | 2886 |
|                | <b>3</b> | 1490 | 1914 | 1995 | 2014 | 3035 | 3405              | 3144 | 3220 |
|                | <b>4</b> | 1668 | 2088 | 2305 | 2363 | 3169 | 3517              | 3272 | 3378 |

### Maximum flow rate for a complete return filter with a pressure drop $\Delta p = 0.5$ bar

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.


For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure.

Please, contact our Sales Department for further additional information.

### Hydraulic symbol

| Filter series  | Style 1 connection |
|----------------|--------------------|
| <b>MPI 100</b> | •                  |
| <b>MPI 250</b> | •                  |
| <b>MPI 630</b> | •                  |
| <b>MPI 850</b> | •                  |



# MPI MPI100 - MPI250 - MPI630 - MPI850

## Designation & Ordering code



### COMPLETE FILTER

|   |   |               |   |                         |  |               |               |               |  |  |  |  |
|---|---|---------------|---|-------------------------|--|---------------|---------------|---------------|--|--|--|--|
| <b>Series and size</b>                  |   |               |   |                         | Configuration example 1: <b>MPI100</b>   <b>1</b>   <b>C</b>   <b>D</b>   <b>A</b>   <b>A10</b>   <b>P01</b> |               |               |               |  |  |  |  |
| <b>MPI100</b>                           |   |               |   |                         | Configuration example 2: <b>MPI630</b>   <b>5</b>   <b>E</b>   <b>D</b>   <b>Z</b>   <b>M25</b>   <b>P01</b> |               |               |               |  |  |  |  |
| <b>MPI250</b>                           |   |               |   |                         |  |               |               |               |  |  |  |  |
| <b>MPI630</b>                           |   |               |   |                         |  |               |               |               |  |  |  |  |
| <b>MPI850</b>                           |   |               |   |                         |  |               |               |               |  |  |  |  |
| <b>Length</b>                           |   |               |   |                         | <b>MPI100</b>  | <b>MPI250</b> | <b>MPI630</b> | <b>MPI850</b> |  |  |  |  |
| <b>1</b>                                |   | •             | •   | •                       | •  |               |               |               |  |  |  |  |
| <b>2</b>                                |   | •             | •   | •                       | •  |               |               |               |  |  |  |  |
| <b>3</b>                                |   | •             | •   | •                       | •  |               |               |               |  |  |  |  |
| <b>4</b>                                |   | •             | •   | •                       | •  |               |               |               |  |  |  |  |
| <b>5</b>                                |   | •             | •   | •                       | •  |               |               |               |  |  |  |  |
| <b>Bypass valve</b>                     |   |               |   |                         | <b>MPI100</b>  | <b>MPI250</b> | <b>MPI630</b> | <b>MPI850</b> |  |  |  |  |
| <b>S</b>                                | Without                                   | •             | •   | •                       | •  |               |               |               |  |  |  |  |
| <b>C</b>                                | 1.75 bar                                  | •             | •   | •                       | •  |               |               |               |  |  |  |  |
| <b>E</b>                                | 2.5 bar                                   | •             | •   | •                       | •  |               |               |               |  |  |  |  |
| <b>Diffuser and magnetic filter</b>     |   |               |   |                         |  |               |               |               |  |  |  |  |
| <b>D</b>                                | With diffuser, with magnetic filter       |               |   |                         |  |               |               |               |  |  |  |  |
| <b>F</b>                                | With diffuser, without magnetic filter    |               |   |                         |  |               |               |               |  |  |  |  |
| <b>O</b>                                | Without diffuser, with magnetic filter    |               |   |                         |  |               |               |               |  |  |  |  |
| <b>E</b>                                | Without diffuser, without magnetic filter |               |   |                         |  |               |               |               |  |  |  |  |
| <b>Seals and treatments</b>             |   |               |   |                         | <b>Filtration rating</b>   |               |               |               |  |  |  |  |
|   |   |               |   |                         | <b>Axx</b>   | <b>Mxx</b>    | <b>Pxx</b>    |               |  |  |  |  |
| <b>A</b>                                | NBR                                       |               |   |                         | •  | •             | •             |               |  |  |  |  |
| <b>V</b>                                | FPM                                       |               |   |                         | •  | •             | •             |               |  |  |  |  |
| <b>W</b>                                | NBR                                       | head anodized | filter element compatible with fluids HFA-HFB-HFC |                         | •  | •             |               |               |  |  |  |  |
| <b>Z</b>                                | FPM                                       | head anodized | filter element compatible with fluids HFA-HFB-HFC |                         | •  | •             |               |               |  |  |  |  |
| <b>Filtration rating (filter media)</b> |   |               |   |                         |  |               |               |               |  |  |  |  |
| <b>A03</b>                              | Inorganic microfiber                      | 3 µm          | <b>M25</b>  | Wire mesh               | 25 µm  |               |               |               |  |  |  |  |
| <b>A06</b>                              | Inorganic microfiber                      | 6 µm          | <b>M60</b>  | Wire mesh               | 60 µm  |               |               |               |  |  |  |  |
| <b>A10</b>                              | Inorganic microfiber                      | 10 µm         | <b>M90</b>  | Wire mesh               | 90 µm  |               |               |               |  |  |  |  |
| <b>A16</b>                              | Inorganic microfiber                      | 16 µm         | <b>P10</b>  | Resin impregnated paper | 10 µm  |               |               |               |  |  |  |  |
| <b>A25</b>                              | Inorganic microfiber                      | 25 µm         | <b>P25</b>  | Resin impregnated paper | 25 µm  |               |               |               |  |  |  |  |
|   |   |               |   |                         | <b>Execution</b>   |               |               |               |  |  |  |  |
|   |   |               |   |                         | <b>P01</b> MP Filtri standard  |               |               |               |  |  |  |  |
|   |   |               |   |                         | <b>Pxx</b> Customized  |               |               |               |  |  |  |  |

### FILTER ELEMENT



|   |                      |       |            |                         |   |                 |                               |                 |  |  |
|---|----------------------|-------|------------|-------------------------|---|-----------------|-------------------------------|-----------------|--|--|
| <b>Element series and size</b>          |                      |       |            |                         | Configuration example 1: <b>MR100</b>   <b>1</b>   <b>A10</b>   <b>A</b>   <b>P01</b> |                 |                               |                 |  |  |
| <b>MR100</b>                            |                      |       |            |                         | Configuration example 2: <b>MR630</b>   <b>5</b>   <b>M25</b>   <b>V</b>   <b>P01</b> |                 |                               |                 |  |  |
| <b>MR250</b>                            |                      |       |            |                         |   |                 |                               |                 |  |  |
| <b>MR630</b>                            |                      |       |            |                         |   |                 |                               |                 |  |  |
| <b>MR850</b>                            |                      |       |            |                         |   |                 |                               |                 |  |  |
| <b>Element length</b>                   |                      |       |            |                         | <b>Size 100</b>   | <b>Size 250</b> | <b>Size 630</b>               | <b>Size 850</b> |  |  |
| <b>1</b>                                |                      | •     | •          | •                       | •   |                 |                               |                 |  |  |
| <b>2</b>                                |                      | •     | •          | •                       | •   |                 |                               |                 |  |  |
| <b>3</b>                                |                      | •     | •          | •                       | •   |                 |                               |                 |  |  |
| <b>4</b>                                |                      | •     | •          | •                       | •   |                 |                               |                 |  |  |
| <b>5</b>                                |                      | •     | •          | •                       | •   |                 |                               |                 |  |  |
| <b>Filtration rating (filter media)</b> |                      |       |            |                         |   |                 |                               |                 |  |  |
| <b>A03</b>                              | Inorganic microfiber | 3 µm  | <b>M25</b> | Wire mesh               | 25 µm   |                 |                               |                 |  |  |
| <b>A06</b>                              | Inorganic microfiber | 6 µm  | <b>M60</b> | Wire mesh               | 60 µm   |                 |                               |                 |  |  |
| <b>A10</b>                              | Inorganic microfiber | 10 µm | <b>M90</b> | Wire mesh               | 90 µm   |                 |                               |                 |  |  |
| <b>A16</b>                              | Inorganic microfiber | 16 µm | <b>P10</b> | Resin impregnated paper | 10 µm   |                 |                               |                 |  |  |
| <b>A25</b>                              | Inorganic microfiber | 25 µm | <b>P25</b> | Resin impregnated paper | 25 µm   |                 |                               |                 |  |  |
|   |                      |       |            |                         | <b>Seals</b>  |                 | <b>Execution</b>              |                 |  |  |
|   |                      |       |            |                         | <b>A</b> NBR  |                 | <b>P01</b> MP Filtri standard |                 |  |  |
|   |                      |       |            |                         | <b>V</b> FPM  |                 | <b>Pxx</b> Customized         |                 |  |  |





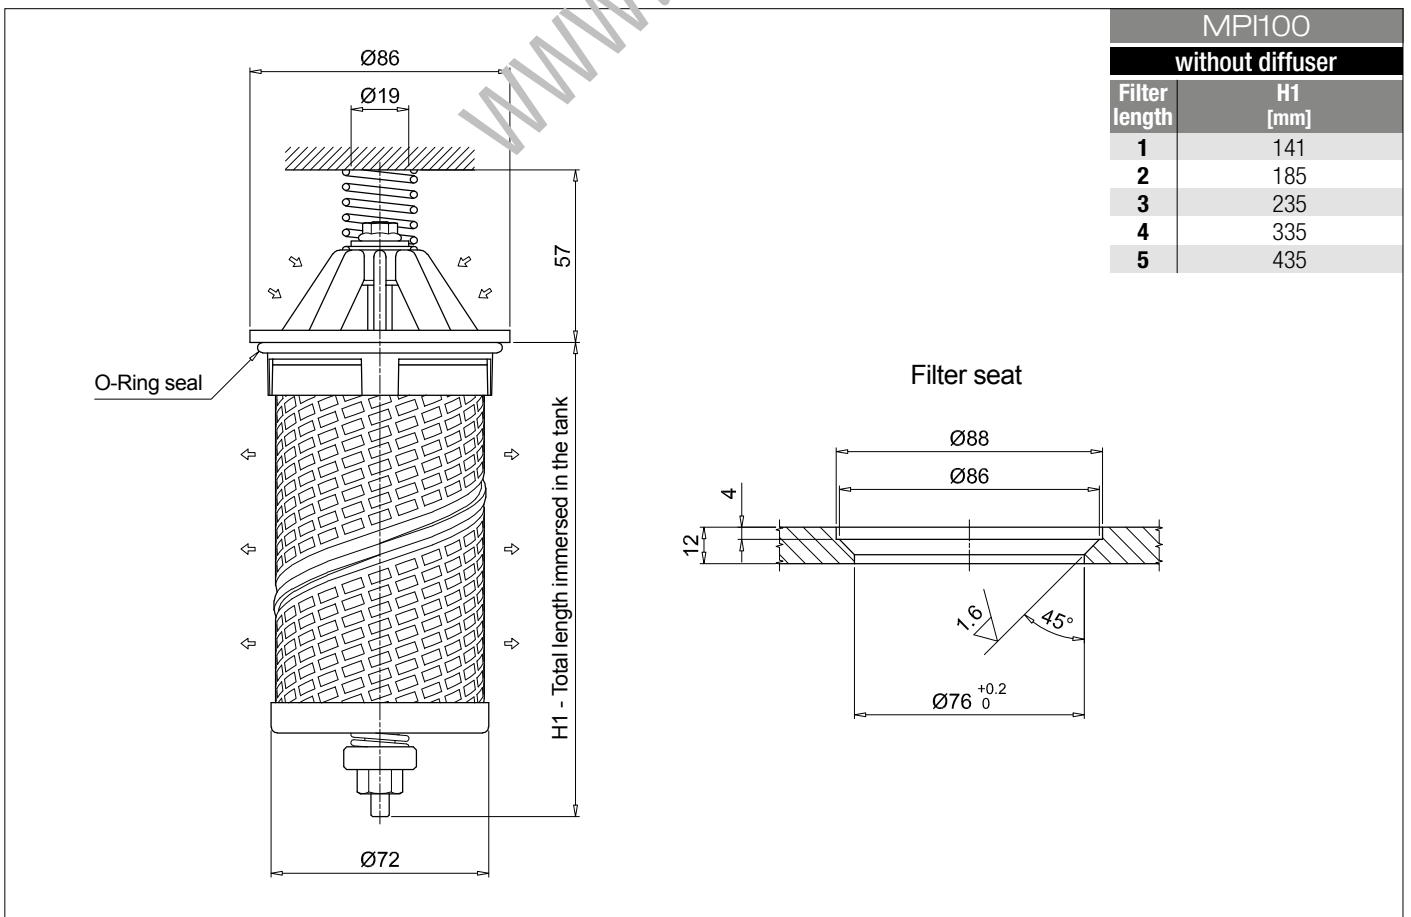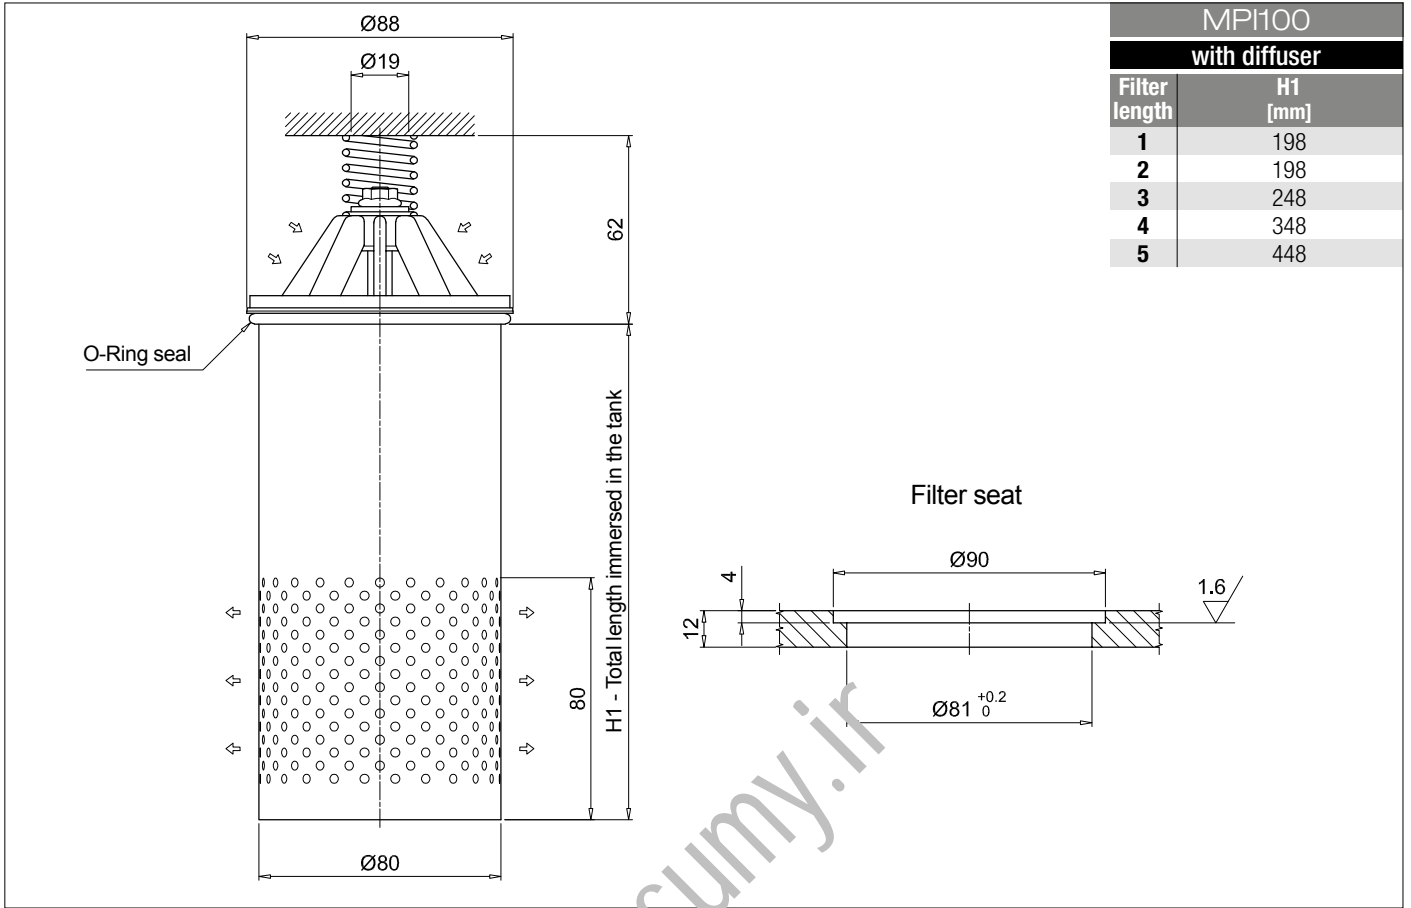

# MPI MPI100 - MPI250 - MPI630 - MPI850



## Dimensions

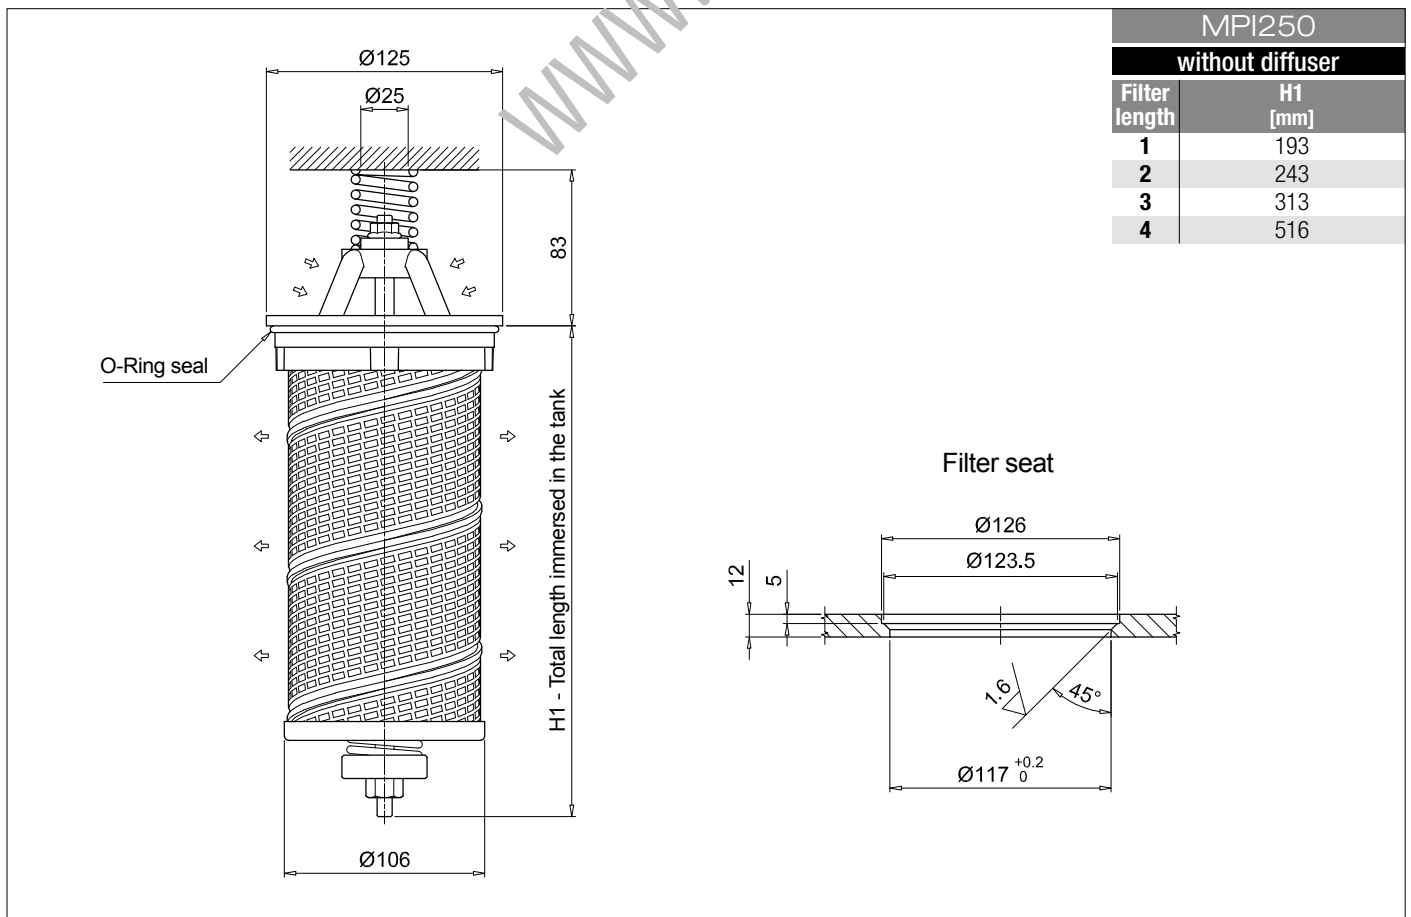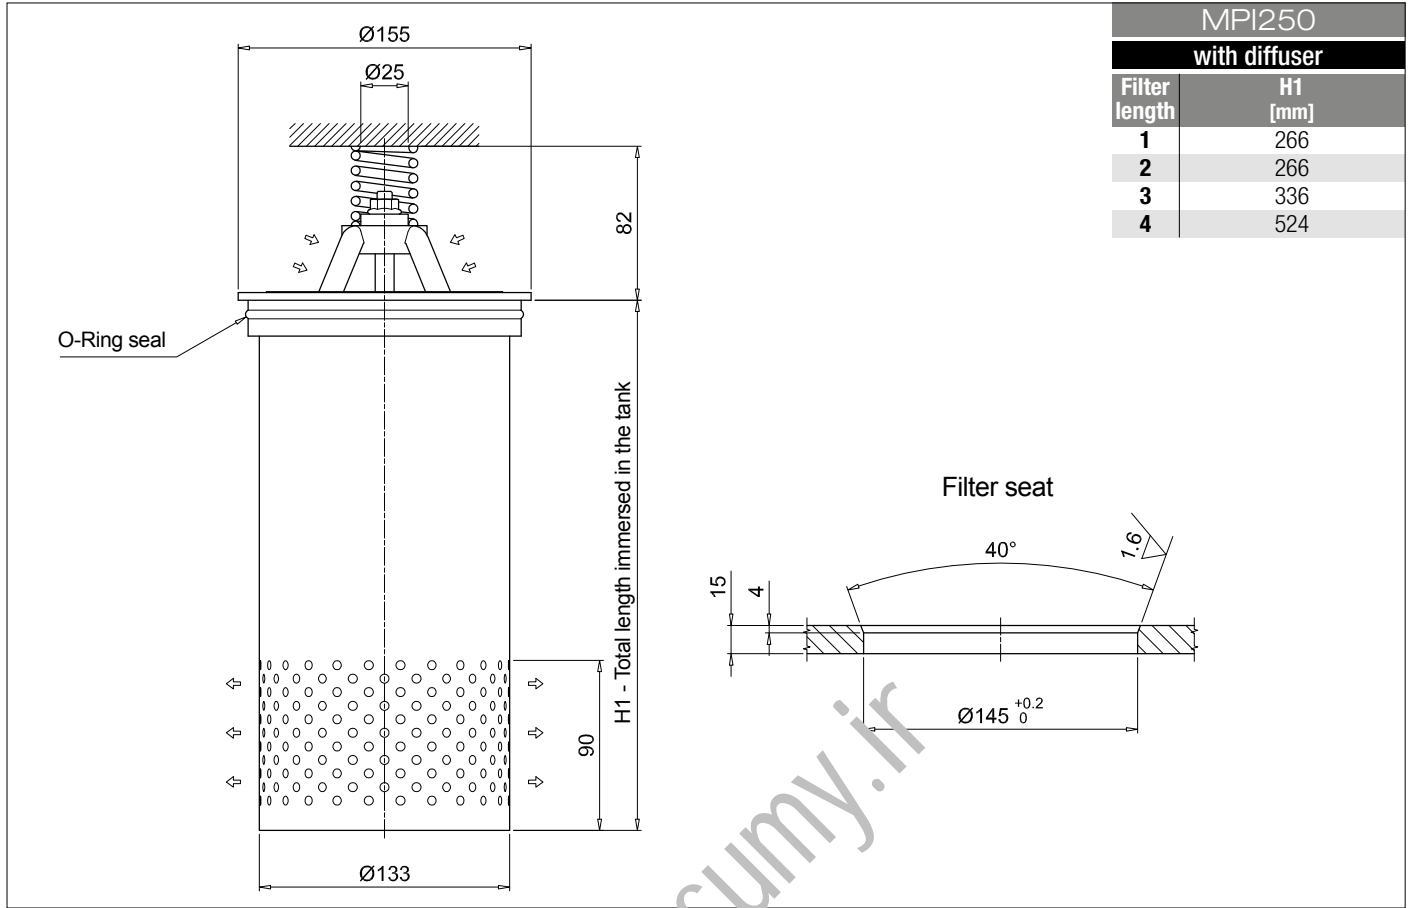

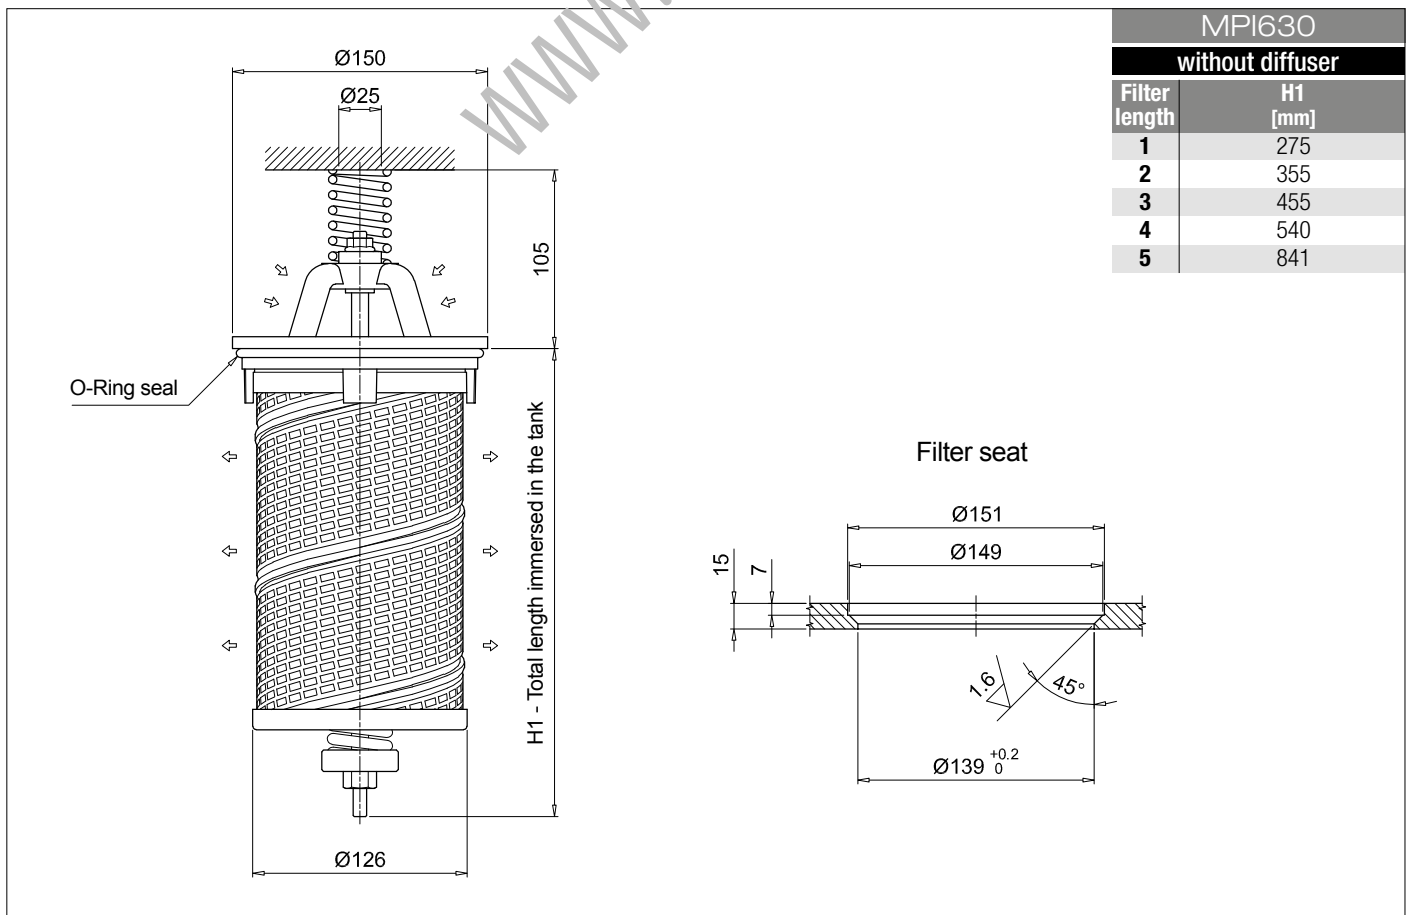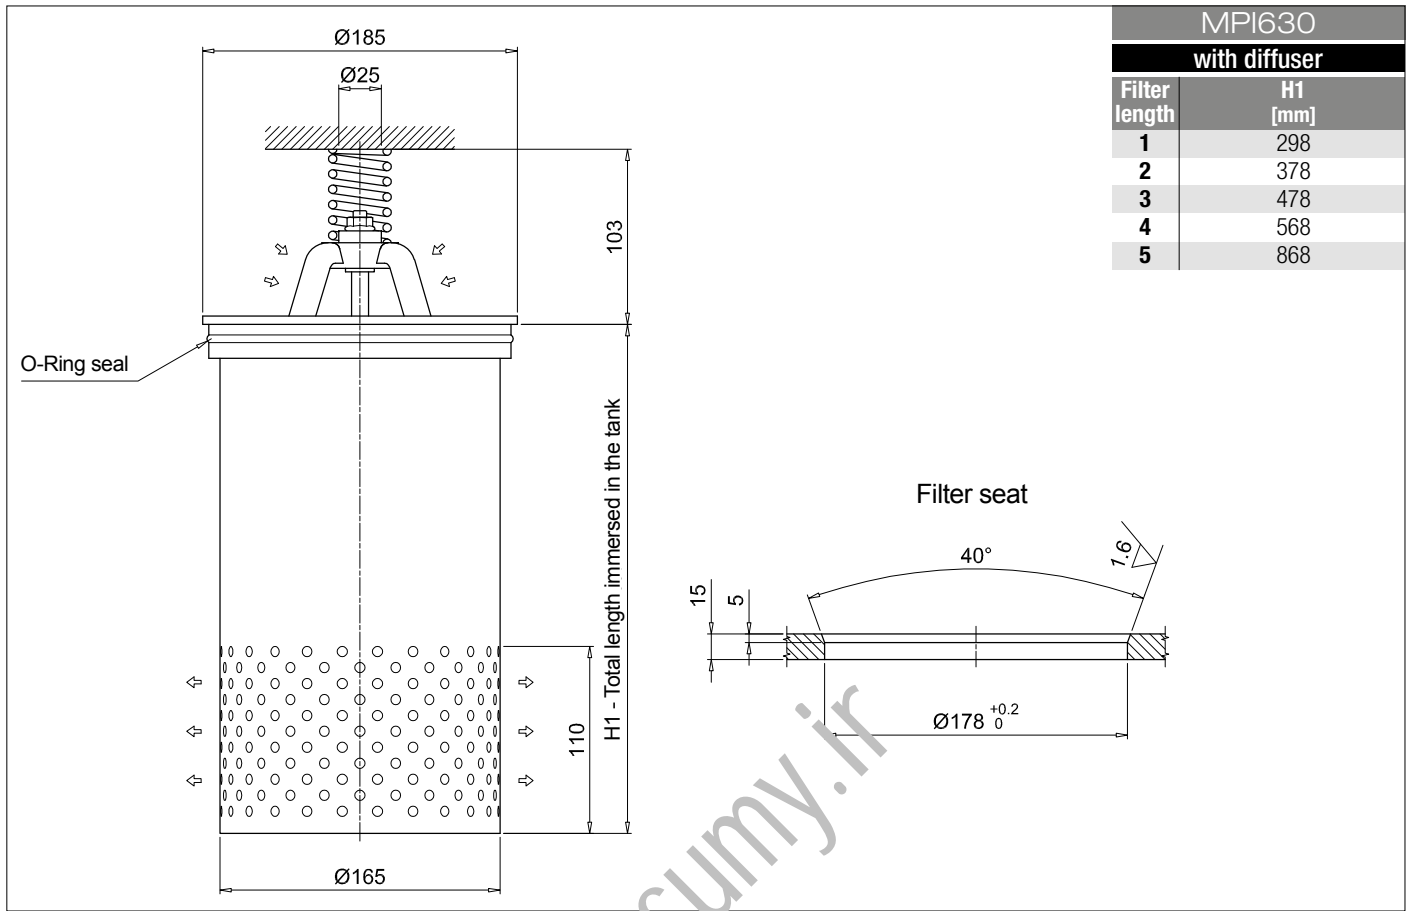

# MPI MPI100 - MPI250 - MPI630 - MPI850

## Dimensions

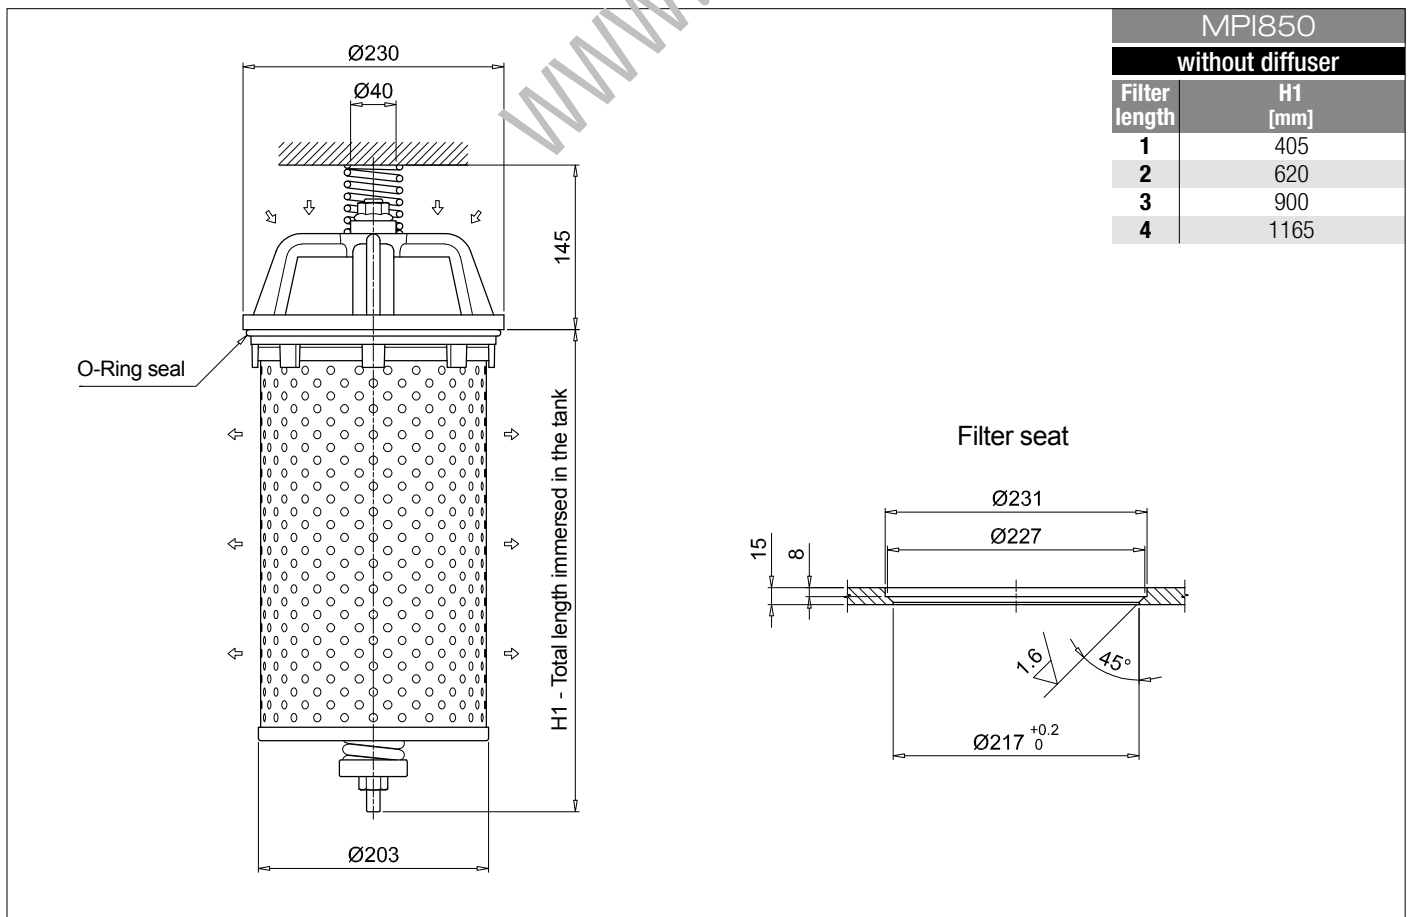
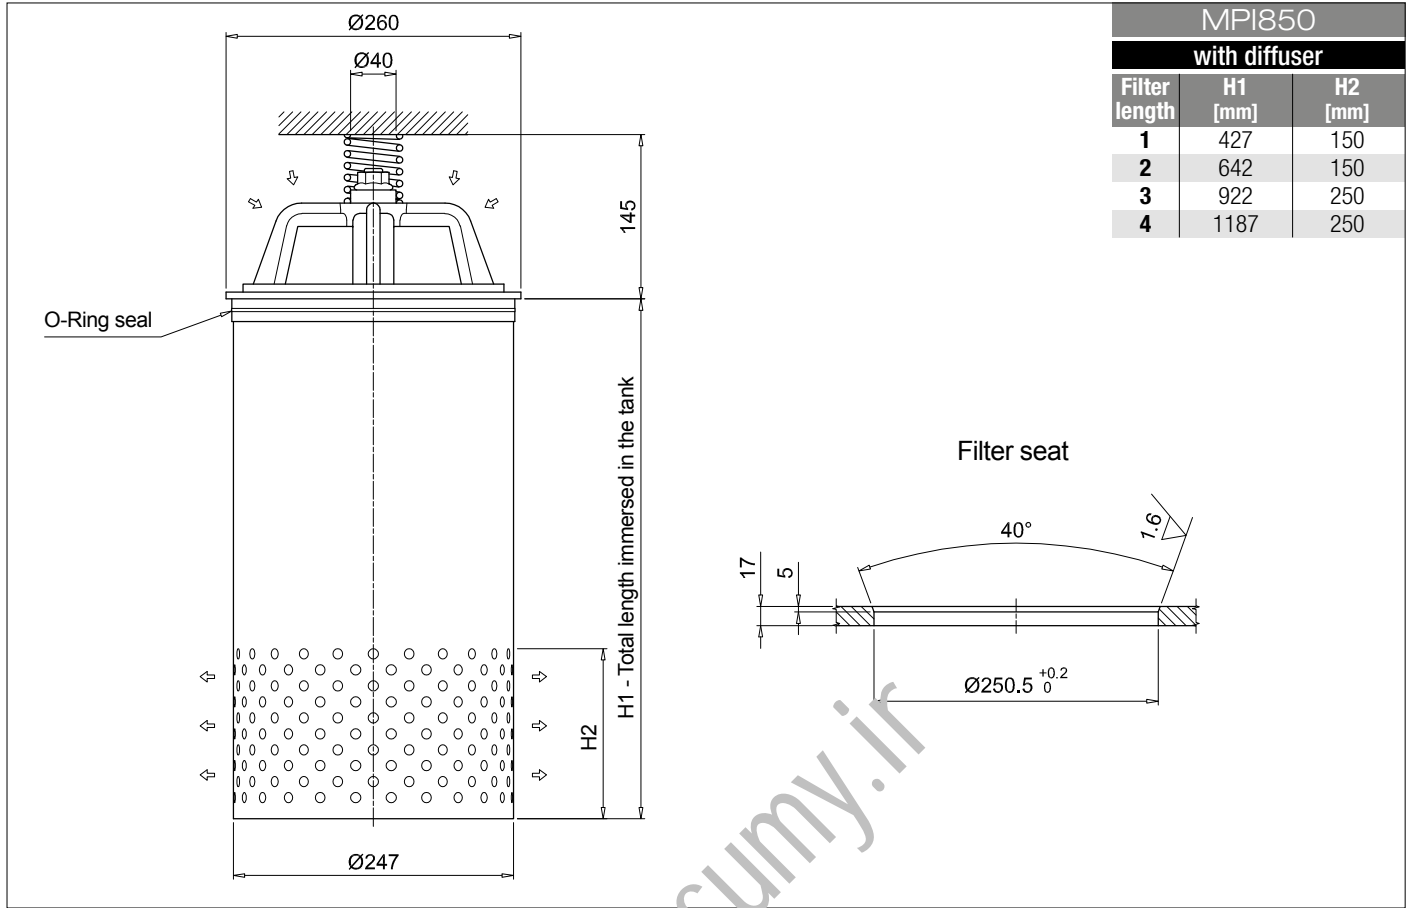


www.sumy.ir

# MPI SPARE PARTS

Order number for spare parts

**MPI 100**

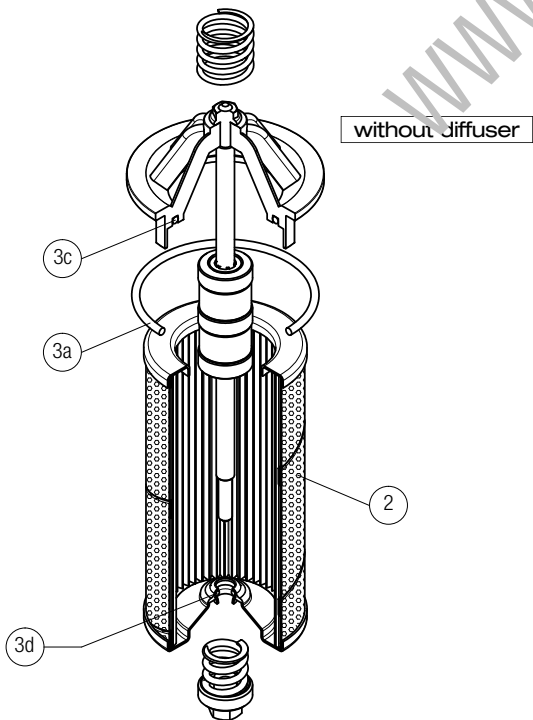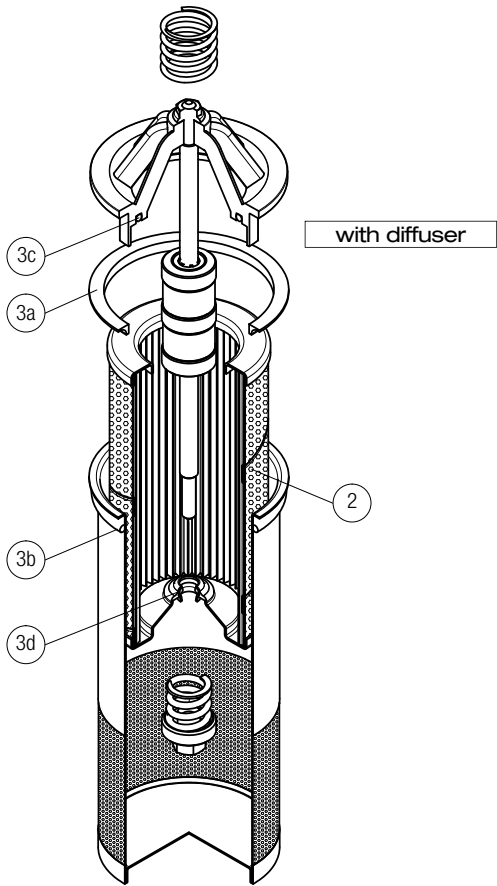

Q.ty: 1 pc.



**2**

Q.ty: 1 pc.

**3** (3a ÷ 3d)

| Item:          | Filter series | Filter element  | Seal Kit code number NBR | FPM      |
|----------------|---------------|-----------------|--------------------------|----------|
| <b>MPI 100</b> |               | See order table | 02050145                 | 02050146 |

**MPI 250 - 630**

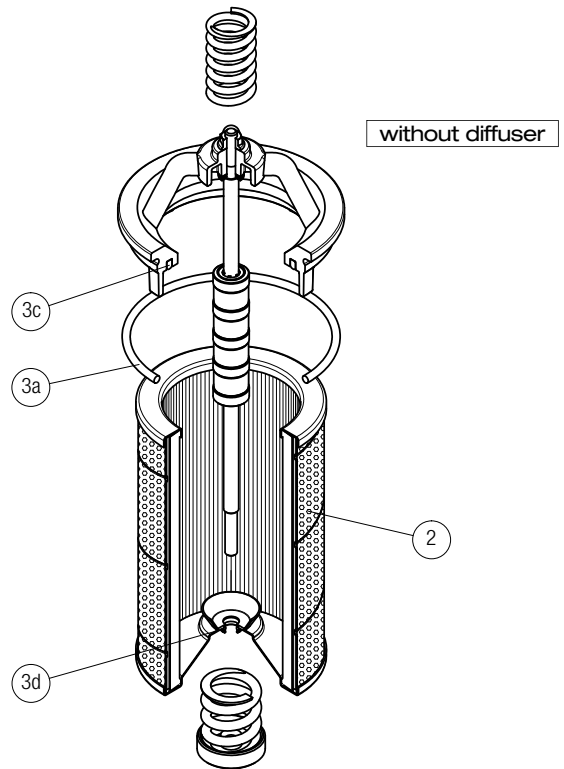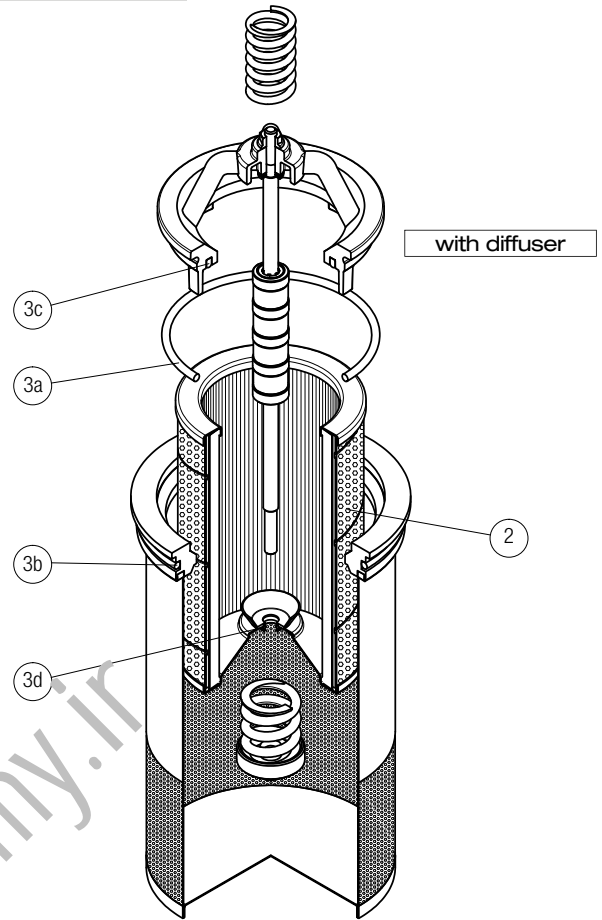

Q.ty: 1 pc.



**2**

Q.ty: 1 pc.

**3** (3a ÷ 3d)

| Item:          | Filter series | Filter element  | Seal Kit code number NBR | FPM      |
|----------------|---------------|-----------------|--------------------------|----------|
| <b>MPI 250</b> |               | See order table | 02050147                 | 02050148 |
| <b>MPI 630</b> |               | See order table | 02050112                 | 02050113 |

MPI 850

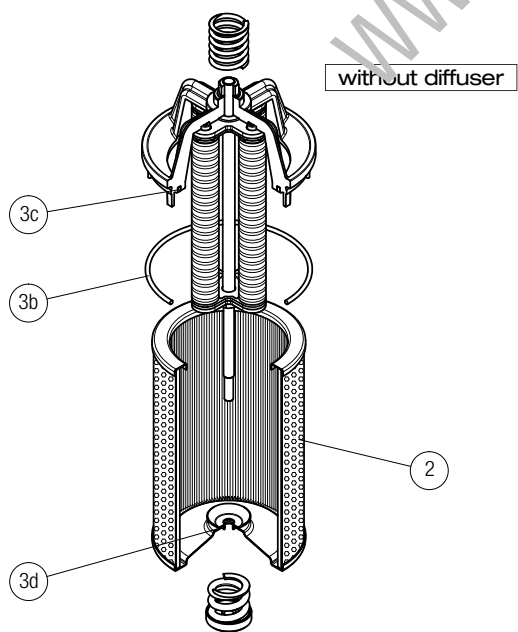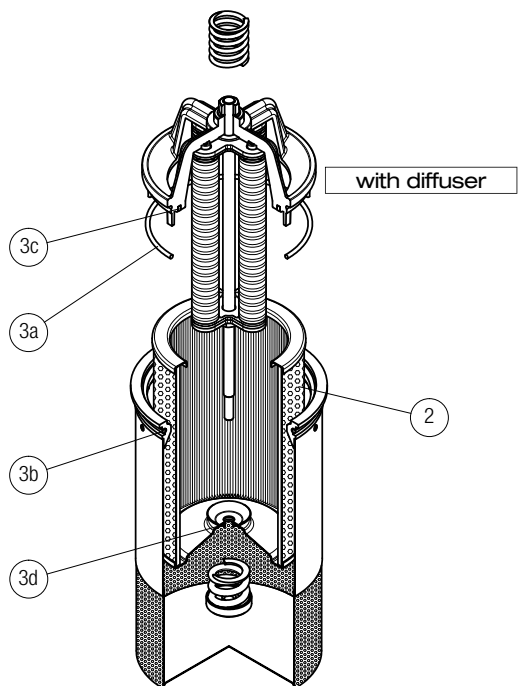

Q.ty: 1 pc.

Q.ty: 1 pc.

Item:

2

3 (3a ÷ 3d)

Filter series

Filter element

Seal Kit code number  
NBR FPM

MPI 850

See order table

02050114

02050115

www.sumy.ir



# FRI series

Maximum working pressure up to 2 MPa (20 bar) - Flow rate up to 2500 l/min



## Description

## Technical data

### Return filter

**Maximum working pressure up to 2 MPa (20 bar)**

**Flow rate up to 2500 l/min**

FRI is a range of return filters for protection of the reservoir against the system contamination.

They could be directly fixed to the reservoir in immersed or semi-immersed position or connected to the lines of the system through the hydraulic fittings.

The filter output must be always immersed into the fluid to avoid aeration or foam generation into the reservoir.

### Available features:

- Female threaded connections up to 2 1/2" and flanged connections up to 3 1/2", for a maximum flow rate of 2500 l/min
- Double input connections, to connect several return lines or drains
- Fine filtration rating, to get a good cleanliness level into the reservoir
- Bypass valve, to relieve excessive pressure drop across the filter media
- Visual, electrical and electronic differential clogging indicators

### Common applications:

Heavy duty industrial equipment

### Filter housing materials

- Filter body
  - Aluminium: FRI 255
  - Anodized Aluminium: FRI 025-040-100-250-630
  - Phosphatized Steel: FRI 850
- Cover
  - Polyamide, GF reinforced: FRI 255
  - Anodized Aluminium: FRI 025-040-100-250-630-850
- Valve: Polyamide, GF reinforced - Steel

### Bypass valve

Opening pressure 240 kPa (2.4 bar) ±10%

### Δp element type

- Microfibre filter elements - series N: 10 bar
- Fluid flow through the filter element from OUT to IN

### Seals

- Standard VHB series A
- Optional FPM series V

### Temperature

From -25 °C to +110 °C

### Note

FRI filters are provided for vertical mounting



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series  | Weights [kg] |      | Volumes [dm <sup>3</sup> ] |       |
|----------------|--------------|------|----------------------------|-------|
|                | Length       | 1    | Length                     | 1     |
| <b>FRI 025</b> |              | 1.0  |                            | 0.28  |
| <b>FRI 040</b> |              | 2.0  |                            | 0.70  |
| <b>FRI 100</b> |              | 3.8  |                            | 1.09  |
| <b>FRI 250</b> |              | 6.3  |                            | 2.60  |
| <b>FRI 255</b> |              | 4.2  |                            | 3.20  |
| <b>FRI 630</b> |              | 13.8 |                            | 7.05  |
| <b>FRI 850</b> |              | 48.0 |                            | 21.50 |

| Filter series  | Length   | Filter element design - N Series |     |     |      |      |                   |      |      |
|----------------|----------|----------------------------------|-----|-----|------|------|-------------------|------|------|
|                |          | A03                              | A06 | A10 | A16  | A25  | M25<br>M60<br>M90 | P10  | P25  |
| <b>FRI 025</b> | <b>1</b> | 6                                | 10  | 17  | 19   | 43   | 122               | 43   | 47   |
| <b>FRI 040</b> | <b>1</b> | 19                               | 23  | 43  | 45   | 94   | 155               | 94   | 102  |
| <b>FRI 100</b> | <b>1</b> | 32                               | 34  | 89  | 92   | 187  | 260               | 187  | 206  |
| <b>FRI 250</b> | <b>1</b> | 144                              | 179 | 271 | 300  | 448  | 645               | 448  | 490  |
| <b>FRI 255</b> | <b>1</b> | 144                              | 179 | 271 | 300  | 448  | 645               | 448  | 490  |
| <b>FRI 630</b> | <b>1</b> | 242                              | 279 | 508 | 577  | 834  | 1446              | 834  | 911  |
| <b>FRI 850</b> | <b>1</b> | 440                              | 541 | 971 | 1143 | 1705 | 2528              | 1705 | 1880 |

**Maximum flow rate for a complete return filter with a pressure drop  $\Delta p = 0.5$  bar.**



The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.




Hydraulic symbols

| Filter series  | Style 1 connection + Diff. indic. | Style 2 connections + Diff. indic. |
|----------------|-----------------------------------|------------------------------------|
| <b>FRI 025</b> |                                   | •                                  |
| <b>FRI 040</b> |                                   | •                                  |
| <b>FRI 100</b> |                                   | •                                  |
| <b>FRI 250</b> |                                   | •                                  |
| <b>FRI 255</b> | •                                 |                                    |
| <b>FRI 630</b> |                                   | •                                  |
| <b>FRI 850</b> | •                                 |                                    |



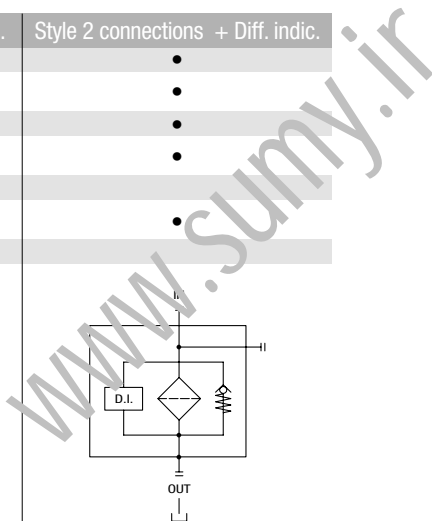



## Pressure drop

### Filter housings $\Delta p$ pressure drop

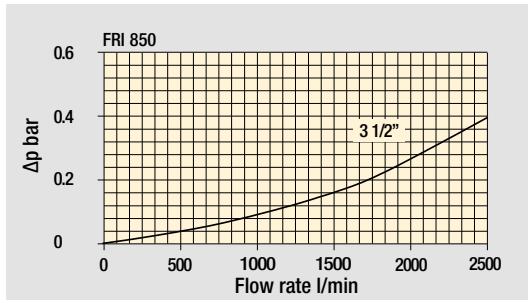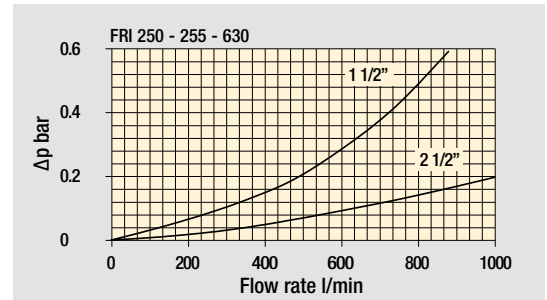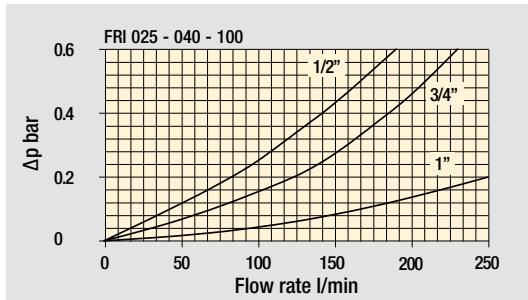

### Bypass valve pressure drop

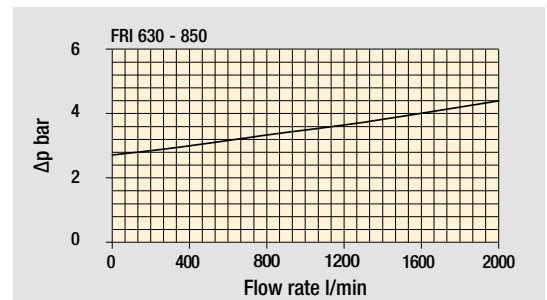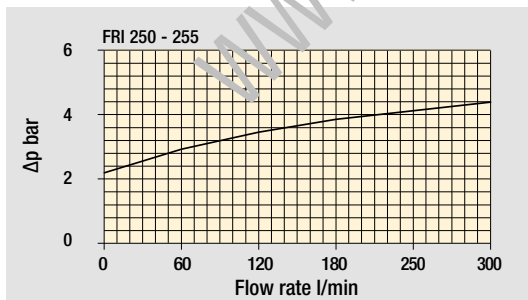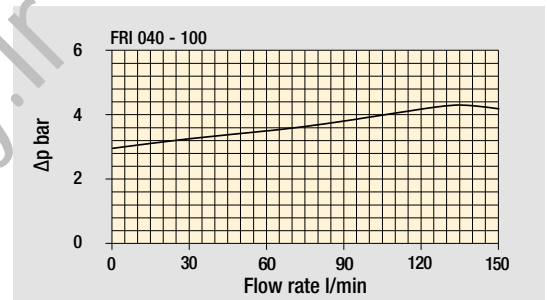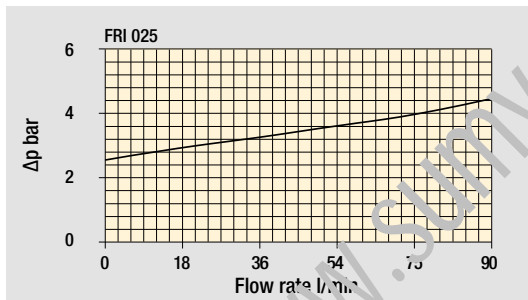

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

[www.sumy.ir](http://www.sumy.ir)

## Designation & Ordering code

### COMPLETE FILTER

|   |   |            |            |  |                               |  |  |
|---|---|------------|------------|--|-------------------------------|--|--|
| <b>Series and size</b>                  | Configuration example 1: <b>FRI025</b> <b>B</b> <b>A</b> <b>G1</b> <b>A25</b> <b>N</b> <b>P01</b> |            |            |  |                               |  |  |
| <b>FRI025</b>                           | Configuration example 2: <b>FRI040</b> <b>S</b> <b>W</b> <b>G2</b> <b>M25</b> <b>N</b> <b>P01</b> |            |            |  |                               |  |  |
| <b>FRI040</b>                           |   |            |            |  |                               |  |  |
| <b>Bypass valve</b>                     |   |            |            |  |                               |  |  |
| <b>B</b> With bypass                    |   |            |            |  |                               |  |  |
| <b>S</b> Without bypass                 |   |            |            |  |                               |  |  |
| <b>Seals and treatments</b>             | Filtration rating   |            |            |  |                               |  |  |
| <b>A</b> NBR                            | <b>Axx</b>  | <b>Mxx</b> | <b>Pxx</b> |  |                               |  |  |
| <b>V</b> FPM                            | •   | •          | •          |  |                               |  |  |
| <b>W</b> NBR head anodized              | •   | •          |            |  |                               |  |  |
| <b>Z</b> FPM head anodized              | •   | •          |            |  |                               |  |  |
|   | filter element compatible with fluids HFA-HFB-HFC   |            |            |  |                               |  |  |
| <b>Connections for FRI025</b>           | <b>Connections for FRI040</b>   |            |            |  |                               |  |  |
| <b>G1</b> G 1/2"                        | <b>G 3/4"</b>   |            |            |  |                               |  |  |
| <b>G2</b> 1/2" NPT                      | <b>3/4" NPT</b>   |            |            |  |                               |  |  |
| <b>G3</b> SAE 8 - 3/4" - 16 UNF         | <b>SAE 12 - 1 1/16" - 12 UN</b>   |            |            |  |                               |  |  |
| <b>Filtration rating (filter media)</b> |   |            |            |  |                               |  |  |
| <b>A03</b> Inorganic microfiber 3 µm    |   |            |            | <b>M25</b> Wire mesh 25 µm               |                               |  |  |
| <b>A06</b> Inorganic microfiber 6 µm    |   |            |            | <b>M60</b> Wire mesh 60 µm               |                               |  |  |
| <b>A10</b> Inorganic microfiber 10 µm   |   |            |            | <b>M90</b> Wire mesh 90 µm               |                               |  |  |
| <b>A16</b> Inorganic microfiber 16 µm   |   |            |            | <b>P10</b> Resin impregnated paper 10 µm |                               |  |  |
| <b>A25</b> Inorganic microfiber 25 µm   |   |            |            | <b>P25</b> Resin impregnated paper 25 µm |                               |  |  |
|   |   |            |            | <b>Element Δp</b>                        | <b>Execution</b>              |  |  |
|   |   |            |            | <b>N</b> 10 bar                          | <b>P01</b> MP Filtri standard |  |  |
|   |   |            |            |  | <b>Pxx</b> Customized         |  |  |


### FILTER ELEMENT

|   |  |            |            |  |  |  |  |
|---|--|------------|------------|--|--|--|--|
| <b>Element series and size</b>          | Configuration example 1: <b>CU025</b> <b>A25</b> <b>N</b> <b>P01</b> |            |            |  |  |  |  |
| <b>CU025</b>                            | Configuration example 2: <b>CU040</b> <b>M25</b> <b>W</b> <b>P01</b> |            |            |  |  |  |  |
| <b>CU040</b>                            |  |            |            |  |  |  |  |
| <b>Filtration rating (filter media)</b> |  |            |            |  |  |  |  |
| <b>A03</b> Inorganic microfiber 3 µm    |  |            |            | <b>M25</b> Wire mesh 25 µm               |  |  |  |
| <b>A06</b> Inorganic microfiber 6 µm    |  |            |            | <b>M60</b> Wire mesh 60 µm               |  |  |  |
| <b>A10</b> Inorganic microfiber 10 µm   |  |            |            | <b>M90</b> Wire mesh 90 µm               |  |  |  |
| <b>A16</b> Inorganic microfiber 16 µm   |  |            |            | <b>P10</b> Resin impregnated paper 10 µm |  |  |  |
| <b>A25</b> Inorganic microfiber 25 µm   |  |            |            | <b>P25</b> Resin impregnated paper 25 µm |  |  |  |
| <b>Seals and treatments</b>             | Filtration rating  |            |            |  |  |  |  |
| <b>N</b> NBR                            | <b>Axx</b>   | <b>Mxx</b> | <b>Pxx</b> |  |  |  |  |
| <b>V</b> FPM                            | •  | •          | •          |  |  |  |  |
| <b>W</b> NBR                            | •  | •          |            |  |  |  |  |
| <b>Z</b> FPM                            | •  | •          |            |  |  |  |  |
|   | filter element compatible with fluids HFA-HFB-HFC                    |            |            |  |  |  |  |
|   |  |            |            | <b>Execution</b>                         |  |  |  |
|   |  |            |            | <b>P01</b> MP Filtri standard            |  |  |  |
|   |  |            |            | <b>Pxx</b> Customized                    |  |  |  |


### ACCESSORIES

|   |         |  |      |
|---|---------|--|------|
| <b>Indicators</b>                                     | page    |  | page |
| <b>DEA</b> Electrical differential indicator          | 242     | <b>DTA</b> Electronic differential indicator | 245  |
| <b>DEM</b> Electrical differential indicator          | 242-243 | <b>DVA</b> Visual differential indicator     | 245  |
| <b>DLA</b> Electrical / visual differential indicator | 243-244 | <b>DVM</b> Visual differential indicator     | 245  |
| <b>DLE</b> Electrical / visual differential indicator | 244     |  |      |
| <b>Additional features</b>                            | page    |  |      |
| <b>T2</b> Plug  | 246     |  |      |

FRI025

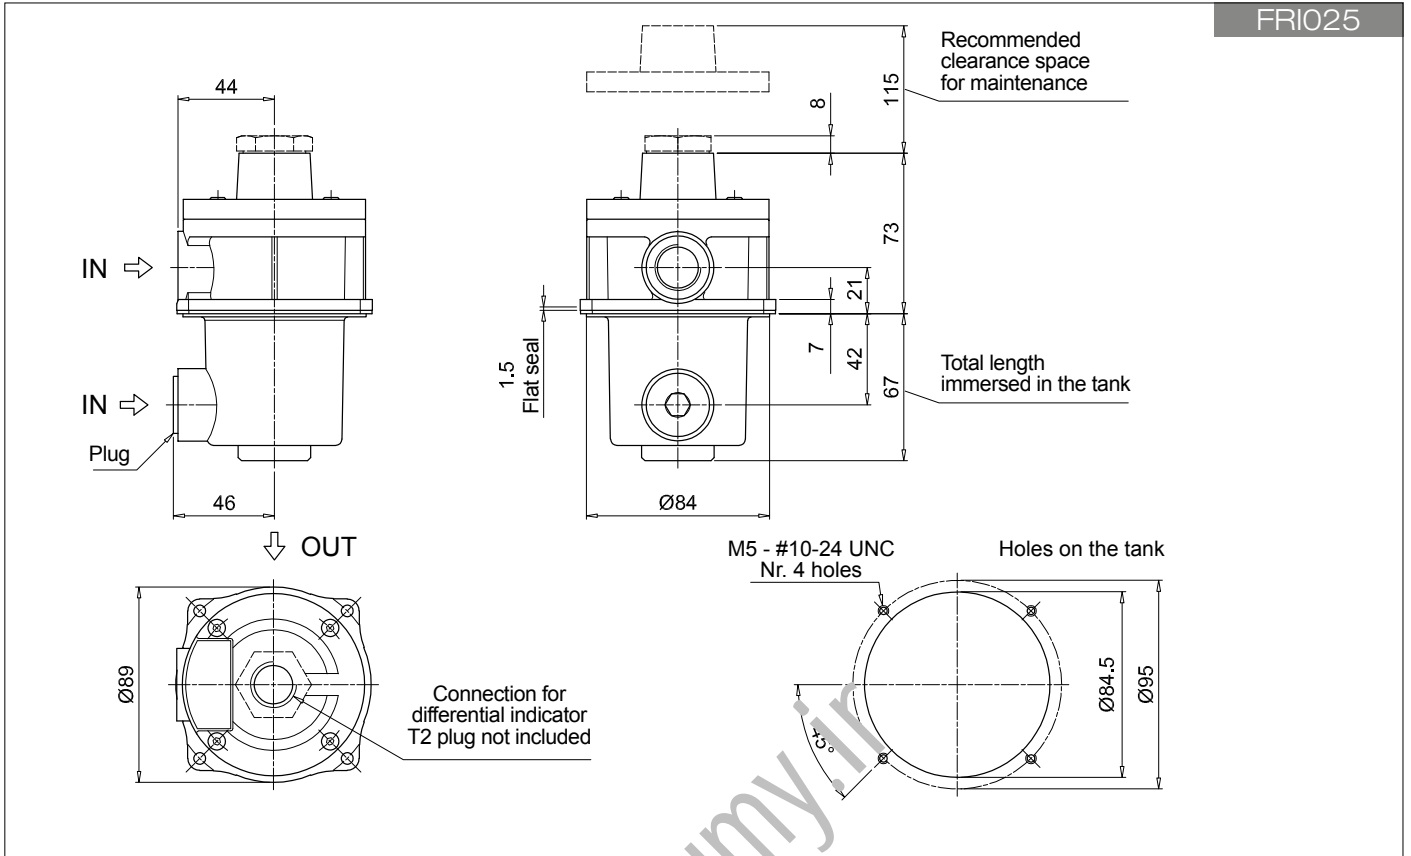

FRI040

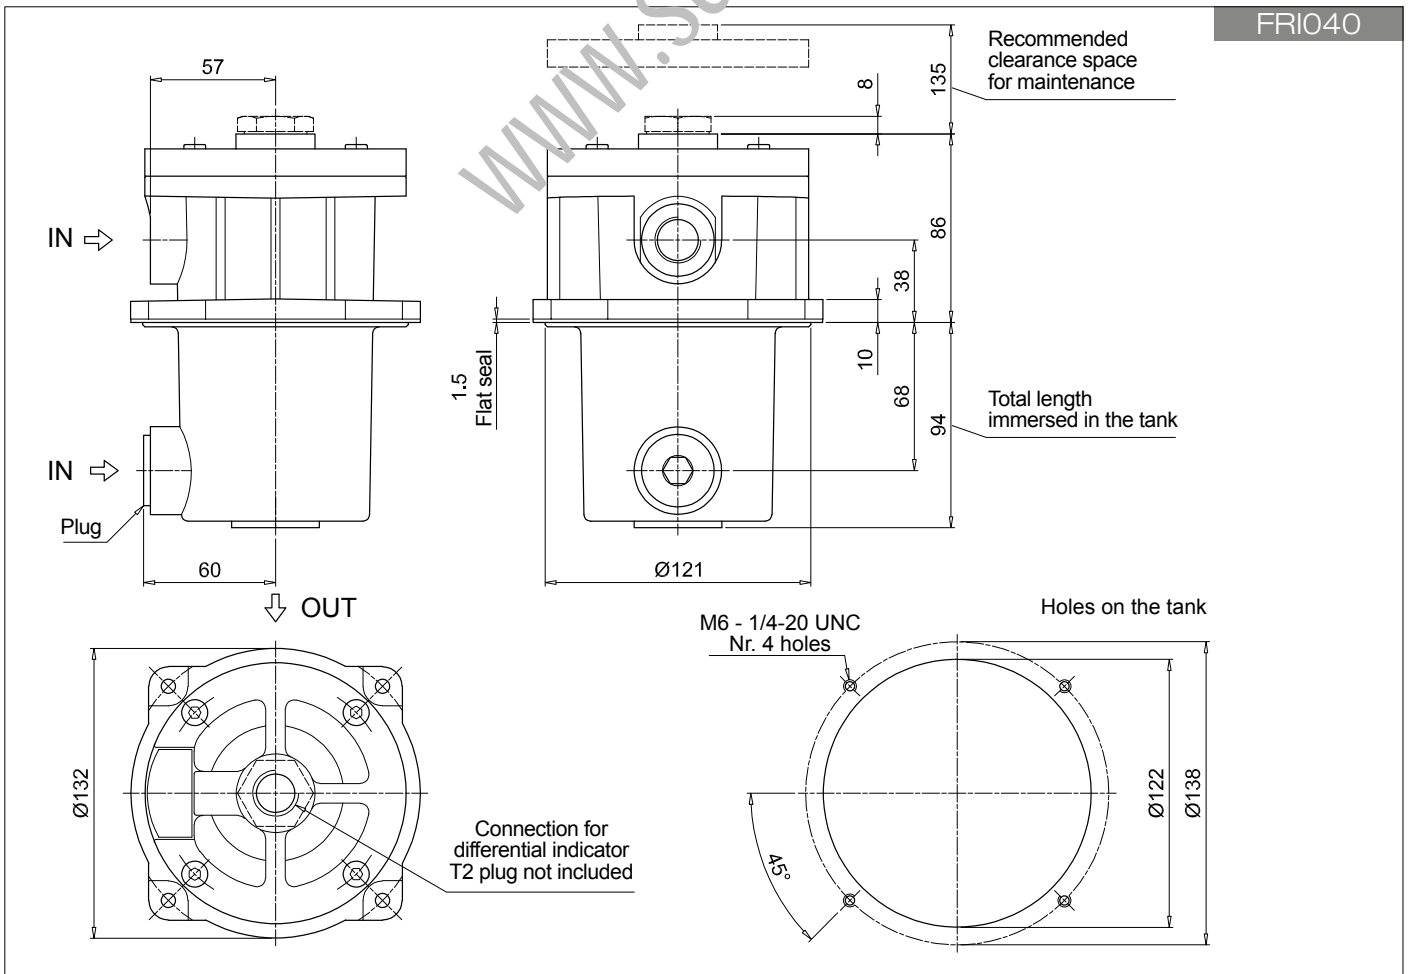

# FRI FRI100 - FRI250 - FRI630

## Designation & Ordering code

### COMPLETE FILTER

|   |   |                                |            |   |                               |  |  |
|---|---|--------------------------------|------------|---|-------------------------------|--|--|
| <b>Series and size</b>                  | Configuration example 1: <b>FRI100</b> <b>B</b> <b>A</b> <b>G1</b> <b>A25</b> <b>N</b> <b>P01</b> |                                |            |   |                               |  |  |
| <b>FRI100</b>                           | Configuration example 2: <b>FRI630</b> <b>S</b> <b>W</b> <b>F2</b> <b>M25</b> <b>N</b> <b>P01</b> |                                |            |   |                               |  |  |
| <b>FRI250</b>                           |   |                                |            |   |                               |  |  |
| <b>FRI630</b>                           |   |                                |            |   |                               |  |  |
| <b>Bypass valve</b>                     |   |                                |            |   |                               |  |  |
| <b>B</b> With bypass                    |   |                                |            |   |                               |  |  |
| <b>S</b> Without bypass                 |   |                                |            |   |                               |  |  |
| <b>Seals and treatments</b>             | Filtration rating   |                                |            |   |                               |  |  |
| <b>A</b> NBR                            | <b>Axx</b>  | <b>Mxx</b>                     | <b>Pxx</b> |   |                               |  |  |
| <b>V</b> FPM                            | •   | •                              | •          |   |                               |  |  |
| <b>W</b> NBR head anodized              | •   | •                              |            | filter element compatible with fluids HFA-HFB-HFC |                               |  |  |
| <b>Z</b> FPM head anodized              | •   | •                              |            |   |                               |  |  |
| <b>Connections for FRI100</b>           | <b>Connections for FRI250</b>   | <b>Connections for FRI630</b>  |            |   |                               |  |  |
| <b>G1</b> G 1"                          | <b>G</b> 1 1/2"   | <b>G</b> 2 1/2"                |            |   |                               |  |  |
| <b>G2</b> 1" NPT                        | <b>1</b> 1/2" NPT   | <b>2</b> 1/2" NPT              |            |   |                               |  |  |
| <b>G3</b> SAE 16 - 1 5/16" - 12 UN      | <b>SAE</b> 24 - 1 7/8" - 12 UN  | <b>SAE</b> 32 - 2 1/2" - 12 UN |            |   |                               |  |  |
| <b>F1</b> 1" SAE 3000 psi/M             | <b>1</b> 1/2" SAE 3000 psi/M  | <b>2</b> 1/2" SAE 3000 psi/M   |            |   |                               |  |  |
| <b>F2</b> 1" SAE 3000 psi/UNC           | <b>1</b> 1/2" SAE 3000 psi/UNC  | <b>2</b> 1/2" SAE 3000 psi/UNC |            |   |                               |  |  |
| <b>Filtration rating (filter media)</b> |   |                                |            |   |                               |  |  |
| <b>A03</b> Inorganic microfiber 3 µm    | <b>M25</b> Wire mesh 25 µm  |                                |            |   |                               |  |  |
| <b>A06</b> Inorganic microfiber 6 µm    | <b>M60</b> Wire mesh 60 µm  |                                |            |   |                               |  |  |
| <b>A10</b> Inorganic microfiber 10 µm   | <b>M90</b> Wire mesh 90 µm  |                                |            |   |                               |  |  |
| <b>A16</b> Inorganic microfiber 16 µm   | <b>P10</b> Resin impregnated paper 10 µm  |                                |            |   |                               |  |  |
| <b>A25</b> Inorganic microfiber 25 µm   | <b>P25</b> Resin impregnated paper 25 µm  |                                |            |   |                               |  |  |
|   |   |                                |            | <b>Element Δp</b>                                 | <b>Execution</b>              |  |  |
|   |   |                                |            | <b>N</b> 10 bar                                   | <b>P01</b> MP Filtri standard |  |  |
|   |   |                                |            |   | <b>Pxx</b> Customized         |  |  |



### FILTER ELEMENT

|   |  |            |            |   |
|---|--|------------|------------|---|
| <b>Element series and size</b>          | Configuration example 1: <b>CU100</b> <b>A25</b> <b>N</b> <b>P01</b> |            |            |   |
| <b>CU100</b>                            | Configuration example 2: <b>CU630</b> <b>M25</b> <b>W</b> <b>P01</b> |            |            |   |
| <b>CU250</b>                            |  |            |            |   |
| <b>CU630</b>                            |  |            |            |   |
| <b>Filtration rating (filter media)</b> |  |            |            |   |
| <b>A03</b> Inorganic microfiber 3 µm    | <b>M25</b> Wire mesh 25 µm   |            |            |   |
| <b>A06</b> Inorganic microfiber 6 µm    | <b>M60</b> Wire mesh 60 µm   |            |            |   |
| <b>A10</b> Inorganic microfiber 10 µm   | <b>M90</b> Wire mesh 90 µm   |            |            |   |
| <b>A16</b> Inorganic microfiber 16 µm   | <b>P10</b> Resin impregnated paper 10 µm                             |            |            |   |
| <b>A25</b> Inorganic microfiber 25 µm   | <b>P25</b> Resin impregnated paper 25 µm                             |            |            |   |
| <b>Seals and treatments</b>             | Filtration rating  |            |            |   |
| <b>N</b> NBR                            | <b>Axx</b>   | <b>Mxx</b> | <b>Pxx</b> |   |
| <b>V</b> FPM                            | •  | •          | •          |   |
| <b>W</b> NBR                            | •  | •          |            | filter element compatible with fluids HFA-HFB-HFC |
| <b>Z</b> FPM                            | •  | •          |            |   |
|   |  |            |            | <b>Execution</b>                                  |
|   |  |            |            | <b>P01</b> MP Filtri standard                     |
|   |  |            |            | <b>Pxx</b> Customized                             |



### ACCESSORIES



|   |         |  |      |
|---|---------|--|------|
| <b>Indicators</b>                                     | page    |  | page |
| <b>DEA</b> Electrical differential indicator          | 242     | <b>DTA</b> Electronic differential indicator | 245  |
| <b>DEM</b> Electrical differential indicator          | 242-243 | <b>DVA</b> Visual differential indicator     | 245  |
| <b>DLA</b> Electrical / visual differential indicator | 243-244 | <b>DVM</b> Visual differential indicator     | 245  |
| <b>DLE</b> Electrical / visual differential indicator | 244     |  |      |
| <b>Additional features</b>                            | page    |  |      |
| <b>T2</b> Plug  | 246     |  |      |



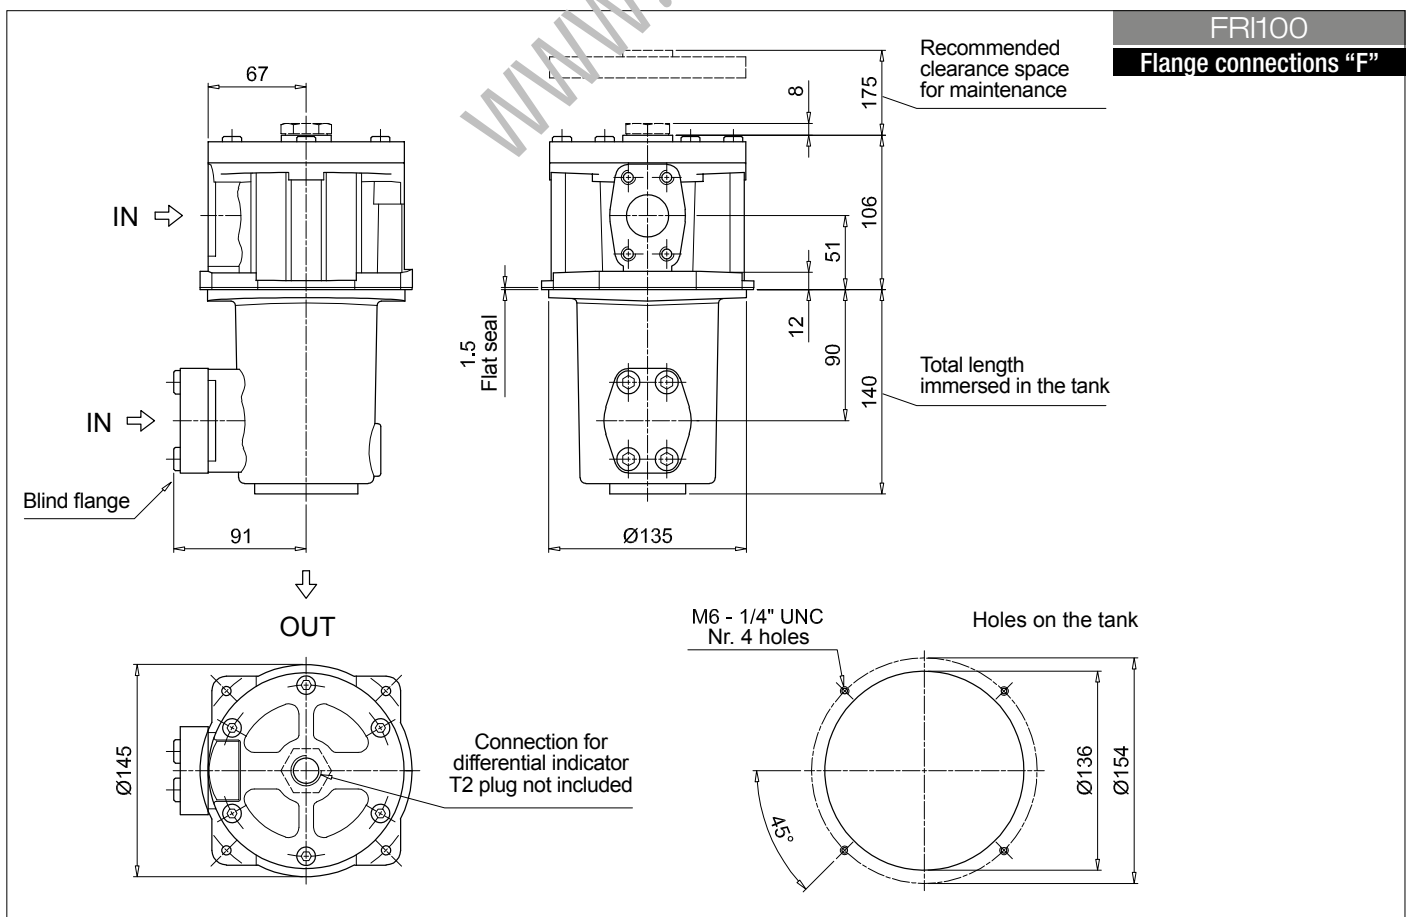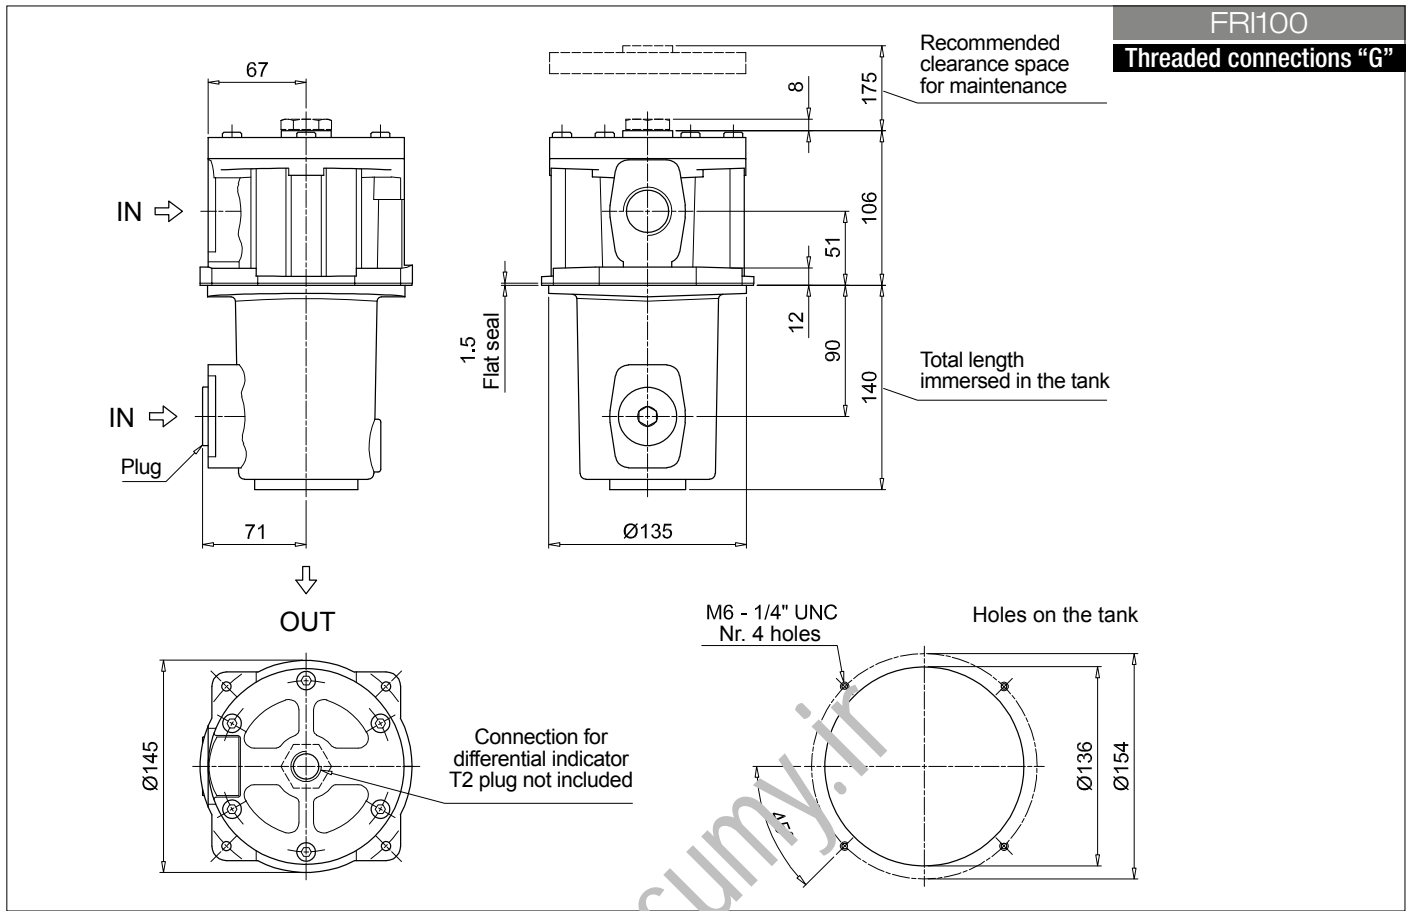

## Dimensions

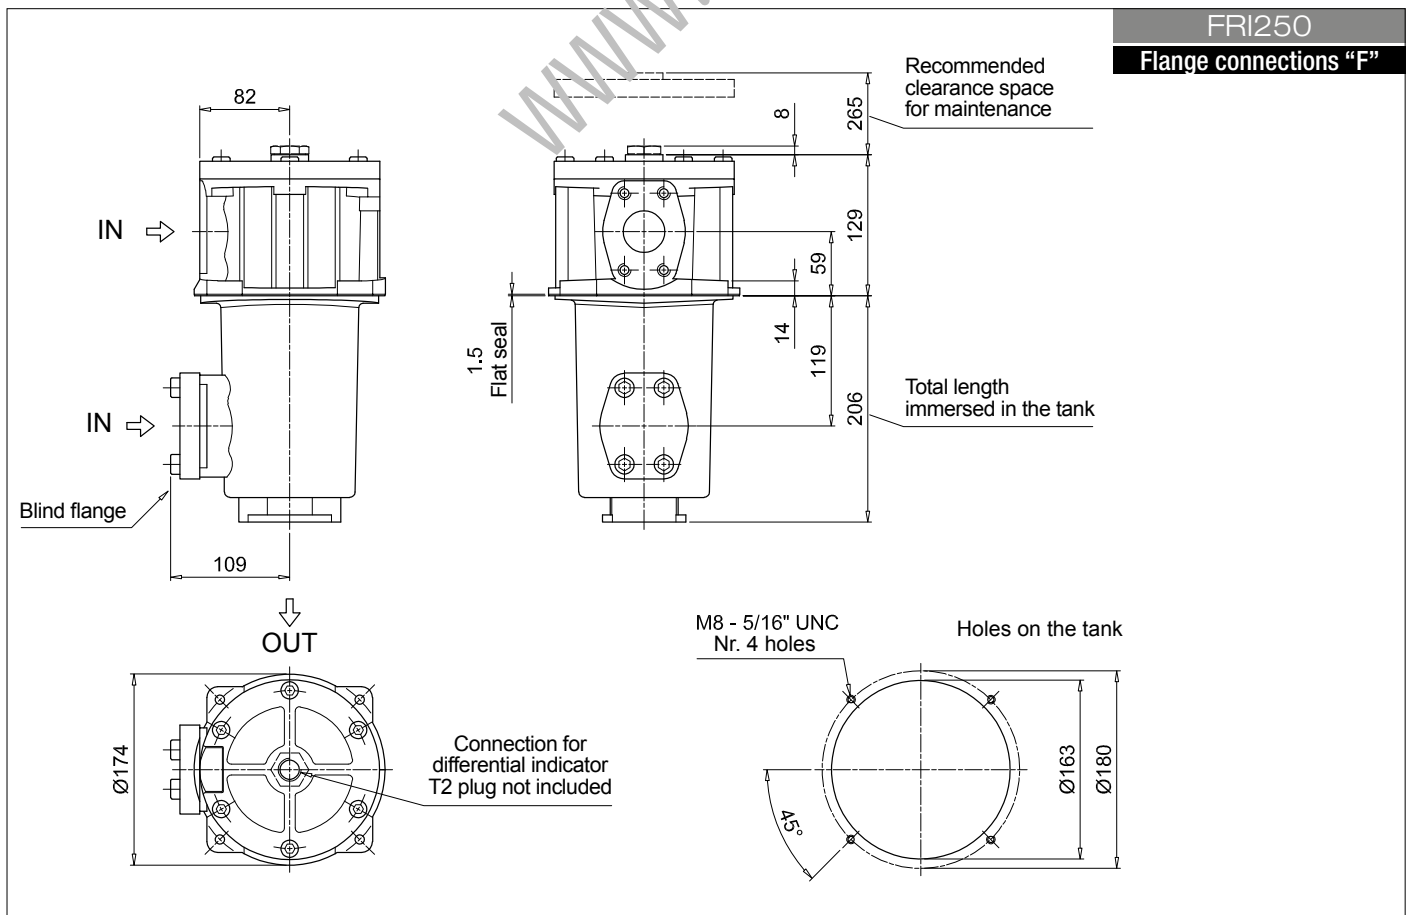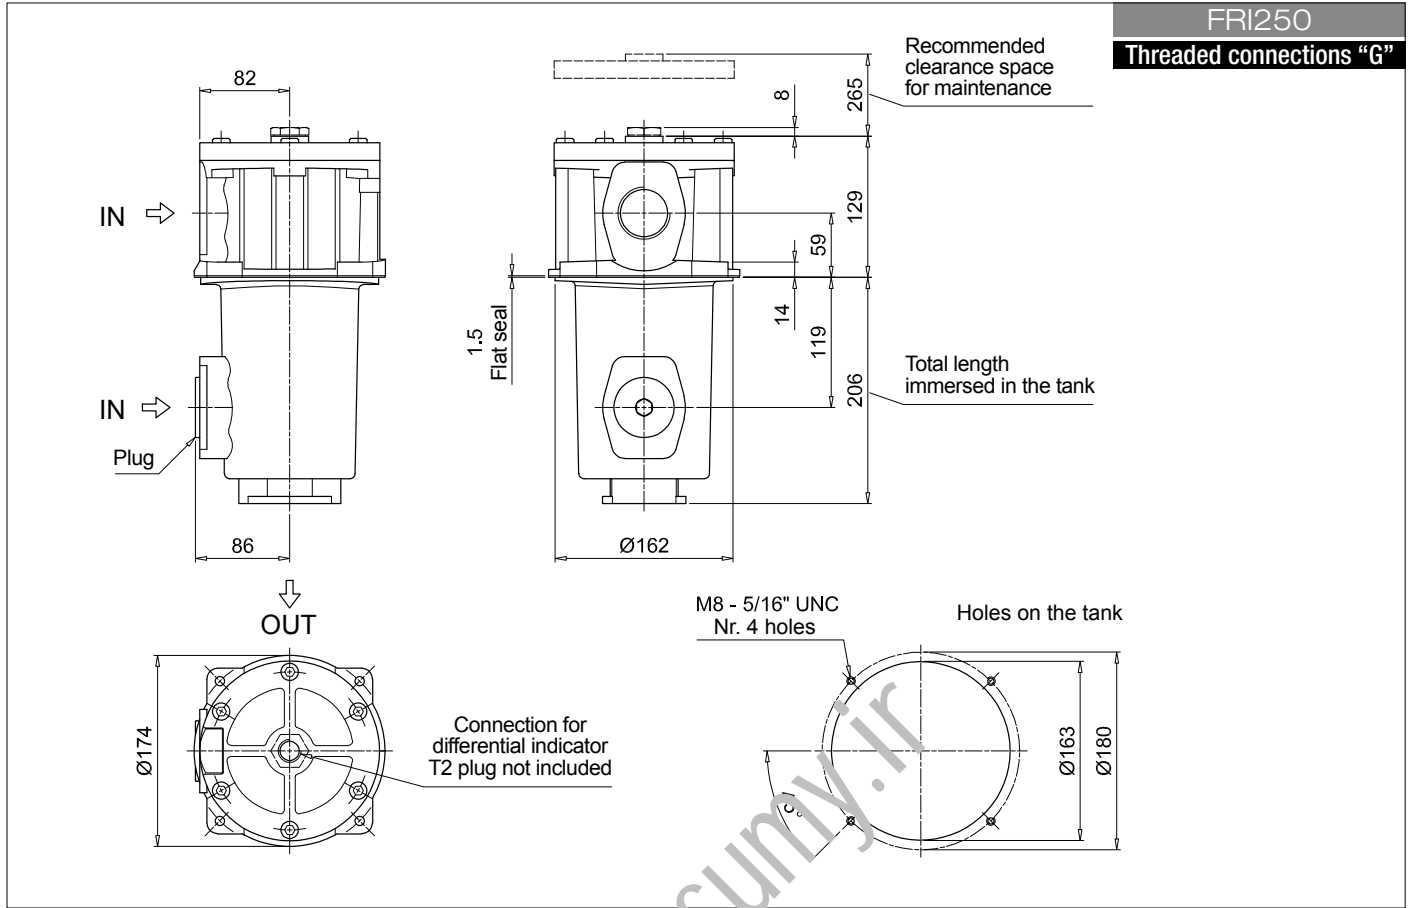

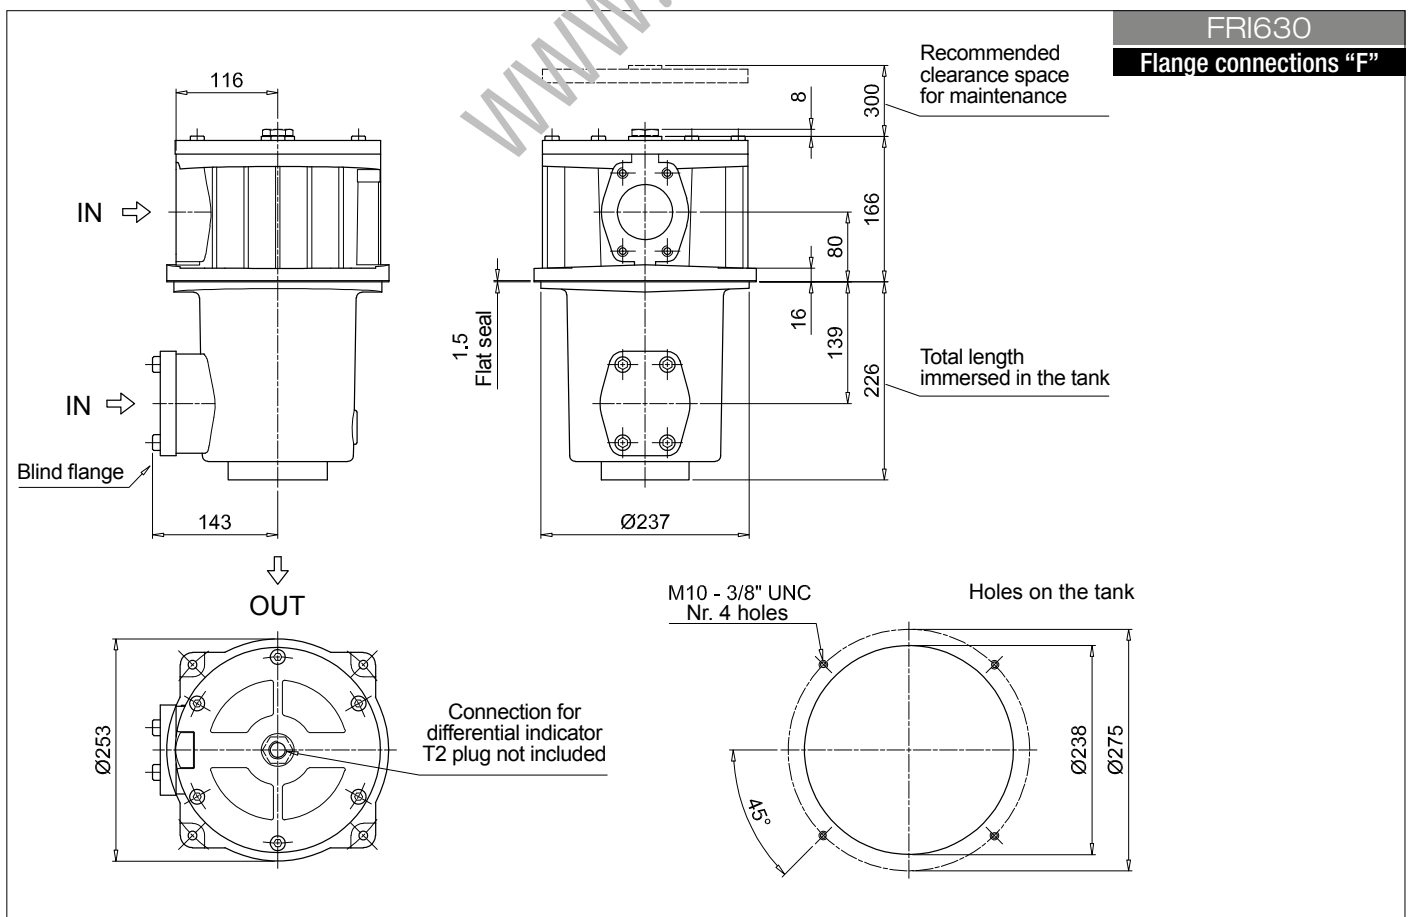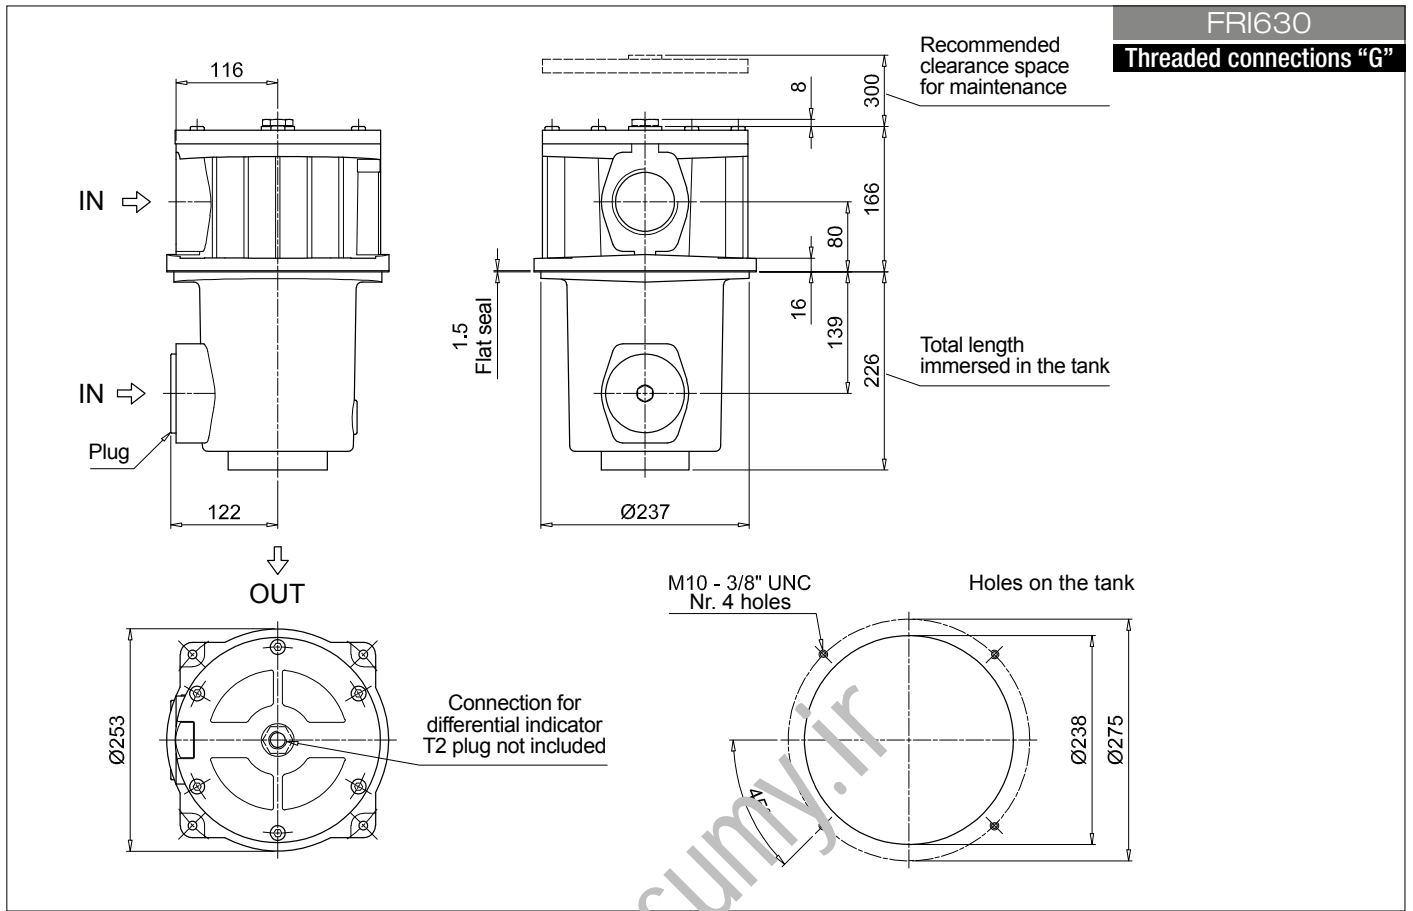

## Designation & Ordering code

### COMPLETE FILTER

|   |   |            |            |   |                               |  |  |
|---|---|------------|------------|---|-------------------------------|--|--|
| <b>Series and size</b>                  | Configuration example 1: <b>FRI255</b> <b>S</b> <b>W</b> <b>F2</b> <b>M25</b> <b>N</b> <b>P01</b> |            |            |   |                               |  |  |
| <b>FRI255</b>                           | Configuration example 2: <b>FRI850</b> <b>B</b> <b>A</b> <b>F1</b> <b>A25</b> <b>N</b> <b>P01</b> |            |            |   |                               |  |  |
| <b>FRI850</b>                           |   |            |            |   |                               |  |  |
| <b>Bypass valve</b>                     |   |            |            |   |                               |  |  |
| <b>B</b> With bypass                    |   |            |            |   |                               |  |  |
| <b>S</b> Without bypass                 |   |            |            |   |                               |  |  |
| <b>Seals and treatments</b>             | Filtration rating   |            |            |   |                               |  |  |
|   | <b>Axx</b>  | <b>Mxx</b> | <b>Pxx</b> |   |                               |  |  |
| <b>A</b> NBR                            | •   | •          | •          |   |                               |  |  |
| <b>V</b> FPM                            | •   | •          | •          |   |                               |  |  |
| <b>W</b> NBR head anodized              | •   | •          |            | filter element compatible with fluids HFA-HFB-HFC |                               |  |  |
| <b>Z</b> FPM head anodized              | •   | •          |            |   |                               |  |  |
| <b>Connections for FRI255</b>           | <b>Connections for FRI850</b>   |            |            |   |                               |  |  |
| <b>G1</b> G 1 1/2"                      | <b>F1</b> 3 1/2" SAE 3000 psi/M   |            |            |   |                               |  |  |
| <b>G2</b> 1 1/2" NPT                    | <b>F2</b> 3 1/2" SAE 3000 psi/UNC   |            |            |   |                               |  |  |
| <b>G3</b> SAE 24 - 1 7/8" - 12 UN       |   |            |            |   |                               |  |  |
| <b>G4</b> G 1 1/4"                      |   |            |            |   |                               |  |  |
| <b>G5</b> 1 1/4" NPT                    |   |            |            |   |                               |  |  |
| <b>G6</b> SAE 20 - 1 5/8" - 12 UN       |   |            |            |   |                               |  |  |
| <b>F1</b> 1 1/2" SAE 3000 psi/M         |   |            |            |   |                               |  |  |
| <b>F2</b> 1 1/2" SAE 3000 psi/UNC       |   |            |            |   |                               |  |  |
| <b>Filtration rating (filter media)</b> |   |            |            |   |                               |  |  |
| <b>A03</b> Inorganic microfiber 3 µm    | <b>M25</b> Wire mesh 25 µm  |            |            |   |                               |  |  |
| <b>A06</b> Inorganic microfiber 6 µm    | <b>M60</b> Wire mesh 60 µm  |            |            |   |                               |  |  |
| <b>A10</b> Inorganic microfiber 10 µm   | <b>M90</b> Wire mesh 90 µm  |            |            |   |                               |  |  |
| <b>A16</b> Inorganic microfiber 16 µm   | <b>P10</b> Resin impregnated paper 10 µm  |            |            |   |                               |  |  |
| <b>A25</b> Inorganic microfiber 25 µm   | <b>P25</b> Resin impregnated paper 25 µm  |            |            |   |                               |  |  |
|   |   |            |            | <b>Element Δp</b>                                 | <b>Execution</b>              |  |  |
|   |   |            |            | <b>N</b> 10 bar                                   | <b>P01</b> MP Filtri standard |  |  |
|   |   |            |            |   | <b>Pxx</b> Customized         |  |  |

### FILTER ELEMENT

|   |  |            |            |   |
|---|--|------------|------------|---|
| <b>Element series and size</b>          | Configuration example 1: <b>CU250</b> <b>M25</b> <b>W</b> <b>P01</b> |            |            |   |
| <b>CU250</b>                            | Configuration example 2: <b>CU850</b> <b>A25</b> <b>N</b> <b>P01</b> |            |            |   |
| <b>CU850</b>                            |  |            |            |   |
| <b>Filtration rating (filter media)</b> |  |            |            |   |
| <b>A03</b> Inorganic microfiber 3 µm    | <b>M25</b> Wire mesh 25 µm   |            |            |   |
| <b>A06</b> Inorganic microfiber 6 µm    | <b>M60</b> Wire mesh 60 µm   |            |            |   |
| <b>A10</b> Inorganic microfiber 10 µm   | <b>M90</b> Wire mesh 90 µm   |            |            |   |
| <b>A16</b> Inorganic microfiber 16 µm   | <b>P10</b> Resin impregnated paper 10 µm                             |            |            |   |
| <b>A25</b> Inorganic microfiber 25 µm   | <b>P25</b> Resin impregnated paper 25 µm                             |            |            |   |
| <b>Seals and treatments</b>             | Filtration rating  |            |            |   |
|   | <b>Axx</b>   | <b>Mxx</b> | <b>Pxx</b> |   |
| <b>N</b> NBR                            | •  | •          | •          |   |
| <b>V</b> FPM                            | •  | •          | •          |   |
| <b>W</b> NBR                            | •  | •          |            | filter element compatible with fluids HFA-HFB-HFC |
| <b>Z</b> FPM                            | •  | •          |            |   |
|   |  |            |            | <b>Execution</b>                                  |
|   |  |            |            | <b>P01</b> MP Filtri standard                     |
|   |  |            |            | <b>Pxx</b> Customized                             |

### FRI255 ACCESSORIES


|   |      |   |         |
|---|------|---|---------|
| <b>Indicators</b>   | page |   | page    |
| <b>BVA</b> Axial pressure gauge                           | 240  | <b>BEA</b> Electrical pressure indicator          | 239     |
| <b>BVR</b> Radial pressure gauge                          | 240  | <b>BEM</b> Electrical pressure indicator          | 239     |
| <b>BVP</b> Visual pressure indicator with automatic reset | 241  | <b>BLA</b> Electrical / visual pressure indicator | 239-240 |
| <b>BVQ</b> Visual pressure indicator with manual reset    | 241  |   |         |

### FRI850 ACCESSORIES


|   |         |  |      |
|---|---------|--|------|
| <b>Indicators</b>                                     | page    |  | page |
| <b>DEA</b> Electrical differential indicator          | 242     | <b>DTA</b> Electronic differential indicator | 245  |
| <b>DEM</b> Electrical differential indicator          | 242-243 | <b>DVA</b> Visual differential indicator     | 245  |
| <b>DLA</b> Electrical / visual differential indicator | 243-244 | <b>DVM</b> Visual differential indicator     | 245  |
| <b>DLE</b> Electrical / visual differential indicator | 244     |  |      |

|                            |      |
|----------------------------|------|
| <b>Additional features</b> | page |
| <b>T2</b> Plug             | 246  |

FRI255

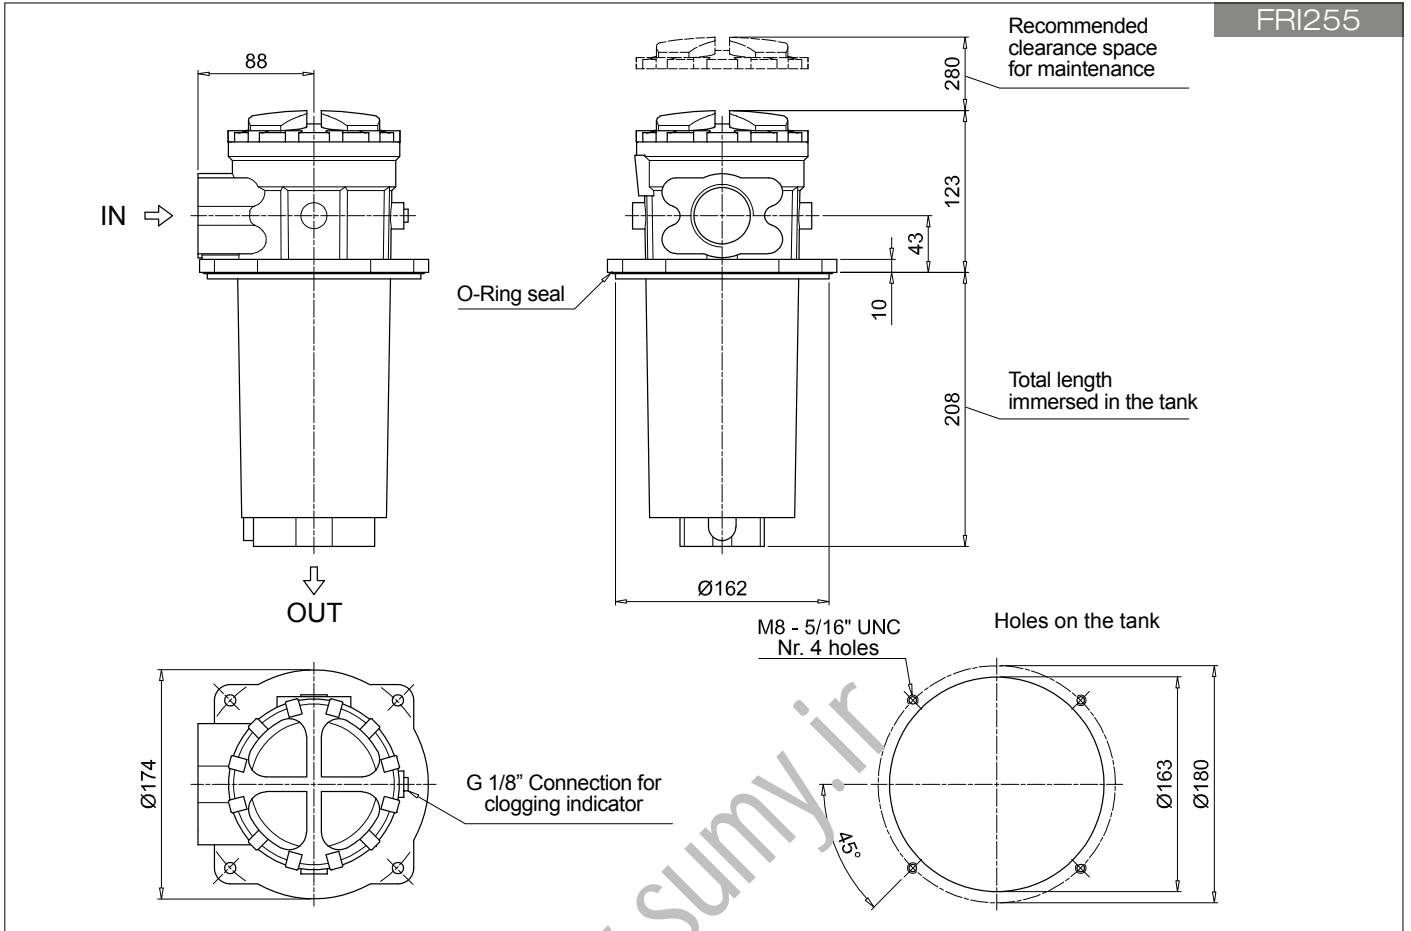


FRI850

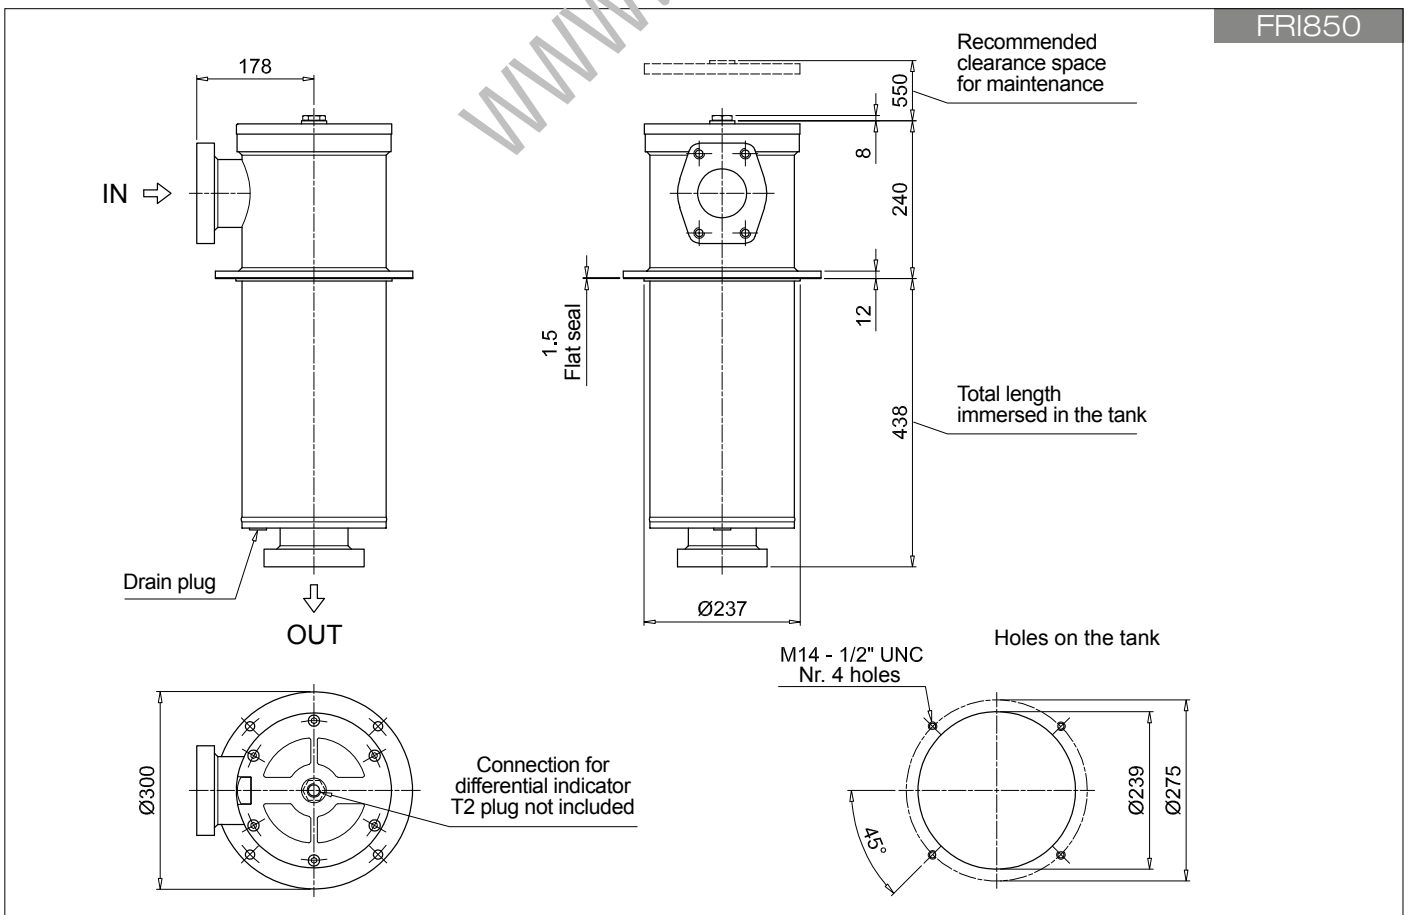

# FRI SPARE PARTS


Order number for spare parts

## FRI 025 - 040

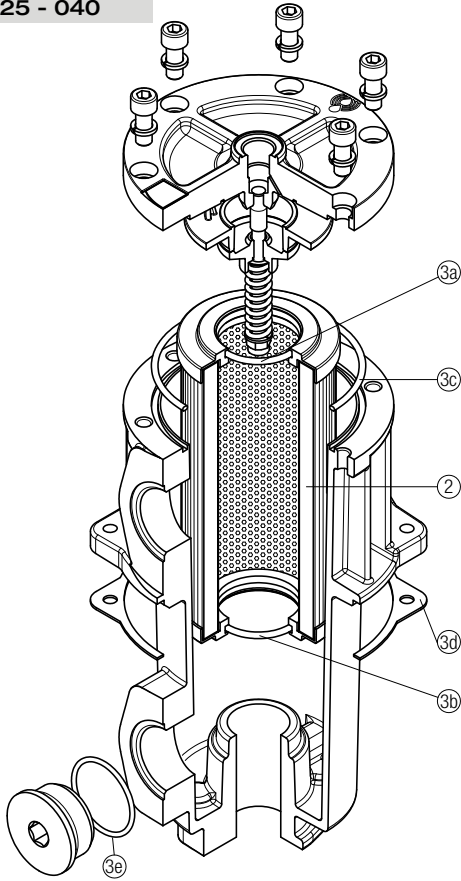


| Item:          | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          |
|----------------|-----------------|----------------------|----------|
|                | <b>2</b>        | <b>3</b> (3a ÷ 3e)   |          |
| Filter series  | Filter element  | Seal Kit code number |          |
|                |                 | NBR                  | FPM      |
| <b>FRI 025</b> | See order table | 02050213             | 02050220 |
| <b>FRI 040</b> |                 | 02050214             | 02050221 |

## FRI 100 - 250 - 630

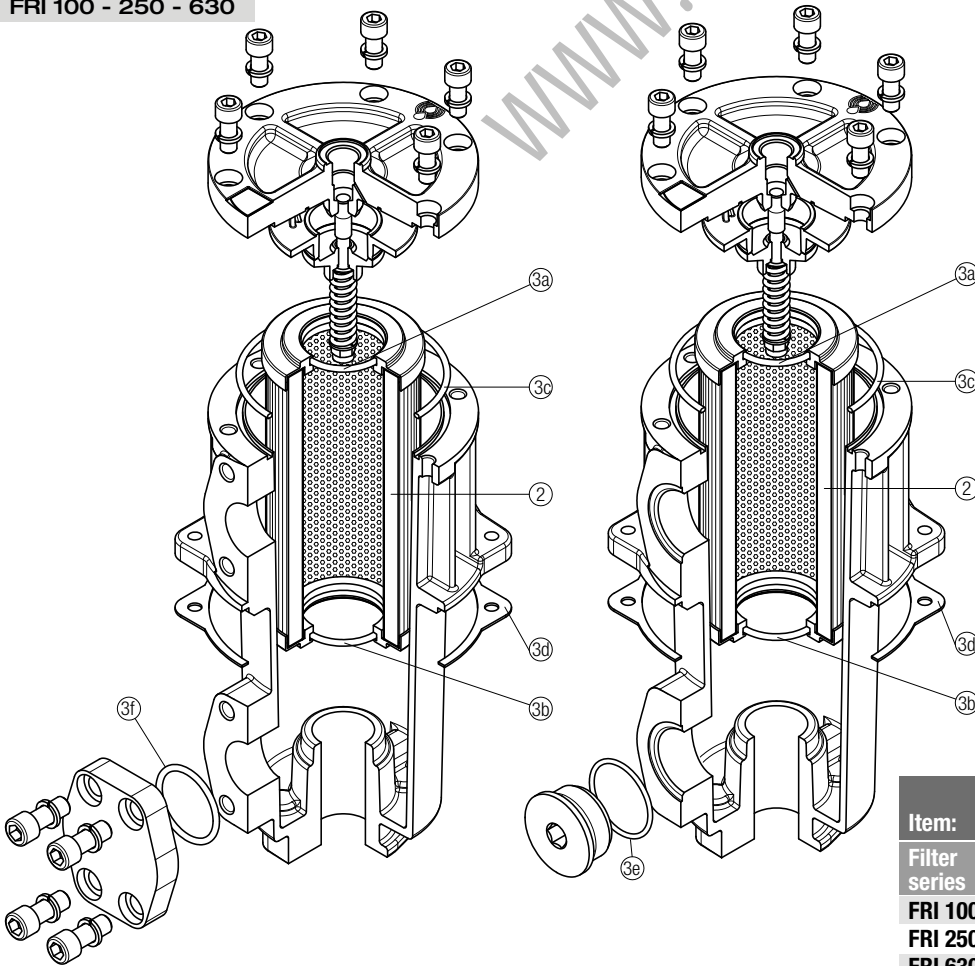


| Item:          | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          |
|----------------|-----------------|----------------------|----------|
|                | <b>2</b>        | <b>3</b> (3a ÷ 3f)   |          |
| Filter series  | Filter element  | Seal Kit code number |          |
|                |                 | NBR                  | FPM      |
| <b>FRI 100</b> | See order table | 02050215             | 02050222 |
| <b>FRI 250</b> |                 | 02050216             | 02050223 |
| <b>FRI 630</b> |                 | 02050217             | 02050224 |

## FRI 255

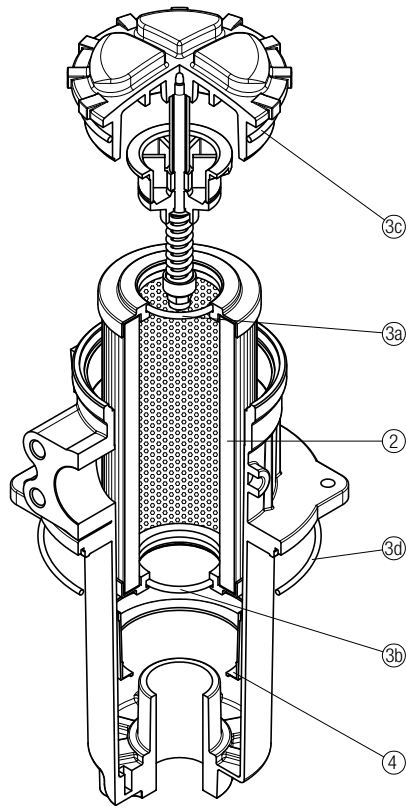

| Item:          | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          | Q.ty: 1 pc.                   |
|----------------|-----------------|----------------------|----------|-------------------------------|
| Filter series  | Filter element  | Seal Kit code number |          | Contamination retainer binder |
|                | See order table | NBR                  | FPM      |                               |
| <b>FRI 255</b> |                 | 02050013             | 02050014 | 01060301                      |

## FRI 850

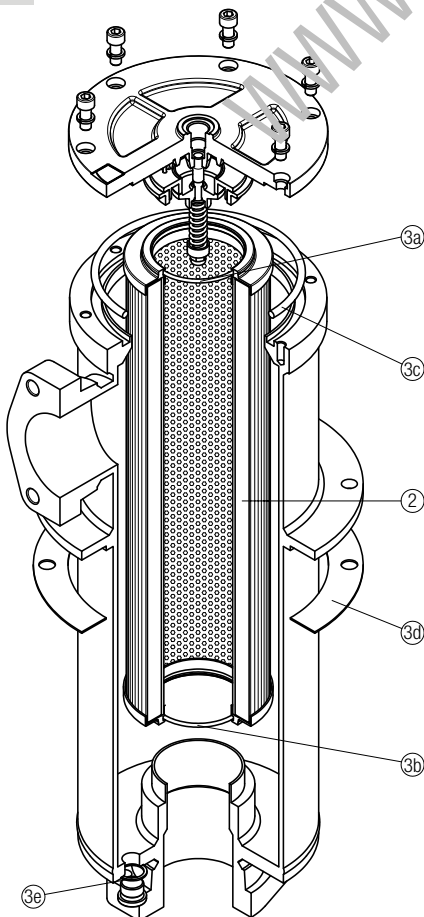

| Item:          | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          |
|----------------|-----------------|----------------------|----------|
| Filter series  | Filter element  | Seal Kit code number |          |
|                | See order table | NBR                  | FPM      |
| <b>FRI 850</b> |                 | 02050218             | 02050225 |

www.sumy.ir



# RF2 series

Maximum working pressure up to 2 MPa (20 bar) - Flow rate up to 615 l/min



## Description

## Technical data

### Return filter

**Maximum working pressure up to 2 MPa (20 bar)**  
**Flow rate up to 615 l/min**

RF2250 and RF2350 are ranges of return filters for side tank mounting with integrated shut-off valve for protection of the reservoir against the system contamination.

They are placed below the minimum oil level, directly connected to the return line of the system.

The shut-off valve closes automatically when the cover is removed, allowing the filter element replacement without the fluid drop.

#### Available features:

- Female threaded connections up to 1" and flanged connections up to 1 1/2", for a maximum flow rate of 615 l/min
- Bypass valve, to relieve excessive pressure drop across the filter media
- Magnetic filter, to hold the ferrous particles
- Visual, electrical and electronic clogging indicators

#### Common applications:

- Compact mobile machines
- Compact industrial equipment

### Filter housing materials

- Filter body: Aluminium
- Cover: Polyamide, GF reinforced
- Valve: Polyamide, GF reinforced - Steel
- Anti-Emptying valve: Steel

### Bypass valve

Opening pressure 175 kPa (1.75 bar)  $\pm$ 10%

### $\Delta p$ element type

- Microfibre filter elements - series CU: 10 bar
- Fluid flow through the filter element from OUT to IN

### Seals

- Standard NBR series A
- Optional FPM series V

### Temperature

From -25 °C to +110 °C

### Note

RF2 250-350 filters mounting, see the drawings on page 235 and following



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series  | Weights [kg] |     | Volumes [dm <sup>3</sup> ] |     |
|----------------|--------------|-----|----------------------------|-----|
|                | Length       | 1   | Length                     | 1   |
| <b>RF2 250</b> |              | 2.6 |                            | 2.0 |
| <b>RF2 350</b> |              | 2.8 |                            | 2.0 |

| Filter series  | Length   | Filter element design - N Series |     |     |     |     |                   |     |     |
|----------------|----------|----------------------------------|-----|-----|-----|-----|-------------------|-----|-----|
|                |          | A03                              | A06 | A10 | A16 | A25 | M25<br>M60<br>M90 | P10 | P25 |
| <b>RF2 250</b> | <b>1</b> | 148                              | 184 | 278 | 307 | 447 | 615               | 447 | 485 |
| <b>RF2 350</b> | <b>1</b> | 148                              | 184 | 278 | 307 | 447 | 615               | 447 | 485 |


### Maximum flow rate for a complete return filter with a pressure drop $\Delta p = 0.5$ bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.


For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.


| Filter series  | Style B - E |
|----------------|-------------|
| <b>RF2 250</b> | •           |
| <b>RF2 350</b> | •           |



Hydraulic symbols

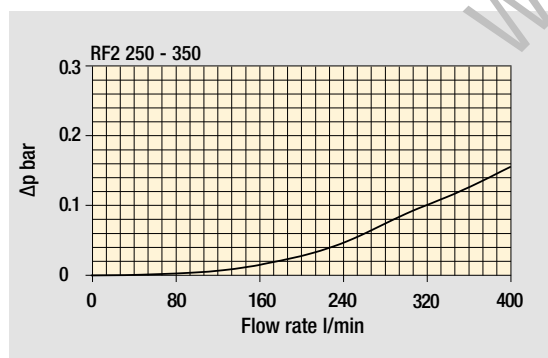

Pressure drop  
Filter housings  $\Delta p$  pressure drop

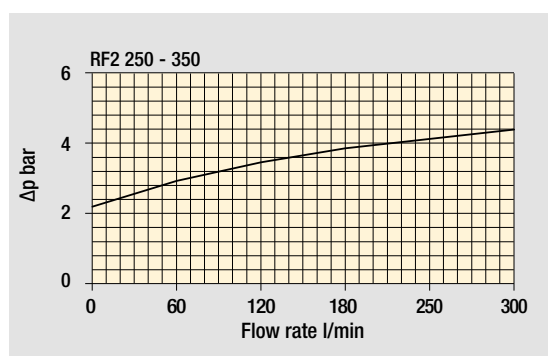

Bypass valve pressure drop

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

# RF2 RF2250 - RF2350



## Designation & Ordering code

### COMPLETE FILTER


|   |  |       |  |  |                         |            |            |  |  |
|---|--|-------|--|--|-------------------------|------------|------------|--|--|
| <b>Series and size</b>                  |  |       |  | Configuration example 1: <b>RF2250</b> <b>W</b> <b>F2</b> <b>E</b> <b>M25</b> <b>P01</b> |                         |            |            |  |  |
| <b>RF2250</b>                           |  |       |  | Configuration example 2: <b>RF2350</b> <b>A</b> <b>G1</b> <b>B</b> <b>A25</b> <b>P01</b> |                         |            |            |  |  |
| <b>RF2350</b>                           |  |       |  |  |                         |            |            |  |  |
|   |  |       |  | Filtration rating  |                         |            |            |  |  |
| <b>Seals and treatments</b>             |  |       |  | <b>Axx</b>   | <b>Mxx</b>              | <b>Pxx</b> |            |  |  |
| <b>A</b>                                | NBR                                    |       |  | •  | •                       | •          |            |  |  |
| <b>V</b>                                | FPM                                    |       |  | •  | •                       | •          |            |  |  |
| <b>W</b>                                | NBR compatible with fluids HFA-HFB-HFC |       |  | •  | •                       |            |            |  |  |
| <b>Z</b>                                | FPM compatible with fluids HFA-HFB-HFC |       |  | •  | •                       |            |            |  |  |
| <b>Connections</b>                      |  |       |  | <b>Aux (only RF2350)</b>   |                         | <b>Mxx</b> | <b>Pxx</b> |  |  |
| <b>G1</b>                               | G 1 1/2"                               |       |  | G 1"   |                         | •          | •          |  |  |
| <b>G2</b>                               | 1 1/2" NPT                             |       |  | -  |                         | •          |            |  |  |
| <b>G3</b>                               | SAE 24 - 1 7/8" - 12 UN                |       |  | SAE 16 - 1 5/16" - 12 UN   |                         | •          | •          |  |  |
| <b>G4</b>                               | G 1 1/4"                               |       |  | -  |                         | •          |            |  |  |
| <b>G5</b>                               | 1 1/4" NPT                             |       |  | -  |                         | •          |            |  |  |
| <b>G6</b>                               | SAE 20 - 1 5/8" - 12 UN                |       |  | -  |                         | •          |            |  |  |
| <b>G7</b>                               | G 1"                                   |       |  | -  |                         | •          |            |  |  |
| <b>G8</b>                               | 1" NPT                                 |       |  | -  |                         | •          |            |  |  |
| <b>G9</b>                               | SAE 16 - 1 5/16" - 12 UN               |       |  | -  |                         | •          |            |  |  |
| <b>F1</b>                               | 1 1/2" SAE 3000 psi/M                  |       |  | -  |                         | •          |            |  |  |
| <b>F2</b>                               | 1 1/2" SAE 3000 psi/UNC                |       |  | -  |                         | •          |            |  |  |
| <b>Bypass valve</b>                     |  |       |  |  |                         |            |            |  |  |
| <b>B</b>                                | 1.75 bar                               |       |  |  |                         |            |            |  |  |
| <b>E</b>                                | 3 bar                                  |       |  |  |                         |            |            |  |  |
| <b>Filtration rating (filter media)</b> |  |       |  |  |                         |            |            |  |  |
| <b>A03</b>                              | Inorganic microfiber                   | 3 µm  |  | <b>M25</b>   | Wire mesh               | 25 µm      |            |  |  |
| <b>A06</b>                              | Inorganic microfiber                   | 6 µm  |  | <b>M60</b>   | Wire mesh               | 60 µm      |            |  |  |
| <b>A10</b>                              | Inorganic microfiber                   | 10 µm |  | <b>M90</b>   | Wire mesh               | 90 µm      |            |  |  |
| <b>A16</b>                              | Inorganic microfiber                   | 16 µm |  | <b>P10</b>   | Resin impregnated paper | 10 µm      |            |  |  |
| <b>A25</b>                              | Inorganic microfiber                   | 25 µm |  | <b>P25</b>   | Resin impregnated paper | 25 µm      |            |  |  |
|   |  |       |  | <b>Execution</b>   |                         |            |            |  |  |
|   |  |       |  | <b>P01</b> MP Filtri standard  |                         |            |            |  |  |
|   |  |       |  | <b>Pxx</b> Customized  |                         |            |            |  |  |

### FILTER ELEMENT


|   |                      |   |  |  |                         |            |  |  |  |
|---|----------------------|---|--|--|-------------------------|------------|--|--|--|
| <b>Element series and size</b>          |                      |   |  | Configuration example 1: <b>CU250</b> <b>M25</b> <b>W</b> <b>P01</b> |                         |            |  |  |  |
| <b>CU250</b>                            |                      |   |  | Configuration example 2: <b>CU250</b> <b>A25</b> <b>N</b> <b>P01</b> |                         |            |  |  |  |
| <b>Filtration rating (filter media)</b> |                      |   |  |  |                         |            |  |  |  |
| <b>A03</b>                              | Inorganic microfiber | 3 µm  |  | <b>M25</b>   | Wire mesh               | 25 µm      |  |  |  |
| <b>A06</b>                              | Inorganic microfiber | 6 µm  |  | <b>M60</b>   | Wire mesh               | 60 µm      |  |  |  |
| <b>A10</b>                              | Inorganic microfiber | 10 µm   |  | <b>M90</b>   | Wire mesh               | 90 µm      |  |  |  |
| <b>A16</b>                              | Inorganic microfiber | 16 µm   |  | <b>P10</b>   | Resin impregnated paper | 10 µm      |  |  |  |
| <b>A25</b>                              | Inorganic microfiber | 25 µm   |  | <b>P25</b>   | Resin impregnated paper | 25 µm      |  |  |  |
| <b>Seals and treatments</b>             |                      |   |  | Filtration rating  |                         |            |  |  |  |
|   |                      |   |  | <b>Axx</b>   | <b>Mxx</b>              | <b>Pxx</b> |  |  |  |
| <b>N</b>                                | NBR                  |   |  | •  | •                       | •          |  |  |  |
| <b>V</b>                                | FPM                  |   |  | •  | •                       | •          |  |  |  |
| <b>W</b>                                | NBR head anodized    | filter element compatible with fluids HFA-HFB-HFC |  | •  | •                       |            |  |  |  |
| <b>Z</b>                                | FPM head anodized    | filter element compatible with fluids HFA-HFB-HFC |  | •  | •                       |            |  |  |  |
|   |                      |   |  | <b>Execution</b>   |                         |            |  |  |  |
|   |                      |   |  | <b>P01</b> MP Filtri standard  |                         |            |  |  |  |
|   |                      |   |  | <b>Pxx</b> Customized  |                         |            |  |  |  |

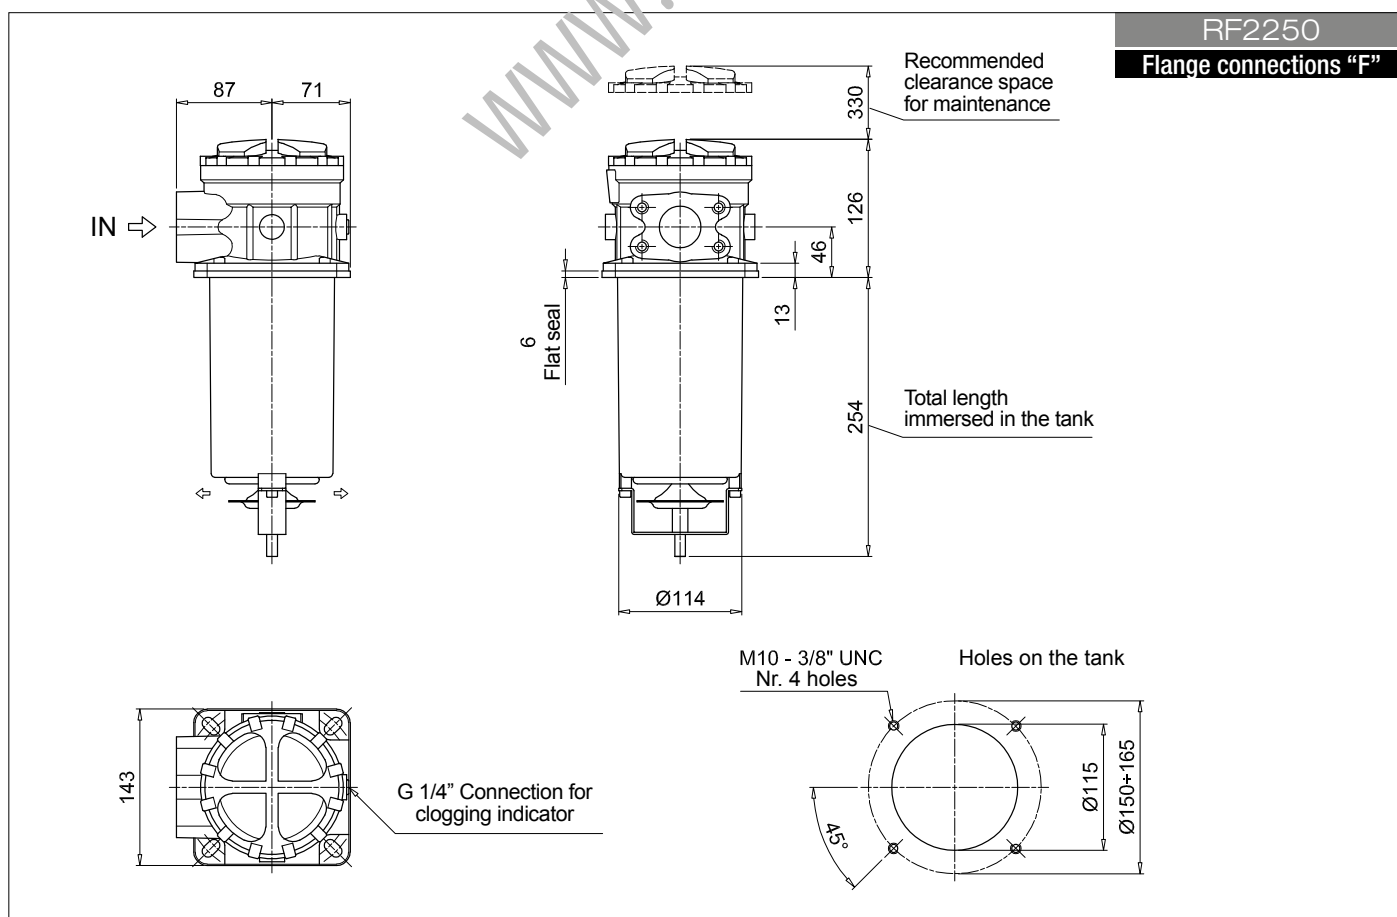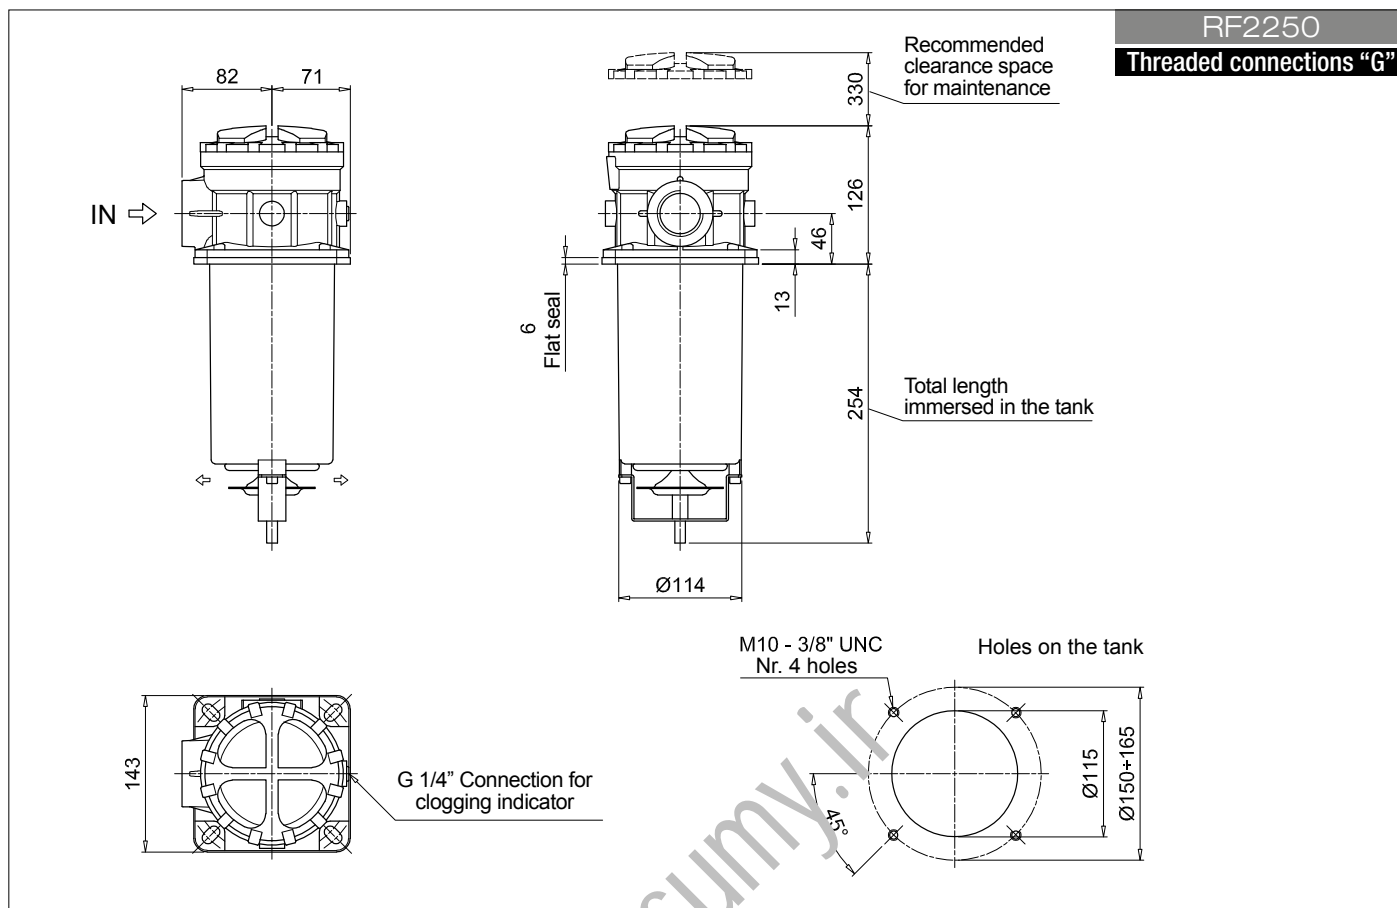

### RF2350

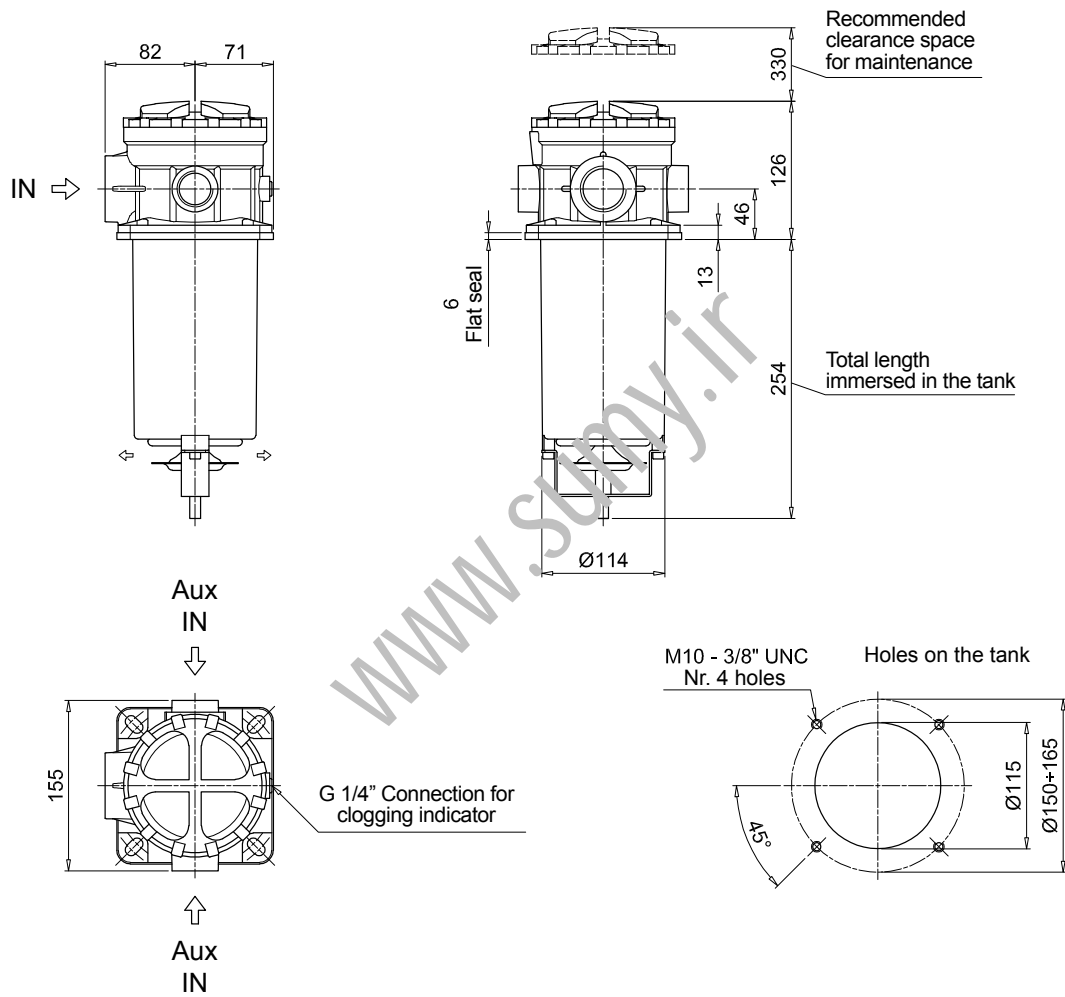

**RF2 250 - 350**

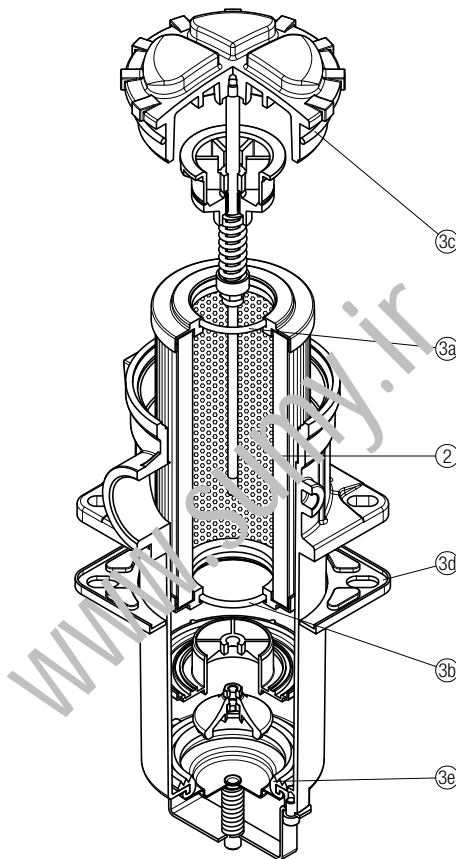

| Item:          | Q.ty: 1 pc.<br><b>2</b> | Q.ty: 1 pc.<br><b>3</b> (3a ÷ 3e) |
|----------------|-------------------------|-----------------------------------|
| Filter series  | Filter element          | Seal Kit code number<br>NBR FPM   |
| <b>RF2 250</b> | See order table         | 02050586 02050587                 |
| <b>RF2 350</b> |                         |                                   |

# Clogging indicators

Barometric indicators  
Differential indicators

## Introduction

Filter elements are efficient only if their Dirt Holding Capacity is fully exploited. This is achieved by using filter housings equipped with clogging indicators.

These devices trip when the clogging of the filter element causes an increase in pressure drop across the filter element.

The indicator is set to alarm before the element becomes fully clogged.

MP Filtri can supply indicators of the following designs:


- Vacuum switches and gauges
- Pressure switches and gauges
- Differential pressure indicators

These type of devices can be provided with a visual, electrical or both signals.

## Suitable indicator types


### BAROMETRIC INDICATORS

Pressure indicators are used on the Return line to check the efficiency of the filter element. They measure the pressure upstream of the filter element. Standard items are produced with R 1/8" EN 10226 connection.

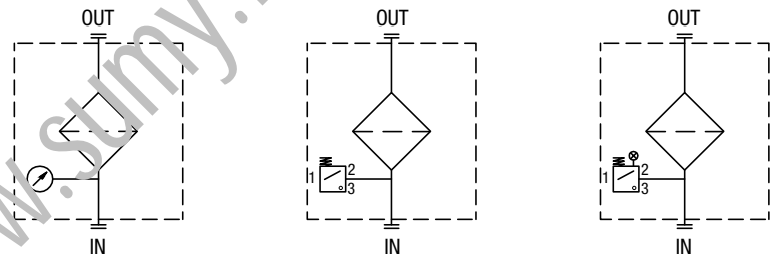

### DIFFERENTIAL INDICATORS

Differential indicators are used on the Pressure line to check the efficiency of the filter element. They measure the pressure upstream and downstream of the filter element (differential pressure). Standard items are produced with special connection G 1/2" size. Also available in Stainless Steel models.

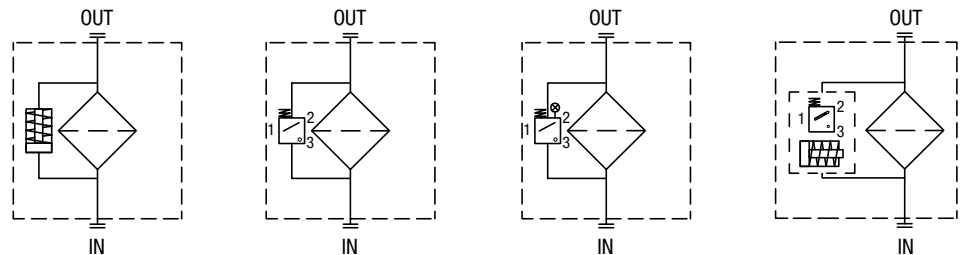

## Quick reference guide

| Filter series   | Visual indicator                               | Electrical indicator         | Electrical / Visual indicator  | Electronic indicator |
|---|--|------------------------------|--|----------------------|
| MPFX-MPTX-MPF-MPT with bypass 1.75 bar<br>MPH with bypass 1.75 bar        | BVA14P01<br>BVR14P01<br>BVP20HP01<br>BVQ20HP01 | BEA15HA50P01<br>BEM15HA41P01 | BLA15HA51P01<br>BLA15HA52P01<br>BLA15HA53P01<br>BLA15HA71P01                 |                      |
| MPFX-MPTX-MPF-MPT with bypass 3 bar<br>MPH with bypass 2.5 bar<br>FRI 255 | BVA25P01<br>BVR25P01<br>BVP20HP01<br>BVQ20HP01 | BEA20HA50P01<br>BEM20HA41P01 | BLA20HA51P01<br>BLA20HA52P01<br>BLA20HA53P01<br>BLA20HA71P01                 |                      |
| MPLX<br>FRI 025 - 040 - 100 - 250 - 630 - 850                             | DVA20xP01<br>DVM20xP01                         | DEA20xA50P01<br>DEM20xAxxP01 | DLA20xA51P01<br>DLA20xA52P01<br>DLA20xA71P01<br>DLE20xA50P01<br>DLE20xF50P01 | DTA20xF70P01         |



| BEA*50                               |                   |
|--------------------------------------|-------------------|
| <b>Electrical Pressure Indicator</b> |                   |
| Settings                             | Ordering code     |
| 1.5 bar ±10%                         | BE A 15 HA 50 P01 |
| 2.0 bar ±10%                         | BE A 20 HA 50 P01 |

**Hydraulic symbol**

**Electrical symbol**

**Materials**

- Body: Brass
- Base: Black Nylon
- Contacts: Silver
- Seal: HNBR

**Technical data**

- Max working pressure: 40 bar
- Proof pressure: 60 bar
- Working temperature: From -25 °C to +80 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943
- Degree of protection: IP65 according to EN 60529

**Electrical data**

- Electrical connection: EN 175301-803
- Resistive load: 5 A / 14 Vdc, 4 A / 30 Vdc, 5 A / 125 Vac, 4 A / 250 Vac

- Available Atex product: II 1GD Ex ia IIC Tx Ex ia IIIC Tx °C X

- CE certification

| BEM*41                               |                   |
|--------------------------------------|-------------------|
| <b>Electrical Pressure Indicator</b> |                   |
| Settings                             | Ordering code     |
| 1.5 bar ±10%                         | BE M 15 HA 41 P01 |
| 2.0 bar ±10%                         | BE M 20 HA 41 P01 |

**Hydraulic symbol**

**Electrical symbol**

**Materials**

- Body: Brass
- Base: Black Nylon
- Contacts: Silver
- Seal: HNBR

**Technical data**

- Max working pressure: 40 bar
- Proof pressure: 60 bar
- Working temperature: From -25 °C to +80 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943
- Degree of protection: IP67 according to EN 60529

**Electrical data**

- Electrical connection: Four-core cable
- Resistive load: 5 A / 14 Vdc, 4 A / 30 Vdc, 5 A / 125 Vac, 4 A / 250 Vac

- CE certification  
On request this indicator can be provided with main connectors in use for wirings.

| BL*51 - BL*52 - BL*53                       |                   |
|---|-------------------|
| <b>Electrical/Visual Pressure Indicator</b> |                   |
| Settings                                    | Ordering code     |
| 1.5 bar ±10%                                | BL A 15 HA xx P01 |
| 2.0 bar ±10%                                | BL A 20 HA xx P01 |

**Hydraulic symbol**

**Electrical symbol**

**Materials**

- Body: Brass
- Base: Transparent Nylon
- Contacts: Silver
- Seal: HNBR

**Technical data**



- Max working pressure: 40 bar
- Proof pressure: 60 bar
- Working temperature: From -25 °C to +80 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943
- Degree of protection: IP65 according to EN 60529




**Electrical data**




- Electrical connection: EN 175301-803
- Type: 51, 52, 53
- Lamps: 24 Vdc, 110 Vdc, 230 Vac
- Resistive load: 1 A / 24 Vdc, 1 A / 110 Vdc, 1 A / 230 Vac






# BAROMETRIC INDICATORS

## Dimensions
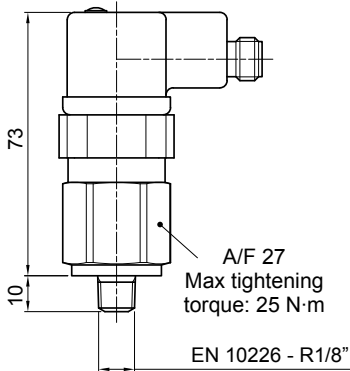
| BL*71   |                      | Hydraulic symbol  | Materials   |
|---|----------------------|---|---|
| <b>Electrical/Visual Pressure Indicator</b>                                       |                      |   |   |
| <b>Settings</b>   | <b>Ordering code</b> |   |   |
| 1.5 bar $\pm 10\%$  | BL A 15 HA 71 P01    | <b>Technical data</b><br>- Max working pressure: 40 bar<br>- Proof pressure: 60 bar<br>- Working temperature: From -25 °C to +80 °C<br>- Compatibility with fluids: Mineral oils, Synthetic fluids<br>HFA, HFB, HFC according to ISO 2943<br>- Degree of protection: IP65 according to EN 60529 |   |
| 2.0 bar $\pm 10\%$  | BL A 20 HA 71 P01    |   |   |
|  |                      | <b>Electrical symbol</b><br>   | <b>Electrical data</b><br>- Electrical connection: IEC 61076-2-101 D (M12)<br>- Lamps: 24 Vdc<br>- Resistive load: 0.4 A / 24 Vdc |
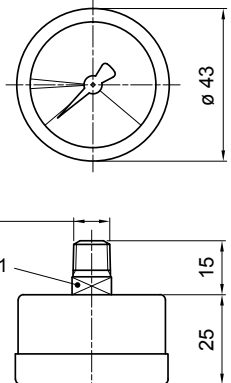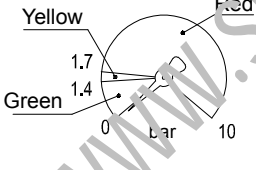
| BVA   |                      | Hydraulic symbol  | Material: |
|---|----------------------|---|-----------|
| <b>Axial Pressure Gauge</b>   |                      |   |           |
| <b>Settings</b>   | <b>Ordering code</b> |   |           |
| 1.4 bar $\pm 10\%$  | BV A 14 P01          | <b>Technical data</b><br>- Max working pressure: Static: 7 bar<br>Fluctuating: 6 bar<br>Short time: 10 bar<br>- Working temperature: From -40 °C to +60 °C<br>- Compatibility with fluids: Mineral oils, Synthetic fluids<br>HFA, HFB, HFC according to ISO 2943<br>- Accuracy: Class 2.5 according to EN 13190<br>- Degree of protection: IP31 according to EN 60529 |           |
| 2.5 bar $\pm 10\%$  | BV A 25 P01          |   |           |
|  |                      | <b>Dial scale</b><br>BV A 14 P01<br>   |           |
|  |                      |   |           |
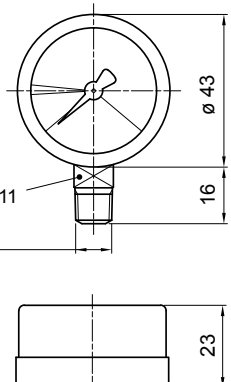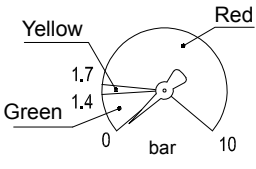
| BVR   |                      | Hydraulic symbol  | Materials |
|---|----------------------|---|-----------|
| <b>Radial Pressure Gauge</b>  |                      |   |           |
| <b>Settings</b>   | <b>Ordering code</b> |   |           |
| 1.4 bar $\pm 10\%$  | BV R 14 P01          | <b>Technical data</b><br>- Max working pressure: Static: 7 bar<br>Fluctuating: 6 bar<br>Short time: 10 bar<br>- Working temperature: From -40 °C to +60 °C<br>- Compatibility with fluids: Mineral oils, Synthetic fluids<br>HFA, HFB, HFC according to ISO 2943<br>- Accuracy: Class 2.5 according to EN 13190<br>- Degree of protection: IP31 according to EN 60529 |           |
| 2.5 bar $\pm 10\%$  | BV R 25 P01          |   |           |
|  |                      | <b>Dial scale</b><br>BV R 14 P01<br>   |           |
|  |                      |   |           |
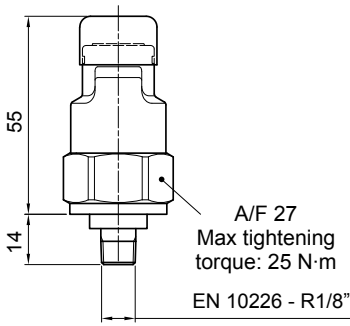
| BVP - BVQ                 |                                | Hydraulic symbol  | Materials   |  |
|---------------------------|--------------------------------|---|---|--|
| Visual Pressure Indicator |                                |   |   |   |
| Setting                   | Ordering code                  |   |   |  |
| 1.5 bar ±10%              | BV P 15 H P01<br>BV Q 15 H P01 |                                        | <b>Technical data</b><br>- Reset: BVP - Automatic reset<br>BVQ - Manual reset<br>- Max working pressure: 10 bar<br>- Proof pressure: 15 bar<br>- Working temperature: From -25 °C to +80 °C<br>- Compatibility with fluids: Mineral oils, Synthetic fluids<br>HFA, HFB, HFC according to ISO 2943<br>- Degree of protection: IP45 according to EN 60529 |  |
| 2.0 bar ±10%              | BV P 20 H P01<br>BV Q 20 H P01 |   |   |  |
|                           |                                | Signals   |   |  |
|                           |                                | <br>Absence of pressure (no indicator) | <br>Presence of pressure (green button rises gradually)  | <br>Clogged filter element (red button risen) |

### DESIGNATION & ORDERING CODE

| Series   | Configuration example 1: |   |    |   |   |    |     |
|--|--------------------------|---|----|---|---|----|-----|
| <b>BE</b> Electrical pressure indicator        | BE                       | M | 15 | H | A | 41 | P01 |
| <b>BL</b> Electrical/Visual pressure indicator | BL                       | A | 20 | H | A | 71 | P01 |
| <b>BV</b> Visual pressure indicator            | BV                       | R | 14 |   |   |    | P01 |
|  | BV                       | P | 20 | H |   |    | P01 |

| Type                                      | BE | BL | BV   |  |
|---|----|----|--|--|
| <b>A</b> Standard type                    | •  | •  | <b>A</b> Axial connection pressure gauge       |  |
| <b>M</b> With wired electrical connection | •  |    | <b>R</b> Radial connection pressure gauge      |  |
|   |    |    | <b>P</b> Visual indicator with automatic reset |  |
|   |    |    | <b>Q</b> Visual indicator with manual reset    |  |

| Pressure setting  | BEA-BEM | BLA | BVA-BVR | BVP-BVQ |
|-------------------|---------|-----|---------|---------|
| <b>14</b> 1.4 bar |         |     | •       |         |
| <b>15</b> 1.5 bar | •       | •   |         |         |
| <b>20</b> 2.0 bar | •       | •   |         | •       |
| <b>25</b> 2.5 bar |         |     | •       |         |

| Seals         | BE | BLA | BVA-BVR | BVP-BVQ |
|---------------|----|-----|---------|---------|
| <b>H</b> HNBR | •  | •   |         | •       |

| Thermostat       | BEA-BEM | BLA | BV |
|------------------|---------|-----|----|
| <b>A</b> Without | •       | •   |    |

| Electrical connections   | BEA | BEM | BL | BV |
|--|-----|-----|----|----|
| <b>41</b> Connection via four-core cable                                   |     | •   |    |    |
| <b>50</b> Connection EN 175301-803   | •   |     |    |    |
| <b>51</b> Connection EN 175301-803, transparent base with lamps 24 Vdc     |     |     | •  |    |
| <b>52</b> Connection EN 175301-803, transparent base with lamps 110 Vdc    |     |     | •  |    |
| <b>53</b> Connection EN 175301-803, transparent base with lamps 230 Vdc    |     |     | •  |    |
| <b>71</b> Connection IEC 61076-2-101 D (M12), black base with lamps 24 Vdc |     |     | •  |    |

| Option                        |
|-------------------------------|
| <b>P01</b> MP Filtri standard |
| <b>Pxx</b> Customized         |

# DIFFERENTIAL INDICATORS

## Dimensions

| DEA*50   |                      | Hydraulic symbol             | Materials  |
|--|----------------------|------------------------------|--|
| <b>Electrical Differential Indicator</b>   |                      |                              |  |
| <b>Settings</b>  | <b>Ordering code</b> |                              |  |
| 2.0 bar $\pm$ 10%  | DE A 20 x A 50 P01   | <b>Electrical symbol</b><br> | <b>Technical data</b> <ul style="list-style-type: none"> <li>- Max working pressure: 420 bar</li> <li>- Proof pressure: 630 bar</li> <li>- Burst pressure: 1260 bar</li> <li>- Working temperature: From -25 °C to +110 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids</li> </ul> |
|  |                      |                              |  |
| <b>Electrical data</b> <ul style="list-style-type: none"> <li>- Electrical connection: EN 175301-803</li> <li>- Resistive load: 0.2 A / 115 Vdc</li> </ul> |                      |                              |  |

| DEM*10   |                      | Hydraulic symbol             | Materials  |
|--|----------------------|------------------------------|--|
| <b>Electrical Differential Indicator</b>   |                      |                              |  |
| <b>Settings</b>  | <b>Ordering code</b> |                              |  |
| 2.0 bar $\pm$ 10%  | DE M 20 xx 10 P01    | <b>Electrical symbol</b><br> | <b>Technical data</b> <ul style="list-style-type: none"> <li>- Max working pressure: 420 bar</li> <li>- Proof pressure: 630 bar</li> <li>- Burst pressure: 1260 bar</li> <li>- Working temperature: From -25 °C to +110 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids</li> </ul> |
|  |                      |                              |  |
| <b>Electrical data</b> <ul style="list-style-type: none"> <li>- Electrical connection: AMP Superseal series 1.5</li> <li>- Resistive load: 0.2 A / 115 Vdc</li> <li>- Switching type: Normally open contacts (NC on request)</li> <li>- Thermal lockout: Normally open up to 30 °C (option "F")</li> </ul> |                      |                              |  |

| DEM*20  |                      | Hydraulic symbol             | Materials  |
|---|----------------------|------------------------------|--|
| <b>Electrical Differential Indicator</b>  |                      |                              |  |
| <b>Settings</b>   | <b>Ordering code</b> |                              |  |
| 2.0 bar $\pm$ 10%   | DEM20xx20P01         | <b>Electrical symbol</b><br> | <b>Technical data</b> <ul style="list-style-type: none"> <li>- Max working pressure: 420 bar</li> <li>- Proof pressure: 630 bar</li> <li>- Burst pressure: 1260 bar</li> <li>- Working temperature: From -25 °C to +110 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids</li> </ul> |
|   |                      |                              |  |
| <b>Electrical data</b> <ul style="list-style-type: none"> <li>- Electrical connection: AMP Time junior</li> <li>- Resistive load: 0.2 A / 115 Vdc</li> <li>- Switching type: Normally open contacts (NC on request)</li> <li>- Thermal lockout: Normally open up to 30 °C (option "F")</li> </ul> |                      |                              |  |






# DIFFERENTIAL INDICATORS

## Dimensions



| DLA*71   |  |
|--|--|
| <b>Electrical/Visual Differential Indicator</b>  |  |
| <b>Settings</b><br>2.0 bar $\pm$ 10%   | <b>Ordering code</b><br>DL A 20 x A 71 P01 |
| <p>A/F 30<br/>Max tightening torque: 65 N·m</p>  |  |
| <p><b>Hydraulic symbol</b></p> <p><b>Electrical symbol</b></p>   |  |
| <p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Base: Black Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR - FPM</li> </ul> <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Max working pressure: 420 bar</li> <li>- Proof pressure: 630 bar</li> <li>- Burst pressure: 1260 bar</li> <li>- Working temperature: From -25 °C to +110 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids<br/>HFA, HFB, HFC according to ISO 2943</li> <li>- Degree protection: IP65 according to EN 60529<br/>IP69K according to ISO 20653</li> </ul> <p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connection: IEC 61076-2-101 D (M12)</li> <li>- Lamps: 24 Vdc</li> <li>- Resistive load: 0.4 A / 24 Vdc</li> </ul> |  |



| DLE*A50  |  |
|--|--|
| <b>Electrical/Visual Differential Indicator</b>  |  |
| <b>Settings</b><br>2.0 bar $\pm$ 10%   | <b>Ordering code</b><br>DL E 20 x A 50 P01 |
| <p>A/F 32<br/>Max tightening torque: 95 N·m</p>  |  |
| <p><b>Hydraulic symbol</b></p> <p><b>Electrical symbol</b></p>   |  |
| <p><b>Material:</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Base: Black Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR - FPM</li> </ul> <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Max working pressure: 420 bar</li> <li>- Proof pressure: 630 bar</li> <li>- Burst pressure: 1260 bar</li> <li>- Working temperature: From -25 °C to +110 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids<br/>HFA, HFB, HFC according to ISO 2943</li> <li>- Degree protection: IP65 according to EN 60529</li> </ul> <p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connections: EN 175301-803</li> <li>- Resistive load: 5 A / 250 Vac</li> <li>- Available the connector with lamps</li> </ul> |  |

| DLE*F50   |  |
|---|--|
| <b>Electrical/Visual Differential Indicator</b>   |  |
| <b>Settings</b><br>2.0 bar $\pm$ 10%  | <b>Ordering code</b><br>DL E 20 x F 50 P01 |
| <p>A/F 32<br/>Max tightening torque: 95 N·m</p>   |  |
| <p><b>Hydraulic symbol</b></p> <p><b>Electrical symbol</b></p>  |  |
| <p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Base: Black Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR - FPM</li> </ul> <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Max working pressure: 420 bar</li> <li>- Proof pressure: 630 bar</li> <li>- Burst pressure: 1260 bar</li> <li>- Working temperature: From -25 °C to +110 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids<br/>HFA, HFB, HFC according to ISO 2943</li> <li>- Degree protection: IP65 according to EN 60529</li> </ul> <p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connections: EN 175301-803</li> <li>- Resistive load: 5 A / 250 Vac</li> <li>- Thermal lockout setting: +30 °C</li> </ul> |  |
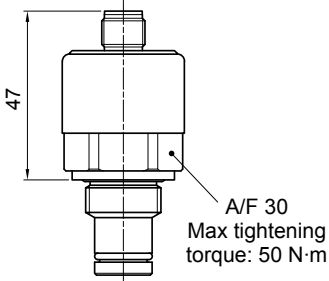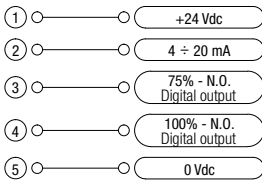
| DTA*70  |  |
|---|--|
| <b>Electronic Differential Indicator</b>  |  |
| <b>Settings</b><br>2.0 bar ±10%   | <b>Ordering code</b><br>DT A 20 x x 70 P01 |
|    |  |
| <p><b>Hydraulic symbol</b></p>   |  |
| <p><b>Electrical symbol</b></p>    |  |
| <p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Internal parts: Brass - Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR - FPM</li> </ul>  |  |
| <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Max working pressure: 420 bar</li> <li>- Proof pressure: 630 bar</li> <li>- Burst pressure: 1260 bar</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943</li> <li>- Degree protection: IP67 according to EN 60529</li> </ul> |  |
| <p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connection: IEC 61076-2-101 D (M12)</li> <li>- Power supply: 24 Vdc</li> <li>- Analogue output: From 4 to 20 mA</li> <li>- Thermal lockout: 30 °C (all output signals stalled up to 30 °C)</li> </ul>   |  |

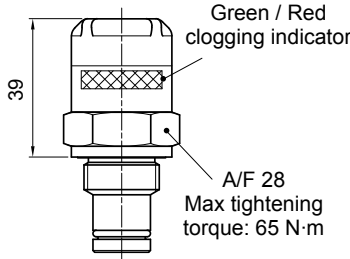


| DVA  |                                       |
|--|---------------------------------------|
| <b>Visual Differential Indicator</b>   |                                       |
| <b>Settings</b><br>2.0 bar ±10%  | <b>Ordering code</b><br>DV A 20 x P01 |
|   |                                       |
| <p><b>Hydraulic symbol</b></p>   |                                       |
| <p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Internal parts: Brass - Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR - FPM</li> </ul>   |                                       |
| <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Reset: Automatic reset</li> <li>- Max working pressure: 420 bar</li> <li>- Proof pressure: 630 bar</li> <li>- Burst pressure: 1260 bar</li> <li>- Working temperature: From -25 °C to +110 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943</li> <li>- Degree protection: IP65 according to EN 60529</li> </ul> |                                       |
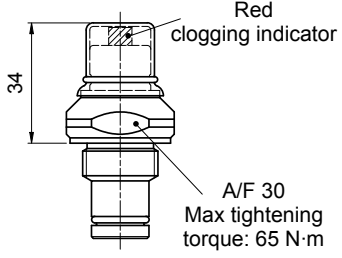
| DVM   |                                       |
|---|---------------------------------------|
| <b>Visual Differential Indicator</b>  |                                       |
| <b>Settings</b><br>2.0 bar ±10%   | <b>Ordering code</b><br>DV M 20 x P01 |
|    |                                       |
| <p><b>Hydraulic symbol</b></p>   |                                       |
| <p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Internal parts: Brass - Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR - FPM</li> </ul>  |                                       |
| <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Reset: Manual reset</li> <li>- Max working pressure: 420 bar</li> <li>- Proof pressure: 630 bar</li> <li>- Burst pressure: 1260 bar</li> <li>- Working temperature: From -25 °C to +110 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943</li> <li>- Degree protection: IP65 according to EN 60529</li> </ul> |                                       |

# DIFFERENTIAL INDICATORS

## Dimensions

| T2             |               |
|----------------|---------------|
| Indicator plug |               |
| Seal           | Ordering code |
| HNBR           | T2 H          |
| FPM            | T2 V          |

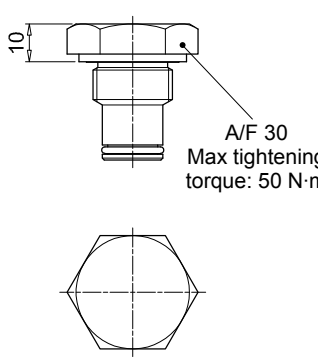

**Materials**

- Body: Phosphatized steel
- Seal: HNBR / FPM

### DESIGNATION & ORDERING CODE - DIFFERENTIAL INDICATORS

| Series   | Configuration example 1: |   |    |   |   |    |     |
|--|--------------------------|---|----|---|---|----|-----|
| <b>DE</b> Electrical differential indicator        | DE                       | M | 20 | H | F | 50 | P01 |
| <b>DL</b> Electrical/Visual differential indicator | DL                       | E | 20 | V | A | 71 | P01 |
| <b>DT</b> Electronic differential indicator        | DT                       | A | 20 | H | F | 70 | P01 |
| <b>DV</b> Visual differential indicator            | DV                       | M | 20 | V |   |    | P01 |

| Type                                      | DE | DL | DT | DV | Description          |
|---|----|----|----|----|----------------------|
| <b>A</b> Standard type                    | •  | •  | •  |    | With automatic reset |
| <b>M</b> With wired electrical connection | •  |    |    |    | With manual reset    |
| <b>E</b> For high power supply            |    | •  |    |    |                      |

| Pressure setting  | DEA | DEM | DLA | DLE | DT | DV |
|-------------------|-----|-----|-----|-----|----|----|
| <b>20</b> 2.0 bar | •   | •   | •   | •   | •  | •  |

| Seals         | DEA | DEM | DLA | DLE | DT | DV |
|---------------|-----|-----|-----|-----|----|----|
| <b>H</b> HNBR | •   | •   | •   | •   | •  | •  |
| <b>V</b> FPM  |     | •   |     | •   | •  |    |

| Thermostat               | DEA | DEM | DLA | DLE | DT | DV |
|--------------------------|-----|-----|-----|-----|----|----|
| <b>A</b> Without         | •   | •   | •   | •   |    |    |
| <b>F</b> With thermostat |     | •   |     | •   | •  |    |

| Electrical connections   | DEA | DEM | DLA | DLE | DT | DV |
|--|-----|-----|-----|-----|----|----|
| <b>10</b> Connection AMP Superseal series 1.5                              |     | •   |     |     |    |    |
| <b>20</b> Connection AMP Timer Junior                                      |     | •   |     |     |    |    |
| <b>30</b> Connection Deutsch DT-04-2-P                                     |     | •   |     |     |    |    |
| <b>35</b> Connection Deutsch DT-04-3-P                                     |     | •   |     |     |    |    |
| <b>50</b> Connection EN 175301-803   | •   |     |     | •   |    |    |
| <b>51</b> Connection EN 175301-803, transparent base with lamps 24 Vdc     |     |     | •   |     |    |    |
| <b>52</b> Connection EN 175301-803, transparent base with lamps 110 Vdc    |     |     | •   |     |    |    |
| <b>70</b> Connection IEC 61076-2-101 D (M12)                               |     |     |     |     | •  |    |
| <b>71</b> Connection IEC 61076-2-101 D (M12), black base with lamps 24 Vdc |     |     | •   |     |    |    |

| Option                        |
|-------------------------------|
| <b>P01</b> MP Filtri standard |
| <b>Pxx</b> Customized         |

### DESIGNATION & ORDERING CODE - DIFFERENTIAL INDICATOR PLUG

| Series                   | Configuration example |   |
|--------------------------|-----------------------|---|
| <b>T2</b> Indicator plug | T2                    | H |

| Seals         |
|---------------|
| <b>H</b> HNBR |
| <b>V</b> FPM  |



[www.sumy.ir](http://www.sumy.ir)

# Accessories

## NYLON EXTENSION TUBE

H1 - Total length immersed in the tank

Configuration example: **TE** **40** **A** **250**

| Series    | Size | Material | Length     | H [mm] |
|-----------|------|----------|------------|--------|
| <b>TE</b> |      |          | <b>200</b> | 200    |
|           |      |          | <b>250</b> | 250    |
|           |      |          | <b>300</b> | 300    |
|           |      |          | <b>350</b> | 350    |
|           |      |          | <b>400</b> | 400    |
|           |      |          | <b>450</b> | 450    |
|           |      |          | <b>500</b> | 500    |

| Size      | Ø D [mm] | Material       |
|-----------|----------|----------------|
| <b>25</b> | 25       | <b>A</b> Nylon |
| <b>32</b> | 32       |                |
| <b>40</b> | 40       |                |

| COMPATIBILITY TABLE |             |     |     |               |             |      |      |     |     |     |     |     |     |     |     |     |
|---------------------|-------------|-----|-----|---------------|-------------|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Filter series       | Filter size |     |     | Filter length | Tube length |      |      |     |     |     |     |     |     |     |     |     |
|                     |             |     |     |               | TE25        | TE32 | TE40 | 200 | 250 | 300 | 350 | 400 | 450 | 500 |     |     |
| H1 [mm]             |             |     |     |               |             |      |      |     |     |     |     |     |     |     |     |     |
| MPF - MPFX          | 30          |     |     | 1             | •           |      |      | 266 | 316 | 366 | 416 | 466 | 516 | 566 |     |     |
| MPF                 | 100         | 104 | 110 | 1             |             | •    |      | 275 | 325 | 375 | 425 | 475 | 525 | 575 |     |     |
|                     |             |     |     | 2             |             |      |      | 322 | 372 | 422 | 472 | 522 | 572 | 622 |     |     |
|                     |             |     |     | 3             |             |      | •    | 400 | 450 | 500 | 550 | 600 | 650 | 700 |     |     |
|                     |             |     |     | 4             |             |      |      | 502 | 552 | 602 | 652 | 702 | 752 | 802 |     |     |
| MPFX                | 100         | 104 | 110 | 1             |             |      |      | 277 | 327 | 377 | 427 | 477 | 527 | 577 |     |     |
|                     |             |     |     | 2             |             |      | •    | 322 | 372 | 422 | 472 | 522 | 572 | 622 |     |     |
|                     |             |     |     | 3             |             |      |      | 400 | 450 | 500 | 550 | 600 | 650 | 700 |     |     |
|                     |             |     |     | 4             |             |      |      | 502 | 552 | 602 | 652 | 702 | 752 | 802 |     |     |
| MPF MPFX            | 181         | 192 | 194 | 1             |             |      | •    | 410 | 460 | 510 | 560 | 610 | 660 | 710 |     |     |
|                     |             |     |     | 2             |             |      |      | 623 | 673 | 723 | 773 | 823 | 873 | 923 |     |     |
| MPT MPTX            | 025         | 027 |     | 1             |             |      |      | 278 | 328 | 378 | 428 | 478 | 528 | 578 |     |     |
|                     |             |     |     | 2             |             | •    |      | 342 | 392 | 442 | 492 | 542 | 592 | 642 |     |     |
|                     |             |     |     | 3             |             |      |      | 380 | 430 | 480 | 530 | 580 | 630 | 680 |     |     |
| MP1                 | 101         | 104 | 110 | 114           | 120         |      |      |     | •   | 273 | 323 | 373 | 423 | 473 | 523 | 573 |
|                     |             |     |     |               |             | 1    |      |     |     | 320 | 370 | 420 | 470 | 520 | 570 | 620 |
|                     |             |     |     |               |             | 2    |      |     |     | 396 | 446 | 496 | 546 | 596 | 646 | 696 |
|                     |             |     |     |               |             | 3    |      |     |     | 498 | 548 | 598 | 648 | 698 | 748 | 798 |
| MPTX                | 101         | 104 | 110 | 114           | 120         |      |      |     | •   | 273 | 323 | 373 | 423 | 473 | 523 | 573 |
|                     |             |     |     |               |             | 1    |      |     |     | 318 | 368 | 418 | 468 | 518 | 568 | 618 |
|                     |             |     |     |               |             | 2    |      |     |     | 396 | 446 | 496 | 546 | 596 | 646 | 696 |
|                     |             |     |     |               |             | 3    |      |     |     | 498 | 548 | 598 | 648 | 698 | 748 | 798 |

## STEEL EXTENSION TUBE


H1 - Total length immersed in the tank

Configuration example: **MPF191** **2** **A** **F1** **A10** **H** **B** **S60**

| Length     | H1 [mm] |
|------------|---------|
| <b>S30</b> | 300     |
| <b>S35</b> | 350     |
| <b>S40</b> | 400     |
| <b>S45</b> | 450     |
| <b>S50</b> | 500     |
| <b>S60</b> | 600     |
| <b>S70</b> | 700     |
| <b>S80</b> | 800     |
| <b>S90</b> | 900     |

| COMPATIBILITY TABLE |             |     |     |               |          |    |   |
|---------------------|-------------|-----|-----|---------------|----------|----|---|
| Filter series       | Filter size |     |     | Filter length | Ø D [mm] |    |   |
|                     |             |     |     |               | 52       | 65 |   |
| MPF                 | 191         | 192 | 194 | 2             | •        |    |   |
|                     |             |     |     | 1             | •        |    |   |
|                     | 400         | 410 | 450 | 451           | 2        |    | • |
|                     |             |     |     |               | 3        |    | • |
|                     |             | 750 |     |               | 1        |    | • |

## DIFFUSER WITH FAST LOCK CONNECTION

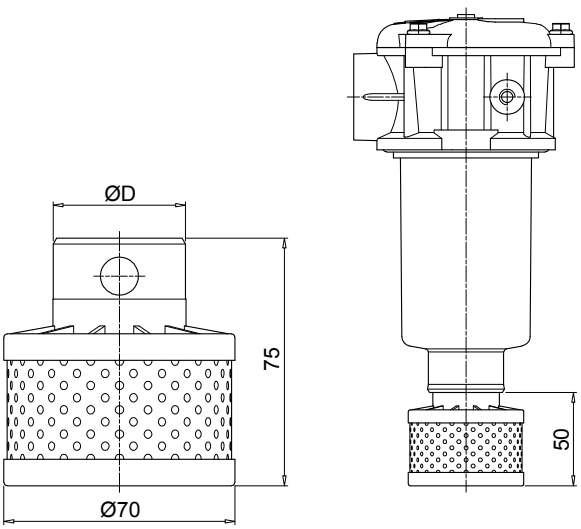

Configuration example: **DFS** **32** **A** **075**


| Series     |          |
|------------|----------|
| <b>DFS</b> |          |
| Size       | ø D [mm] |
| <b>32</b>  | 32       |
| <b>40</b>  | 40       |

| Version  |          |
|----------|----------|
| <b>A</b> | Standard |

| Length     |          |
|------------|----------|
| <b>075</b> | Standard |

| COMPATIBILITY TABLE |             |     |     |               |       |       |   |   |
|---------------------|-------------|-----|-----|---------------|-------|-------|---|---|
| Filter series       | Filter size |     |     | Filter Length | DFS32 | DFS40 |   |   |
| MPF                 | 100         | 104 | 110 | 1             | •     |       |   |   |
|                     |             |     |     | 2             |       |       |   |   |
|                     |             |     |     | 3             |       | •     |   |   |
|                     |             |     |     | 4             |       |       |   |   |
| MPFX                | 100         | 104 | 110 | 1             |       | •     |   |   |
|                     |             |     |     | 2             |       | •     |   |   |
|                     |             |     |     | 3             |       |       |   |   |
|                     |             |     |     | 4             |       |       |   |   |
| MPT                 | 101         | 104 | 110 | 114           | 120   | 1     | • |   |
|                     |             |     |     |               |       | 2     |   |   |
|                     |             |     |     |               |       | 3     |   |   |
|                     |             |     |     |               |       | 4     |   | • |
| MPTX                | 101         | 104 | 110 | 114           | 120   | 1     |   | • |
|                     |             |     |     |               |       | 2     |   | • |
|                     |             |     |     |               |       | 3     |   |   |
|                     |             |     |     |               |       | 4     |   |   |

## DIPSTICK

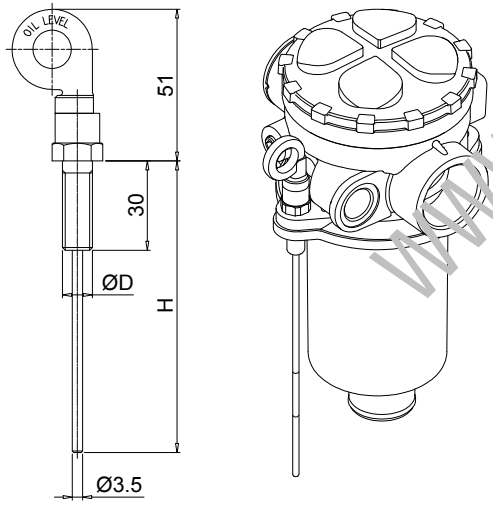

Configuration example: **DPT** **20** **M10** **A** **P01**

| Series     |        |
|------------|--------|
| <b>DPT</b> |        |
| Length     | H [mm] |
| <b>15</b>  | 134    |
| <b>20</b>  | 184    |
| <b>25</b>  | 234    |
| <b>30</b>  | 284    |
| <b>35</b>  | 334    |

**Materials**  
 - Screw: phosphatized steel  
 - Stick: phosphatized steel  
 - Handle: Nylon


**Technical data**  
 Working temperature: from -25 °C to +110 °C

| Fastening  |                                 |
|------------|---------------------------------|
| <b>M8</b>  | Fastening with screws ø D = M8  |
| <b>M10</b> | Fastening with screws ø D = M10 |

| Seals    |     |
|----------|-----|
| <b>A</b> | NBR |
| <b>V</b> | FPM |

| Execution  |                    |
|------------|--------------------|
| <b>P01</b> | MP Filtri standard |
| <b>Pxx</b> | Customized         |

## FILLER PLUG

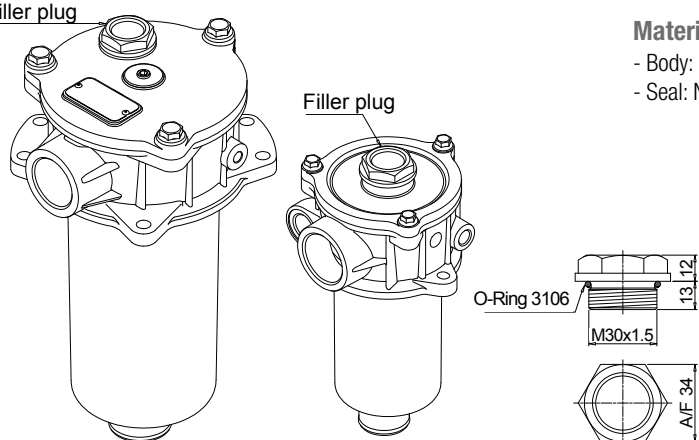

**Materials**  
 - Body: Nylon  
 - Seal: NBR

**Technical data**  
 Tightening torque: 15 N·m

O-Ring 3106

13 12

M30x1.5

A/F 34

For any further information, please, contact our commercial dept.

**Hydraulic combined filters for installation on the return and suction lines of hydrostatic transmissions (HSTs) for commercial vehicles, construction machinery, agricultural vehicles, and mobile work equipment with hydrostatic drive.**

**Advantage for the installation:**

- **Space-saving assembly**
- **Reduced assembly time**
- **Fewer connections to the tank**
- **Protection from the pollution of the tank**

**Advantages for the operativity:**

- **Absolute filtration of the oil for the hydrostatic drive**
- **Fulfilment of the purity requirements according to ISO 4406, as specified by the manufacturer of the driving drives.**
- **Protection against damages from cavitation even under adverse conditions, i.e. cold start**
- **Less formation of free air in the system**
- **Easier maintenance operations (one spare filter element instead of two)**

WWW.SUMITRIR

## FILTER SIZING

For the proper corrective factor Y see chapter at page 24

# Return / Suction filters



|                   |          |
|-------------------|----------|
| MRSX              | page 253 |
| LMP 124 MULTIPORT | 265      |
| INDICATORS        | 273      |




THE NEW FILTER CONCEPT

MRSX  
RSX  
series

## NEW FILTER ELEMENT WITH EXCLUSIVE INTERFACE CONNECTION

- ◆ **Protects the machine from improper use of non-original products.**
- ◆ **Safety of constant quality protection & reliability**


With exclusive filter element you are sure that only MP Filtri filter elements can be used, ensuring the best cleaning level of the oil due to the use of original filter elements.

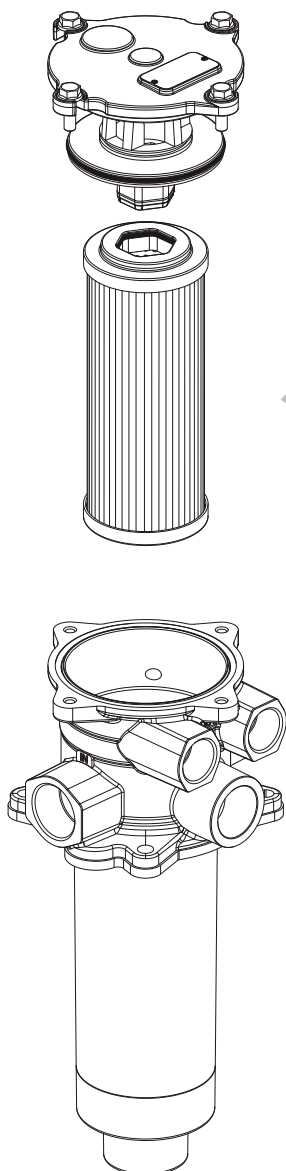


Cover

Diaphragm

Upper End cap

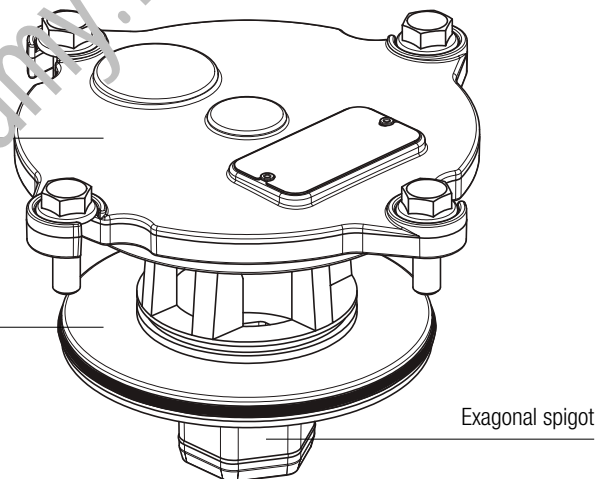

Exagonal spigot



Special exagonal seal

The products identified as MRSX and RSX are protected by:

- ◆ Italian Patent n° 102014902261205
- ◆ Canadian Patent n° 2,937,258
- ◆ European Patent n° 16181725.9
- ◆ US Patent n° 15/224,337

# MRSX series

Maximum working pressure up to 1 MPa (10 bar) - Flow rate up to 250 l/min



Return / Suction filter

Tank mounted

**Maximum working pressure up to 1 MPa (10 bar)**  
**Flow rate up to 250 l/min**

MRSX is a range of suction/return filters for hydraulic systems with two or more circuits (both open and closed loops). They are able to provide pressurized oil cleaned by fine filtration to the feed pump of the hydrostatic systems.

They are directly fixed to the reservoir, in immersed or semi-immersed position.

The filter output must be always immersed into the fluid to avoid aeration or foam generation into the reservoir.

### Available features:

- Female threaded return connections up to 1 1/4", for a maximum return flow rate of 250 l/min
- Multiple connections, to connect several return and suction lines
- Fine filtration rating, to get a good cleanliness level into the reservoir
- Bypass valve to the tank, to relieve excessive pressure drop across the filter media when the return flow is enough higher than the suction flow
- Bypass valve to the suction line with additional suction filter element, to relieve excessive pressure drop across the filter media when the return flow is not enough higher than the suction flow
- De-pressurization valve, to reduce the pressure inside the filter during the maintenance operations
- Anti-cavitation valve with additional suction filter element, to ensure fluid to the feed pump of the hydrostatic systems during cold starts or initial filling
- O-ring or Flat Seal to suit a variety of reservoir surfaces
- Reservoir side mounting, to save space in the machines
- Visual, electrical and electronic clogging indicators
- MYclean interface connection, to protect the product against non-original spare parts
- External protective wrap, to optimize the flow through the element and to save the element efficiency against non-proper handling

### Common applications:

Mobile machines with hydrostatic systems on board  
 (i.e. skid steer loaders, telehandlers, dumpers, road sweepers)

### Filter housing materials

- Head: Aluminium
- Cover  
 Nylon: MRSX 116  
 Aluminium: MRSX 165-166
- Bowl: Nylon

### Δp element type

- RSX: 10 bar
- Oil flow from exterior to interior.

### Seals

- Standard NBR series A
- Optional FPM series V

### Temperature

From -25 °C to +110 °C



## FILTER ASSEMBLY SIZING

Flow rates [l/min]

| Filter series  | Length | A10 | A16 | A25 |
|----------------|--------|-----|-----|-----|
| MRSX 116       | 1      | 74  | 82  | 87  |
|                | 2      | 108 | 113 | 124 |
| MRSX 165 - 166 | 1      | 155 | 166 | 178 |
|                | 2      | 187 | 196 | 200 |
|                | 3      | 201 | 205 | 217 |



### Maximum flow rate for a complete return/suction filter with a pressure drop Δp = 1 bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.



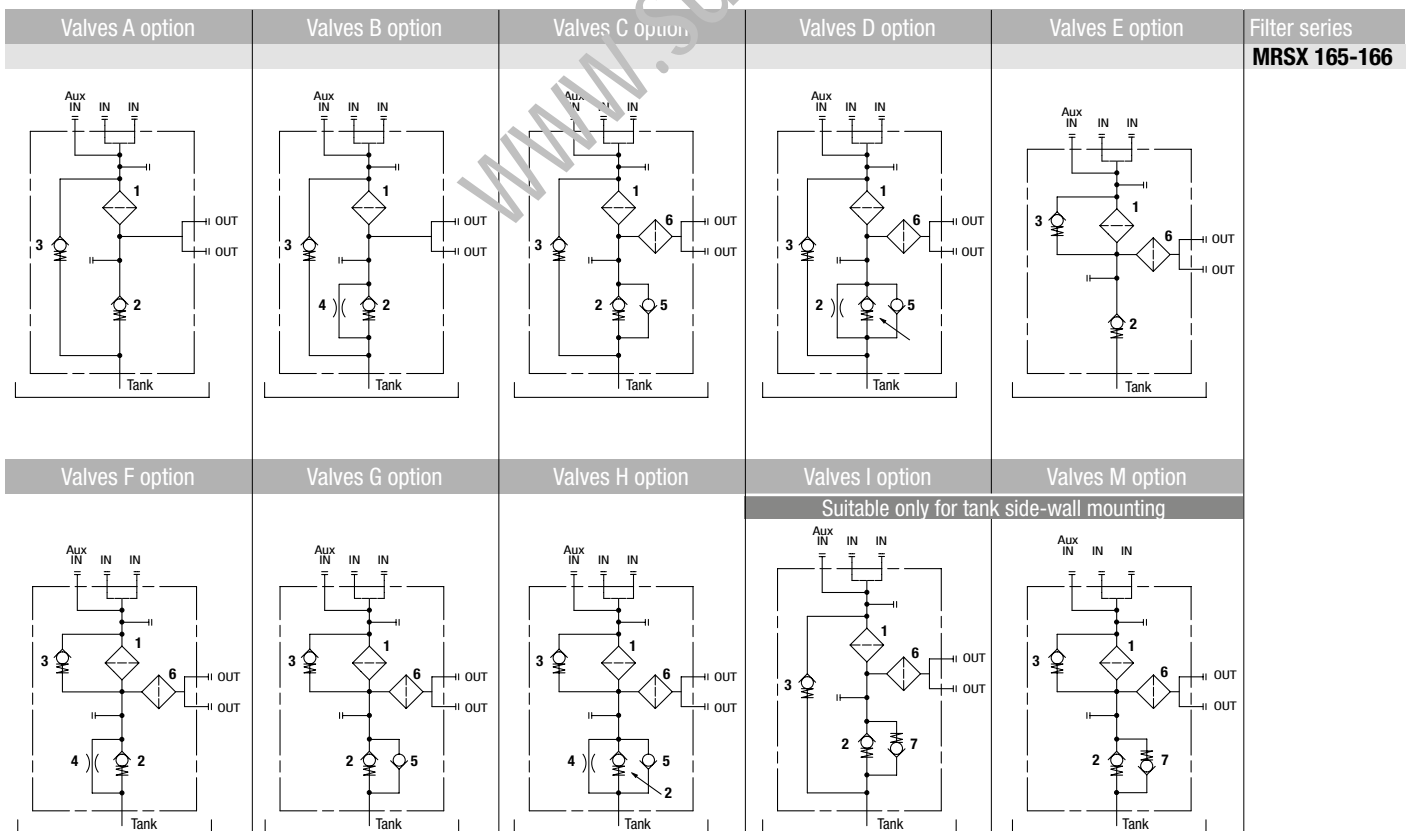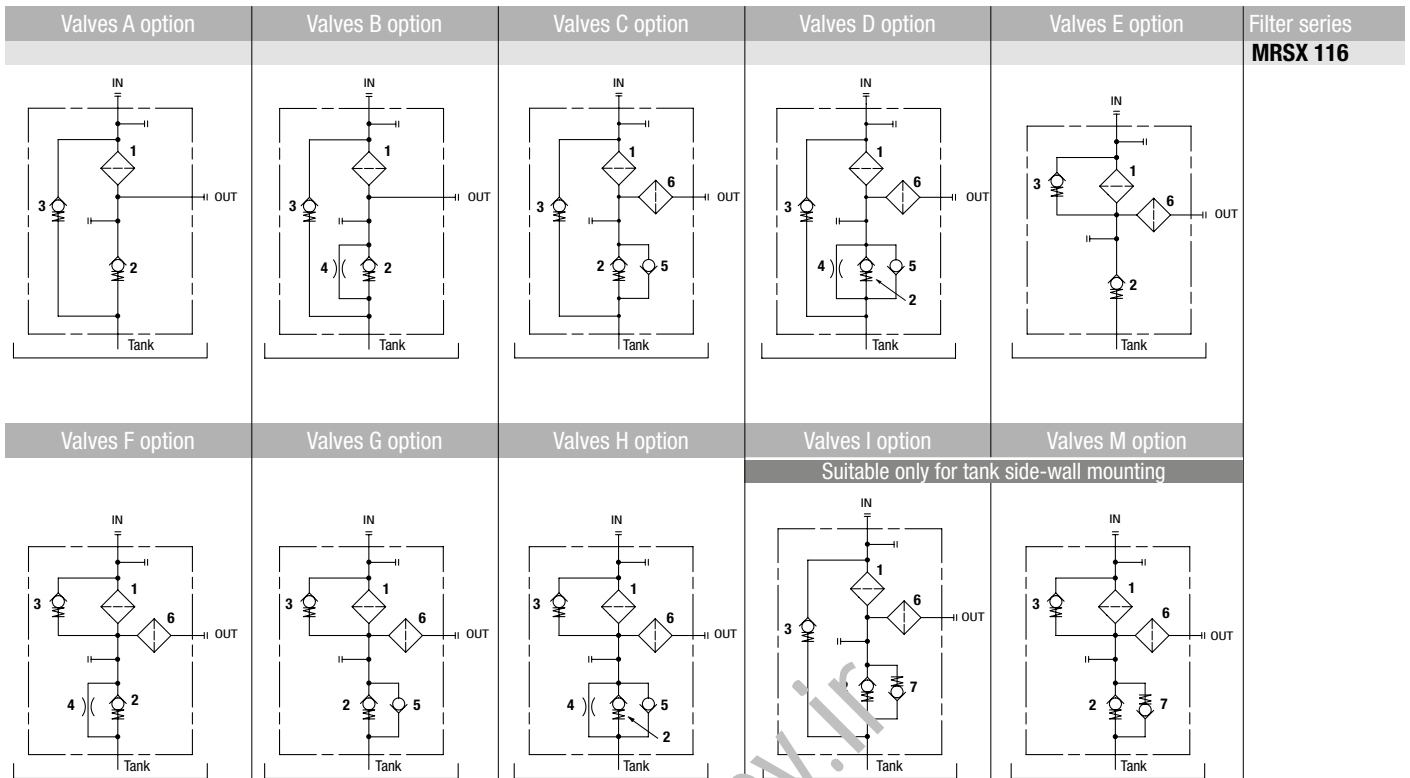



### LEGEND

- 1 - Filter element
- 2 - Back-Pressure valve: opening pressure 0.5 bar  $\pm$ 10%
- 3 - Bypass valve: opening pressure 2.5 bar  $\pm$ 10%
- 4 - Depressurization valve



- 5 - Anti-Cavitation valve
- 6 - Safety filter element (wire mesh 60  $\mu$ m)
- 7 - Anti-Cavitation valve / Anti-Emptying valve

## Pressure drop

### Filter housings $\Delta p$ pressure drop

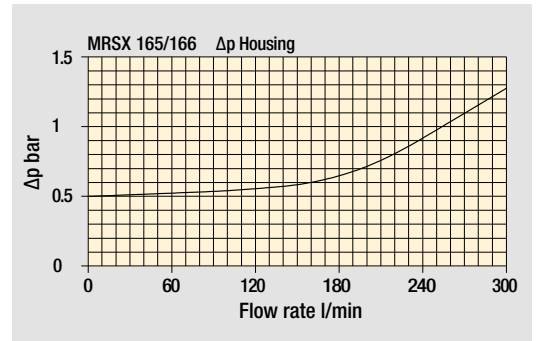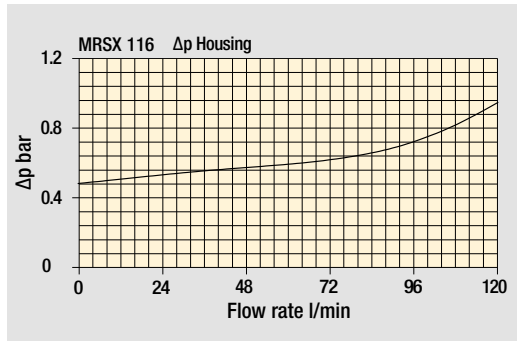

### Bypass valve pressure drop

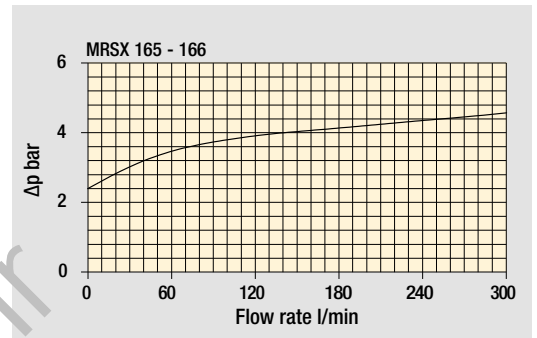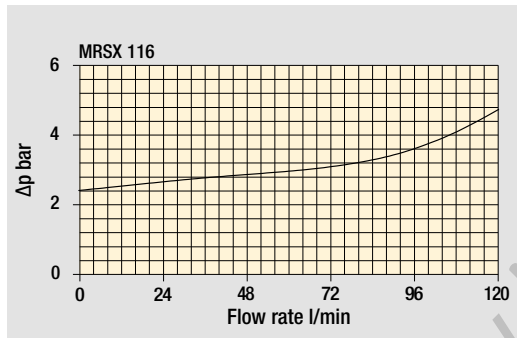

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3508.  $\Delta p$  varies proportionally with density.

### Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series   | Weights [kg] |      |      | Volumes [dm <sup>3</sup> ] |        |      |      |      |
|-----------------|--------------|------|------|----------------------------|--------|------|------|------|
|                 | Length       | 1    | 2    | 3                          | Length | 1    | 2    | 3    |
| <b>MRSX 116</b> |              | 1.30 | 1.40 | -                          |        | 0.80 | 1.00 | -    |
| <b>MRSX 165</b> |              | 3.40 | 3.80 | 4.10                       |        | 2.00 | 2.60 | 3.00 |
| <b>MRSX 166</b> |              | 3.40 | 3.80 | 4.10                       |        | 2.00 | 2.60 | 3.00 |

[www.sumy.ir](http://www.sumy.ir)

## Designation & Ordering code

### COMPLETE FILTER

Configuration example: **MRSX116** | **1** | **B** | **A** | **G1** | **0** | **A16** | **B** | **P01**

**Series and size**  
**MRSX116** Filter element with private spigot

**Length**  
**1** | **2** |

**Hydraulic diagram configuration - see page 257**

| Bypass valve to tank |          |          |          | Bypass valve to OUT |  |  |  |
|----------------------|----------|----------|----------|---------------------|--|--|--|
| <b>A</b>             | <b>B</b> | <b>C</b> | <b>D</b> |                     |  |  |  |
| <b>E</b>             | <b>F</b> | <b>G</b> | <b>H</b> |                     |  |  |  |
| <b>I</b>             |          |          |          |                     |  |  |  |
| <b>M</b>             |          |          |          |                     |  |  |  |

**Seals and treatments**

|                              |                                 |
|------------------------------|---------------------------------|
| <b>A</b> NBR, O-Ring on head | <b>B</b> NBR, flat seal on head |
| <b>V</b> FPM, O-Ring on head | <b>D</b> FPM, flat seal on head |

**Connections IN**

|                                    |
|------------------------------------|
| <b>G1</b> G 3/4"                   |
| <b>G2</b> G 1"                     |
| <b>G3</b> 3/4" NPT                 |
| <b>G4</b> 1" NPT                   |
| <b>G5</b> SAE 12 - 1 1/16" - 12 UN |
| <b>G6</b> SAE 16 - 1 5/16" - 12 UN |
| <b>D1</b> G 1"                     |
| <b>D2</b> 1" NPT                   |
| <b>D3</b> SAE 16 - 1 5/16" - 12 UN |

**Connections OUT**

|                          |
|--------------------------|
| G 3/4"                   |
| G 1"                     |
| 3/4" NPT                 |
| 1" NPT                   |
| SAE 12 - 1 1/16" - 12 UN |
| SAE 16 - 1 5/16" - 12 UN |
| G 3/4"                   |
| 3/4" NPT                 |
| SAE 12 - 1 1/16" - 12 UN |

**Aux IN connection**  
**0** Without aux IN connection

**Filtration rating (filter media)**  
**A10** Inorganic microfiber 10 µm  
**A16** Inorganic microfiber 16 µm  
**A25** Inorganic microfiber 25 µm

**Mounting position**

|                                  | <b>A</b> | <b>B</b> | <b>C</b> | <b>D</b> | <b>L</b> | <b>F</b> | <b>G</b> | <b>H</b> | <b>I</b> | <b>M</b> |
|----------------------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| <b>S</b> Standard                | •        | •        | •        | •        |          |          |          |          |          |          |
| <b>B</b> Tank side-wall mounting | •        | •        |          |          |          |          |          |          | •        | •        |

**Valves configuration**

**Execution**  
**P01** MP Filtri standard  
**Pxx** Customized

### FILTER ELEMENT

Configuration example: **RSX116** | **1** | **A16** | **A** | **P01**

**Element series and size**  
**RSX116** Filter element with private spigot

**Element length**  
**1** | **2** |

**Filtration rating (filter media)**  
**A10** Inorganic microfiber 10 µm  
**A16** Inorganic microfiber 16 µm  
**A25** Inorganic microfiber 25 µm

**Seals**  
**A** NBR  
**V** FPM




**Execution**  
**P01** MP Filtri standard  
**Pxx** Customized

### ACCESSORIES

| Indicators on Return Line                                 |  | page | Indicators on Suction Line                        |  | page    |
|---|--|------|---|--|---------|
| <b>BVA</b> Axial pressure gauge                           |  | 278  | <b>BEA</b> Electrical pressure indicator          |  | 276     |
| <b>BVR</b> Radial pressure gauge                          |  | 278  | <b>BEM</b> Electrical pressure indicator          |  | 276     |
| <b>BVP</b> Visual pressure indicator with automatic reset |  | 279  | <b>BET</b> Electrical pressure indicator          |  | 276-277 |
| <b>BVQ</b> Visual pressure indicator with manual reset    |  | 279  | <b>BLA</b> Electrical / visual pressure indicator |  | 277-278 |
| <b>VVB</b> Axial vacuum gauge                             |  | 275  | <b>VEB</b> Electrical vacuum indicator            |  | 274     |
| <b>VVS</b> Radial vacuum gauge                            |  | 275  | <b>VLB</b> Electrical / visual vacuum indicator   |  | 274     |

| MRSX116       |         |         |
|---------------|---------|---------|
| Filter length | H1 [mm] | H2 [mm] |
| <b>1</b>      | 203     | 240     |
| <b>2</b>      | 263     | 300     |

| Connections    | T        |
|----------------|----------|
| <b>G1 - G2</b> | G 1/8"   |
| <b>G3 - G4</b> | 1/8" NPT |
| <b>G5 - G6</b> | 1/8" NPT |
| <b>D1</b>      | G 1/8"   |
| <b>D2 - D3</b> | 1/8" NPT |

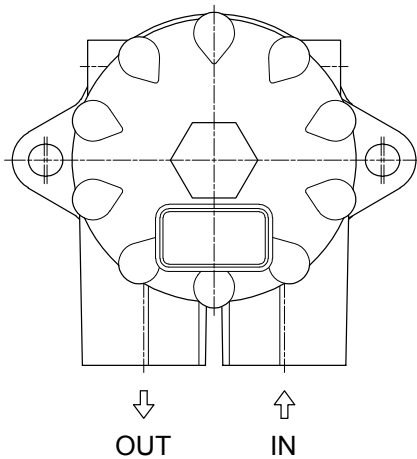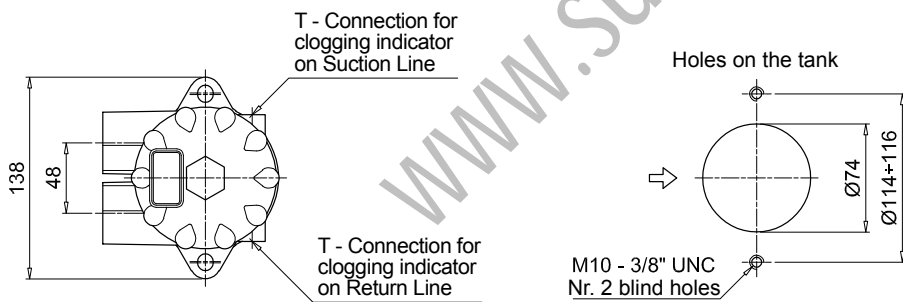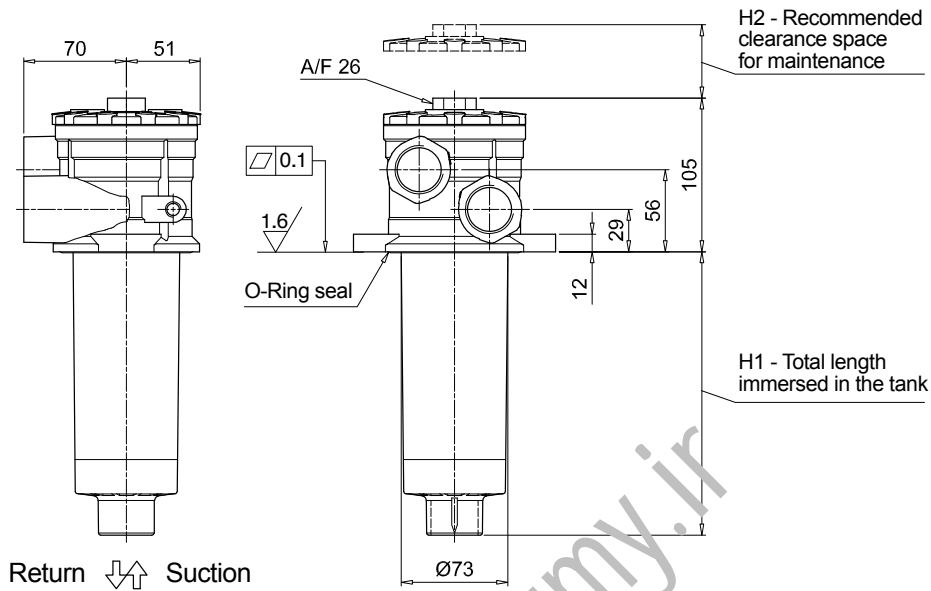

# MRSX MRSX165 - MRSX166

## Designation & Ordering code

### COMPLETE FILTER

Configuration example: **MRSX166** | **2** | **C** | **V** | **G3** | **1** | **A10** | **S** | **P01**

**Series and size**  
**MRSX165** | **MRSX166** Filter element with private spigot

**Length**  
**1** | **2** | **3**

**Hydraulic diagram configuration** - see page 257

| A        | B        | C        | D        | Bypass valve to tank | Bypass valve to OUT |
|----------|----------|----------|----------|----------------------|---------------------|
|          |          |          |          | •                    |                     |
| <b>E</b> | <b>F</b> | <b>G</b> | <b>H</b> |                      | •                   |
| <b>I</b> |          |          |          | •                    |                     |
| <b>M</b> |          |          |          |                      | •                   |

**Seals and treatments**

|          |                     |          |                        |
|----------|---------------------|----------|------------------------|
| <b>A</b> | NBR, O-Ring on head | <b>B</b> | NBR, flat seal on head |
| <b>V</b> | FPM, O-Ring on head | <b>D</b> | FPM, flat seal on head |

**Connections**

|           | IN (size 165)           | IN (size 166)            | Aux IN                  | OUT                      |
|-----------|-------------------------|--------------------------|-------------------------|--------------------------|
| <b>G1</b> | G 1 1/4"                | G 1"                     | G 1 1/4"                | G 1"                     |
| <b>G2</b> | 1 1/4" NPT              | 1" NPT                   | 1 1/4" NPT              | 1" NPT                   |
| <b>G3</b> | SAE 20 - 1 5/8" - 12 UN | SAE 16 - 1 5/16" - 12 UN | SAE 20 - 1 5/8" - 12 UN | SAE 16 - 1 5/16" - 12 UN |

**Aux IN connection**

|          | MRSX 165                                    | MRSX 166 |
|----------|---|----------|
| <b>0</b> | Without aux IN connection                   | • -      |
| <b>1</b> | With aux IN connection - see previous table | • •      |

**Filtration rating (filter media)**

**A10** Inorganic microfiber 10 µm  
**A16** Inorganic microfiber 16 µm  
**A25** Inorganic microfiber 25 µm

**Valves configuration**

| Mounting position                | A | B | C | D | E | F | G | H | I | M |
|----------------------------------|---|---|---|---|---|---|---|---|---|---|
| <b>S</b> Standard                | • | • | • | • | • | • | • | • | • | • |
| <b>B</b> Tank side-wall mounting | • | • |   |   | • |   |   |   | • | • |

**Execution**  
**P01** MP Filtri standard  
**Pxx** Customized

### FILTER ELEMENT

Configuration example: **RSX165** | **2** | **A10** | **V** | **P01**

**Element series and size**  
**RSX165** Filter element with private spigot

**Element length**  
**1** | **2** | **3**

**Filtration rating (filter media)**


**A10** Inorganic microfiber 10 µm  
**A16** Inorganic microfiber 16 µm  
**A25** Inorganic microfiber 25 µm

**Seals**  
**A** NBR  
**V** FPM

**Execution**  
**P01** MP Filtri standard  
**Pxx** Customized

### ACCESSORIES

| Indicators on Return Line                                 | page |   | page    |
|---|------|---|---------|
| <b>BVA</b> Axial pressure gauge                           | 278  | <b>BEA</b> Electrical pressure indicator          | 276     |
| <b>BVR</b> Radial pressure gauge                          | 278  | <b>BEM</b> Electrical pressure indicator          | 276     |
| <b>BVP</b> Visual pressure indicator with automatic reset | 279  | <b>BET</b> Electrical pressure indicator          | 276-277 |
| <b>BVQ</b> Visual pressure indicator with manual reset    | 279  | <b>BLA</b> Electrical / visual pressure indicator | 277-278 |
| Indicators on Suction Line                                | page |   | page    |
| <b>VVB</b> Axial vacuum gauge                             | 275  | <b>VEB</b> Electrical vacuum indicator            | 274     |
| <b>VVS</b> Radial vacuum gauge                            | 275  | <b>VLB</b> Electrical / visual vacuum indicator   | 274     |

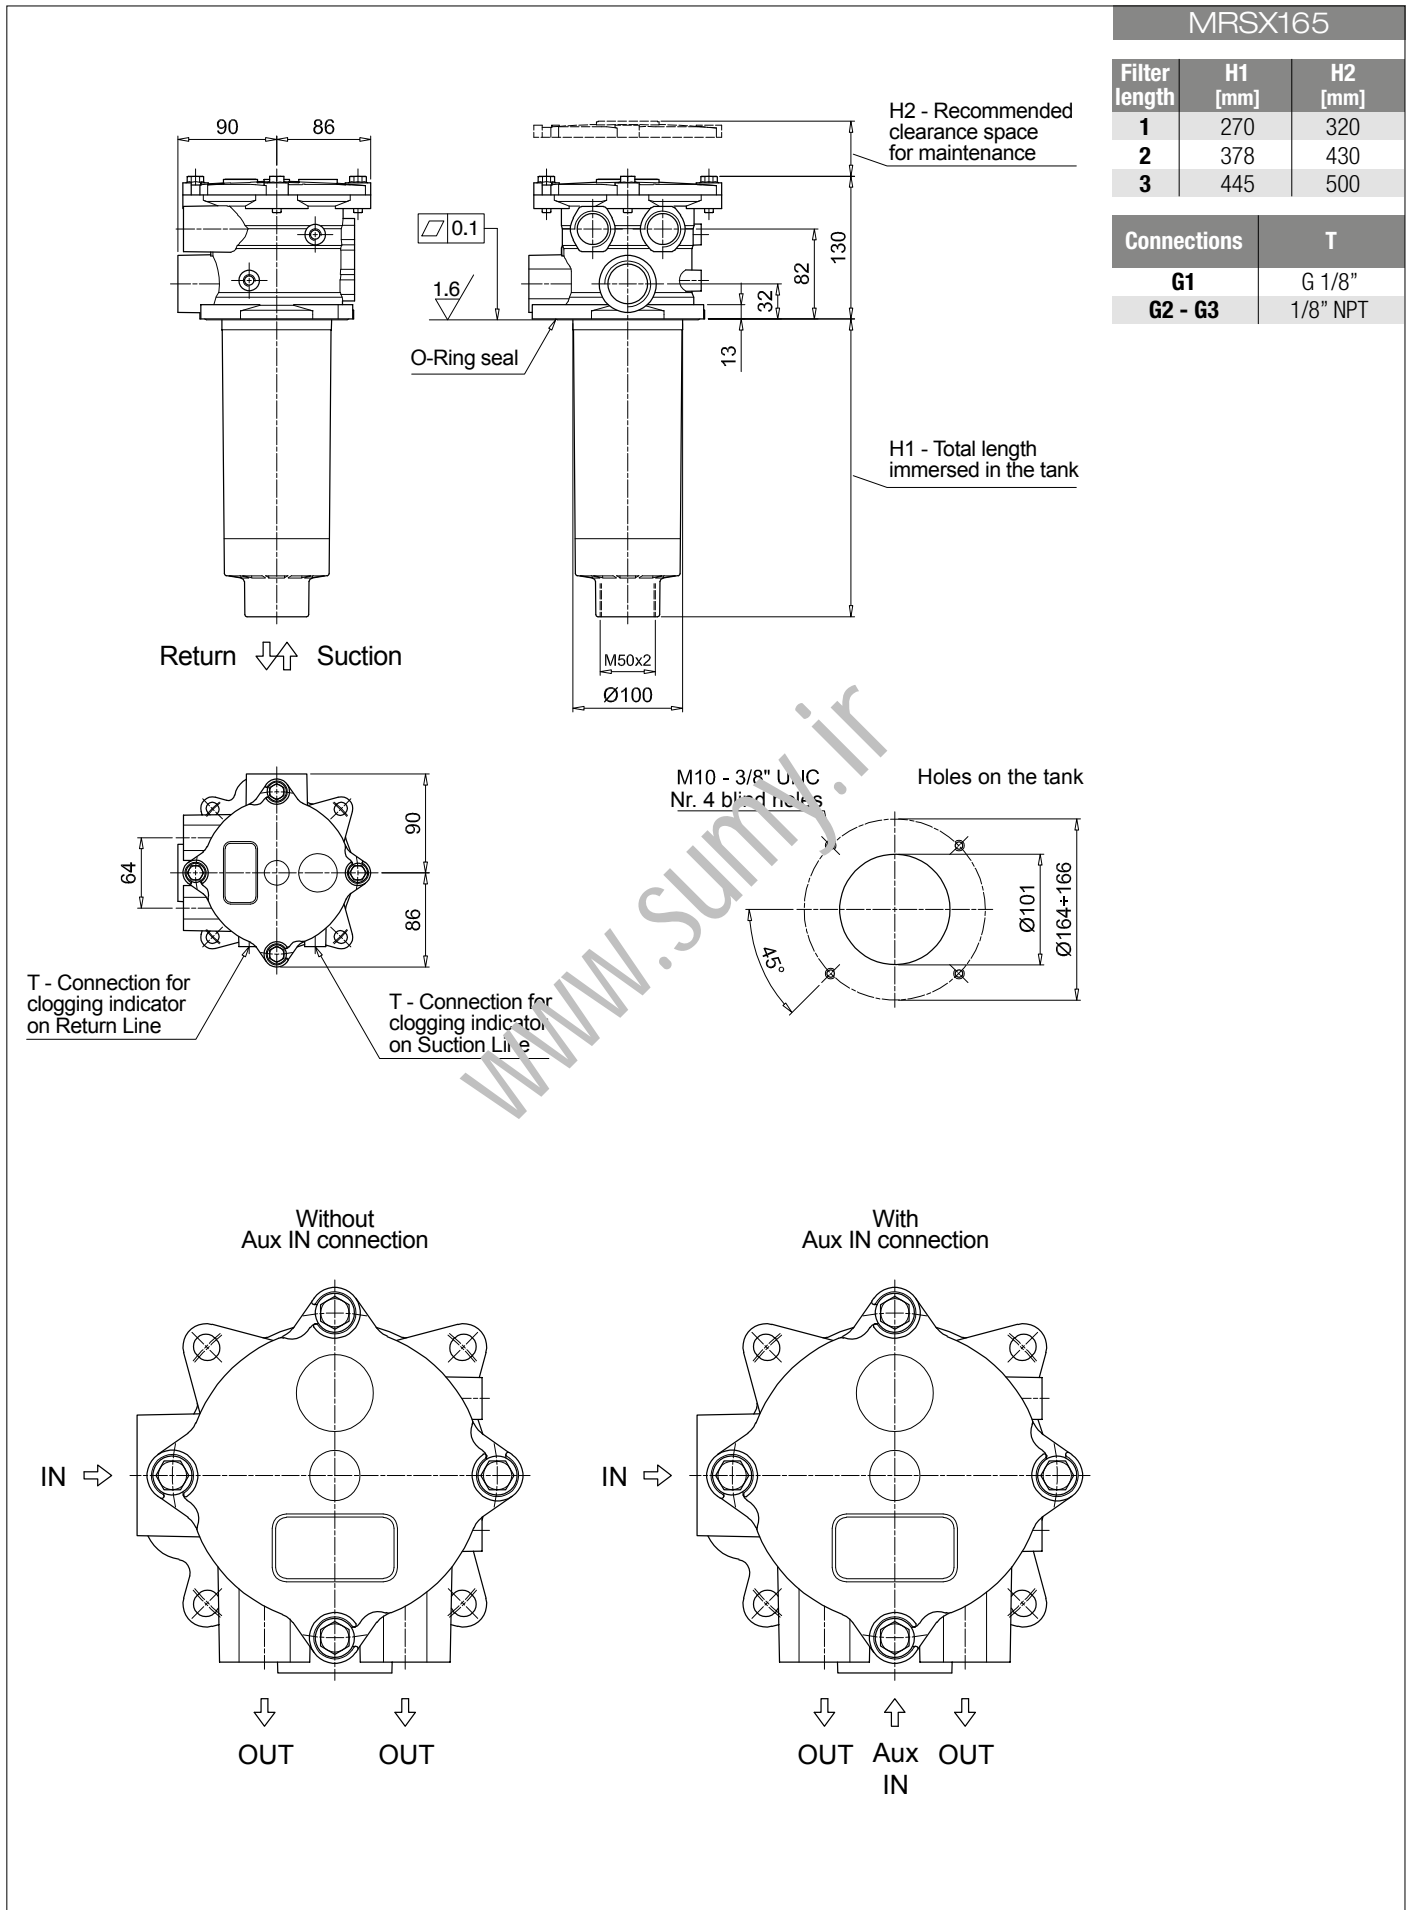


| MRSX165       |         |         |
|---------------|---------|---------|
| Filter length | H1 [mm] | H2 [mm] |
| 1             | 270     | 320     |
| 2             | 378     | 430     |
| 3             | 445     | 500     |

| Connections | T        |
|-------------|----------|
| G1          | G 1/8"   |
| G2 - G3     | 1/8" NPT |


# MRSX MRSX165 - MRSX166

## Dimensions



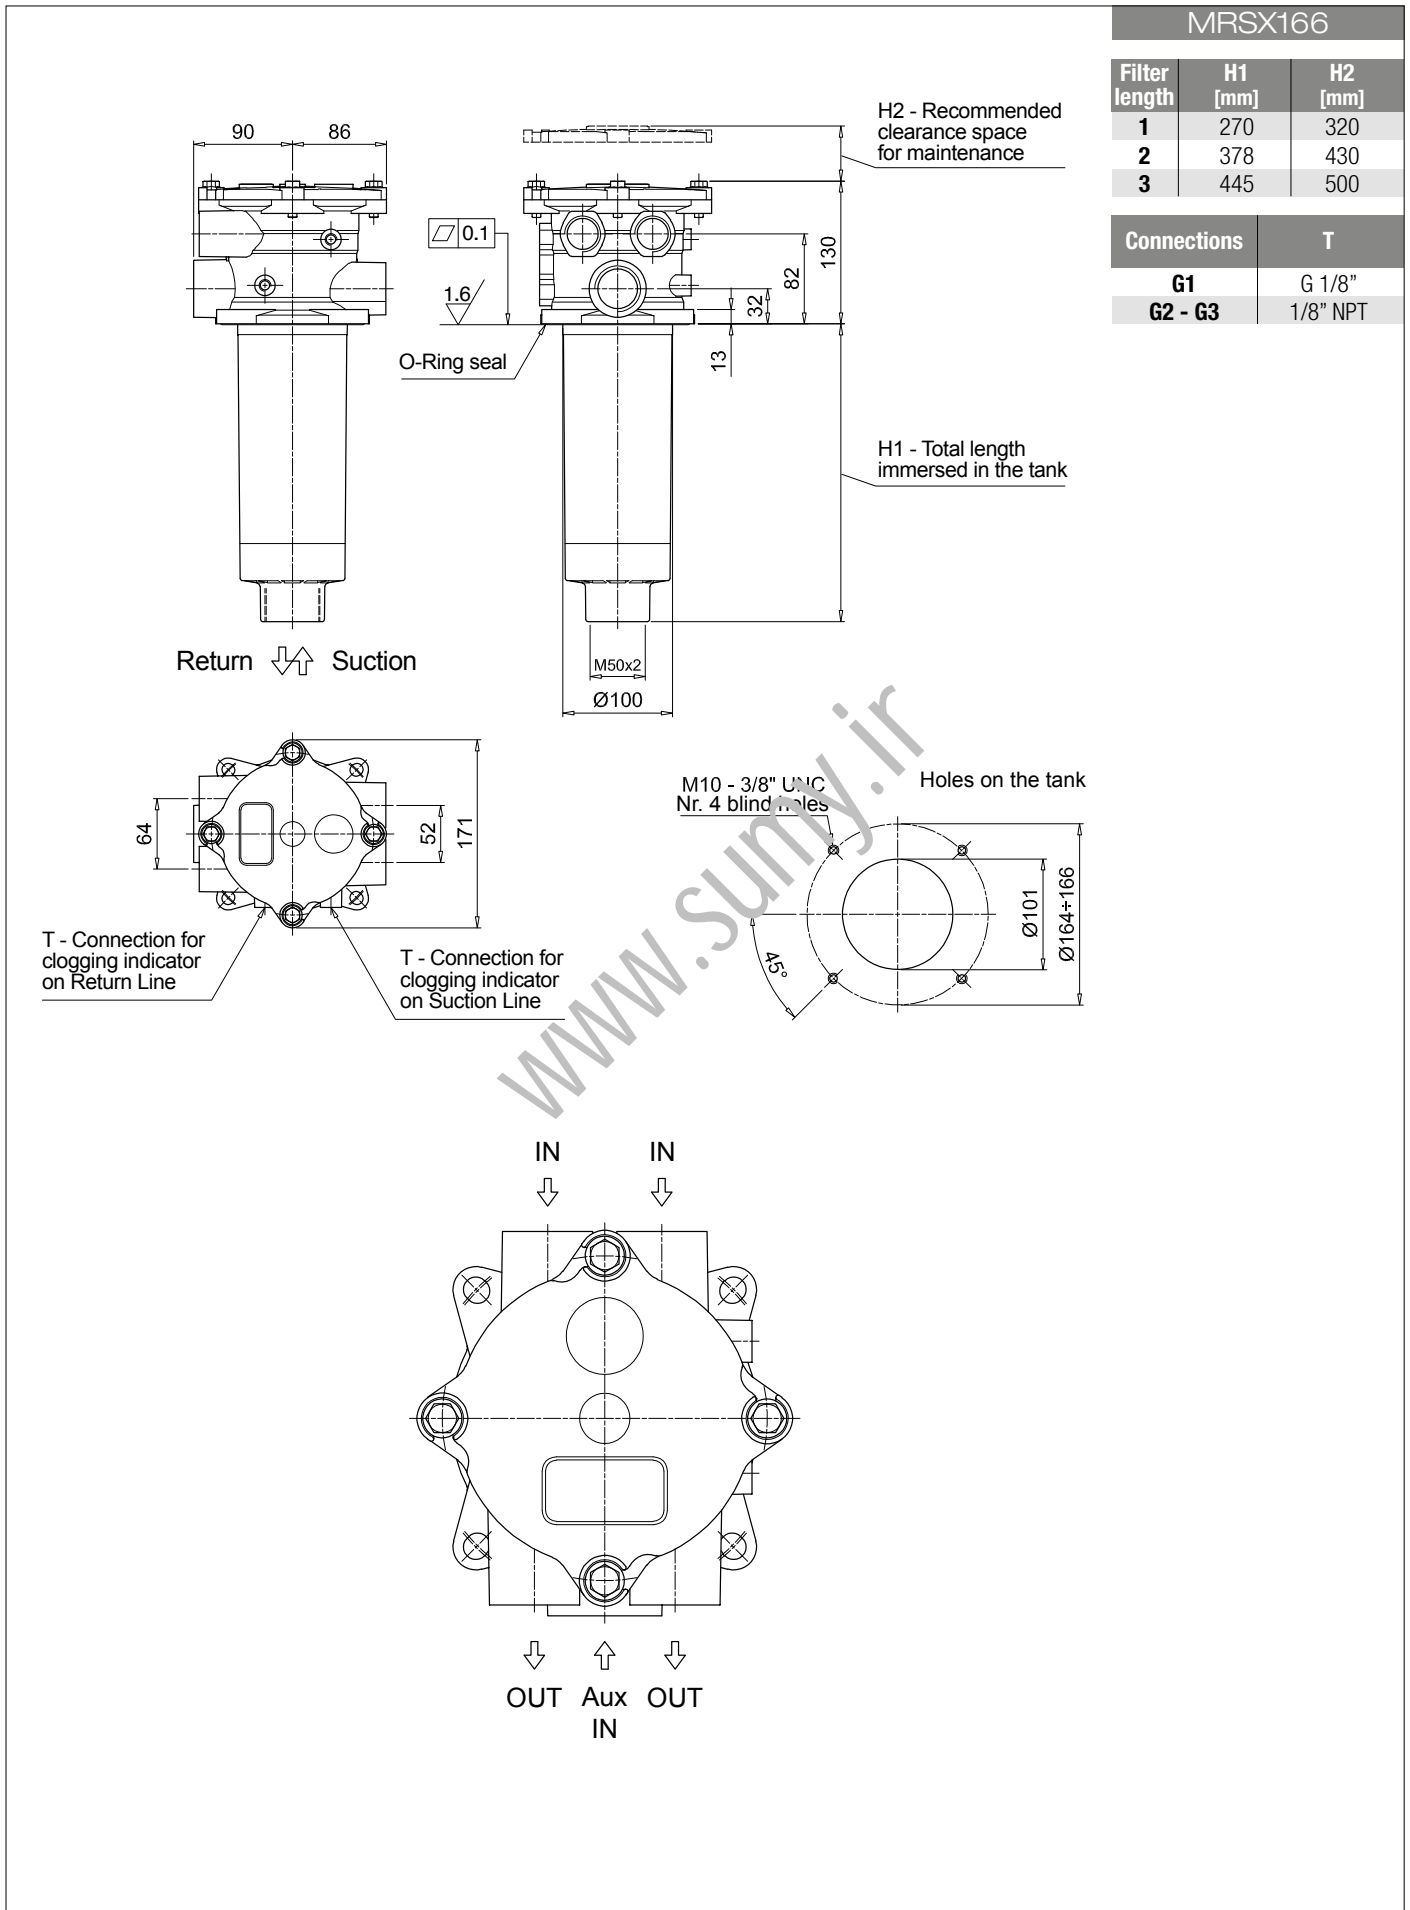


## MRSX 116

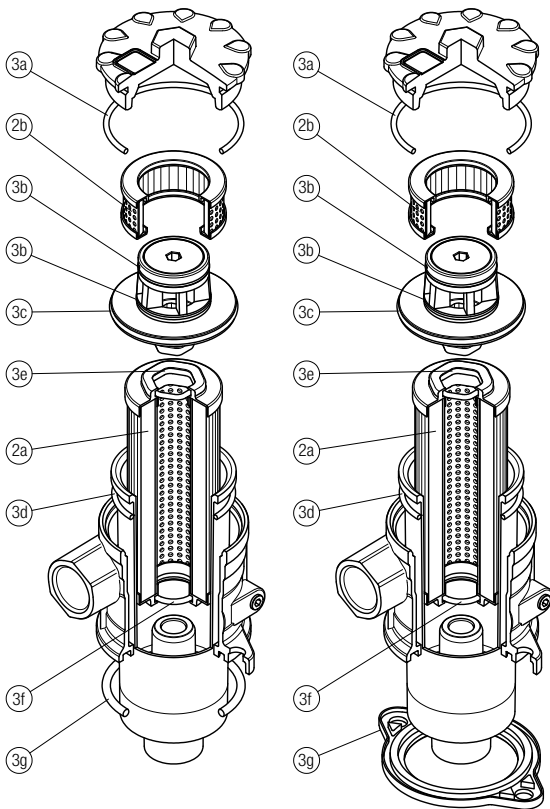

| Item:         | Q.ty: 1 pc.     |                       | O-RING SEAL              |                          | FLAT SEAL                |                          |
|---------------|-----------------|-----------------------|--------------------------|--------------------------|--------------------------|--------------------------|
|               | 2a              | 2b                    | 3 (3a ÷ 3g)              |                          | 3 (3a ÷ 3g)              |                          |
| Filter series | Filter element  | Safety filter element | Seal Kit code number NBR | Seal Kit code number FPM | Seal Kit code number NBR | Seal Kit code number FPM |
| MRSX 116      | See order table | S116M60P01            | 02050617                 | 02050619                 | 02050618                 | 02050620                 |

## MRSX 165 - 166

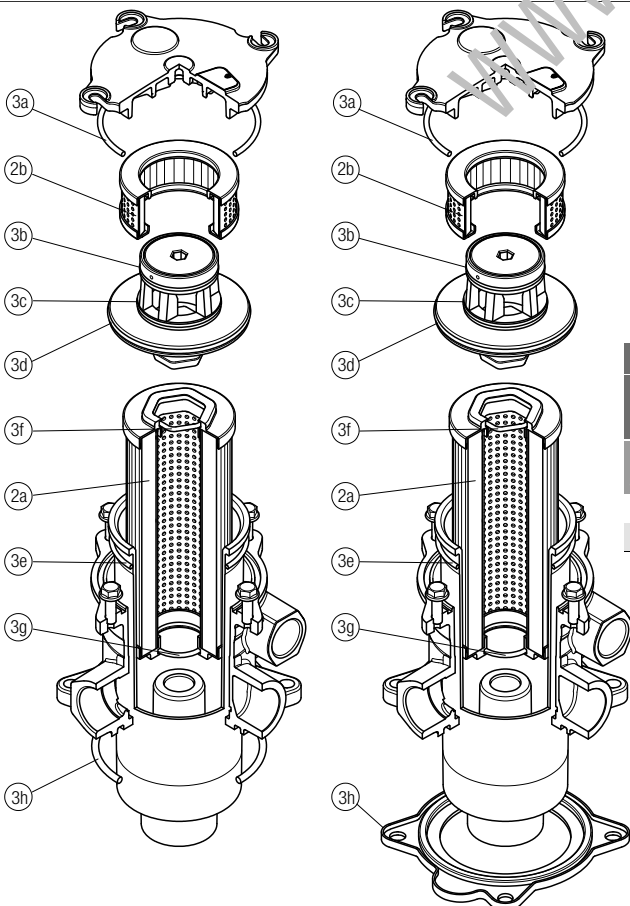

| Item:         | Q.ty: 1 pc.     |                       | O-RING SEAL              |                          | FLAT SEAL                |                          |
|---------------|-----------------|-----------------------|--------------------------|--------------------------|--------------------------|--------------------------|
|               | 2a              | 2b                    | 3 (3a ÷ 3h)              |                          | 3 (3a ÷ 3h)              |                          |
| Filter series | Filter element  | Safety filter element | Seal Kit code number NBR | Seal Kit code number FPM | Seal Kit code number NBR | Seal Kit code number FPM |
| MRSX 165      | See order table | S165M60P01            | 02050627                 | 02050630                 | 02050628                 | 02050631                 |
| MRSX 166      |                 |                       | 02050627                 | 02050630                 | 02050629                 | 02050632                 |

[www.sumy.ir](http://www.sumy.ir)

# LMP 124 series

MULTI-PORT

Maximum working pressure up to 8 MPa (80 bar) - Flow rate up to 120 l/min



## Description

## Technical data

Return / Suction filter

In-line

**Maximum working pressure up to 8 MPa (80 bar)**  
**Flow rate up to 120 l/min**

LMP124 is a range of return/suction filters for hydraulic systems with two or more circuits (both open and closed loops). They are able to provide pressurized oil cleaned by fine filtration to the feed pump of the hydrostatic systems.

They are directly connected to the lines of the system through the hydraulic fittings.

### Available features:

- Female threaded connections up to 1", for a maximum return flow rate of 120 l/min
- Fine filtration rating, to get a good cleanliness level into the reservoir
- Bypass valve to the tank, to relieve excessive pressure drop across the filter media when the return flow is enough higher than the suction flow
- Bypass valve to the suction line with additional suction filter element, to relieve excessive pressure drop across the filter media when the return flow is not enough higher than the suction flow
- De-pressurization valve, to reduce the pressure inside the filter during the maintenance operations
- Visual, electrical and electronic differential clogging indicators

### Common applications:

Mobile machines with hydrostatic systems on board.  
 (i.e. skid steer loaders, telehandlers, dumpers, road sweepers)

### Filter housing materials

- Head: Aluminium
- Housing: Cathaphoresis - Painted Steel
- Bypass valve: Brass - Aluminium

### Pressure

- Test pressure: 12MPa (120 bar)
- Burst pressure: 38 MPa (380 bar)
- Pulse pressure fatigue test: 1 000 000 cycles with pressure from 0 to 80 bar (8 MPa)

### Bypass valve

- Opening pressure 250 kPa (2.5 bar) ±10%
- Other opening pressures on request.

### Δp element type

- Microfibre filter elements - series N - W: 20 bar
- Fluid flow through the filter element from OUT to IN.

### Seals

- Standard NBR series A
- Optional FPM series V

### Temperature

From -25 °C to +110 °C

### Note

LMP124 filters are provided for vertical mounting



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series  | Weights [kg] |      |      |      | Volumes [dm <sup>3</sup> ] |        |      |      |      |      |
|----------------|--------------|------|------|------|----------------------------|--------|------|------|------|------|
|                | Length       | 1    | 2    | 3    | 4                          | Length | 1    | 2    | 3    | 4    |
| <b>LMP 124</b> |              | 1.70 | 1.90 | 2.20 | 2.70                       |        | 0.75 | 0.81 | 1.11 | 1.53 |

| Filter series  | Length   | Filter element design - N series |     |     |     |     |                   |     |     |
|----------------|----------|----------------------------------|-----|-----|-----|-----|-------------------|-----|-----|
|                |          | A03                              | A06 | A10 | A16 | A25 | M25<br>M60<br>M90 | P10 | P25 |
| <b>LMP 124</b> | <b>1</b> | 39                               | 41  | 58  | 60  | 69  | 99                | 84  | 85  |
|                | <b>2</b> | 47                               | 53  | 68  | 69  | 77  | 99                | 90  | 91  |
|                | <b>3</b> | 59                               | 61  | 73  | 77  | 86  | 99                | 92  | 93  |
|                | <b>4</b> | 70                               | 78  | 84  | 86  | 93  | 100               | 94  | 95  |


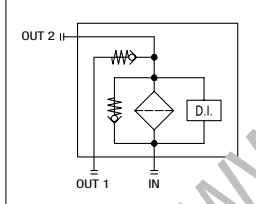
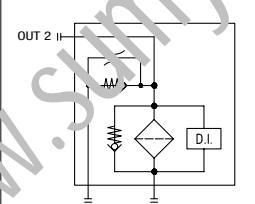
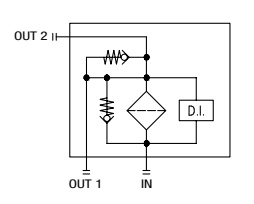
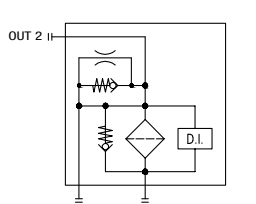
**Maximum flow rate for a complete return/suction filter with a pressure drop  $\Delta p = 1.2$  bar.**


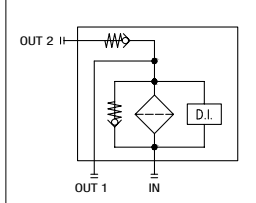
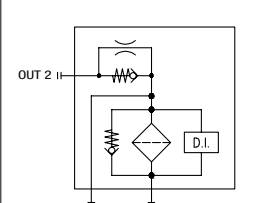
The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.


### Hydraulic symbols - Multiport styles

| Multiport   | Valves C option   | Valves D option   | Valves E option  | Valves F option   |
|---|---|---|--|---|
|  <p><b>IN</b> - Return<br/><b>OUT 1</b> - Tank<br/><b>OUT 2</b> - Pump</p> |  |  |  |  |


| Multiport   | Valves G option   | Valves H option   |
|---|---|---|
|  <p><b>IN</b> - Return<br/><b>OUT 1</b> - Tank<br/><b>OUT 2</b> - Pump</p> |  |  |

## Pressure drop



### Filter housings $\Delta p$ pressure drop

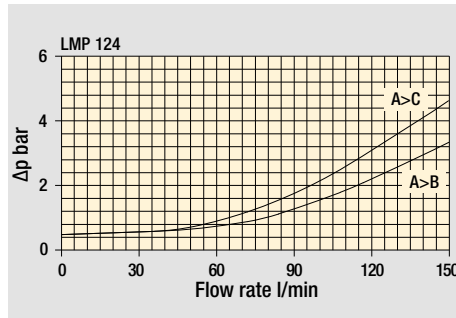

### Bypass valve pressure drop



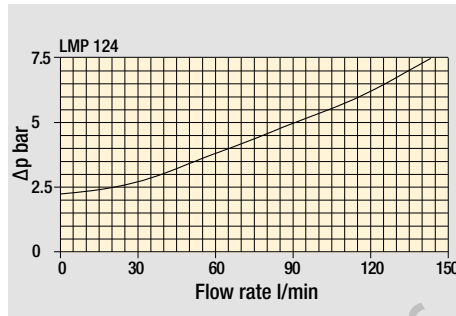


### Valves


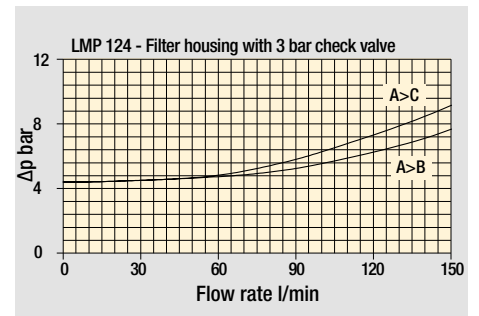
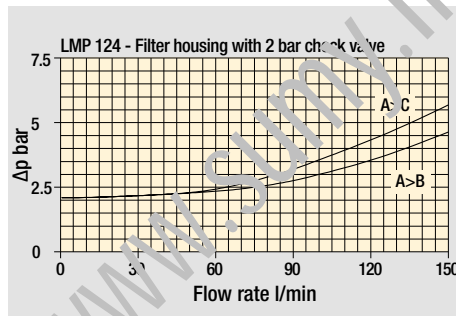


### Filter length: 1 - 2 - 3 - 4

#### STYLE C - D - E - F

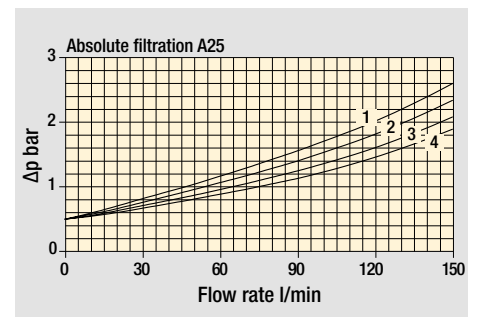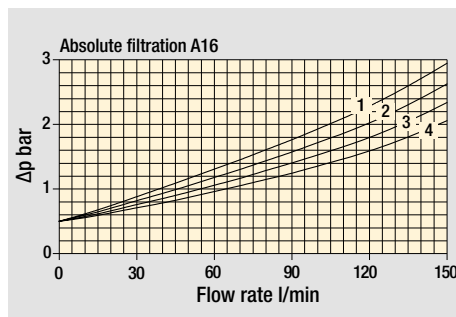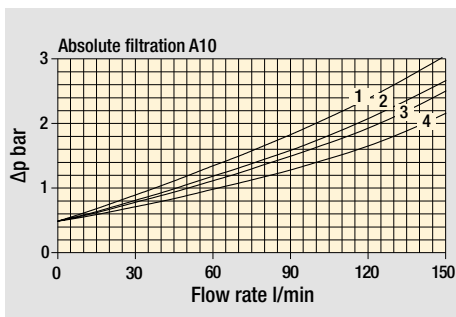

#### STYLE G - H

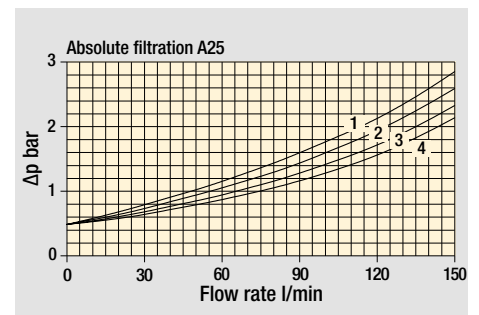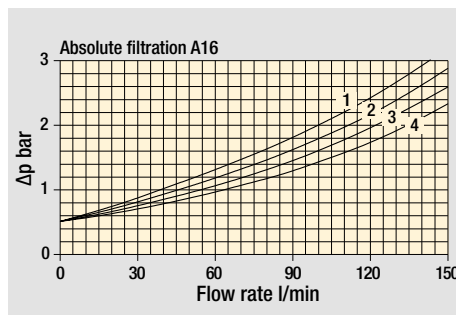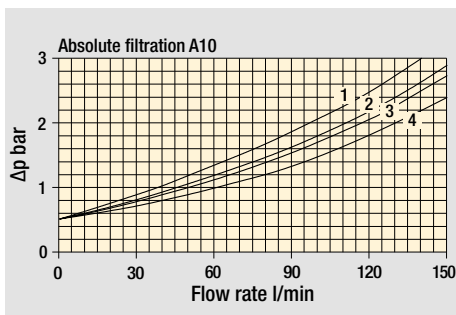

The curves are plotted using mineral oil with density of  $0.86 \text{ kg/dm}^3$  in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

www.sumy.ir

## Designation & Ordering code

### COMPLETE FILTER

|  |  |     |     |                   |  |  |  |  |  |                               |
|--|--|-----|-----|-------------------|--|--|--|--|--|-------------------------------|
| <b>Series and size</b>                                 | Configuration example: <b>LMP124</b>   <b>4</b>   <b>C</b>   <b>A</b>   <b>F</b>   <b>1</b>   <b>A10</b>   <b>N</b>   <b>P01</b> |     |     |                   |  |  |  |  |  |                               |
| <b>LMP124</b>  |  |     |     |                   |  |  |  |  |  |                               |
| <b>Filter length</b>                                   | 1   2   3   4  |     |     |                   |  |  |  |  |  |                               |
| <b>Hydraulic diagram configuration</b> - see page 268  | C   D   E   F   G   H  |     |     |                   |  |  |  |  |  |                               |
| <b>Seals and treatments</b>                            | Filtration rating  |     |     |                   |  |  |  |  |  |                               |
| <b>A</b> NBR   | Axx  | Mxx | Pxx |                   |  |  |  |  |  |                               |
| <b>V</b> FPM   | •  | •   | •   |                   |  |  |  |  |  |                               |
| <b>W</b> NBR compatible with fluids HFA-HFB-HFC        | •  | •   |     |                   |  |  |  |  |  |                               |
| <b>Connections</b>                                     |  |     |     |                   |  |  |  |  |  |                               |
| <b>B</b> G 1"  |  |     |     |                   |  |  |  |  |  |                               |
| <b>F</b> SAE 16 - 1 5/16" - 12 UN                      |  |     |     |                   |  |  |  |  |  |                               |
| <b>Connection for indicator</b>                        |  |     |     |                   |  |  |  |  |  |                               |
| <b>1</b> Without                                       |  |     |     |                   |  |  |  |  |  |                               |
| <b>2</b> With connection G 1/8" for clogging indicator |  |     |     |                   |  |  |  |  |  |                               |
| <b>3</b> With connection G 1/4" for clogging indicator |  |     |     |                   |  |  |  |  |  |                               |
| <b>4</b> With connection for differential indicator    |  |     |     |                   |  |  |  |  |  |                               |
| <b>Filtration rating (filter media)</b>                |  |     |     |                   |  |  |  |  |  |                               |
| <b>A03</b> Inorganic microfiber 3 µm                   |  |     |     |                   |  |  |  |  |  |                               |
| <b>A06</b> Inorganic microfiber 6 µm                   |  |     |     |                   |  |  |  |  |  |                               |
| <b>A10</b> Inorganic microfiber 10 µm                  |  |     |     |                   |  |  |  |  |  |                               |
| <b>A16</b> Inorganic microfiber 16 µm                  |  |     |     |                   |  |  |  |  |  |                               |
| <b>A25</b> Inorganic microfiber 25 µm                  |  |     |     |                   |  |  |  |  |  |                               |
| <b>M25</b> Wire mesh 25 µm                             |  |     |     |                   |  |  |  |  |  |                               |
| <b>M60</b> Wire mesh 60 µm                             |  |     |     |                   |  |  |  |  |  |                               |
| <b>M90</b> Wire mesh 90 µm                             |  |     |     |                   |  |  |  |  |  |                               |
| <b>P10</b> Resin impregnated paper 10 µm               |  |     |     |                   |  |  |  |  |  |                               |
| <b>P25</b> Resin impregnated paper 25 µm               |  |     |     |                   |  |  |  |  |  |                               |
|  |  |     |     | <b>Element Δp</b> |  |  |  |  |  | <b>Execution</b>              |
|  |  |     |     | <b>N</b> 20 bar   |  |  |  |  |  | <b>P01</b> MP Filtri standard |
|  |  |     |     |                   |  |  |  |  |  | <b>Pxx</b> Customized         |

### FILTER ELEMENT



|   |  |     |     |                   |  |  |  |                               |
|---|--|-----|-----|-------------------|--|--|--|-------------------------------|
| <b>Element series and size</b>                  | Configuration example: <b>CU110</b>   <b>4</b>   <b>A10</b>   <b>A</b>   <b>N</b>   <b>P01</b> |     |     |                   |  |  |  |                               |
| <b>CU110</b>                                    |  |     |     |                   |  |  |  |                               |
| <b>Element length</b>                           | 1   2   3   4  |     |     |                   |  |  |  |                               |
| <b>Filtration rating (filter media)</b>         |  |     |     |                   |  |  |  |                               |
| <b>A03</b> Inorganic microfiber 3 µm            |  |     |     |                   |  |  |  |                               |
| <b>A06</b> Inorganic microfiber 6 µm            |  |     |     |                   |  |  |  |                               |
| <b>A10</b> Inorganic microfiber 10 µm           |  |     |     |                   |  |  |  |                               |
| <b>A16</b> Inorganic microfiber 16 µm           |  |     |     |                   |  |  |  |                               |
| <b>A25</b> Inorganic microfiber 25 µm           |  |     |     |                   |  |  |  |                               |
| <b>M25</b> Wire mesh 25 µm                      |  |     |     |                   |  |  |  |                               |
| <b>M60</b> Wire mesh 60 µm                      |  |     |     |                   |  |  |  |                               |
| <b>M90</b> Wire mesh 90 µm                      |  |     |     |                   |  |  |  |                               |
| <b>P10</b> Resin impregnated paper 10 µm        |  |     |     |                   |  |  |  |                               |
| <b>P25</b> Resin impregnated paper 25 µm        |  |     |     |                   |  |  |  |                               |
| <b>Seals</b>                                    | Filtration rating  |     |     |                   |  |  |  |                               |
| <b>A</b> NBR                                    | Axx  | Mxx | Pxx |                   |  |  |  |                               |
| <b>V</b> FPM                                    | •  | •   | •   |                   |  |  |  |                               |
| <b>W</b> NBR compatible with fluids HFA-HFB-HFC | •  | •   |     |                   |  |  |  |                               |
|   |  |     |     | <b>Element Δp</b> |  |  |  | <b>Execution</b>              |
|   |  |     |     | <b>N</b> 20 bar   |  |  |  | <b>P01</b> MP Filtri standard |
|   |  |     |     |                   |  |  |  | <b>Pxx</b> Customized         |

### ACCESSORIES


|   |         |   |  |  |         |
|---|---------|---|--|--|---------|
| <b>Indicators on Return Line</b>                          | page    |   |  |  | page    |
| <b>BVA</b> Axial pressure gauge                           | 278     | <b>BEA</b> Electrical pressure indicator          |  |  | 276     |
| <b>BVR</b> Radial pressure gauge                          | 278     | <b>BEM</b> Electrical pressure indicator          |  |  | 276     |
| <b>BVP</b> Visual pressure indicator with automatic reset | 279     | <b>BET</b> Electrical pressure indicator          |  |  | 276-277 |
| <b>BVQ</b> Visual pressure indicator with manual reset    | 279     | <b>BLA</b> Electrical / visual pressure indicator |  |  | 277-278 |
| <b>Differential indicators</b>                            | page    |   |  |  | page    |
| <b>DEA</b> Electrical differential indicator              | 280     | <b>DTA</b> Electronic differential indicator      |  |  | 283     |
| <b>DEM</b> Electrical differential indicator              | 280-281 | <b>DVA</b> Visual differential indicator          |  |  | 283     |
| <b>DLA</b> Electrical / visual differential indicator     | 281-282 | <b>DVM</b> Visual differential indicator          |  |  | 283     |
| <b>DLE</b> Electrical / visual differential indicator     | 282     |   |  |  |         |
| <b>Additional features</b>                                | page    |   |  |  |         |
| <b>T2</b> Plug  | 284     |   |  |  |         |



| LMP 124       |          |
|---------------|----------|
| MULTIPORT     |          |
| Filter length | H [mm]   |
| 1             | 182      |
| 2             | 215      |
| 3             | 265      |
| 4             | 365      |
| Connections   | R        |
| B             | M10      |
| F             | 3/8" UNC |

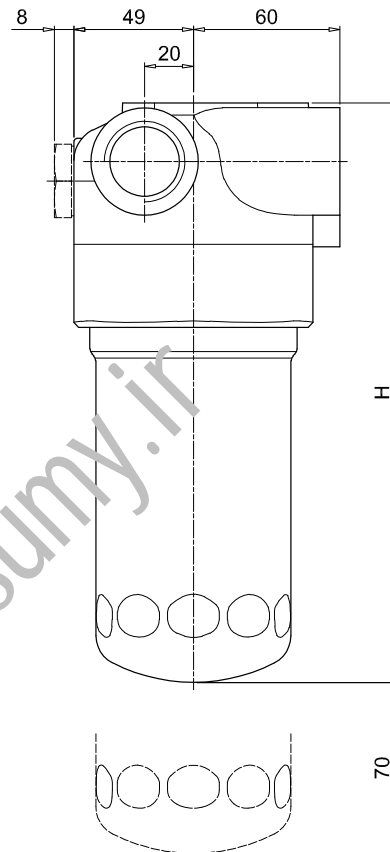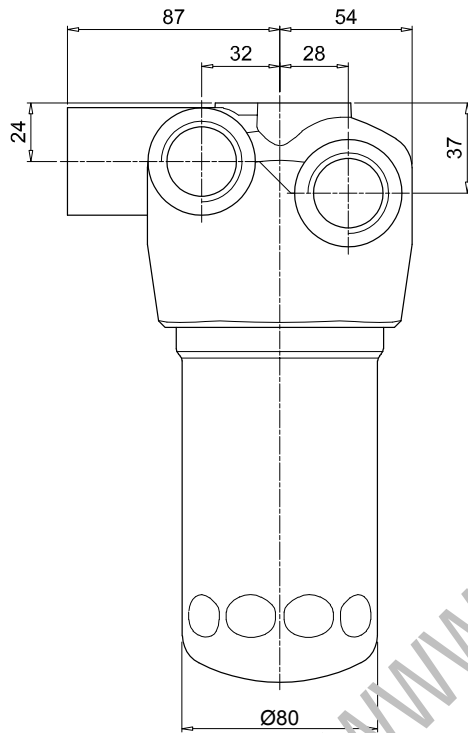

Recommended clearance space for maintenance

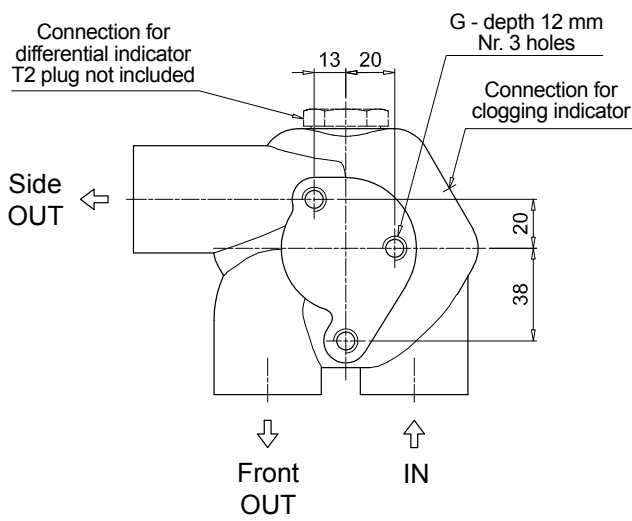


# LMP 124 MULTIPORT

MULTIPORT

Order number for spare parts

## LMP 124 MULTIPORT

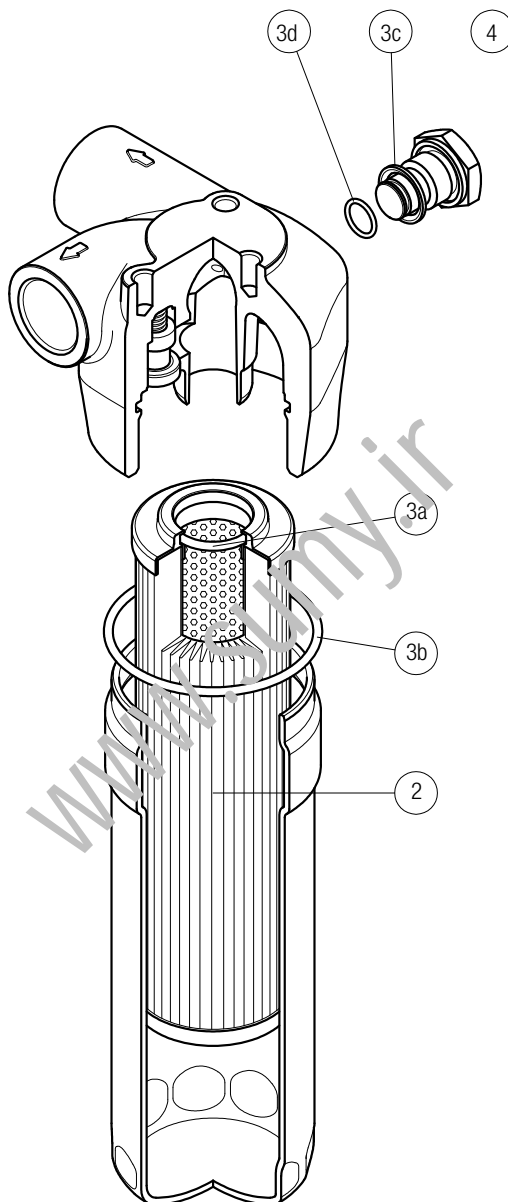

| Item:             | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          | Q.ty: 1 pc.               |     |
|-------------------|-----------------|----------------------|----------|---------------------------|-----|
| Filter series     | Filter element  | Seal Kit code number |          | Indicator connection plug |     |
| LMP 124 MULTIPORT | See order table | NBR                  | FPM      | NBR                       | FPM |
|                   | <b>2</b>        | <b>3</b> (3a ÷ 3d)   |          | <b>4</b>                  |     |
|                   |                 | 02050478             | 02050479 | T2H                       | T2V |

# Clogging indicators

## Introduction

Filter elements are efficient only if their Dirt Holding Capacity is fully exploited. This is achieved by using filter housings equipped with clogging indicators.

These devices trip when the clogging of the filter element causes an increase in pressure drop across the filter element.

The indicator is set to alarm before the element becomes fully clogged.

MP Filtri can supply indicators of the following designs:

- Vacuum switches and gauges
- Pressure switches and gauges
- Differential pressure indicators

These type of devices can be provided with a visual, electrical or both signals.

**Vacuum indicators**  
**Barometric indicators**  
**Differential indicators**

## Suitable indicator types


### VACUUM INDICATORS

Vacuum indicators are used on the Suction line to check the efficiency of the filter element.

They measure the pressure downstream of the filter element.

Standard items are produced with R 1/4" EN 10226 connection.

Available products with R 1/8" EN 10226 to be fitted on MPS series.

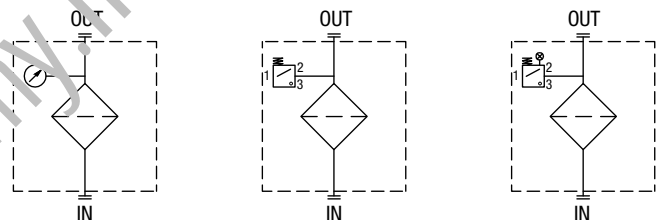


### BAROMETRIC INDICATORS

Pressure indicators are used on the Return line to check the efficiency of the filter element.

They measure the pressure upstream of the filter element.

Standard items are produced with R 1/8" EN 10226 connection.

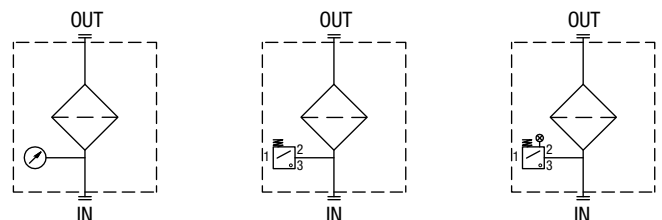


### DIFFERENTIAL INDICATORS

Differential indicators are used on the Pressure line to check the efficiency of the filter element.

They measure the pressure upstream and downstream of the filter element (differential pressure).

Standard items are produced with special connection G 1/2" size.

Also available in Stainless Steel models.

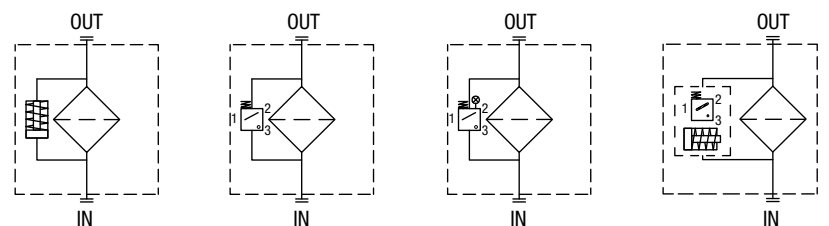

## Quick reference guide

|              | Filter series                             | Visual indicator                               | Electrical indicator   | Electrical / Visual indicator                                |
|--------------|---|--|--|--|
| Suction line | MRSX 116 - 165 - 166                      | VVB16P01<br>VVS16P01                           | VEB21AA50P01   | VLB21AA51P01<br>VLB21AA52P01<br>VLB21AA53P01<br>VLB21AA71P01 |
| Return line  | MRSX 116 - 165 - 166<br>LMP 124 MULTIPORT | BVA25P01<br>BVR25P01<br>BVP20HP01<br>BVQ20HP01 | BEA25HA50P01<br>BEM25HA41P01<br>BET25HF10P01<br>BET25HF30P01<br>BET25HF50P01 | BLA25HA51P01<br>BLA25HA52P01<br>BLA25HA53P01<br>BLA25HA71P01 |

# VACUUM INDICATORS

## Dimensions

| VE*50                              |                    |
|------------------------------------|--------------------|
| <b>Electrical Vacuum Indicator</b> |                    |
| R                                  | Ordering code      |
| EN 10226 - R1/4"                   | VE A 21 A A 50 P01 |
| EN 10226 - R1/8"                   | VE B 21 A A 50 P01 |

**Hydraulic symbol**

**Electrical symbol**

**Materials**

- Body: Brass
- Base: Black Nylon
- Contacts: Silver
- Seal: NBR

**Technical data**

- Vacuum setting: -0.21 bar ±10%
- Max working pressure: 10 bar
- Proof pressure: 15 bar
- Working temperature: From -25 °C to +80 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids  
HFA, HFB, HFC according to ISO 2943
- Degree of protection: IP65 according to EN 60529

**Electrical data**

- Electrical connection: EN 175301-803
- Resistive load: 5 A / 14 Vdc  
4 A / 30 Vdc  
5 A / 125 Vac  
4 A / 250 Vac
- Available Atex product: II 1GD Ex ia IIC Tx Ex ia IIIC Tx°C X
- CE certification

| VL*51 - VL*52 - VL*53                     |                    |
|---|--------------------|
| <b>Electrical/Visual Vacuum Indicator</b> |                    |
| R   | Ordering code      |
| EN 10226 - R1/4"                          | VL A 21 A A xx P01 |
| EN 10226 - R1/8"                          | VL B 21 A A xx P01 |

**Hydraulic symbol**

**Electrical symbol**

**Material:**

- Body: Brass
- Base: Transparent Nylon
- Contacts: Brass - Nylon
- Seal: NBR

**Technical data**

- Vacuum setting: -0.21 bar ±10%
- Max working pressure: 10 bar
- Proof pressure: 15 bar
- Working temperature: From -25 °C to +80 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids  
HFA, HFB, HFC according to ISO 2943
- Degree of protection: IP65 according to EN 60529

**Electrical data**

- Electrical connection: EN 175301-803
- Type: 51                      52                      53
- Lamps: 24 Vdc            110 Vdc            230 Vac
- Resistive load: 1 A / 24 Vdc    1 A / 110 Vdc    1 A / 230 Vac

| VL*71                                     |                    |
|---|--------------------|
| <b>Electrical/Visual Vacuum Indicator</b> |                    |
| Connections                               | Indicator code     |
| EN 10226 - R1/4"                          | VL A 21 A A 71 P01 |
| EN 10226 - R1/8"                          | VL B 21 A A 71 P01 |

**Hydraulic symbol**

**Electrical symbol**

**Materials**

- Body: Brass
- Base: Black Nylon
- Contacts: Silver
- Seal: NBR

**Technical data**

- Vacuum setting: -0.21 bar ±10%
- Max working pressure: 10 bar
- Proof pressure: 15 bar
- Working temperature: From -25 °C to +80 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids  
HFA, HFB, HFC according to ISO 2943
- Degree of protection: IP65 according to EN 60529

**Electrical data**

- Electrical connection: IEC 61076-2-101 D (M12)
- Lamps: 24 Vdc
- Resistive load: 0.4 A / 24 Vdc

| VVA - VVB          |                      |
|--------------------|----------------------|
| Axial Vacuum Gauge |                      |
| <b>R</b>           | <b>Ordering code</b> |
| EN 10226 - R1/4"   | VV A 16 P01          |
| EN 10226 - R1/8"   | VV B 16 P01          |

**Hydraulic symbol**

**Dial scale**

**Conversion to SI units**

| [cmHg] | [bar] |
|--------|-------|
| -12    | -0.16 |
| -18    | -0.24 |
| -76    | -1.01 |

**Materials**

- Case: Painted Steel
- Window: Transparent plastic
- Dial: Painted Steel
- Pointer: Painted Aluminium
- Pressure connection: Brass
- Pressure element: Bourdon tube Cu-alloy soft soldered

**Technical data**

- Max working pressure: Static: 7 bar  
Fluctuating: 6 bar  
Short time: 10 bar
- Working temperature: From -40 °C to +60 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids  
HFA, HFB, HFC according to ISO 2943
- Accuracy: Class 2.5 according to EN 13190
- Degree of protection: IP31 according to EN 60529

| VVR - VVS           |            |                      |
|---------------------|------------|----------------------|
| Radial Vacuum Gauge |            |                      |
| <b>R</b>            | <b>A/F</b> | <b>Ordering code</b> |
| EN 10226 - R1/4"    | 14         | VV R 16 P01          |
| EN 10226 - R1/8"    | 11         | VV S 16 P01          |

**Hydraulic symbol**

**Dial scale**

**Conversion to SI units**

| [cmHg] | [bar] |
|--------|-------|
| -12    | -0.16 |
| -18    | -0.24 |
| -76    | -1.01 |

**Materials**

- Case: Painted Steel
- Window: Transparent plastic
- Dial: Painted Steel
- Pointer: Painted Aluminium
- Pressure connection: Brass
- Pressure element: Bourdon tube Cu-alloy soft soldered

**Technical data**

- Max working pressure: Static: 7 bar  
Fluctuating: 6 bar  
Short time: 10 bar
- Working temperature: From -40 °C to +60 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids  
HFA, HFB, HFC according to ISO 2943
- Accuracy: Class 2.5 according to EN 13190
- Degree of protection: IP31 according to EN 60529

### DESIGNATION & ORDERING CODE

|  |   |           |           |           |   |   |    |     |
|--|---|-----------|-----------|-----------|---|---|----|-----|
| <b>Series</b>  | Configuration example 1:                    | VE        | A         | 21        | A | A | 50 | P01 |
| <b>VE</b> Electrical vacuum indicator                                      | Configuration example 2:                    | VL        | B         | 21        | A | A | 71 | P01 |
| <b>VL</b> Electrical/Visual vacuum indicator                               | Configuration example 3:                    | VV        | R         | 16        |   |   |    | P01 |
| <b>VV</b> Vacuum gauge   |   |           |           |           |   |   |    |     |
| <b>Type VE - VL</b>  | <b>Type VV</b>                              |           |           |           |   |   |    |     |
| <b>A</b> Connection EN 10226 - R1/4"                                       | <b>A</b> Axial connection EN 10226 - R1/4"  |           |           |           |   |   |    |     |
| <b>B</b> Connection EN 10226 - R1/8"                                       | <b>B</b> Axial connection EN 10226 - R1/8"  |           |           |           |   |   |    |     |
|  | <b>R</b> Radial connection EN 10226 - R1/4" |           |           |           |   |   |    |     |
|  | <b>S</b> Radial connection EN 10226 - R1/8" |           |           |           |   |   |    |     |
| <b>Vacuum setting</b>  |   | <b>VE</b> | <b>VL</b> | <b>VV</b> |   |   |    |     |
| <b>16</b> -0.16 bar  |   |           |           | •         |   |   |    |     |
| <b>21</b> -0.21 bar  |   | •         | •         |           |   |   |    |     |
| <b>Seals</b>   |   | <b>VE</b> | <b>VL</b> | <b>VV</b> |   |   |    |     |
| <b>A</b> NBR   |   | •         | •         |           |   |   |    |     |
| <b>Thermostat</b>  |   | <b>VE</b> | <b>VL</b> | <b>VV</b> |   |   |    |     |
| <b>A</b> Without   |   | •         | •         |           |   |   |    |     |
| <b>Electrical connections</b>  |   | <b>VE</b> | <b>VL</b> | <b>VV</b> |   |   |    |     |
| <b>50</b> Connection EN 175301-803   |   | •         |           |           |   |   |    |     |
| <b>51</b> Connection EN 175301-803, transparent base with lamps 24 Vdc     |   |           | •         |           |   |   |    |     |
| <b>52</b> Connection EN 175301-803, transparent base with lamps 110 Vdc    |   |           | •         |           |   |   |    |     |
| <b>53</b> Connection EN 175301-803, transparent base with lamps 230 Vdc    |   |           | •         |           |   |   |    |     |
| <b>71</b> Connection IEC 61076-2-101 D (M12), black base with lamps 24 Vdc |   |           | •         |           |   |   |    |     |
|  | <b>Option</b>                               |           |           |           |   |   |    |     |
|  | <b>P01</b> MP Filtri standard               |           |           |           |   |   |    |     |
|  | <b>Pxx</b> Customized                       |           |           |           |   |   |    |     |

# BAROMETRIC INDICATORS

## Dimensions

| BEA*50   |                    |
|--|--------------------|
| <b>Electrical Pressure Indicator</b>   |                    |
| Settings   | Ordering code      |
| 1.5 bar $\pm$ 10%  | BE A 15 H A 50 P01 |
| 2.0 bar $\pm$ 10%  | BE A 20 H A 50 P01 |
|  |                    |
| <p><b>Hydraulic symbol</b></p>   |                    |
| <p><b>Electrical symbol</b></p>  |                    |
| <p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Base: Black Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR</li> </ul>   |                    |
| <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Max working pressure: 40 bar</li> <li>- Proof pressure: 60 bar</li> <li>- Working temperature: From -25 °C to +80 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids<br/>HFA, HFB, HFC according to ISO 2943</li> <li>- Degree of protection: IP65 according to EN 60529</li> </ul> |                    |
| <p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connection: EN 175301-803</li> <li>- Resistive load: 5 A / 14 Vdc<br/>4 A / 30 Vdc<br/>5 A / 125 Vac<br/>4 A / 250 Vac</li> <li>- Available Atex product: II 1GD Ex ia IIC Tx Ex ia IIIC Tx°C X</li> <li>- CE certification</li> </ul>   |                    |

| BEM*41   |                    |
|--|--------------------|
| <b>Electrical Pressure Indicator</b>   |                    |
| Settings   | Ordering code      |
| 1.5 bar $\pm$ 10%  | BE M 15 H A 41 P01 |
| 2.0 bar $\pm$ 10%  | BE M 20 H A 41 P01 |
|  |                    |
| <p><b>Hydraulic symbol</b></p>   |                    |
| <p><b>Electrical symbol</b></p>  |                    |
| <p><b>Material:</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Base: Black Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR</li> </ul>   |                    |
| <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Max working pressure: 40 bar</li> <li>- Proof pressure: 60 bar</li> <li>- Working temperature: From -25 °C to +80 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids<br/>HFA, HFB, HFC according to ISO 2943</li> <li>- Degree of protection: IP67 according to EN 60529</li> </ul> |                    |
| <p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connection: Four-core cable</li> <li>- Resistive load: 5 A / 14 Vdc<br/>4 A / 30 Vdc<br/>5 A / 125 Vac<br/>4 A / 250 Vac</li> <li>- CE certification</li> <li>On request this indicator can be provided with main connectors in use for wirings.</li> </ul>                                  |                    |

| BET*10  |                   |
|---|-------------------|
| <b>Electrical Pressure Indicator</b>  |                   |
| Settings  | Ordering code     |
| 2.0 bar $\pm$ 10%   | BET 20 H F 10 P01 |
| 2.5 bar $\pm$ 10%   | BET 25 H F 10 P01 |
|   |                   |
| <p><b>Hydraulic symbol</b></p>  |                   |
| <p><b>Electrical symbol</b></p>   |                   |
| <p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Base: Black Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR</li> </ul>  |                   |
| <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Max working pressure: 10 bar</li> <li>- Proof pressure: 15 bar</li> <li>- Working temperature: From -25 °C to +100 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids<br/>HFA, HFB, HFC according to ISO 2943</li> <li>- Degree of protection: IP65 according to EN 60529</li> </ul> |                   |
| <p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connection: AMP Superseal series 1.5</li> <li>- Resistive load: 0.5 A / 48 Vdc</li> <li>- Thermostat condition: Open up to 30 °C</li> <li>- CE certification</li> </ul>   |                   |

| BET*30  |                   |
|---|-------------------|
| <b>Electrical Pressure Indicator</b>  |                   |
| Settings  | Ordering code     |
| 2.0 bar $\pm 10\%$  | BET 20 H F 30 P01 |
| 2.5 bar $\pm 10\%$  | BET 25 H F 30 P01 |
|   |                   |
| <p><b>Hydraulic symbol</b></p>  |                   |
| <p><b>Electrical symbol</b></p>   |                   |
| <p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Base: Black Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR</li> </ul>  |                   |
| <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Max working pressure: 10 bar</li> <li>- Proof pressure: 15 bar</li> <li>- Working temperature: From -25 °C to +100 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids<br/>HFA, HFB, HFC according to ISO 2943</li> <li>- Degree of protection: IP65 according to EN 60529</li> </ul> |                   |
| <p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connection: Deutsch DT-04-2-P</li> <li>- Resistive load: 0.5 A / 48 Vdc</li> <li>- Thermostat condition: Open up to 30 °C</li> <li>- CE certification</li> </ul>  |                   |

| BET*50  |                   |
|---|-------------------|
| <b>Electrical Pressure Indicator</b>  |                   |
| Settings  | Ordering code     |
| 2.0 bar $\pm 10\%$  | BET 20 H F 50 P01 |
| 2.5 bar $\pm 10\%$  | BET 25 H F 50 P01 |
|   |                   |
| <p><b>Hydraulic symbol</b></p>  |                   |
| <p><b>Electrical symbol</b></p>   |                   |
| <p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Base: Black Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR</li> </ul>  |                   |
| <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Max working pressure: 10 bar</li> <li>- Proof pressure: 15 bar</li> <li>- Working temperature: From -25 °C to +100 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids<br/>HFA, HFB, HFC according to ISO 2943</li> <li>- Degree of protection: IP65 according to EN 60529</li> </ul> |                   |
| <p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connection: EN 175301-803</li> <li>- Resistive load: 0.5 A / 48 Vdc</li> <li>- Thermostat condition: Open up to 30 °C</li> <li>- CE certification</li> </ul>  |                   |

| BL*51 - BL*52 - BL*53  |                    |
|--|--------------------|
| <b>Electrical/Visual Pressure Indicator</b>  |                    |
| Settings   | Ordering code      |
| 1.5 bar $\pm 10\%$   | BL A 15 H A xx P01 |
| 2.0 bar $\pm 10\%$   | BL A 20 H A xx P01 |
|  |                    |
| <p><b>Hydraulic symbol</b></p>   |                    |
| <p><b>Electrical symbol</b></p>  |                    |
| <p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Base: Transparent Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR</li> </ul>   |                    |
| <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Max working pressure: 40 bar</li> <li>- Proof pressure: 60 bar</li> <li>- Working temperature: From -25 °C to +80 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids<br/>HFA, HFB, HFC according to ISO 2943</li> <li>- Degree of protection: IP65 according to EN 60529</li> </ul> |                    |
| <p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connection: EN 175301-803</li> <li>- Type: 51      52      53</li> <li>- Lamps: 24 Vdc    110 Vdc    230 Vac</li> <li>- Resistive load: 1 A / 24 Vdc    1 A / 110 Vdc    1 A / 230 Vac</li> </ul>  |                    |

# BAROMETRIC INDICATORS






## Dimensions

| BL*71  |                   |
|--|-------------------|
| <b>Electrical/Visual Pressure Indicator</b>  |                   |
| Settings   | Ordering code     |
| 1.5 bar $\pm 10\%$   | BL A 15 HA 71 P01 |
| 2.0 bar $\pm 10\%$   | BL A 20 HA 71 P01 |
|  |                   |
| <p><b>Hydraulic symbol</b></p>   |                   |
| <p><b>Electrical symbol</b></p>  |                   |
| <p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Base: Black Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR</li> </ul>   |                   |
| <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Max working pressure: 40 bar</li> <li>- Proof pressure: 60 bar</li> <li>- Working temperature: From -25 °C to +80 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943</li> <li>- Degree of protection: IP65 according to EN 60529</li> </ul> |                   |
| <p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connection: IEC 61076-2-101 D (M12)</li> <li>- Lamps: 24 Vdc</li> <li>- Resistive load: 0.4 A / 24 Vdc</li> </ul>  |                   |

| BVA  |               |
|--|---------------|
| <b>Axial Pressure Gauge</b>  |               |
| Settings   | Ordering code |
| 1.4 bar $\pm 10\%$   | BVA 14 P01    |
| 2.5 bar $\pm 10\%$   | BVA 25 P01    |
|  |               |
| <p><b>Hydraulic symbol</b></p>   |               |
| <p><b>Dial scale</b></p> <p>BVA 14 P01</p> <p>BVA 25 P01</p>   |               |
| <p><b>Material:</b></p> <ul style="list-style-type: none"> <li>- Case: Painted Steel</li> <li>- Window: Transparent plastic</li> <li>- Dial: Painted Steel</li> <li>- Pointer: Painted Aluminium</li> <li>- Pressure connection: Brass</li> <li>- Pressure element: Bourdon tube Cu-alloy soft soldered</li> </ul>   |               |
| <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Max working pressure: Static: 7 bar<br/>Fluctuating: 6 bar<br/>Short time: 10 bar</li> <li>- Working temperature: From -40 °C to +60 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943</li> <li>- Accuracy: Class 2.5 according to EN 13190</li> <li>- Degree of protection: IP31 according to EN 60529</li> </ul> |               |

| BVR  |               |
|--|---------------|
| <b>Radial Pressure Gauge</b>   |               |
| Settings   | Ordering code |
| 1.4 bar $\pm 10\%$   | BV R 14 P01   |
| 2.5 bar $\pm 10\%$   | BV R 25 P01   |
|  |               |
| <p><b>Hydraulic symbol</b></p>   |               |
| <p><b>Dial scale</b></p> <p>BV R 14 P01</p> <p>BV R 25 P01</p>   |               |
| <p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Case: Painted Steel</li> <li>- Window: Transparent plastic</li> <li>- Dial: Painted Steel</li> <li>- Pointer: Painted Aluminium</li> <li>- Pressure connection: Brass</li> <li>- Pressure element: Bourdon tube Cu-alloy soft soldered</li> </ul>   |               |
| <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Max working pressure: Static: 7 bar<br/>Fluctuating: 6 bar<br/>Short time: 10 bar</li> <li>- Working temperature: From -40 °C to +60 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943</li> <li>- Accuracy: Class 2.5 according to EN 13190</li> <li>- Degree of protection: IP31 according to EN 60529</li> </ul> |               |

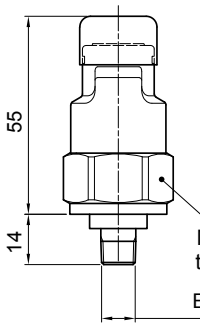

| BVP - BVQ   |                                | Hydraulic symbol  | Materials   |  |  |
|---|--------------------------------|---|---|--|--|
| Visual Pressure Indicator                                   |                                |   |   |   | - Body: Brass<br>- Cover / internal parts: Nylon<br>- Caps: VMQ<br>- Seal: HNBR  |
| Setting   | Ordering code                  |   |   |  |  |
| 1.5 bar ±10%  | BV P 15 H P01<br>BV Q 15 H P01 |  | <b>Technical data</b><br>- Reset: BVP - Automatic reset<br>BVQ - Manual reset<br>- Max working pressure: 10 bar<br>- Proof pressure: 15 bar<br>- Working temperature: From -25 °C to +80 °C<br>- Compatibility with fluids: Mineral oils, Synthetic fluids<br>HFA, HFB, HFC according to ISO 2943<br>- Degree of protection: IP45 according to EN 60529 |  |  |
| 2.0 bar ±10%  | BV P 20 H P01<br>BV Q 20 H P01 |   |   |  |  |
| A/F 27<br>Max tightening torque: 25 N·m<br>EN 10226 - R1/8" |                                | <b>Signals</b>  | <br>Absence of pressure (no indicator)   | <br>Presence of pressure (green button rises gradually) | <br>Clogged filter element (red button risen) |

### DESIGNATION & ORDERING CODE

| Series   | Configuration example 1: |   |    |   |   |    |     |
|--|--------------------------|---|----|---|---|----|-----|
| <b>BE</b> Electrical pressure indicator        | BE                       | M | 15 | H | A | 41 | P01 |
| <b>BL</b> Electrical/Visual pressure indicator | BL                       | A | 20 | H | A | 71 | P01 |
| <b>BV</b> Visual pressure indicator            | BV                       | R | 14 |   |   |    | P01 |
|  | BV                       | P | 20 | H |   |    | P01 |

| Type                                      | BE | BL | BV   |
|---|----|----|--|
| <b>A</b> Standard type                    | •  | •  | <b>A</b> Axial connection pressure gauge       |
| <b>M</b> With wired electrical connection | •  |    | <b>R</b> Radial connection pressure gauge      |
| <b>T</b> With thermal switch              | •  |    | <b>P</b> Visual indicator with automatic reset |
|   |    |    | <b>Q</b> Visual indicator with manual reset    |

| Pressure setting  | BEA-BEM | BET | BLA | BVA-BVR | BVP-BVQ |
|-------------------|---------|-----|-----|---------|---------|
| <b>14</b> 1.4 bar |         |     |     | •       |         |
| <b>15</b> 1.5 bar | •       |     | •   |         |         |
| <b>20</b> 2.0 bar | •       | •   | •   |         | •       |
| <b>25</b> 2.5 bar |         | •   |     | •       |         |

| Seals         | BE | BLA | BVA-BVR | BVP-BVQ |
|---------------|----|-----|---------|---------|
| <b>H</b> HNBR | •  | •   |         | •       |

| Thermostat       | BEA-BEM | BET | BLA | BV |
|------------------|---------|-----|-----|----|
| <b>A</b> Without | •       |     | •   |    |
| <b>F</b> With    |         | •   |     |    |




| Electrical connections   | BEA | BEM | BET | BL | BV |
|--|-----|-----|-----|----|----|
| <b>10</b> Connection AMP Superseal series 1.5                              |     |     | •   |    |    |
| <b>30</b> Connection Deutsch DT-04-2-P                                     |     |     | •   |    |    |
| <b>41</b> Connection via four-core cable                                   |     | •   |     |    |    |
| <b>50</b> Connection EN 175301-803   | •   |     | •   |    |    |
| <b>51</b> Connection EN 175301-803, transparent base with lamps 24 Vdc     |     |     |     | •  |    |
| <b>52</b> Connection EN 175301-803, transparent base with lamps 110 Vdc    |     |     |     | •  |    |
| <b>53</b> Connection EN 175301-803, transparent base with lamps 230 Vdc    |     |     |     | •  |    |
| <b>71</b> Connection IEC 61076-2-101 D (M12), black base with lamps 24 Vdc |     |     |     | •  |    |




  




| Option                        |
|-------------------------------|
| <b>P01</b> MP Filtri standard |
| <b>Pxx</b> Customized         |

# DIFFERENTIAL INDICATORS

## Dimensions
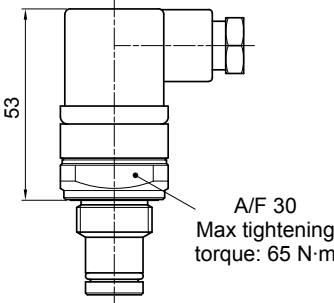
| DEA*50   |  |
|--|--|
| <b>Electrical Differential Indicator</b>   |  |
| <b>Settings</b><br>2.0 bar ±10%  | <b>Ordering code</b><br>DE A 20 x A 50 P01 |
|   |  |
| <p><b>Hydraulic symbol</b></p>  <p><b>Electrical symbol</b></p>    |  |
| <p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Base: Black Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR - FPM</li> </ul> <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Max working pressure: 420 bar</li> <li>- Proof pressure: 630 bar</li> <li>- Burst pressure: 1260 bar</li> <li>- Working temperature: From -25 °C to +110 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids<br/>HFA, HFB, HFC according to ISO 2943</li> <li>- Degree protection: IP66 according to EN 60529<br/>IP69K according to ISO 20653</li> </ul> <p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connection: EN 175301-803</li> <li>- Resistive load: 0.2 A / 115 Vdc</li> </ul> |  |
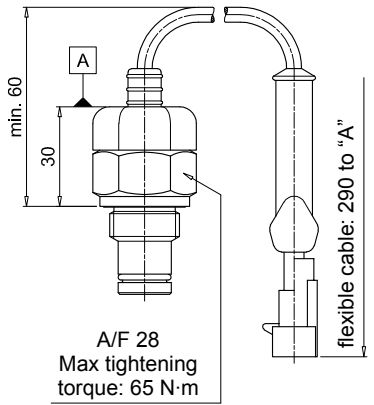
| DEM*10  |   |
|---|---|
| <b>Electrical Differential Indicator</b>  |   |
| <b>Settings</b><br>2.0 bar ±10%   | <b>Ordering code</b><br>DE M 20 xx 10 P01 |
|    |   |
| <p><b>Hydraulic symbol</b></p>  <p><b>Electrical symbol</b></p>    |   |
| <p><b>Material:</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Base: Black Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR - FPM</li> </ul> <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Max working pressure: 420 bar</li> <li>- Proof pressure: 630 bar</li> <li>- Burst pressure: 1260 bar</li> <li>- Working temperature: From -25 °C to +110 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids<br/>HFA, HFB, HFC according to ISO 2943</li> <li>- Degree protection: IP66 according to EN 60529</li> </ul> <p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connection: AMP Superseal series 1.5</li> <li>- Resistive load: 0.2 A / 115 Vdc</li> <li>- Switching type: Normally open contacts (NC on request)</li> <li>- Thermal lockout: Normally open up to 30 °C (option "F")</li> </ul> |   |
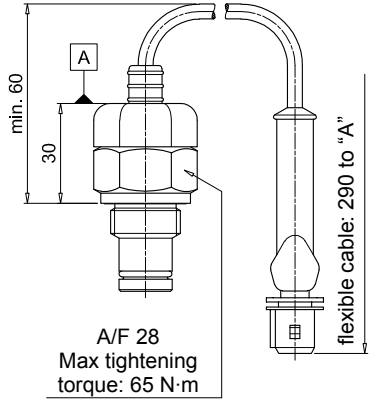
| DEM*20   |                                      |
|--|--------------------------------------|
| <b>Electrical Differential Indicator</b>   |                                      |
| <b>Settings</b><br>2.0 bar ±10%  | <b>Ordering code</b><br>DEM20xx20P01 |
|   |                                      |
| <p><b>Hydraulic symbol</b></p>  <p><b>Electrical symbol</b></p>    |                                      |
| <p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Base: Black Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR - FPM</li> </ul> <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Max working pressure: 420 bar</li> <li>- Proof pressure: 630 bar</li> <li>- Burst pressure: 1260 bar</li> <li>- Working temperature: From -25 °C to +110 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids<br/>HFA, HFB, HFC according to ISO 2943</li> <li>- Degree protection: IP66 according to EN 60529</li> </ul> <p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connection: AMP Time junior</li> <li>- Resistive load: 0.2 A / 115 Vdc</li> <li>- Switching type: Normally open contacts (NC on request)</li> <li>- Thermal lockout: Normally open up to 30 °C (option "F")</li> </ul> |                                      |






# DIFFERENTIAL INDICATORS

## Dimensions



| DLA*71   |   |
|--|---|
| <b>Electrical/Visual Differential Indicator</b>  |   |
| <b>Settings</b><br>2.0 bar $\pm$ 10%   | <b>Ordering code</b><br>DLA 20 x A 71 P01 |
| <p>A/F 30<br/>Max tightening torque: 65 N·m</p>  |   |
| <p><b>Hydraulic symbol</b></p> <p><b>Electrical symbol</b></p>   |   |
| <p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Base: Black Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR - FPM</li> </ul> <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Max working pressure: 420 bar</li> <li>- Proof pressure: 630 bar</li> <li>- Burst pressure: 1260 bar</li> <li>- Working temperature: From -25 °C to +110 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids<br/>HFA, HFB, HFC according to ISO 2943</li> <li>- Degree protection: IP65 according to EN 60529<br/>IP69K according to ISO 20653</li> </ul> <p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connection: IEC 61076-2-101 D (M12)</li> <li>- Lamps: 24 Vdc</li> <li>- Resistive load: 0.4 A / 24 Vdc</li> </ul> |   |



| DLE*A50  |   |
|--|---|
| <b>Electrical/Visual Differential Indicator</b>  |   |
| <b>Settings</b><br>2.0 bar $\pm$ 10%   | <b>Ordering code</b><br>DLE 20 x A 50 P01 |
| <p>A/F 32<br/>Max tightening torque: 95 N·m</p>  |   |
| <p><b>Hydraulic symbol</b></p> <p><b>Electrical symbol</b></p>   |   |
| <p><b>Material:</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Base: Black Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR - FPM</li> </ul> <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Max working pressure: 420 bar</li> <li>- Proof pressure: 630 bar</li> <li>- Burst pressure: 1260 bar</li> <li>- Working temperature: From -25 °C to +110 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids<br/>HFA, HFB, HFC according to ISO 2943</li> <li>- Degree protection: IP65 according to EN 60529</li> </ul> <p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connections: EN 175301-803</li> <li>- Resistive load: 5 A / 250 Vac</li> <li>- Available the connector with lamps</li> </ul> |   |

| DLE*F50   |   |
|---|---|
| <b>Electrical/Visual Differential Indicator</b>   |   |
| <b>Settings</b><br>2.0 bar $\pm$ 10%  | <b>Ordering code</b><br>DLE 20 x F 50 P01 |
| <p>A/F 32<br/>Max tightening torque: 95 N·m</p>   |   |
| <p><b>Hydraulic symbol</b></p> <p><b>Electrical symbol</b></p>  |   |
| <p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Base: Black Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR - FPM</li> </ul> <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Max working pressure: 420 bar</li> <li>- Proof pressure: 630 bar</li> <li>- Burst pressure: 1260 bar</li> <li>- Working temperature: From -25 °C to +110 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids<br/>HFA, HFB, HFC according to ISO 2943</li> <li>- Degree protection: IP65 according to EN 60529</li> </ul> <p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connections: EN 175301-803</li> <li>- Resistive load: 5 A / 250 Vac</li> <li>- Thermal lockout setting: +30 °C</li> </ul> |   |
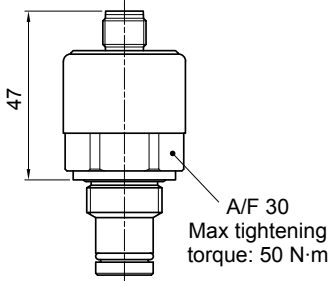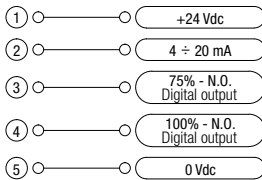
| DTA*70  |  |
|---|--|
| <b>Electronic Differential Indicator</b>  |  |
| <b>Settings</b><br>2.0 bar ±10%   | <b>Ordering code</b><br>DT A 20 x x 70 P01 |
|    |  |
| <p><b>Hydraulic symbol</b></p>   |  |
| <p><b>Electrical symbol</b></p>    |  |
| <p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Internal parts: Brass - Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR - FPM</li> </ul>  |  |
| <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Max working pressure: 420 bar</li> <li>- Proof pressure: 630 bar</li> <li>- Burst pressure: 1260 bar</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943</li> <li>- Degree protection: IP67 according to EN 60529</li> </ul> |  |
| <p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connection: IEC 61076-2-101 D (M12)</li> <li>- Power supply: 24 Vdc</li> <li>- Analogue output: From 4 to 20 mA</li> <li>- Thermal lockout: 30 °C (all output signals stalled up to 30 °C)</li> </ul>   |  |

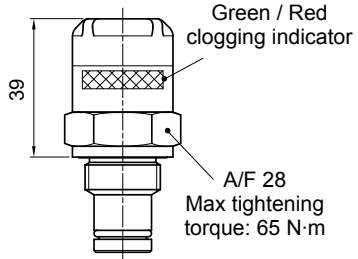

| DVA  |                                       |
|--|---------------------------------------|
| <b>Visual Differential Indicator</b>   |                                       |
| <b>Settings</b><br>2.0 bar ±10%  | <b>Ordering code</b><br>DV A 20 x P01 |
|   |                                       |
| <p><b>Hydraulic symbol</b></p>   |                                       |
| <p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Internal parts: Brass - Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR - FPM</li> </ul>   |                                       |
| <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Reset: Automatic reset</li> <li>- Max working pressure: 420 bar</li> <li>- Proof pressure: 630 bar</li> <li>- Burst pressure: 1260 bar</li> <li>- Working temperature: From -25 °C to +110 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943</li> <li>- Degree protection: IP65 according to EN 60529</li> </ul> |                                       |
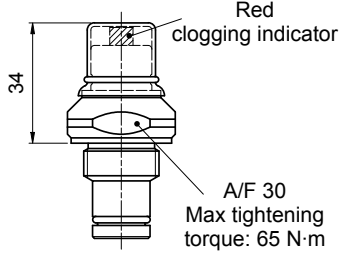
| DVM   |                                       |
|---|---------------------------------------|
| <b>Visual Differential Indicator</b>  |                                       |
| <b>Settings</b><br>2.0 bar ±10%   | <b>Ordering code</b><br>DV M 20 x P01 |
|    |                                       |
| <p><b>Hydraulic symbol</b></p>   |                                       |
| <p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Internal parts: Brass - Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR - FPM</li> </ul>  |                                       |
| <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Reset: Manual reset</li> <li>- Max working pressure: 420 bar</li> <li>- Proof pressure: 630 bar</li> <li>- Burst pressure: 1260 bar</li> <li>- Working temperature: From -25 °C to +110 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943</li> <li>- Degree protection: IP65 according to EN 60529</li> </ul> |                                       |

# DIFFERENTIAL INDICATORS

## Dimensions

| T2             |               | Materials<br>- Body: Phosphatized steel<br>- Seal: HNBR / FPM |
|----------------|---------------|---|
| Indicator plug |               |   |
| Seal           | Ordering code |   |
| HNBR           | T2 H          |   |
| FPM            | T2 V          |   |

A/F 30  
Max tightening torque: 50 N·m

### DESIGNATION & ORDERING CODE - DIFFERENTIAL INDICATORS

| Series   | Configuration example 1: |   |    |   |   |    |     |
|--|--------------------------|---|----|---|---|----|-----|
| <b>DE</b> Electrical differential indicator        | DE                       | M | 20 | H | F | 50 | P01 |
| <b>DL</b> Electrical/Visual differential indicator | DL                       | E | 20 | V | A | 71 | P01 |
| <b>DT</b> Electronic differential indicator        | DT                       | A | 20 | H | F | 70 | P01 |
| <b>DV</b> Visual differential indicator            | DV                       | M | 20 | V |   |    | P01 |

| Type                                      | DE | DL | DT | DV | Description          |
|---|----|----|----|----|----------------------|
| <b>A</b> Standard type                    | •  | •  | •  |    | With automatic reset |
| <b>M</b> With wired electrical connection | •  |    |    |    | With manual reset    |
| <b>E</b> For high power supply            |    | •  |    |    |                      |

| Pressure setting  | DEA | DEM | DLA | DLE | DT | DV |
|-------------------|-----|-----|-----|-----|----|----|
| <b>20</b> 2.0 bar | •   | •   | •   | •   |    |    |

| Seals         | DEA | DEM | DLA | DLE | DT | DV |
|---------------|-----|-----|-----|-----|----|----|
| <b>H</b> HNBR | •   | •   | •   | •   |    |    |
| <b>V</b> FPM  |     | •   |     | •   | •  |    |

| Thermostat               | DEA | DEM | DLA | DLE | DT | DV |
|--------------------------|-----|-----|-----|-----|----|----|
| <b>A</b> Without         | •   | •   | •   | •   |    |    |
| <b>F</b> With thermostat |     | •   |     | •   | •  |    |

| Electrical connections   | DEA | DEM | DLA | DLE | DT | DV |
|--|-----|-----|-----|-----|----|----|
| <b>10</b> Connection AMP Superseal series 1.5                              |     | •   |     |     |    |    |
| <b>20</b> Connection AMP Timer Junior                                      |     | •   |     |     |    |    |
| <b>30</b> Connection Deutsch DT-04-2-P                                     |     | •   |     |     |    |    |
| <b>35</b> Connection Deutsch DT-04-3-P                                     |     | •   |     |     |    |    |
| <b>50</b> Connection EN 175301-803   | •   |     |     | •   |    |    |
| <b>51</b> Connection EN 175301-803, transparent base with lamps 24 Vdc     |     |     | •   |     |    |    |
| <b>52</b> Connection EN 175301-803, transparent base with lamps 110 Vdc    |     |     | •   |     |    |    |
| <b>70</b> Connection IEC 61076-2-101 D (M12)                               |     |     |     |     | •  |    |
| <b>71</b> Connection IEC 61076-2-101 D (M12), black base with lamps 24 Vdc |     |     | •   |     |    |    |

| Option                        |
|-------------------------------|
| <b>P01</b> MP Filtri standard |
| <b>Pxx</b> Customized         |

### DESIGNATION & ORDERING CODE - DIFFERENTIAL INDICATOR PLUG

| Series                   | Configuration example |   |
|--------------------------|-----------------------|---|
| <b>T2</b> Indicator plug | T2                    | H |

| Seals         |
|---------------|
| <b>H</b> HNBR |
| <b>V</b> FPM  |

[www.sumy.ir](http://www.sumy.ir)

**Spin-On filters are used as process and safety filters to protect individual pumps, valves or the entire hydraulic circuit from contamination as per ISO 4406.**

**In-line Spin-On filters can be used for the following purposes:**

- Suction filters
- On the return circuit, for mounting on the line or on the tank cover
- In-line for low and medium pressure applications

**Spin-On filters are available in 4 configurations:**

- Single cartridge in-line
- In-line with two parallel cartridges on the same axis
- In-line with two parallel cartridges mounted side by side

**All versions may be equipped with visual and/or electrical blockage indicators.**

[www.sumy.ir](http://www.sumy.ir)



# Spin-on filters



|            |          |
|------------|----------|
| MPS        | page 289 |
| MSH        | 305      |
| INDICATORS | 311      |

www.sumy.ir

# MPS series

Maximum working pressure up to 1.2 MPa (12 bar) - Flow rate up to 365 l/min



### Spin-on filters

**Maximum working pressure up to 1.2 MPa (12 bar)**

**Flow rate up to 365 l/min**

MPS is a range of spin-on filters suitable to be used in suction, return and low pressure lines.

They offer a good balance between performances, dimensions and prices. They are directly connected to the lines of the system through the hydraulic fittings.

#### Available features:

- Female threaded connections up to 1 1/2" and flanged connections up to 1 1/2", for a maximum flow rate of 365 l/min
- Fine filtration rating, to get a good cleanliness level into the reservoir
- Water removal elements (CW), to remove the free water from the hydraulic fluid
- Double connection for the cans, to fit both European and American standard elements
- Double cans fitting, to increase the life time of the filter
- Bypass valve, to relieve excessive pressure drop across the filter media
- Visual, electrical and electronic clogging indicators for suction and return applications
- Visual, electrical and electronic differential clogging indicators for low pressure applications

#### Common applications:

- Suction lines, Return lines, Delivery lines, in economic industrial equipment or mobile machines.
- Off-line filtration tank in economic industrial equipment or mobile machines

#### Filter housing materials

- Head: Aluminium
- Bypass valve: Nylon - Steel
- Element: Zinc-Plated Steel - Painted Steel

#### Bypass valve

- Return filter opening pressure: 175 kPa (1.75 bar)  $\pm 10\%$
- Suction filter opening pressure: 30 kPa (0.3 bar)  $\pm 10\%$

#### $\Delta p$ element type

- $\Delta p$ : 5 bar
- Fluid flow through the filter element from OUT to IN

#### Seals

Standard NBR - series A

#### Temperature

From -20 °C to +110 °C

#### Note

MPS filters are provided for vertical mounting







## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series      | Weights [kg] | Volumes [dm <sup>3</sup> ] |
|--------------------|--------------|----------------------------|
| <b>MPS 050</b>     | 1.00         | 0.70                       |
| <b>MPS 051</b>     | 1.05         | 0.70                       |
| <b>MPS 070</b>     | 1.20         | 0.95                       |
| <b>MPS 071</b>     | 1.25         | 0.95                       |
| <b>MPS 100</b>     | 2.10         | 1.65                       |
| <b>MPS 101</b>     | 2.20         | 1.65                       |
| <b>MPS 150</b>     | 2.40         | 2.00                       |
| <b>MPS 151</b>     | 2.50         | 2.00                       |
| <b>MPS 200</b>     | 3.90         | 3.00                       |
| <b>MPS 250</b>     | 4.60         | 3.70                       |
| <b>MPS 300-301</b> | 5.30         | 3.40                       |
| <b>MPS 350-351</b> | 6.00         | 4.10                       |

| Filter series |           |           |           |           |           |
|---------------|-----------|-----------|-----------|-----------|-----------|
| MPS 050       | •         |           |           |           |           |
| MPS 051       |           | •         |           |           |           |
| MPS 070       | •         |           |           |           |           |
| MPS 071       |           | •         |           |           |           |
| MPS 100       | •         |           |           |           |           |
| MPS 101       |           | •         |           |           |           |
| MPS 150       | •         |           |           |           |           |
| MPS 151       |           | •         |           |           |           |
| MPS 200       |           |           | •         |           |           |
| MPS 250       |           |           | •         |           |           |
| MPS 300       |           |           |           | •         |           |
| MPS 301       |           |           |           | •         | •         |
| MPS 350       |           |           |           | •         |           |
| MPS 351       |           |           |           |           | •         |
|               | Style U/P | Style U/P | Style U   | Style U/P | Style U/P |
|               |           |           |           |           |           |
|               | Style R/S | Style R/S | Style H/S | Style R/S | Style R/S |
|               |           |           |           |           |           |

## Pressure drop

Bypass valve  
pressure drop

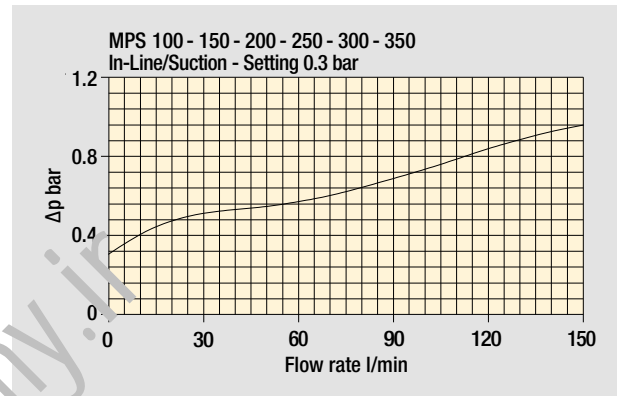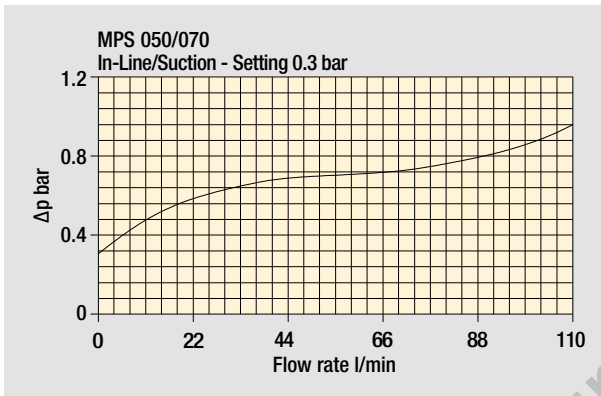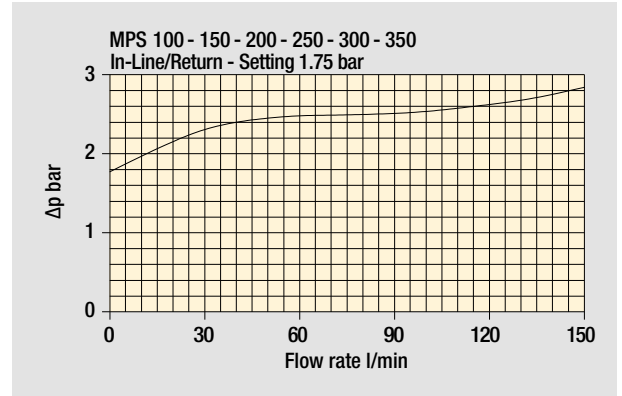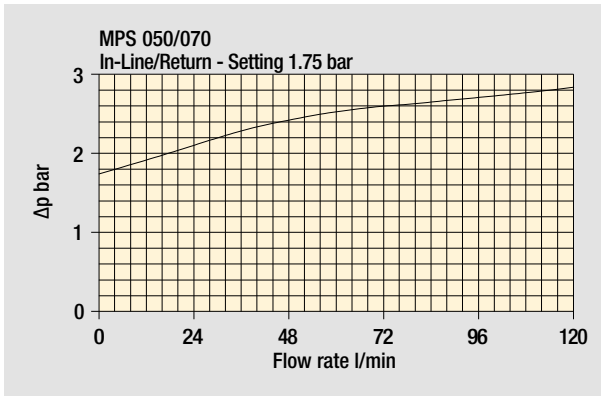

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

**CS** 050 - 070 - 100 - 150

**CG - CW** 050 - 070



**CG - CW** 100 - 150



**CW**

This series of cartridge removes water from oil while filtering the oil at the same time.

Water absorbent polymers up to 800 times their own weight provide this major feature.

Water holding capacities:  
CW 050= 240 ml

Ordering code: **CW050P10AP01**


CW 150= 788 ml

Ordering code: **CW150P10AP01**

| Thread connections |                |
|--------------------|----------------|
| Element            | Connection     |
| CS 050 - 070       | G 3/4"         |
| CS 100 - 150       | G 1 1/4"       |
| CG / CW 050 - 070  | 1" - 12 UNF    |
| CG / CW 100 - 150  | 1 1/2" - 16 UN |

| Water holding capacities CW |                                       |                                      |
|-----------------------------|---------------------------------------|--------------------------------------|
|                             | good                                  | poor                                 |
| Viscosity                   | 30/46 mm <sup>2</sup> /s (cSt)        | > 46 mm <sup>2</sup> /s (cSt)        |
| H <sub>2</sub> O p.p.m.     | 600/800 p.p.m.                        | > 800 p.p.m.                         |
| Flow rate                   | CW050 7/15 l/min<br>CW150 20/40 l/min | CW050 > 20 l/min<br>CW150 > 50 l/min |
| Temperature                 | 40/60 °C                              | < 30 °C                              |

## Heads

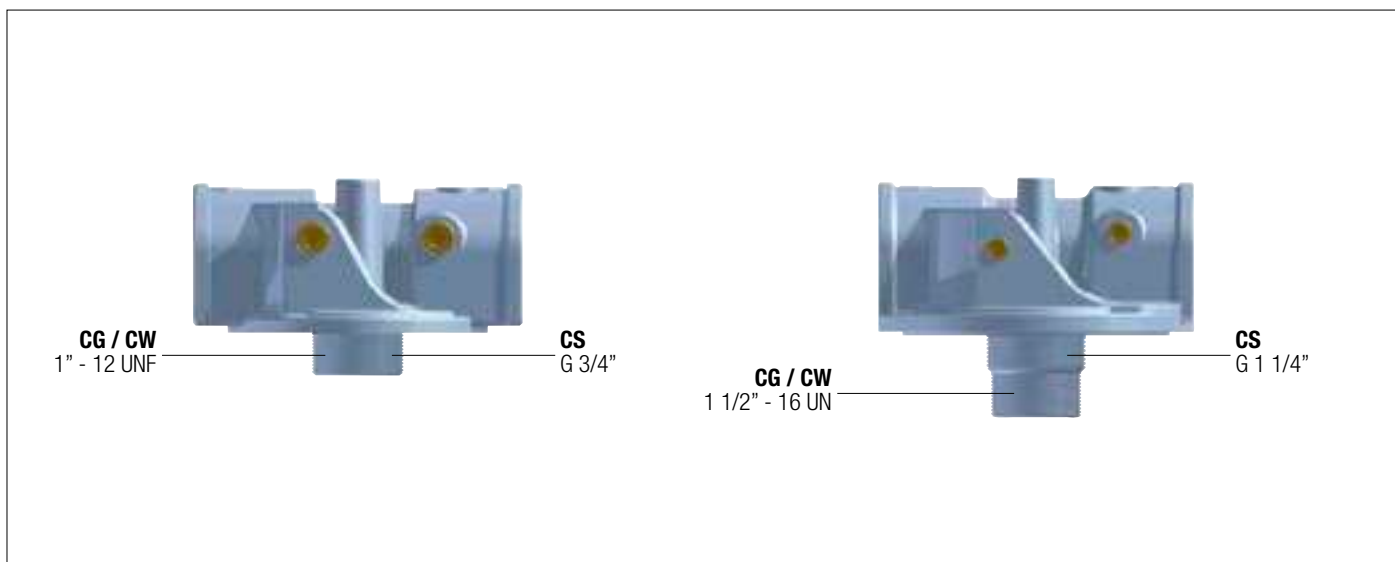

**CG / CW**  
1" - 12 UNF



**CS**  
G 3/4"

**CG / CW**  
1 1/2" - 16 UN

**CS**  
G 1 1/4"





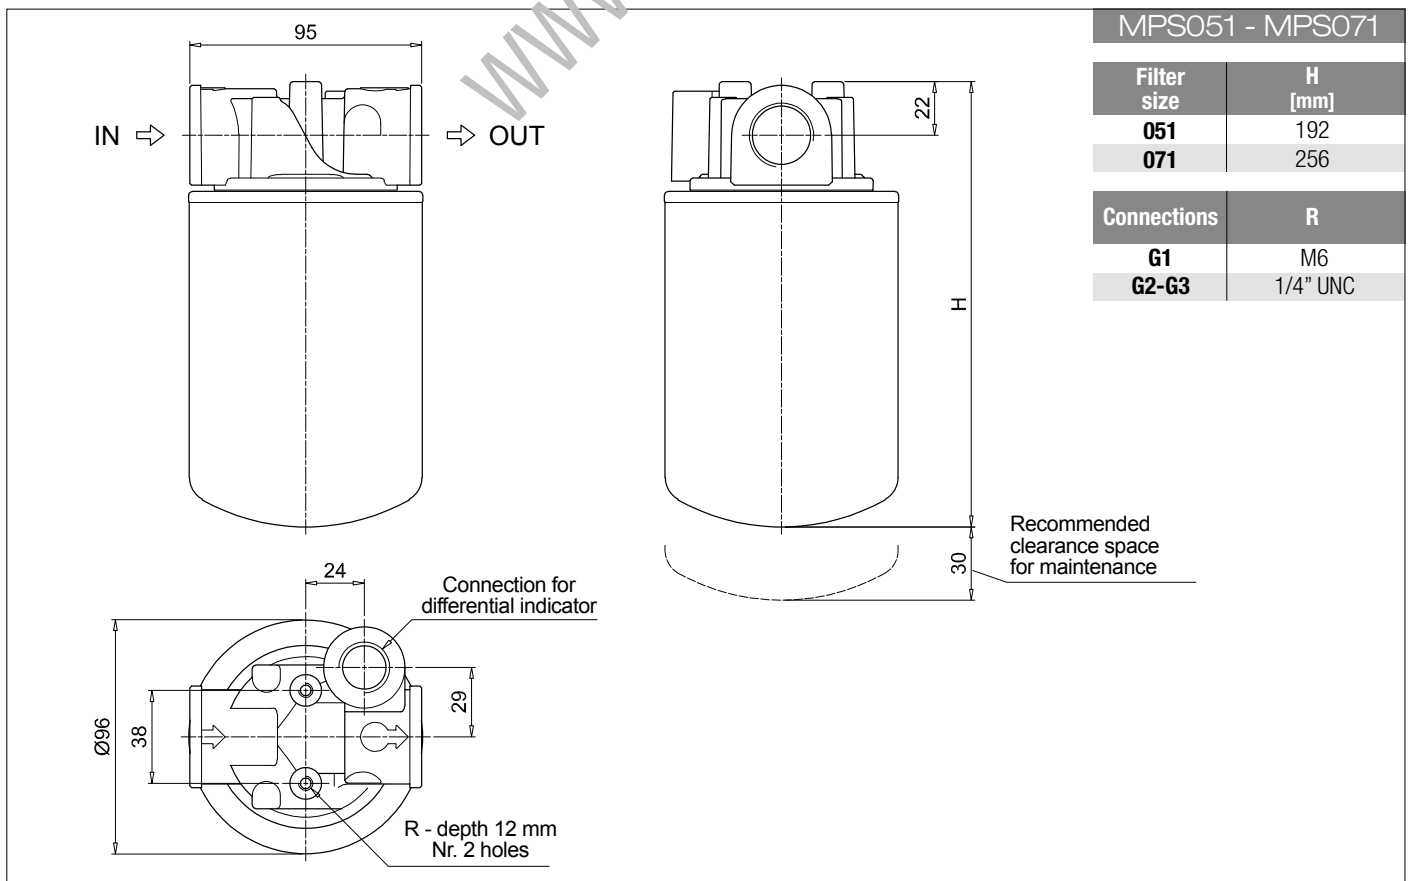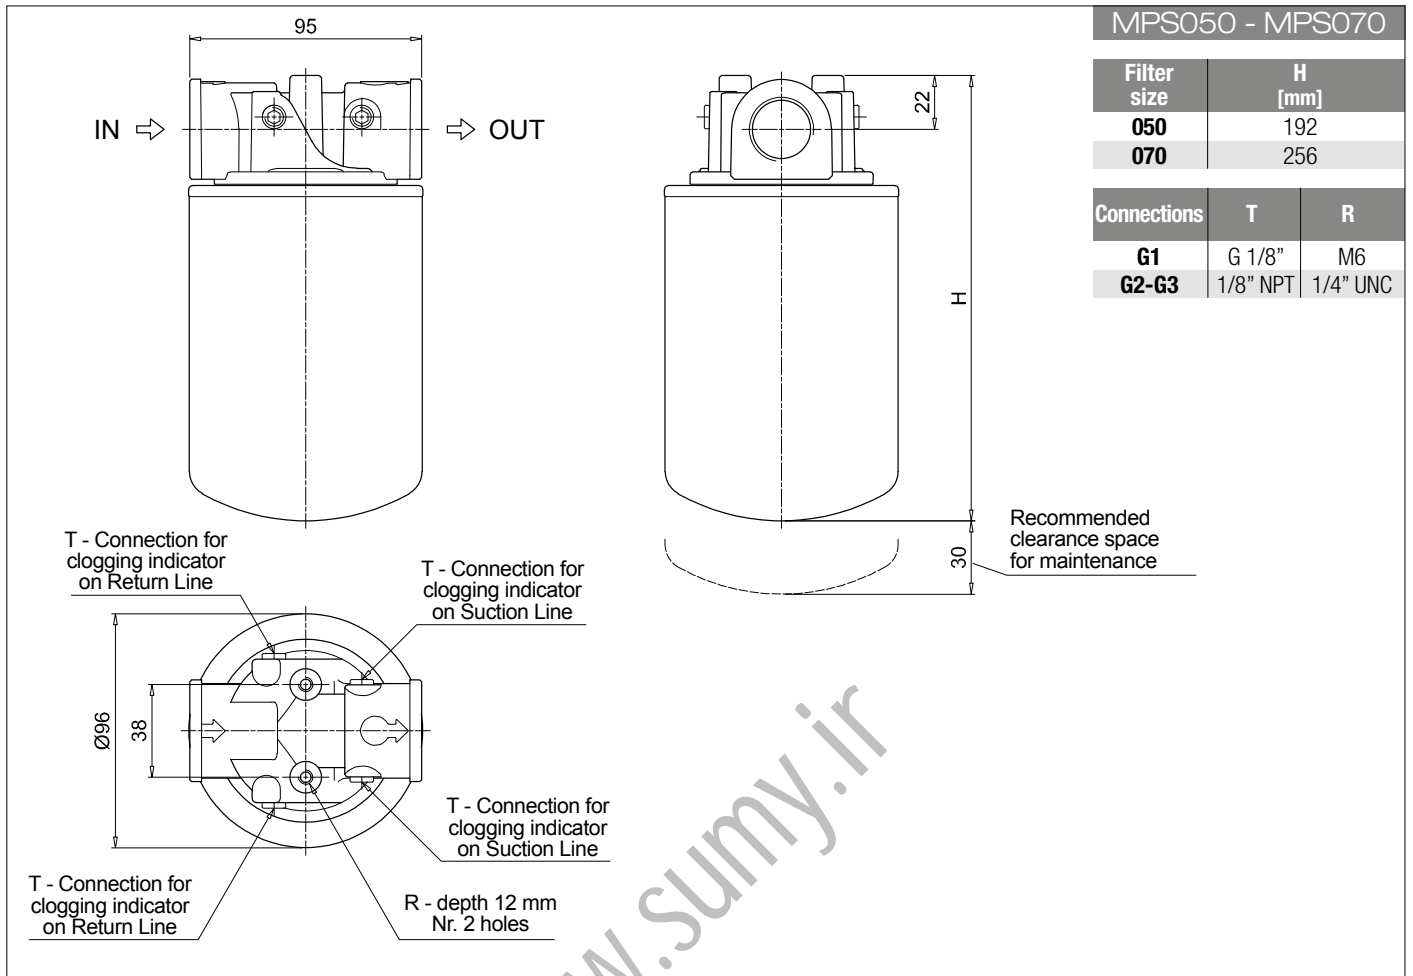

# MPS MPS100 - MPS150 MPS101 - MPS151

## Designation & Ordering code

### COMPLETE FILTER



|   |  |  |                      |                  |                               |  |
|---|--|--|----------------------|------------------|-------------------------------|--|
| <b>Series and size</b>                  |  | Configuration example: <b>MPS100</b> <b>R</b> <b>G1</b> <b>A10</b> <b>A</b> <b>P01</b> |                      |                  |                               |  |
| <b>MPS100</b>   <b>MPS150</b>           | With connections for clogging indicators     |  |                      |                  |                               |  |
| <b>MPS101</b>   <b>MPS151</b>           | With connections for differential indicators |  |                      |                  |                               |  |
| <b>Bypass valve</b>                     |  | <b>MPS 100 - 150</b>   | <b>MPS 101 - 151</b> |                  |                               |  |
| <b>R</b>                                | Return: 1.75 bar                             | •  | •                    |                  |                               |  |
| <b>S</b>                                | Suction: 30 kPa                              | •  |                      |                  |                               |  |
| <b>U</b>                                | Without bypass                               | •  |                      |                  |                               |  |
| <b>P</b>                                | Without bypass                               |  | •                    |                  |                               |  |
| <b>Connections</b>                      |  |  |                      |                  |                               |  |
| <b>G1</b>                               | G 1 1/4"                                     |  |                      |                  |                               |  |
| <b>G2</b>                               | 1 1/4" NPT                                   |  |                      |                  |                               |  |
| <b>G3</b>                               | SAE 20 - 1 5/8" - 12 UN                      |  |                      |                  |                               |  |
| <b>Filtration rating (filter media)</b> |  |  |                      |                  |                               |  |
| <b>A03</b>                              | Inorganic microfiber 3 µm                    |  |                      | <b>M25</b>       | Wire mesh 25 µm               |  |
| <b>A06</b>                              | Inorganic microfiber 6 µm                    |  |                      | <b>M60</b>       | Wire mesh 60 µm               |  |
| <b>A10</b>                              | Inorganic microfiber 10 µm                   |  |                      | <b>M90</b>       | Wire mesh 90 µm               |  |
| <b>A25</b>                              | Inorganic microfiber 25 µm                   |  |                      | <b>P10</b>       | Resin impregnated paper 10 µm |  |
|   |  |  |                      | <b>P25</b>       | Resin impregnated paper 25 µm |  |
|   |  |  |                      | <b>Seal</b>      | <b>A</b> NBR                  |  |
|   |  |  |                      | <b>Execution</b> | <b>P01</b> MP Filtri standard |  |

### CARTRIDGE

|   |                            |  |  |                  |  |
|---|----------------------------|--|--|------------------|--|
| <b>Cartridge series and size</b>        |                            | Configuration example: <b>CS100</b> <b>A10</b> <b>A</b> <b>P01</b> |  |                  |  |
| <b>CS100</b>   <b>CS150</b>             |                            |  |  |                  |  |
| <b>Filtration rating (filter media)</b> |                            |  |  |                  |  |
| <b>A03</b>                              | Inorganic microfiber 3 µm  |  |  | <b>M25</b>       | Wire mesh 25 µm  |
| <b>A06</b>                              | Inorganic microfiber 6 µm  |  |  | <b>M60</b>       | Wire mesh 60 µm  |
| <b>A10</b>                              | Inorganic microfiber 10 µm |  |  | <b>M90</b>       | Wire mesh 90 µm  |
| <b>A25</b>                              | Inorganic microfiber 25 µm |  |  | <b>P10</b>       | Resin impregnated paper 10 µm                          |
|   |                            |  |  | <b>P25</b>       | Resin impregnated paper 25 µm                          |
|   |                            |  |  | <b>Seals</b>     | <b>A</b> NBR   |
|   |                            |  |  | <b>Execution</b> | <b>P01</b> MP Filtri standard<br><b>Pxx</b> Customized |

### ACCESSORIES

| <b>Clogging indicators on RETURN line</b>  |  | page    | <b>Clogging indicators on SUCTION line</b> |  | page    |
|--|--|---------|--|--|---------|
| <b>BVA</b>                                 | Axial pressure gauge                           | 315     | <b>BEA</b>                                 | Electrical pressure indicator          | 314     |
| <b>BVR</b>                                 | Radial pressure gauge                          | 315     | <b>BEM</b>                                 | Electrical pressure indicator          | 314     |
| <b>BVP</b>                                 | Visual pressure indicator with automatic reset | 316     | <b>BLA</b>                                 | Electrical / visual pressure indicator | 314-315 |
| <b>BVQ</b>                                 | Visual pressure indicator with manual reset    | 316     |  |  |         |
| <b>Clogging indicators on SUCTION line</b> |  | page    | <b>Clogging indicators on SUCTION line</b> |  | page    |
| <b>VVB</b>                                 | Axial pressure gauge                           | 313     | <b>VEB</b>                                 | Electrical vacuum indicator            | 312     |
| <b>VVS</b>                                 | Radial pressure gauge                          | 313     | <b>VLB</b>                                 | Electrical/visual vacuum indicator     | 312     |
| <b>Differential indicators</b>             |  | page    | <b>Differential indicators</b>             |  | page    |
| <b>DEA</b>                                 | Electrical differential indicator              | 317     | <b>DTA</b>                                 | Electronic differential indicator      | 320     |
| <b>DEM</b>                                 | Electrical differential indicator              | 317-318 | <b>DVA</b>                                 | Visual differential indicator          | 320     |
| <b>DLA</b>                                 | Electrical / visual differential indicator     | 318-319 | <b>DVM</b>                                 | Visual differential indicator          | 320     |
| <b>DLE</b>                                 | Electrical / visual differential indicator     | 319     |  |  |         |

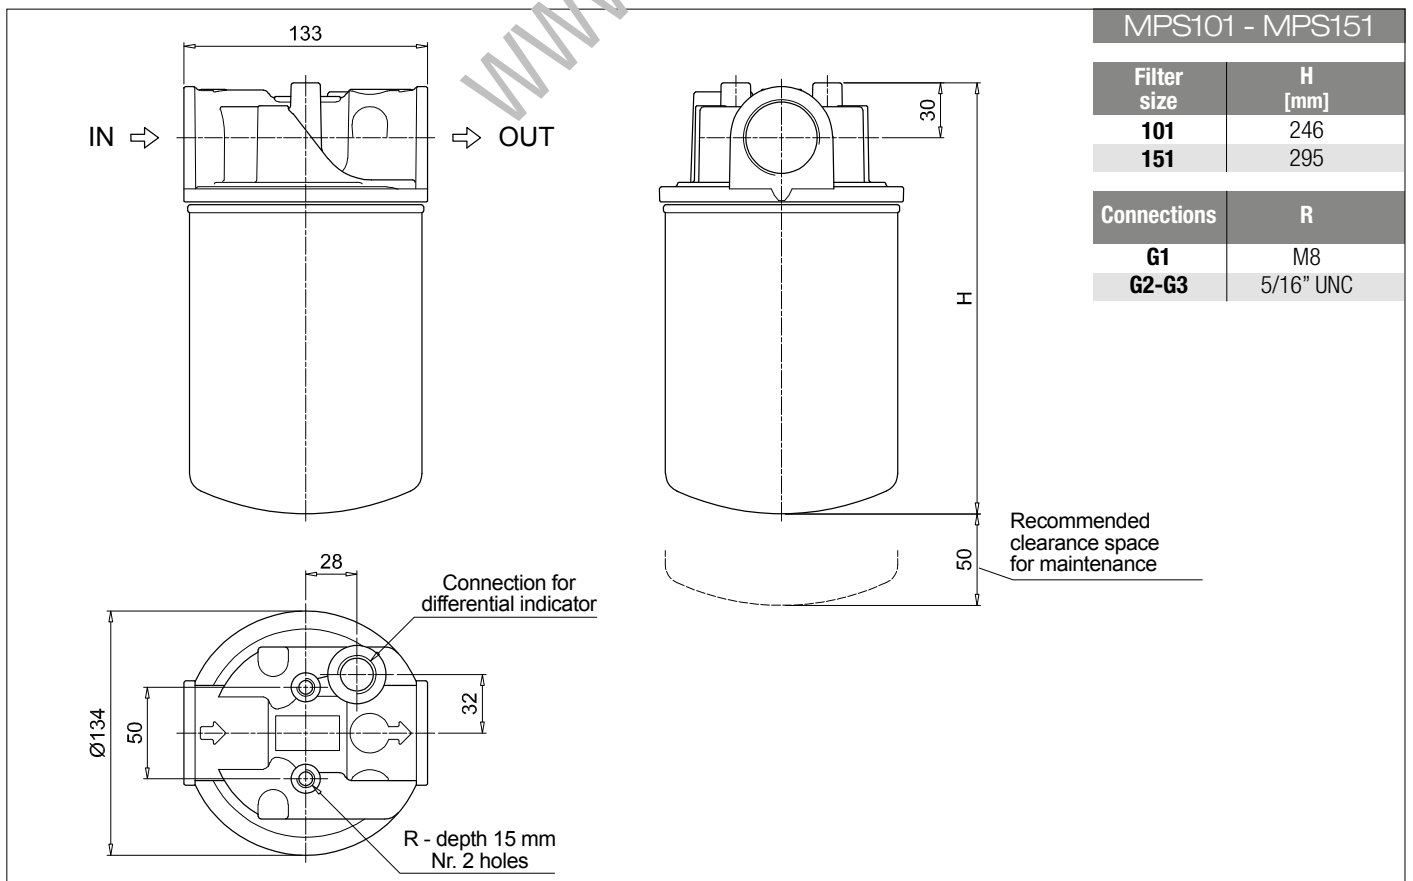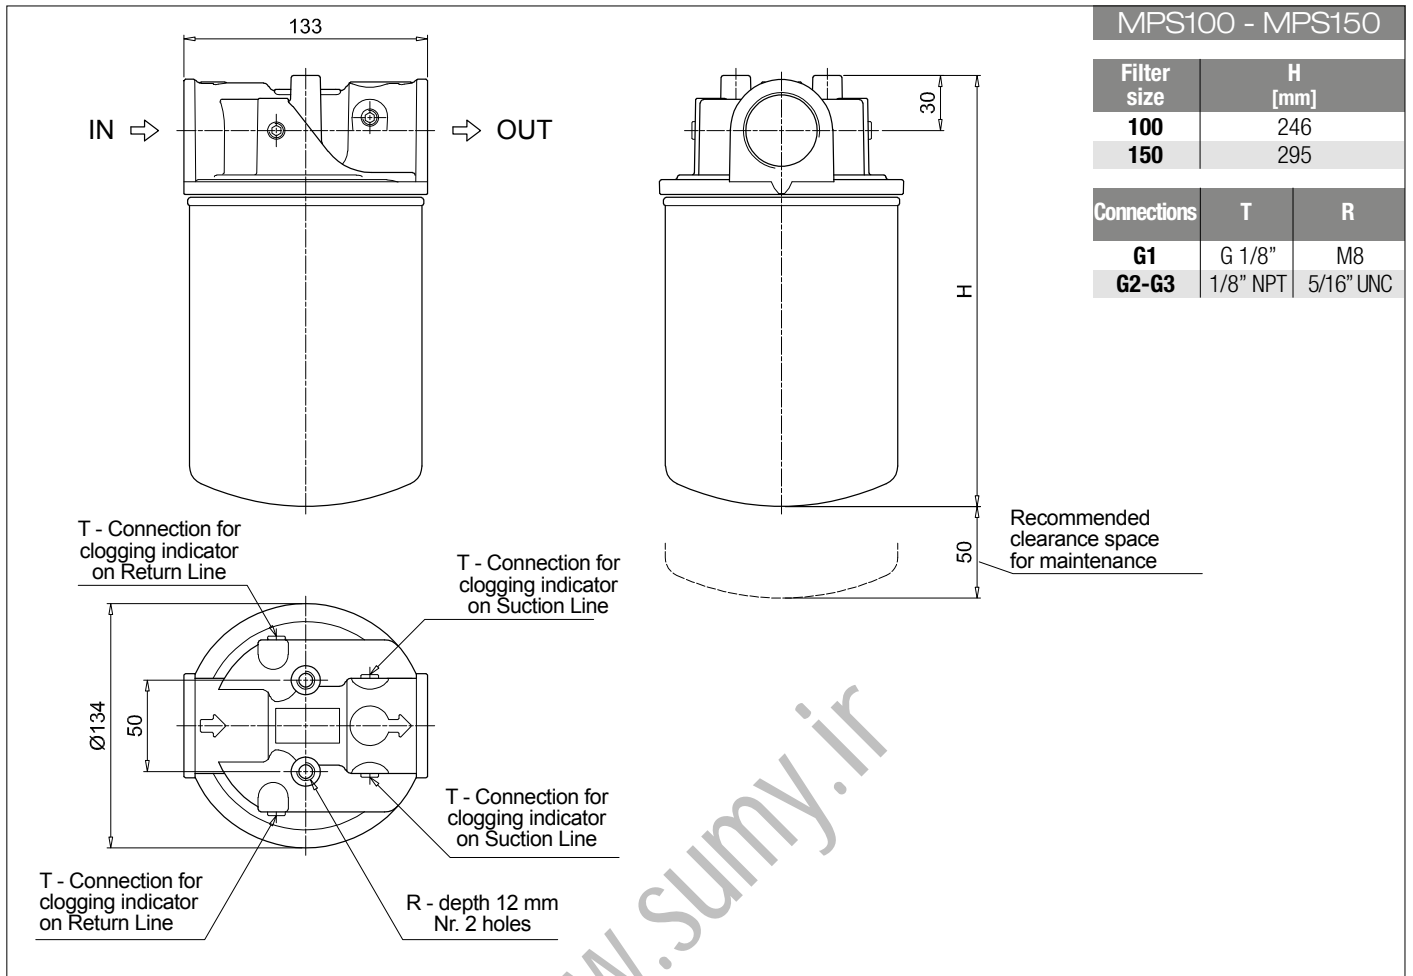

# MPS MPS200 - MPS250

## Designation & Ordering code

### COMPLETE FILTER

|   |                                   |   |    |     |   |     |
|---|-----------------------------------|---|----|-----|---|-----|
| <b>Series and size</b><br>MPS200   MPS250 | Configuration example: MPS200     | R | G1 | A10 | A | P01 |
| <b>Bypass valve</b>                       |                                   |   |    |     |   |     |
| R Return: 1.75 bar                        |                                   |   |    |     |   |     |
| S Suction: 30 kPa                         |                                   |   |    |     |   |     |
| U Without bypass                          |                                   |   |    |     |   |     |
| <b>Connections</b>                        |                                   |   |    |     |   |     |
| G1 G 1 1/2"                               |                                   |   |    |     |   |     |
| G2 1 1/2" NPT                             |                                   |   |    |     |   |     |
| G3 SAE 24 - 1 7/8" - 12 UN                |                                   |   |    |     |   |     |
| <b>Filtration rating (filter media)</b>   |                                   |   |    |     |   |     |
| A03 Inorganic microfiber 3 µm             | M25 Wire mesh 25 µm               |   |    |     |   |     |
| A06 Inorganic microfiber 6 µm             | M60 Wire mesh 60 µm               |   |    |     |   |     |
| A10 Inorganic microfiber 10 µm            | M90 Wire mesh 90 µm               |   |    |     |   |     |
| A25 Inorganic microfiber 25 µm            | P10 Resin impregnated paper 10 µm |   |    |     |   |     |
|   | P25 Resin impregnated paper 25 µm |   |    |     |   |     |
|   | <b>Seal</b>                       |   |    |     |   |     |
|   | A NBR                             |   |    |     |   |     |
|   | <b>Execution</b>                  |   |    |     |   |     |
|   | P01 MP Filtri standard            |   |    |     |   |     |

### CARTRIDGE

|   |                                   |     |   |     |
|---|-----------------------------------|-----|---|-----|
| <b>Cartridge series and size</b><br>CS100   CS150 | Configuration example: CS100      | A10 | A | P01 |
| <b>Filtration rating (filter media)</b>           |                                   |     |   |     |
| A03 Inorganic microfiber 3 µm                     | M25 Wire mesh 25 µm               |     |   |     |
| A06 Inorganic microfiber 6 µm                     | M60 Wire mesh 60 µm               |     |   |     |
| A10 Inorganic microfiber 10 µm                    | M90 Wire mesh 90 µm               |     |   |     |
| A25 Inorganic microfiber 25 µm                    | P10 Resin impregnated paper 10 µm |     |   |     |
|   | P25 Resin impregnated paper 25 µm |     |   |     |
|   | <b>Seals</b>                      |     |   |     |
|   | A NBR                             |     |   |     |
|   | <b>Execution</b>                  |     |   |     |
|   | P01 MP Filtri standard            |     |   |     |
|   | Pxx Customized                    |     |   |     |


### ACCESSORIES

| Clogging indicators on RETURN line  |  | page |     |  | page    |
|-------------------------------------|--|------|-----|--|---------|
| BVA                                 | Axial pressure gauge                           | 315  | BEA | Electrical pressure indicator          | 314     |
| BVR                                 | Radial pressure gauge                          | 315  | BEM | Electrical pressure indicator          | 314     |
| BVP                                 | Visual pressure indicator with automatic reset | 316  | BLA | Electrical / visual pressure indicator | 314-315 |
| BVQ                                 | Visual pressure indicator with manual reset    | 316  |     |  |         |
| Clogging indicators on SUCTION line |  | page |     |  | page    |
| VVB                                 | Axial pressure gauge                           | 313  | VEB | Electrical vacuum indicator            | 312     |
| VVS                                 | Radial pressure gauge                          | 313  | VLB | Electrical/visual vacuum indicator     | 312     |

### MPS200 - MPS250

| Filter size | H [mm] |
|-------------|--------|
| <b>200</b>  | 213    |
| <b>250</b>  | 262    |

| Connections  | T        | R         |
|--------------|----------|-----------|
| <b>G1</b>    | G 1/8"   | M10       |
| <b>G2-G3</b> | 1/8" NPT | 7/16" UNC |

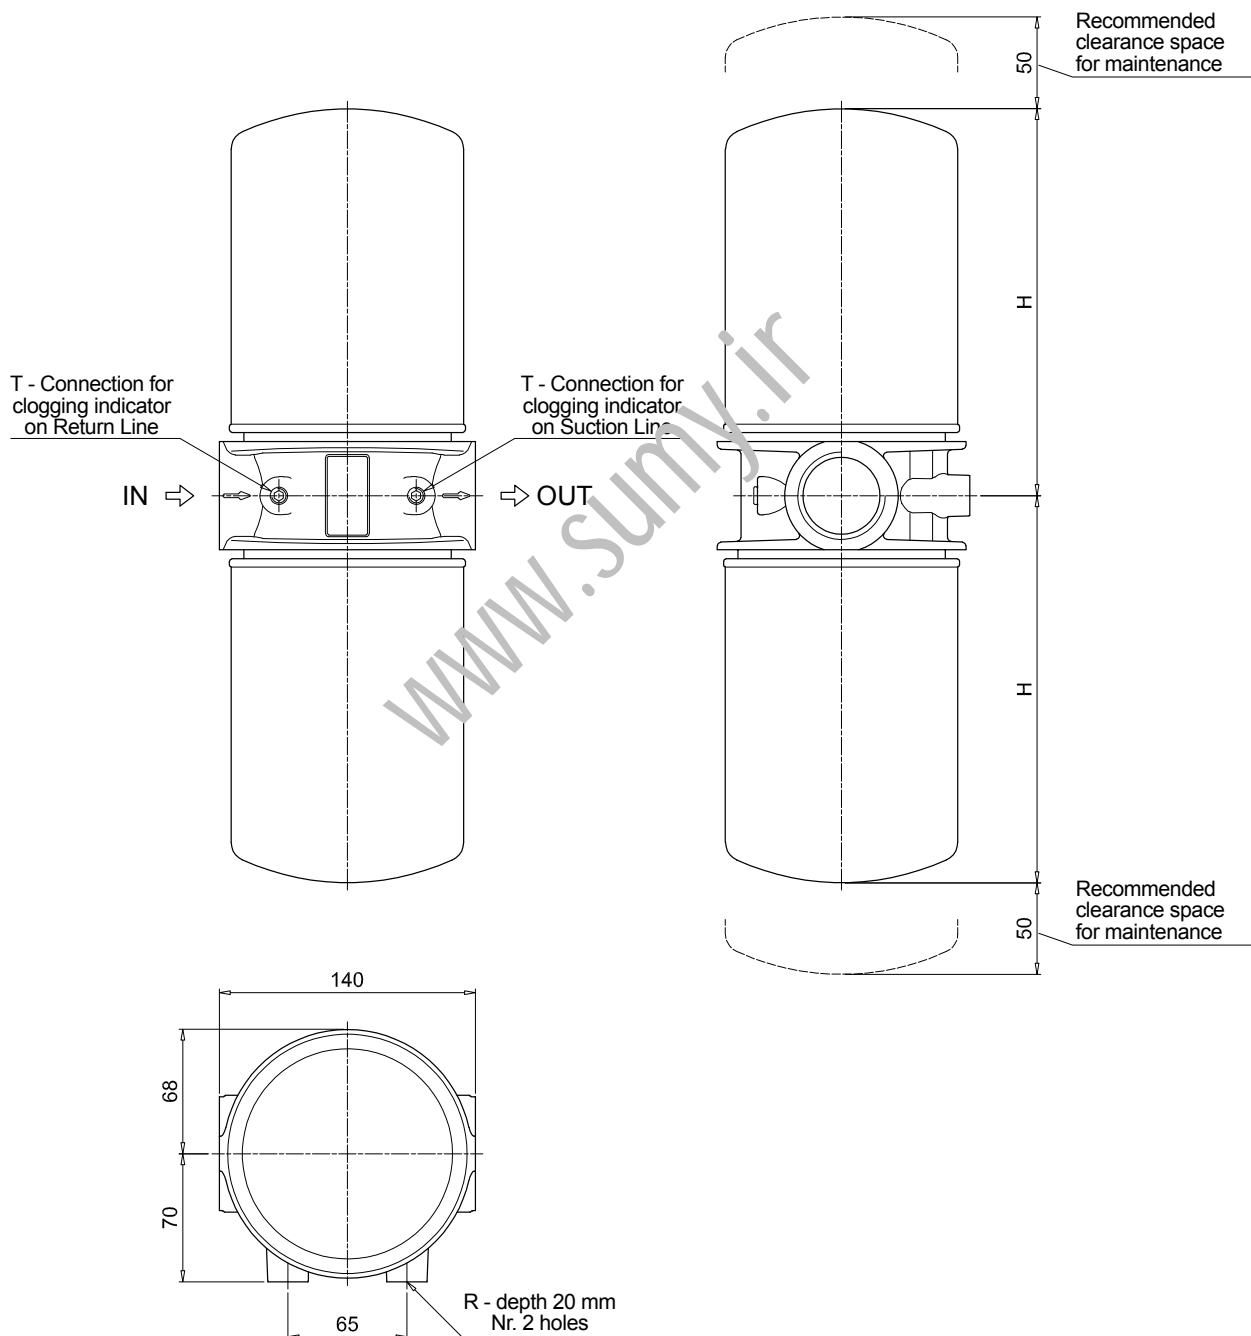

# MPS MPS300 - MPS350 MPS301 - MPS351

## Designation & Ordering code

### COMPLETE FILTER

|   |  |  |                               |                               |  |  |
|---|--|--|-------------------------------|-------------------------------|--|--|
| <b>Series and size</b>                  |  | Configuration example: <b>MPS300</b> <b>R</b> <b>F1</b> <b>A10</b> <b>A</b> <b>P01</b> |                               |                               |  |  |
| <b>MPS300</b>   <b>MPS350</b>           | With connections for clogging indicators     |  |                               |                               |  |  |
| <b>MPS301</b>   <b>MPS351</b>           | With connections for differential indicators |  |                               |                               |  |  |
| <b>Bypass valve</b>                     |  | <b>MPS 300 - 350</b>   | <b>MPS 301 - 351</b>          |                               |  |  |
| <b>R</b>                                | Return: 1.75 bar                             | •  | •                             |                               |  |  |
| <b>S</b>                                | Suction: 30 kPa                              | •  |                               |                               |  |  |
| <b>U</b>                                | Without bypass                               | •  |                               |                               |  |  |
| <b>P</b>                                | Without bypass                               |  | •                             |                               |  |  |
| <b>Connections</b>                      |  |  |                               |                               |  |  |
| <b>G1</b>                               | G 1 1/2"                                     |  |                               |                               |  |  |
| <b>G2</b>                               | 1 1/2" NPT                                   |  |                               |                               |  |  |
| <b>G3</b>                               | SAE 24 - 1 7/8" - 12 UN                      |  |                               |                               |  |  |
| <b>F1</b>                               | 1 1/2" SAE 3000 psi/M                        |  |                               |                               |  |  |
| <b>F2</b>                               | 1 1/2" SAE 3000 psi/UNC                      |  |                               |                               |  |  |
| <b>Filtration rating (filter media)</b> |  |  |                               |                               |  |  |
| <b>A03</b>                              | Inorganic microfiber 3 µm                    | <b>M25</b>   | Wire mesh 25 µm               |                               |  |  |
| <b>A06</b>                              | Inorganic microfiber 6 µm                    | <b>M60</b>   | Wire mesh 60 µm               |                               |  |  |
| <b>A10</b>                              | Inorganic microfiber 10 µm                   | <b>M90</b>   | Wire mesh 90 µm               |                               |  |  |
| <b>A25</b>                              | Inorganic microfiber 25 µm                   | <b>P10</b>   | Resin impregnated paper 10 µm |                               |  |  |
|   |  | <b>P25</b>   | Resin impregnated paper 25 µm |                               |  |  |
|   |  | <b>Seal</b>  |                               | <b>Execution</b>              |  |  |
|   |  | <b>A</b> NBR   |                               | <b>P01</b> MP Filtri standard |  |  |

### CARTRIDGE

|   |                            |  |                               |                               |  |
|---|----------------------------|--|-------------------------------|-------------------------------|--|
| <b>Cartridge series and size</b>        |                            | Configuration example: <b>CS100</b> <b>A10</b> <b>A</b> <b>P01</b> |                               |                               |  |
| <b>CS100</b>   <b>CS150</b>             |                            |  |                               |                               |  |
| <b>Filtration rating (filter media)</b> |                            |  |                               |                               |  |
| <b>A03</b>                              | Inorganic microfiber 3 µm  | <b>M25</b>   | Wire mesh 25 µm               |                               |  |
| <b>A06</b>                              | Inorganic microfiber 6 µm  | <b>M60</b>   | Wire mesh 60 µm               |                               |  |
| <b>A10</b>                              | Inorganic microfiber 10 µm | <b>M90</b>   | Wire mesh 90 µm               |                               |  |
| <b>A25</b>                              | Inorganic microfiber 25 µm | <b>P10</b>   | Resin impregnated paper 10 µm |                               |  |
|   |                            | <b>P25</b>   | Resin impregnated paper 25 µm |                               |  |
|   |                            | <b>Seals</b>   |                               | <b>Execution</b>              |  |
|   |                            | <b>A</b> NBR   |                               | <b>P01</b> MP Filtri standard |  |
|   |                            |  |                               | <b>Pxx</b> Customized         |  |



### ACCESSORIES

| <b>Clogging indicators on RETURN line</b>  |  | page    |            |  | page    |
|--|--|---------|------------|--|---------|
| <b>BVA</b>                                 | Axial pressure gauge                           | 315     | <b>BEA</b> | Electrical pressure indicator          | 314     |
| <b>BVR</b>                                 | Radial pressure gauge                          | 315     | <b>BEM</b> | Electrical pressure indicator          | 314     |
| <b>BVP</b>                                 | Visual pressure indicator with automatic reset | 316     | <b>BLA</b> | Electrical / visual pressure indicator | 314-315 |
| <b>BVQ</b>                                 | Visual pressure indicator with manual reset    | 316     |            |  |         |
| <b>Clogging indicators on SUCTION line</b> |  | page    |            |  | page    |
| <b>VVB</b>                                 | Axial pressure gauge                           | 313     | <b>VEB</b> | Electrical vacuum indicator            | 312     |
| <b>VVS</b>                                 | Radial pressure gauge                          | 313     | <b>VLB</b> | Electrical/visual vacuum indicator     | 312     |
| <b>Differential indicators</b>             |  | page    |            |  | page    |
| <b>DEA</b>                                 | Electrical differential indicator              | 317     | <b>DTA</b> | Electronic differential indicator      | 320     |
| <b>DEM</b>                                 | Electrical differential indicator              | 317-318 | <b>DVA</b> | Visual differential indicator          | 320     |
| <b>DLA</b>                                 | Electrical / visual differential indicator     | 318-319 | <b>DVM</b> | Visual differential indicator          | 320     |
| <b>DLE</b>                                 | Electrical / visual differential indicator     | 319     |            |  |         |

### MPS300 - MPS350

| Filter size | H [mm] |
|-------------|--------|
| <b>300</b>  | 266    |
| <b>350</b>  | 315    |

| Connections  | T        | R         |
|--------------|----------|-----------|
| <b>G1</b>    | G 1/8"   | M10       |
| <b>G2-G3</b> | 1/8" NPT | 7/16" UNC |
| <b>F1</b>    | G 1/8"   | M10       |
| <b>F2</b>    | 1/8" NPT | 7/16" UNC |

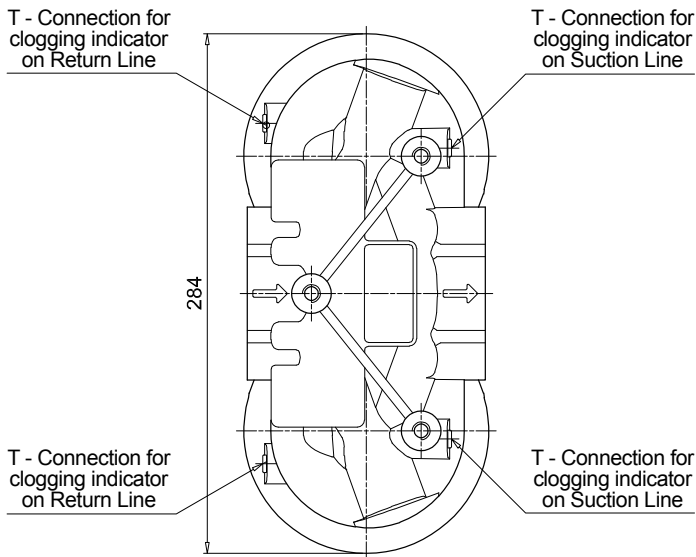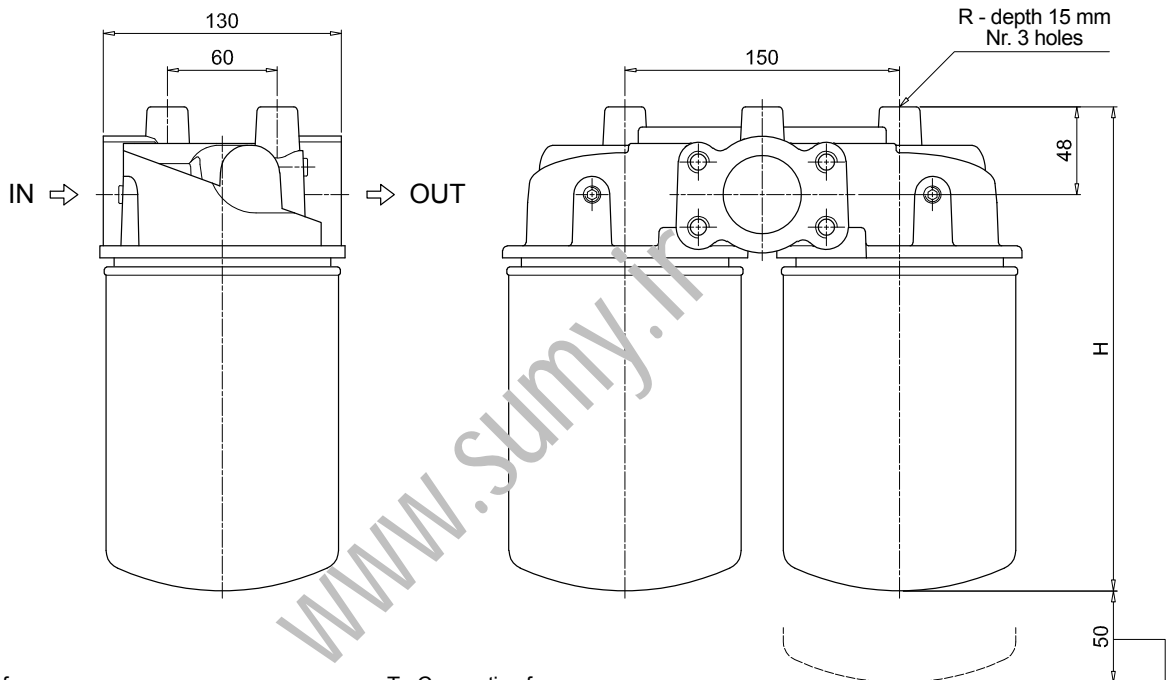

Recommended clearance space for maintenance

# MPS MPS300 - MPS350 MPS301 - MPS351


## Dimensions

### MPS301 - MPS351

| Filter size | H [mm] |
|-------------|--------|
| <b>301</b>  | 266    |
| <b>351</b>  | 315    |

| Connections  | R         |
|--------------|-----------|
| <b>G1</b>    | M10       |
| <b>G2-G3</b> | 7/16" UNC |
| <b>F1</b>    | M10       |
| <b>F2</b>    | 7/16" UNC |



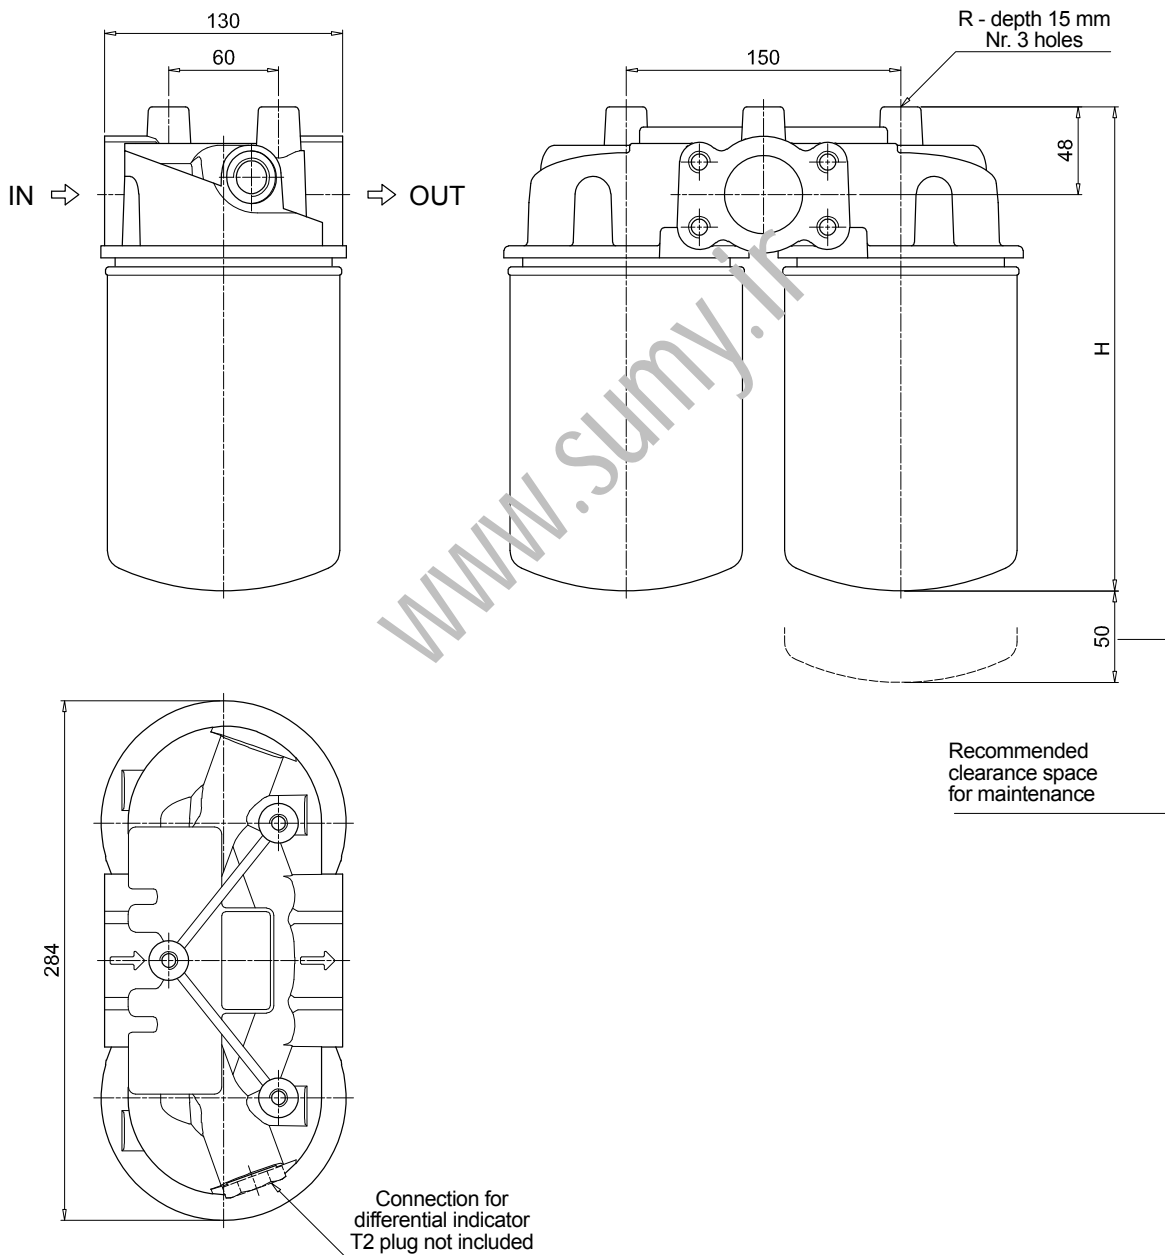

[www.sumy.ir](http://www.sumy.ir)

www.sumy.ir

# MSH series

Maximum working pressure up to 3.5 MPa (35 bar) - Flow rate up to 195 l/min



## Description

## Technical data

### Spin-on filters

**Maximum working pressure up to 3.5 MPa (35 bar)**  
**Flow rate up to 195 l/min**

MSH is a range of spin-on filters suitable to be used in low pressure lines. They offer a good balance between performances, dimensions and prices. They are directly connected to the lines of the system through the hydraulic fittings.

#### Available features:

- Female threaded connections up to 1 1/4", for a maximum flow rate of 195 l/min
- Fine filtration rating, to get a good cleanliness level into the reservoir
- Strong sealing between the housing and cans, to be used in heavy applications
- Bypass valve, to relieve excessive pressure drop across the filter media
- Visual, electrical and electronic differential clogging indicators for low pressure applications

#### Common applications:

- Delivery lines, in economic industrial equipment or mobile machines

### Filter housing materials

- Head: Anodized Aluminium
- Bypass valve: Nylon - Steel
- Element: Aluminium - Painted Steel

### Bypass valve

Opening pressure: 250 kPa (2.5 bar) ±10%

### Δp element type

- Δp: 5 bar
- Oil flow from OUT to IN

### Seals

- Standard NBR - series A
- Optional FPM - series V

### Temperature

From -20 °C to +110 °C

### Note

MSH filters are provided for vertical mounting



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series  | Weights [kg] | Volumes [dm <sup>3</sup> ] |
|----------------|--------------|----------------------------|
| <b>MSH 050</b> | 1.50         | 0.65                       |
| <b>MSH 070</b> | 1.90         | 0.95                       |
| <b>MSH 100</b> | 3.30         | 1.80                       |
| <b>MSH 150</b> | 3.80         | 2.20                       |

## Cartridge



CH



### Thread connections



| Type                | Connection |
|---------------------|------------|
| <b>CH 050 - 070</b> | M32 x 2    |
| <b>CH 100 - 150</b> | M45 x 2    |

| Filter series  | Style S | Style B |
|----------------|---------|---------|
| <b>MSH 050</b> | •       | •       |
| <b>MSH 070</b> | •       | •       |
| <b>MSH 100</b> | •       | •       |
| <b>MSH 150</b> | •       | •       |



Pressure drop

Bypass valve pressure drop

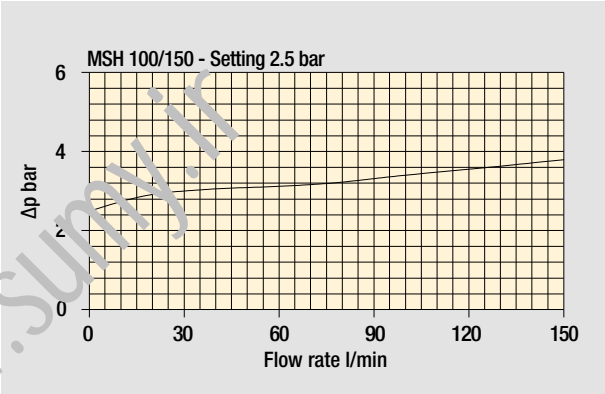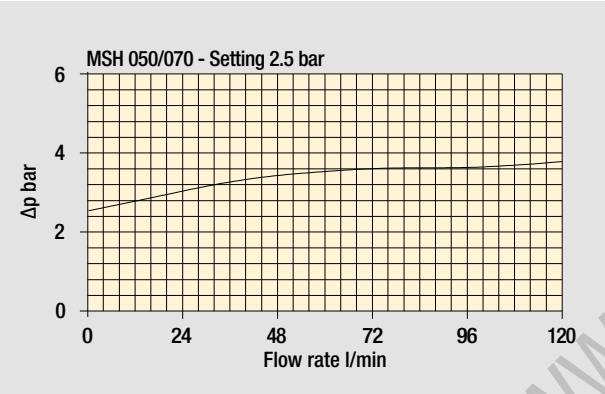

The curves are plotted using mineral oil with density of 0.88 kg/dm<sup>3</sup> in compliance with ISO 3968. Δp varies proportionally with density.

# MSH MSH050 - MSH070 MSH100 - MSH150

## Designation & Ordering code

### COMPLETE FILTER

|   |                            |  |                               |  |  |  |
|---|----------------------------|--|-------------------------------|--|--|--|
| <b>Series and size</b>  |                            | Configuration example: <b>MSH050</b> <b>B</b> <b>A</b> <b>G1</b> <b>A10</b> <b>P01</b> |                               |  |  |  |
| <b>MSH050</b>   <b>MSH070</b>   <b>MSH100</b>   <b>MSH150</b> |                            |  |                               |  |  |  |
| <b>Bypass valve</b>   |                            |  |                               |  |  |  |
| <b>S</b>  | Without bypass             |  |                               |  |  |  |
| <b>B</b>  | 2.5 bar                    |  |                               |  |  |  |
| <b>Seal</b>   |                            |  |                               |  |  |  |
| <b>A</b>  | NBR                        |  |                               |  |  |  |
| <b>Connections</b>  | <b>MSH 050 - 070</b>       | <b>MSH 100 - 150</b>   |                               |  |  |  |
| <b>G1</b>   | G 1"                       | G 1 1/2"   |                               |  |  |  |
| <b>G2</b>   | G 3/4"                     | G 1 1/4"   |                               |  |  |  |
| <b>G3</b>   | 1" NPT                     | 1 1/2" NPT   |                               |  |  |  |
| <b>G4</b>   | 3/4" NPT                   | 1 1/4" NPT   |                               |  |  |  |
| <b>G5</b>   | SAE 16 - 1 5/16" - 12 UN   | SAE 24 - 1 7/8" - 12 UN  |                               |  |  |  |
| <b>G6</b>   | SAE 12 - 1 1/16" - 12 UN   | SAE 20 - 1 5/8" - 12 UN  |                               |  |  |  |
| <b>Filtration rating (filter media)</b>                       |                            |  |                               |  |  |  |
| <b>A03</b>  | Inorganic microfiber 3 µm  | <b>M25</b>   | Wire mesh 25 µm               |  |  |  |
| <b>A06</b>  | Inorganic microfiber 6 µm  | <b>M60</b>   | Wire mesh 60 µm               |  |  |  |
| <b>A10</b>  | Inorganic microfiber 10 µm | <b>M90</b>   | Wire mesh 90 µm               |  |  |  |
| <b>A25</b>  | Inorganic microfiber 25 µm | <b>P10</b>   | Resin impregnated paper 10 µm |  |  |  |
|   |                            | <b>P25</b>   | Resin impregnated paper 25 µm |  |  |  |
|   |                            |  | <b>Execution</b>              |  |  |  |
|   |                            |  | <b>P01</b> MP Filtri standard |  |  |  |



### CARTRIDGE

|   |                            |  |                               |                               |  |
|---|----------------------------|--|-------------------------------|-------------------------------|--|
| <b>Cartridge series and size</b>                          |                            | Configuration example: <b>CH050</b> <b>A10</b> <b>A</b> <b>P01</b> |                               |                               |  |
| <b>CH050</b>   <b>CH070</b>   <b>CH100</b>   <b>CH150</b> |                            |  |                               |                               |  |
| <b>Filtration rating (filter media)</b>                   |                            |  |                               |                               |  |
| <b>A03</b>  | Inorganic microfiber 3 µm  | <b>M25</b>   | Wire mesh 25 µm               |                               |  |
| <b>A06</b>  | Inorganic microfiber 6 µm  | <b>M60</b>   | Wire mesh 60 µm               |                               |  |
| <b>A10</b>  | Inorganic microfiber 10 µm | <b>M90</b>   | Wire mesh 90 µm               |                               |  |
| <b>A25</b>  | Inorganic microfiber 25 µm | <b>P10</b>   | Resin impregnated paper 10 µm |                               |  |
|   |                            | <b>P25</b>   | Resin impregnated paper 25 µm |                               |  |
|   |                            |  | <b>Seal</b>                   | <b>Execution</b>              |  |
|   |                            |  | <b>A</b> NBR                  | <b>P01</b> MP Filtri standard |  |
|   |                            |  |                               | <b>Pxx</b> Customized         |  |

### ACCESSORIES


| <b>Differential indicators</b> |  | page    |            |                                   | page |
|--------------------------------|--|---------|------------|-----------------------------------|------|
| <b>DEA</b>                     | Electrical differential indicator          | 317     | <b>DTA</b> | Electronic differential indicator | 320  |
| <b>DEM</b>                     | Electrical differential indicator          | 317-318 | <b>DVA</b> | Visual differential indicator     | 320  |
| <b>DLA</b>                     | Electrical / visual differential indicator | 318-319 | <b>DVM</b> | Visual differential indicator     | 320  |
| <b>DLE</b>                     | Electrical / visual differential indicator | 319     |            |                                   |      |

| <b>Additional features</b> |      | page |
|----------------------------|------|------|
| <b>T2</b>                  | Plug | 321  |

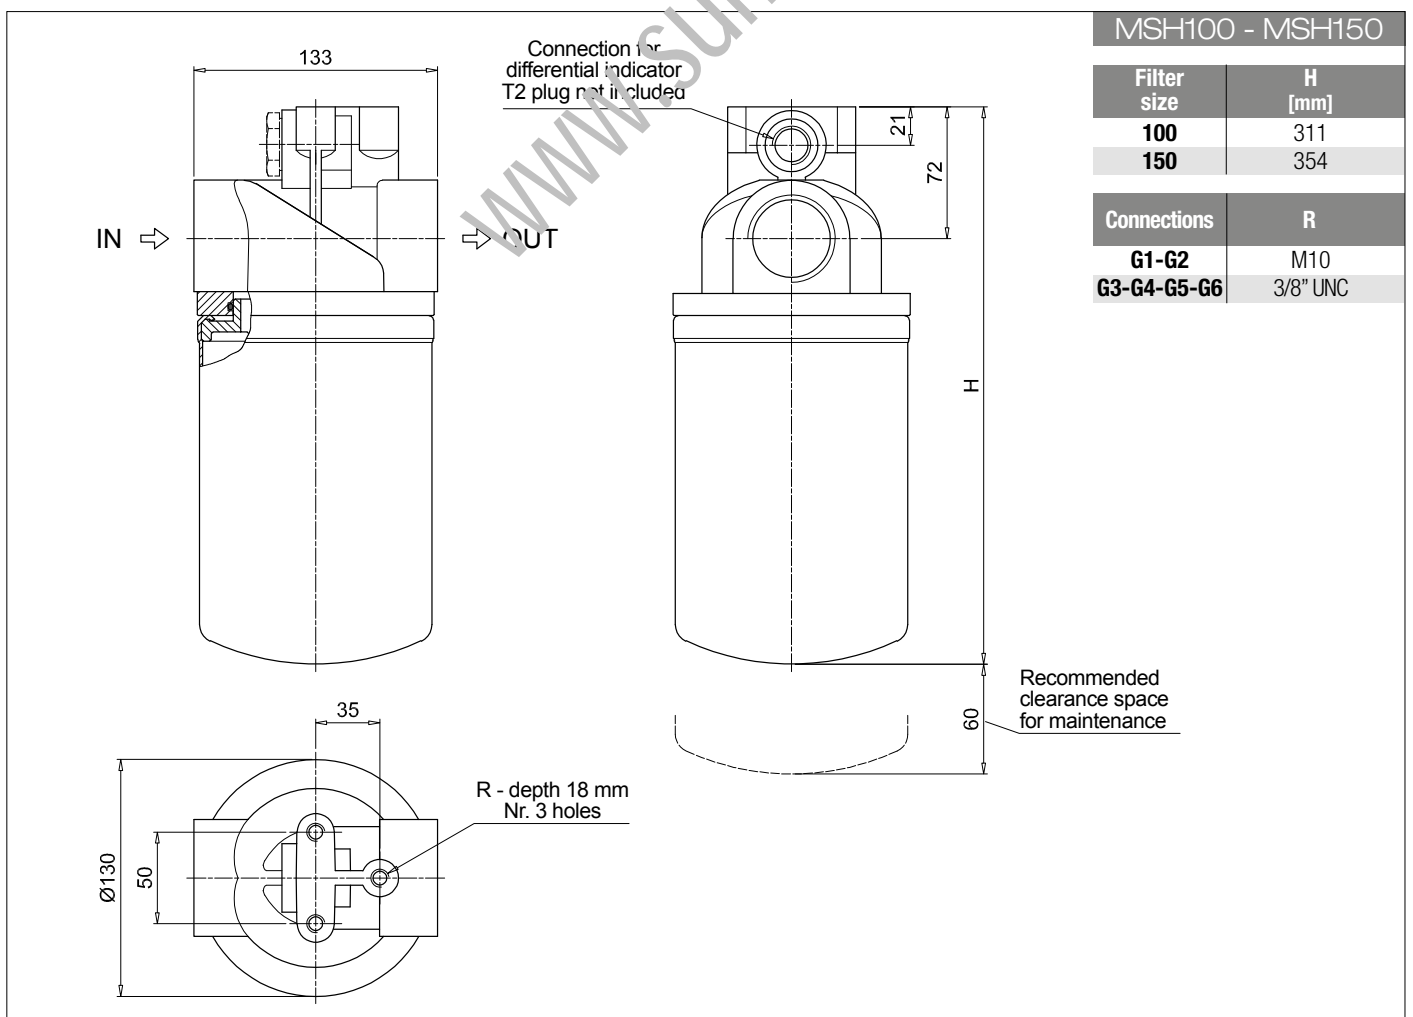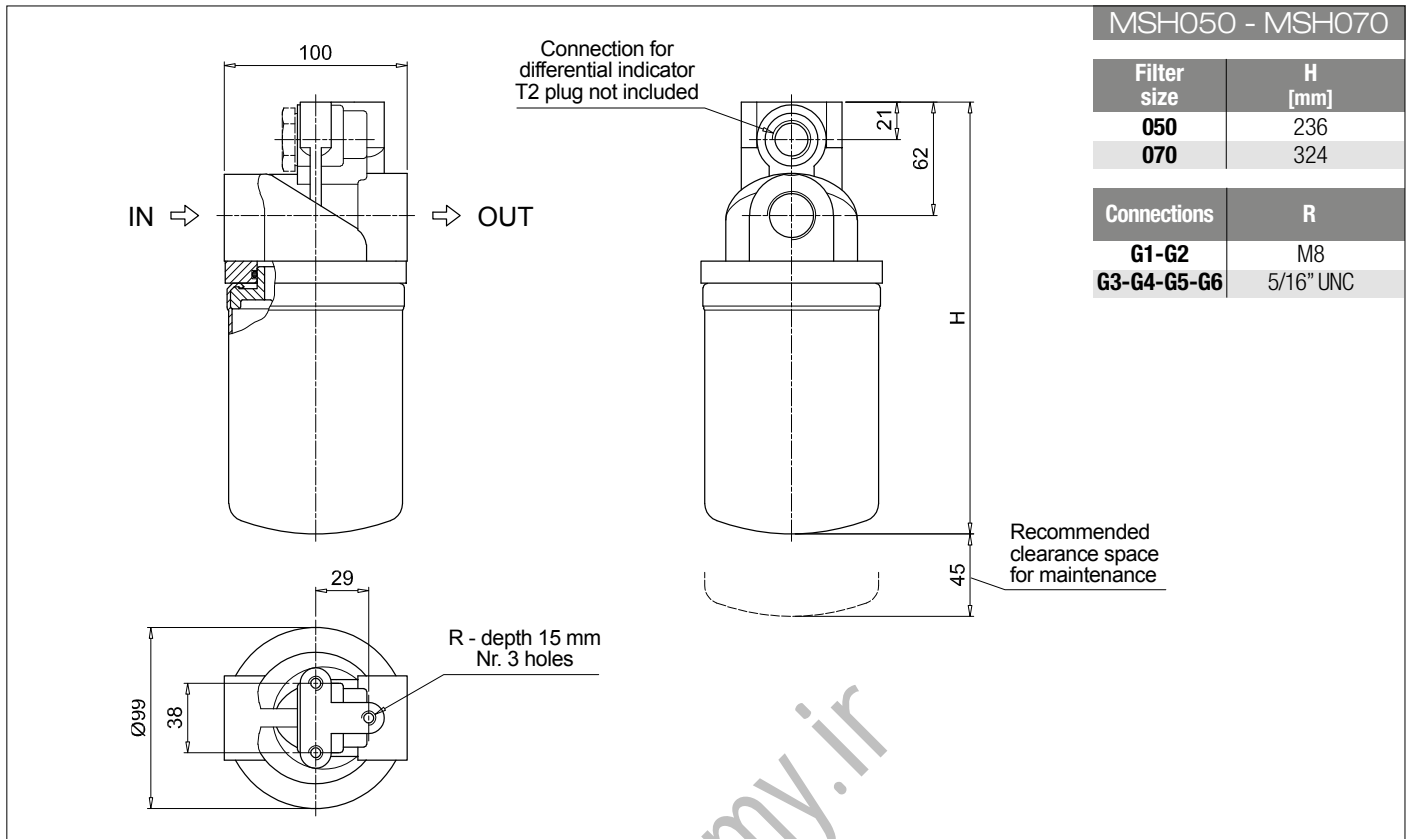

# MSH SPARE PARTS

Order number for spare parts

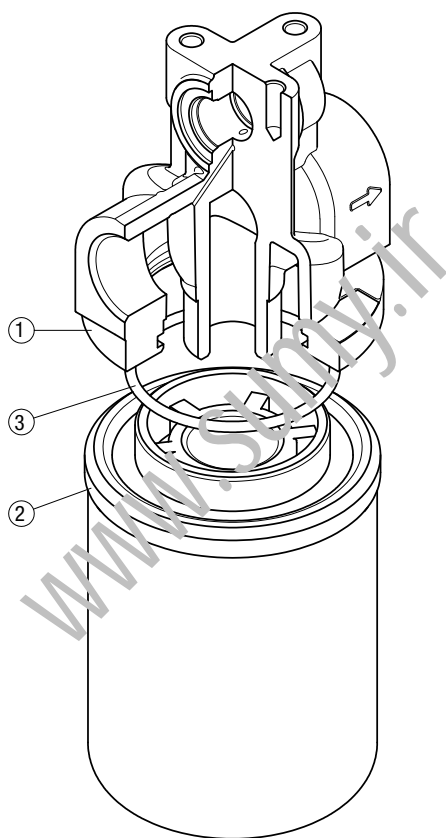

| Item:              | Q.ty: 1 pc.<br>① | Q.ty: 1 pc.<br>② | Q.ty: 1 pc.<br>③          |
|--------------------|------------------|------------------|---------------------------|
| Filter series      | Filter assembly  | Cartridge        | Seal code number          |
| <b>MSH 050-070</b> | See order table  | See order table  | 0-R 167 (ø 63.50 x 3.53)  |
| <b>MSH 100-150</b> | See order table  | See order table  | 0-R 4362 (ø 91.67 x 3.53) |



# Clogging indicators

## Introduction

Filter elements are efficient only if their Dirt Holding Capacity is fully exploited. This is achieved by using filter housings equipped with clogging indicators. These devices trip when the clogging of the filter element causes an increase in pressure drop across the filter element.

The indicator is set to alarm before the element becomes fully clogged.

MP Filtri can supply indicators of the following designs:

- Vacuum switches and gauges
- Pressure switches and gauges
- Differential pressure indicators

These type of devices can be provided with a visual, electrical or both signals.


**Barometric indicators**  
**Vacuum indicators**  
**Differential indicators**

## Suitable indicator types

### VACUUM INDICATORS

Vacuum indicators are used on the Suction line to check the efficiency of the filter element.


They measure the pressure downstream of the filter element. Standard items are produced with R 1/4" EN 10226 connection. Available products with R 1/8" EN 10226 to be fitted on MPS series.

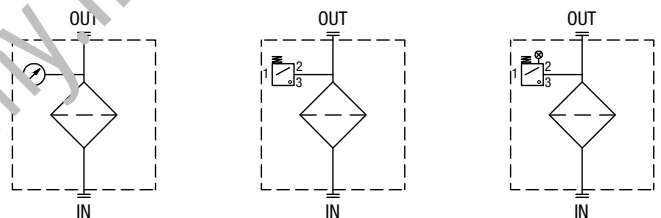

### BAROMETRIC INDICATORS

Pressure indicators are used on the Return line to check the efficiency of the filter element.


They measure the pressure upstream of the filter element. Standard items are produced with R 1/8" EN 10226 connection.

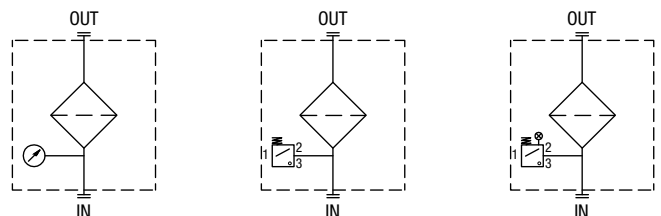

### DIFFERENTIAL INDICATORS

Differential indicators are used on the Pressure line to check the efficiency of the filter element.

They measure the pressure upstream and downstream of the filter element (differential pressure). Standard items are produced with special connection G 1/2" size. Also available in Stainless Steel models.

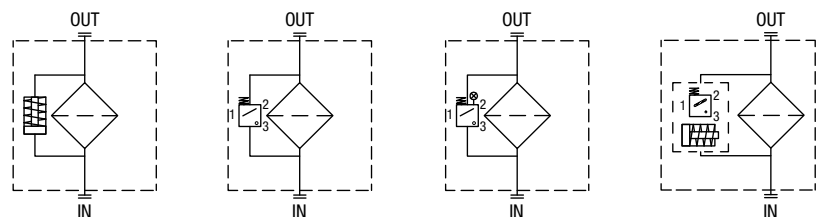

## Quick reference guide

|              | Filter series   | Visual indicator                               | Electrical indicator         | Electrical / Visual indicator  |
|--------------|---|--|------------------------------|--|
| Suction line | MPS 050 - 070 - 100 - 150<br>MPS 200 - 250 - 300 - 350                  | VVB16P01<br>VVS16P01                           | VEB21AA50P01                 | VLB21AA51P01<br>VLB21AA52P01<br>VLB21AA53P01<br>VLB21AA71P01                 |
| Return line  | MPS 050 - 070 - 100 - 150<br>MPS 200 - 250 - 300 - 350                  | BVA14P01<br>BVR14P01<br>BVP20HP01<br>BVQ20HP01 | BEA15HA50P01<br>BEM15HA41P01 | BLA15HA51P01<br>BLA15HA52P01<br>BLA15HA53P01<br>BLA15HA71P01                 |
| In-line      | MPS 051 - 071 - 101 - 151<br>MPS 301 - 351<br>MSH 050 - 070 - 100 - 150 | DVA12xP01<br>DVM12xP01                         | DEA12xA50P01<br>DEM12xAxxP01 | DLA12xA51P01<br>DLA12xA52P01<br>DLA12xA71P01<br>DLE12xA50P01<br>DLE12xF50P01 |


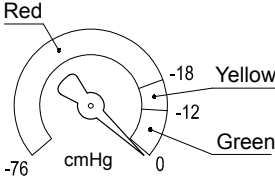
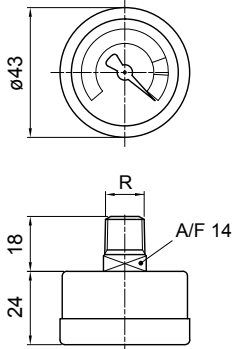
# VACUUM INDICATORS


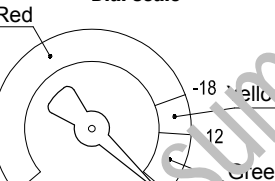
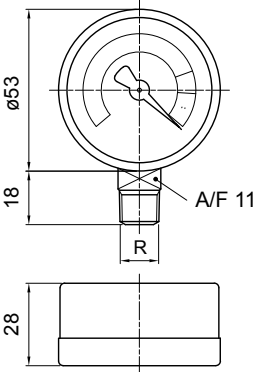
## Dimensions

| VE*50  |                      |
|--|----------------------|
| <b>Electrical Vacuum Indicator</b>   |                      |
| <b>R</b>   | <b>Ordering code</b> |
| EN 10226 - R1/8"   | VE B 21 A A 50 P01   |
|  |                      |
| <p><b>Hydraulic symbol</b></p>   |                      |
| <p><b>Electrical symbol</b></p>  |                      |
| <p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Base: Black Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: NBR</li> </ul>  |                      |
| <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Vacuum setting: -0.21 bar ±10%</li> <li>- Max working pressure: 10 bar</li> <li>- Proof pressure: 15 bar</li> <li>- Working temperature: From -25 °C to +80 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids<br/>HFA, HFB, HFC according to ISO 2943</li> <li>- Degree of protection: IP65 according to EN 60529</li> </ul> |                      |
| <p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connection: EN 175301-803</li> <li>- Resistive load: <ul style="list-style-type: none"> <li>5 A / 14 Vdc</li> <li>4 A / 30 Vdc</li> <li>5 A / 125 Vac</li> <li>4 A / 250 Vac</li> </ul> </li> <li>- Available Atex product: II 1GD Ex ia IIC Tx Ex ia IIIC Tx°C X </li> <li>- CE certification</li> </ul>                              |                      |

| VL*51 - VL*52 - VL*53  |                      |               |    |    |        |         |         |              |               |               |
|--|----------------------|---------------|----|----|--------|---------|---------|--------------|---------------|---------------|
| <b>Electrical/Visual Vacuum Indicator</b>  |                      |               |    |    |        |         |         |              |               |               |
| <b>R</b>   | <b>Ordering code</b> |               |    |    |        |         |         |              |               |               |
| EN 10226 - R1/8"   | VL B 21 A A xx P01   |               |    |    |        |         |         |              |               |               |
|  |                      |               |    |    |        |         |         |              |               |               |
| <p><b>Hydraulic symbol</b></p>   |                      |               |    |    |        |         |         |              |               |               |
| <p><b>Electrical symbol</b></p>  |                      |               |    |    |        |         |         |              |               |               |
| <p><b>Material:</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Base: Transparent Nylon</li> <li>- Contacts: Brass - Nylon</li> <li>- Seal: NBR</li> </ul>   |                      |               |    |    |        |         |         |              |               |               |
| <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Vacuum setting: -0.21 bar ±10%</li> <li>- Max working pressure: 10 bar</li> <li>- Proof pressure: 15 bar</li> <li>- Working temperature: From -25 °C to +80 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids<br/>HFA, HFB, HFC according to ISO 2943</li> <li>- Degree of protection: IP65 according to EN 60529</li> </ul>   |                      |               |    |    |        |         |         |              |               |               |
| <p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connection: EN 175301-803</li> <li>- Type: <table border="1"> <tr> <td>51</td> <td>52</td> <td>53</td> </tr> </table> </li> <li>- Lamps: <table border="1"> <tr> <td>24 Vdc</td> <td>110 Vdc</td> <td>230 Vac</td> </tr> </table> </li> <li>- Resistive load: <table border="1"> <tr> <td>1 A / 24 Vdc</td> <td>1 A / 110 Vdc</td> <td>1 A / 230 Vac</td> </tr> </table> </li> </ul> |                      | 51            | 52 | 53 | 24 Vdc | 110 Vdc | 230 Vac | 1 A / 24 Vdc | 1 A / 110 Vdc | 1 A / 230 Vac |
| 51   | 52                   | 53            |    |    |        |         |         |              |               |               |
| 24 Vdc   | 110 Vdc              | 230 Vac       |    |    |        |         |         |              |               |               |
| 1 A / 24 Vdc   | 1 A / 110 Vdc        | 1 A / 230 Vac |    |    |        |         |         |              |               |               |

| VL*71  |                      |
|--|----------------------|
| <b>Electrical/Visual Vacuum Indicator</b>  |                      |
| <b>Connections</b>   | <b>Ordering code</b> |
| EN 10226 - R1/8"   | VL B 21 A A 71 P01   |
|  |                      |
| <p><b>Hydraulic symbol</b></p>   |                      |
| <p><b>Electrical symbol</b></p>  |                      |
| <p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Base: Black Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: NBR</li> </ul>  |                      |
| <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Vacuum setting: -0.21 bar ±10%</li> <li>- Max working pressure: 10 bar</li> <li>- Proof pressure: 15 bar</li> <li>- Working temperature: From -25 °C to +80 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids<br/>HFA, HFB, HFC according to ISO 2943</li> <li>- Degree of protection: IP65 according to EN 60529</li> </ul> |                      |
| <p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connection: IEC 61076-2-101 D (M12)</li> <li>- Lamps: 24 Vdc</li> <li>- Resistive load: 0.4 A / 24 Vdc</li> </ul>  |                      |

| VVB   |                      | Hydraulic symbol   | Materials   |   |  |     |       |     |       |     |       |
|---|----------------------|--|---|---|--|-----|-------|-----|-------|-----|-------|
| <b>Axial Vacuum Gauge</b>   |                      |  |   |  | <ul style="list-style-type: none"> <li>- Case: Painted Steel</li> <li>- Window: Transparent plastic</li> <li>- Dial: Painted Steel</li> <li>- Pointer: Painted Aluminium</li> <li>- Pressure connection: Brass</li> <li>- Pressure element: Bourdon tube Cu-alloy soft soldered</li> </ul> |     |       |     |       |     |       |
| <b>R</b>  | <b>Ordering code</b> |  |   |   |  |     |       |     |       |     |       |
| EN 10226 - R1/8"  | VV B 16 P01          | <b>Dial scale</b><br>   | <b>Technical data</b> <ul style="list-style-type: none"> <li>- Max working pressure: Static: 7 bar<br/>Fluctuating: 6 bar<br/>Short time: 10 bar</li> <li>- Working temperature: From -40 °C to +60 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids<br/>HFA, HFB, HFC according to ISO 2943</li> <li>- Accuracy: Class 2.5 according to EN 13190</li> <li>- Degree of protection: IP31 according to EN 60529</li> </ul> |   |  |     |       |     |       |     |       |
|  |                      |  |   |   |  |     |       |     |       |     |       |
|   |                      | <b>Conversion to SI units</b> <table border="1"> <thead> <tr> <th>[cmHg]</th> <th>[bar]</th> </tr> </thead> <tbody> <tr> <td>-12</td> <td>-0.16</td> </tr> <tr> <td>-18</td> <td>-0.24</td> </tr> <tr> <td>-76</td> <td>-1.01</td> </tr> </tbody> </table> |   | [cmHg]  | [bar]  | -12 | -0.16 | -18 | -0.24 | -76 | -1.01 |
| [cmHg]  | [bar]                |  |   |   |  |     |       |     |       |     |       |
| -12   | -0.16                |  |   |   |  |     |       |     |       |     |       |
| -18   | -0.24                |  |   |   |  |     |       |     |       |     |       |
| -76   | -1.01                |  |   |   |  |     |       |     |       |     |       |

| VVS  |                      | Hydraulic symbol   | Materials   |   |  |     |       |     |       |     |       |
|--|----------------------|--|---|---|--|-----|-------|-----|-------|-----|-------|
| <b>Radial Vacuum Gauge</b>   |                      |  |   |  | <ul style="list-style-type: none"> <li>- Case: Painted Steel</li> <li>- Window: Transparent plastic</li> <li>- Dial: Painted Steel</li> <li>- Pointer: Painted Aluminium</li> <li>- Pressure connection: Brass</li> <li>- Pressure element: Bourdon tube Cu-alloy soft soldered</li> </ul> |     |       |     |       |     |       |
| <b>R</b>   | <b>Ordering code</b> |  |   |   |  |     |       |     |       |     |       |
| EN 10226 - R1/8"   | VV S 16 P01          | <b>Dial scale</b><br>  | <b>Technical data</b> <ul style="list-style-type: none"> <li>- Max working pressure: Static: 7 bar<br/>Fluctuating: 6 bar<br/>Short time: 10 bar</li> <li>- Working temperature: From -40 °C to +60 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids<br/>HFA, HFB, HFC according to ISO 2943</li> <li>- Accuracy: Class 2.5 according to EN 13190</li> <li>- Degree of protection: IP31 according to EN 60529</li> </ul> |   |  |     |       |     |       |     |       |
|  |                      |  |   |   |  |     |       |     |       |     |       |
|  |                      | <b>Conversion to SI units</b> <table border="1"> <thead> <tr> <th>[cmHg]</th> <th>[bar]</th> </tr> </thead> <tbody> <tr> <td>-12</td> <td>-0.16</td> </tr> <tr> <td>-18</td> <td>-0.24</td> </tr> <tr> <td>-76</td> <td>-1.01</td> </tr> </tbody> </table> |   | [cmHg]  | [bar]  | -12 | -0.16 | -18 | -0.24 | -76 | -1.01 |
| [cmHg]   | [bar]                |  |   |   |  |     |       |     |       |     |       |
| -12  | -0.16                |  |   |   |  |     |       |     |       |     |       |
| -18  | -0.24                |  |   |   |  |     |       |     |       |     |       |
| -76  | -1.01                |  |   |   |  |     |       |     |       |     |       |

| DESIGNATION & ORDERING CODE   |  |                          |                                    |           |    |   |   |    |                               |
|-------------------------------|--|--------------------------|------------------------------------|-----------|----|---|---|----|-------------------------------|
| <b>Series</b>                 |  | Configuration example 1: | VE                                 | B         | 21 | A | A | 50 | P01                           |
| <b>VE</b>                     | Electrical vacuum indicator                                      | Configuration example 2: | VL                                 | B         | 21 | A | A | 71 | P01                           |
| <b>VL</b>                     | Electrical/Visual vacuum indicator                               | Configuration example 3: | VV                                 | S         | 16 |   |   |    | P01                           |
| <b>VV</b>                     | Vacuum gauge   |                          |                                    |           |    |   |   |    |                               |
| <b>Type VE - VL</b>           |  | <b>Type VV</b>           |                                    |           |    |   |   |    |                               |
| <b>B</b>                      | Connection EN 10226 - R1/8"                                      | <b>B</b>                 | Axial connection EN 10226 - R1/8"  |           |    |   |   |    |                               |
|                               |  | <b>S</b>                 | Radial connection EN 10226 - R1/8" |           |    |   |   |    |                               |
| <b>Vacuum setting</b>         |  | <b>VE</b>                | <b>VL</b>                          | <b>VV</b> |    |   |   |    |                               |
| <b>16</b>                     | -0.16 bar  |                          |                                    | •         |    |   |   |    |                               |
| <b>21</b>                     | -0.21 bar  | •                        | •                                  |           |    |   |   |    |                               |
| <b>Seals</b>                  |  | <b>VE</b>                | <b>VL</b>                          | <b>VV</b> |    |   |   |    |                               |
| <b>A</b>                      | NBR  | •                        | •                                  |           |    |   |   |    |                               |
| <b>Thermostat</b>             |  | <b>VE</b>                | <b>VL</b>                          | <b>VV</b> |    |   |   |    |                               |
| <b>A</b>                      | Without  | •                        | •                                  |           |    |   |   |    |                               |
| <b>Electrical connections</b> |  | <b>VE</b>                | <b>VL</b>                          | <b>VV</b> |    |   |   |    |                               |
| <b>50</b>                     | Connection EN 175301-803   | •                        |                                    |           |    |   |   |    |                               |
| <b>51</b>                     | Connection EN 175301-803, transparent base with lamps 24 Vdc     |                          | •                                  |           |    |   |   |    |                               |
| <b>52</b>                     | Connection EN 175301-803, transparent base with lamps 110 Vdc    |                          | •                                  |           |    |   |   |    |                               |
| <b>53</b>                     | Connection EN 175301-803, transparent base with lamps 230 Vdc    |                          | •                                  |           |    |   |   |    |                               |
| <b>71</b>                     | Connection IEC 61076-2-101 D (M12), black base with lamps 24 Vdc |                          | •                                  |           |    |   |   |    |                               |
|                               |  |                          |                                    |           |    |   |   |    | <b>Option</b>                 |
|                               |  |                          |                                    |           |    |   |   |    | <b>P01</b> MP Filtri standard |
|                               |  |                          |                                    |           |    |   |   |    | <b>Pxx</b> Customized         |

# BAROMETRIC INDICATORS

## Dimensions

| BEA*50   |                    |
|--|--------------------|
| <b>Electrical Pressure Indicator</b>   |                    |
| Settings   | Ordering code      |
| 1.5 bar $\pm$ 10%  | BE A 15 H A 50 P01 |
| 2.0 bar $\pm$ 10%  | BE A 20 H A 50 P01 |
|  |                    |
| <p><b>Hydraulic symbol</b></p>   |                    |
| <p><b>Electrical symbol</b></p>  |                    |
| <p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Base: Black Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR</li> </ul>   |                    |
| <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Max working pressure: 40 bar</li> <li>- Proof pressure: 60 bar</li> <li>- Working temperature: From -25 °C to +80 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids<br/>HFA, HFB, HFC according to ISO 2943</li> <li>- Degree of protection: IP65 according to EN 60529</li> </ul> |                    |
| <p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connection: EN 175301-803</li> <li>- Resistive load: 5 A / 14 Vdc<br/>4 A / 30 Vdc<br/>5 A / 125 Vac<br/>4 A / 250 Vac</li> </ul> <p>- Available Atex product: II 1GD Ex ia IIC Tx Ex ia IIIC Tx°C X </p> <p>- CE certification</p>  |                    |

| BEM*41   |                    |
|--|--------------------|
| <b>Electrical Pressure Indicator</b>   |                    |
| Settings   | Ordering code      |
| 1.5 bar $\pm$ 10%  | BE M 15 H A 41 P01 |
| 2.0 bar $\pm$ 10%  | BE M 20 H A 41 P01 |
|  |                    |
| <p><b>Hydraulic symbol</b></p>   |                    |
| <p><b>Electrical symbol</b></p>  |                    |
| <p><b>Material:</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Base: Black Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR</li> </ul>   |                    |
| <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Max working pressure: 40 bar</li> <li>- Proof pressure: 60 bar</li> <li>- Working temperature: From -25 °C to +80 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids<br/>HFA, HFB, HFC according to ISO 2943</li> <li>- Degree of protection: IP67 according to EN 60529</li> </ul> |                    |
| <p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connection: Four-core cable</li> <li>- Resistive load: 5 A / 14 Vdc<br/>4 A / 30 Vdc<br/>5 A / 125 Vac<br/>4 A / 250 Vac</li> </ul> <p>- CE certification<br/>On request this indicator can be provided with main connectors in use for wirings.</p>   |                    |

| BL*51 - BL*52 - BL*53  |                    |
|--|--------------------|
| <b>Electrical/Visual Pressure Indicator</b>  |                    |
| Settings   | Ordering code      |
| 1.5 bar $\pm$ 10%  | BL A 15 H A xx P01 |
| 2.0 bar $\pm$ 10%  | BL A 20 H A xx P01 |
|  |                    |
| <p><b>Hydraulic symbol</b></p>   |                    |
| <p><b>Electrical symbol</b></p>  |                    |
| <p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Base: Transparent Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR</li> </ul>   |                    |
| <p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Max working pressure: 40 bar</li> <li>- Proof pressure: 60 bar</li> <li>- Working temperature: From -25 °C to +80 °C</li> <li>- Compatibility with fluids: Mineral oils, Synthetic fluids<br/>HFA, HFB, HFC according to ISO 2943</li> <li>- Degree of protection: IP65 according to EN 60529</li> </ul> |                    |
| <p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connection: EN 175301-803</li> <li>- Type: 51                      52                      53</li> <li>- Lamps: 24 Vdc            110 Vdc            230 Vac</li> <li>- Resistive load: 1 A / 24 Vdc    1 A / 110 Vdc    1 A / 230 Vac</li> </ul>  |                    |

| BL*71                                       |                   |
|---|-------------------|
| <b>Electrical/Visual Pressure Indicator</b> |                   |
| Settings                                    | Ordering code     |
| 1.5 bar $\pm 10\%$                          | BL A 15 HA 71 P01 |
| 2.0 bar $\pm 10\%$                          | BL A 20 HA 71 P01 |

**Hydraulic symbol**

**Electrical symbol**

**Materials**

- Body: Brass
- Base: Black Nylon
- Contacts: Silver
- Seal: HNBR

**Technical data**

- Max working pressure: 40 bar
- Proof pressure: 60 bar
- Working temperature: From -25 °C to +80 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943
- Degree of protection: IP65 according to EN 60529

**Electrical data**

- Electrical connection: IEC 61076-2-101 D (M12)
- Lamps: 24 Vdc
- Resistive load: 0.4 A / 24 Vdc

| BVA                         |               |
|-----------------------------|---------------|
| <b>Axial Pressure Gauge</b> |               |
| Settings                    | Ordering code |
| 1.4 bar $\pm 10\%$          | BV A 14 P01   |
| 2.5 bar $\pm 10\%$          | BV A 25 P01   |

**Hydraulic symbol**

**Dial scale**

BV A 14 P01

BV A 25 P01

**Materials**

- Case: Painted Steel
- Window: Transparent plastic
- Dial: Painted Steel
- Pointer: Painted Aluminium
- Pressure connection: Brass
- Pressure element: Bourdon tube Cu-alloy soft soldered

**Technical data**

- Max working pressure: Static: 7 bar  
Fluctuating: 6 bar  
Short time: 10 bar
- Working temperature: From -40 °C to +60 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943
- Accuracy: Class 2.5 according to EN 13190
- Degree of protection: IP31 according to EN 60529

| BVR                          |               |
|------------------------------|---------------|
| <b>Radial Pressure Gauge</b> |               |
| Settings                     | Ordering code |
| 1.4 bar $\pm 10\%$           | BV R 14 P01   |
| 2.5 bar $\pm 10\%$           | BV R 25 P01   |

**Hydraulic symbol**

**Dial scale**

BV R 14 P01

BV R 25 P01

**Materials**




- Case: Painted Steel
- Window: Transparent plastic
- Dial: Painted Steel
- Pointer: Painted Aluminium
- Pressure connection: Brass
- Pressure element: Bourdon tube Cu-alloy soft soldered

**Technical data**

- Max working pressure: Static: 7 bar  
Fluctuating: 6 bar  
Short time: 10 bar
- Working temperature: From -40 °C to +60 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943
- Accuracy: Class 2.5 according to EN 13190
- Degree of protection: IP31 according to EN 60529

# BAROMETRIC INDICATORS

## Dimensions
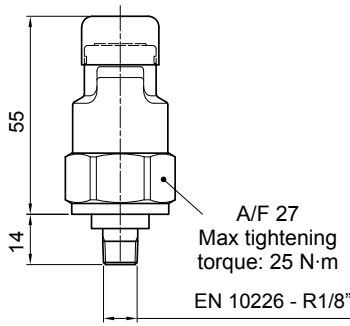
| BVP - BVQ                 |               | Hydraulic symbol   | Materials   |  |
|---------------------------|---------------|--|---|--|
| Visual Pressure Indicator |               |  |   |                                     |
| Setting                   | Ordering code |  |   |  |
| 1.5 bar ±10%              | BV P 15 H P01 |  <p>A/F 27<br/>Max tightening torque: 25 N·m<br/>EN 10226 - R1/8"</p> | <b>Technical data</b><br>- Reset: BVP - Automatic reset<br>BVQ - Manual reset<br>- Max working pressure: 10 bar<br>- Proof pressure: 15 bar<br>- Working temperature: From -25 °C to +80 °C<br>- Compatibility with fluids: Mineral oils, Synthetic fluids<br>HFA, HFB, HFC according to ISO 2943<br>- Degree of protection: IP45 according to EN 60529 |  |
|                           | 2.0 bar ±10%  |  |   | BV P 20 H P01  |
|                           |               |  |   | BV Q 15 H P01  |
|                           | BV Q 20 H P01 |  |   |  Absence of pressure (no indicator) |

## DESIGNATION & ORDERING CODE

| Series   | Configuration example 1: | BE | M | 15 | H | A | 41 | P01 |
|--|--------------------------|----|---|----|---|---|----|-----|
| <b>BE</b> Electrical pressure indicator        | Configuration example 2: | BL | A | 20 | H | A | 71 | P01 |
| <b>BL</b> Electrical/Visual pressure indicator | Configuration example 3: | BV | R | 14 |   |   |    | P01 |
| <b>BV</b> Visual pressure indicator            | Configuration example 4: | BV | P | 20 | H |   |    | P01 |

| Type                                      | BE | BL | BV   |
|---|----|----|--|
| <b>A</b> Standard type                    | •  | •  | <b>A</b> Axial connection pressure gauge       |
| <b>M</b> With wired electrical connection | •  |    | <b>R</b> Radial connection pressure gauge      |
|   |    |    | <b>P</b> Visual indicator with automatic reset |
|   |    |    | <b>Q</b> Visual indicator with manual reset    |

| Pressure setting  | BEA-BEM | BLA | BVA-BVR | BVP-BVQ |
|-------------------|---------|-----|---------|---------|
| <b>14</b> 1.4 bar |         |     | •       |         |
| <b>15</b> 1.5 bar | •       | •   |         |         |
| <b>20</b> 2 bar   | •       | •   |         | •       |
| <b>25</b> 2.5 bar |         |     | •       |         |


| Seals         | BE | BLA | BVA-BVR | BVP-BVQ |
|---------------|----|-----|---------|---------|
| <b>H</b> HNBR | •  | •   |         | •       |

| Thermostat       | BEA-BEM | BLA | BV |
|------------------|---------|-----|----|
| <b>A</b> Without | •       | •   |    |

| Electrical connections   | BEA | BEM | BL | BV |
|--|-----|-----|----|----|
| <b>10</b> Connection AMP Superseal series 1.5                              |     |     |    |    |
| <b>30</b> Connection Deutsch DT-04-2-P                                     |     |     |    |    |
| <b>41</b> Connection via four-core cable                                   |     | •   |    |    |
| <b>50</b> Connection EN 175301-803   | •   |     |    |    |
| <b>51</b> Connection EN 175301-803, transparent base with lamps 24 Vdc     |     |     | •  |    |
| <b>52</b> Connection EN 175301-803, transparent base with lamps 110 Vdc    |     |     | •  |    |
| <b>53</b> Connection EN 175301-803, transparent base with lamps 230 Vdc    |     |     | •  |    |
| <b>71</b> Connection IEC 61076-2-101 D (M12), black base with lamps 24 Vdc |     |     | •  |    |


| Option                        |
|-------------------------------|
| <b>P01</b> MP Filtri standard |
| <b>Pxx</b> Customized         |

| DEA*50                                   |                    |
|--|--------------------|
| <b>Electrical Differential Indicator</b> |                    |
| Settings                                 | Ordering code      |
| 1.2 bar $\pm 10\%$                       | DE A 12 x A 50 P01 |
| 2.0 bar $\pm 10\%$                       | DE A 20 x A 50 P01 |

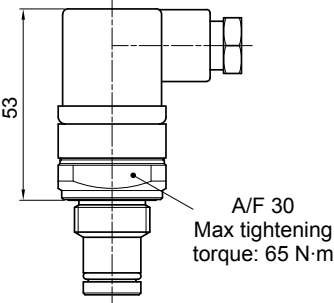


A/F 30  
Max tightening torque: 65 N·m

**Hydraulic symbol**



**Electrical symbol**



**Materials**

- Body: Brass
- Base: Black Nylon
- Contacts: Silver
- Seal: HNBR - FPM


**Technical data**

- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -25 °C to +110 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids  
HFA, HFB, HFC according to ISO 2943
- Degree protection: IP66 according to EN 60529  
IP69K according to ISO 20653

**Electrical data**

- Electrical connection: EN 175301-803
- Resistive load: 0.2 A / 115 Vdc


| DEM*10                                   |                    |
|--|--------------------|
| <b>Electrical Differential Indicator</b> |                    |
| Settings                                 | Ordering code      |
| 1.2 bar $\pm 10\%$                       | DE M 12 x x 10 P01 |
| 2.0 bar $\pm 10\%$                       | DE M 20 x x 10 P01 |

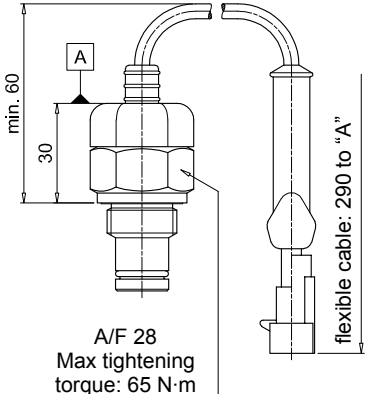


A/F 28  
Max tightening torque: 65 N·m

flexible cable: 290 to "A"

**Hydraulic symbol**



**Electrical symbol**



**Materials**

- Body: Brass
- Base: Black Nylon
- Contacts: Silver
- Seal: HNBR - FPM


**Technical data**

- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -25 °C to +110 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids  
HFA, HFB, HFC according to ISO 2943
- Degree protection: IP66 according to EN 60529

**Electrical data**

- Electrical connection: AMP Superseal series 1.5
- Resistive load: 0.2 A / 115 Vdc
- Switching type: Normally open contacts (NC on request)
- Thermal lockout: Normally open up to 30 °C (option "F")


| DEM*20                                   |                    |
|--|--------------------|
| <b>Electrical Differential Indicator</b> |                    |
| Settings                                 | Ordering code      |
| 1.2 bar $\pm 10\%$                       | DE M 12 x x 20 P01 |
| 2.0 bar $\pm 10\%$                       | DE M 20 x x 20 P01 |

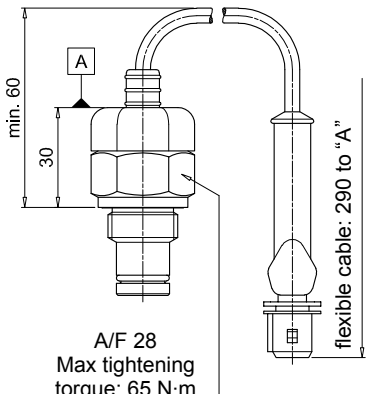


A/F 28  
Max tightening torque: 65 N·m

flexible cable: 290 to "A"

**Hydraulic symbol**



**Electrical symbol**



**Materials**

- Body: Brass
- Base: Black Nylon
- Contacts: Silver
- Seal: HNBR - FPM

**Technical data**

- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -25 °C to +110 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids  
HFA, HFB, HFC according to ISO 2943
- Degree protection: IP66 according to EN 60529

**Electrical data**

- Electrical connection: AMP Time junior
- Resistive load: 0.2 A / 115 Vdc
- Switching type: Normally open contacts (NC on request)
- Thermal lockout: Normally open up to 30 °C (option "F")





| DLA*71  |                    |
|---|--------------------|
| <b>Electrical/Visual Differential Indicator</b> |                    |
| Settings  | Ordering code      |
| 1.2 bar $\pm$ 10%                               | DL A 12 x A 71 P01 |
| 2.0 bar $\pm$ 10%                               | DL A 20 x A 71 P01 |

**Hydraulic symbol**

**Electrical symbol**

**Materials**

- Body: Brass
- Base: Black Nylon
- Contacts: Silver
- Seal: HNBR - FPM

**Technical data**

- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -25 °C to +110 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids  
HFA, HFB, HFC according to ISO 2943
- Degree protection: IP65 according to EN 60529  
IP69K according to ISO 20653

**Electrical data**

- Electrical connection: IEC 61076-2-101 D (M12)
- Lamps: 24 Vdc
- Resistive load: 0.4 A / 24 Vdc

| DLE*A50   |                    |
|---|--------------------|
| <b>Electrical/Visual Differential Indicator</b> |                    |
| Settings  | Ordering code      |
| 1.2 bar $\pm$ 10%                               | DL E 12 x A 50 P01 |
| 2.0 bar $\pm$ 10%                               | DL E 20 x A 50 P01 |

**Hydraulic symbol**

**Electrical symbol**

**Materials**

- Body: Brass
- Base: Black Nylon
- Contacts: Silver
- Seal: HNBR - FPM

**Technical data**

- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -25 °C to +110 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids  
HFA, HFB, HFC according to ISO 2943
- Degree protection: IP65 according to EN 60529

**Electrical data**

- Electrical connections: EN 175301-803
- Resistive load: 5 A / 250 Vac
- Available the connector with lamps

| DLE*F50   |                    |
|---|--------------------|
| <b>Electrical/Visual Differential Indicator</b> |                    |
| Settings  | Ordering code      |
| 1.2 bar $\pm$ 10%                               | DL E 12 x F 50 P01 |
| 2.0 bar $\pm$ 10%                               | DL E 20 x F 50 P01 |

**Hydraulic symbol**

**Electrical symbol**

**Materials**

- Body: Brass
- Base: Black Nylon
- Contacts: Silver
- Seal: HNBR - FPM

**Technical data**

- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -25 °C to +110 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids  
HFA, HFB, HFC according to ISO 2943
- Degree protection: IP65 according to EN 60529


**Electrical data**

- Electrical connections: EN 175301-803
- Resistive load: 5 A / 250 Vac
- Thermal lockout setting: +30 °C

# DIFFERENTIAL INDICATORS

## Dimensions


| DTA*70                                   |                    |
|--|--------------------|
| <b>Electronic Differential Indicator</b> |                    |
| Settings                                 | Ordering code      |
| 1.2 bar $\pm 10\%$                       | DT A 12 x x 70 P01 |
| 2.0 bar $\pm 10\%$                       | DT A 20 x x 70 P01 |

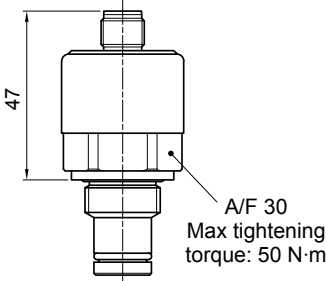

47

A/F 30  
Max tightening torque: 50 N-m

**Hydraulic symbol**



**Electrical symbol**

|   |   |   |                            |
|---|---|---|----------------------------|
| ① | ○ | ○ | +24 Vdc                    |
| ② | ○ | ○ | 4 ÷ 20 mA                  |
| ③ | ○ | ○ | 75% - N.O. Digital output  |
| ④ | ○ | ○ | 100% - N.O. Digital output |
| ⑤ | ○ | ○ | 0 Vdc                      |

**Materials**

- Body: Brass
- Internal parts: Brass - Nylon
- Contacts: Silver
- Seal: HNBR - FPM

**Technical data**


- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943
- Degree protection: IP67 according to EN 60529

**Electrical data**

- Electrical connection: IEC 61076-2-101 D (M12)
- Power supply: 24 Vdc
- Analogue output: From 4 to 20 mA
- Thermal lockout: 30 °C (all output signals stalled up to 30 °C)



| DVA                                  |               |
|--------------------------------------|---------------|
| <b>Visual Differential Indicator</b> |               |
| Settings                             | Ordering code |
| 1.2 bar $\pm 10\%$                   | DV A 12 x P01 |
| 2.0 bar $\pm 10\%$                   | DV A 20 x P01 |

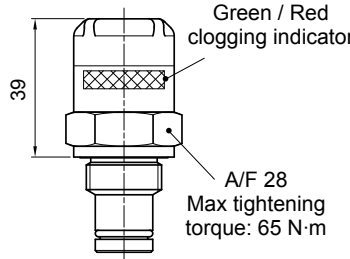


39

Green / Red clogging indicator

A/F 28  
Max tightening torque: 65 N-m

**Hydraulic symbol**




**Material:**

- Body: Brass
- Internal parts: Brass - Nylon
- Contacts: Silver
- Seal: HNBR - FPM

**Technical data**

- Reset: Automatic reset
- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -25 °C to +110 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943
- Degree protection: IP65 according to EN 60529

| DVM                                  |               |
|--------------------------------------|---------------|
| <b>Visual Differential Indicator</b> |               |
| Settings                             | Ordering code |
| 1.2 bar $\pm 10\%$                   | DV M 12 x P01 |
| 2.0 bar $\pm 10\%$                   | DV M 20 x P01 |

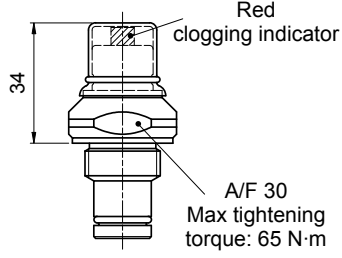


34

Red clogging indicator

A/F 30  
Max tightening torque: 65 N-m

**Hydraulic symbol**



**Materials**

- Body: Brass
- Internal parts: Brass - Nylon
- Contacts: Silver
- Seal: HNBR - FPM

**Technical data**

- Reset: Manual reset
- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -25 °C to +110 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943
- Degree protection: IP65 according to EN 60529

| T2             |               |
|----------------|---------------|
| Indicator plug |               |
| Seal           | Ordering code |
| HNBR           | T2 H          |
| FPM            | T2 V          |

10

A/F 30  
Max tightening torque: 50 N·m

**Materials**

- Body: Phosphatized steel
- Seal: HNBR / FPM

### DESIGNATION & ORDERING CODE - DIFFERENTIAL INDICATORS

| Series   | Configuration example 1: |   |    |   |   |    |     |
|--|--------------------------|---|----|---|---|----|-----|
| <b>DE</b> Electrical differential indicator        | DE                       | M | 12 | H | F | 50 | P01 |
| <b>DL</b> Electrical/Visual differential indicator | Configuration example 2: |   |    |   |   |    |     |
|  | DL                       | E | 20 | V | A | 71 | P01 |
| <b>DT</b> Electronic differential indicator        | Configuration example 3: |   |    |   |   |    |     |
|  | DT                       | A | 12 | H | F | 70 | P01 |
| <b>DV</b> Visual differential indicator            | Configuration example 4: |   |    |   |   |    |     |
|  | DV                       | M | 20 | V |   |    | P01 |

| Type                                      | DE | DL | DT | DV                            |
|---|----|----|----|-------------------------------|
| <b>A</b> Standard type                    | •  | •  | •  | <b>A</b> With automatic reset |
| <b>M</b> With wired electrical connection | •  |    |    | <b>M</b> With manual reset    |
| <b>E</b> For high power supply            |    | •  |    |                               |

| Pressure setting  |
|-------------------|
| <b>12</b> 1.2 bar |
| <b>20</b> 2.0 bar |

| Seals         |
|---------------|
| <b>H</b> HNBR |
| <b>V</b> FPM  |

| Thermostat               | DEA | DEM | DLA | DLE | DT | DV |
|--------------------------|-----|-----|-----|-----|----|----|
| <b>A</b> Without         | •   | •   | •   | •   |    |    |
| <b>F</b> With thermostat |     | •   |     | •   | •  |    |

| Electrical connections   | DEA | DEM | DLA | DLE | DT | DV |
|--|-----|-----|-----|-----|----|----|
| <b>10</b> Connection AMP Superseal series 1.5                              |     | •   |     |     |    |    |
| <b>20</b> Connection AMP Timer Junior                                      |     | •   |     |     |    |    |
| <b>30</b> Connection Deutsch DT-04-2-P                                     |     | •   |     |     |    |    |
| <b>35</b> Connection Deutsch DT-04-3-P                                     |     | •   |     |     |    |    |
| <b>50</b> Connection EN 175301-803   | •   |     |     | •   |    |    |
| <b>51</b> Connection EN 175301-803, transparent base with lamps 24 Vdc     |     |     | •   |     |    |    |
| <b>52</b> Connection EN 175301-803, transparent base with lamps 110 Vdc    |     |     | •   |     |    |    |
| <b>70</b> Connection IEC 61076-2-101 D (M12)                               |     |     |     |     | •  |    |
| <b>71</b> Connection IEC 61076-2-101 D (M12), black base with lamps 24 Vdc |     |     | •   |     |    |    |

| Option                        |
|-------------------------------|
| <b>P01</b> MP Filtri standard |
| <b>Pxx</b> Customized         |

### DESIGNATION & ORDERING CODE - DIFFERENTIAL INDICATOR PLUG

| Series                   | Configuration example |   |
|--------------------------|-----------------------|---|
| <b>T2</b> Indicator plug | T2                    | H |

| Seals         |
|---------------|
| <b>H</b> HNBR |
| <b>V</b> FPM  |

**LMP - low and medium pressure filters are used as process filters to protect pumps, pressure reducers and hydraulic circuits from damage due to oil contamination as per ISO 4406.**

**LMP series is available in 5 different sizes: 100, 200, 400, 900 and 950 and a wide range of versions.**

**LMP filters are available with several working pressures suitable for all hydraulic circuits as:**

- **return filters in external tank mounting construction for medium and high flow rates in single and duplex versions**
- **in-line filters for low and medium pressures for off-line applications**
- **in-line process filters for medium pressures, for example, for forced lubrication applications, in single or duplex versions**
- **in-line filters for medium pressures for filtering hydraulic boost circuits**
- **in-line filters as high holding capacity filters on test benches**

**LMP filters are thus specifically designed to be suitable for a wide range of application: from steel plants to mobile equipments, from test benches to naval application, providing the right solution for filtering requirements in all sectors.**

**LMP filters are available in single, manifold and duplex versions (LMD series).**

## FILTER SIZING

For the proper corrective factor Y see chapter at page 24

# Low & Medium Pressure filters



|                               |          |
|-------------------------------|----------|
| LMP 110 - 120 - 123 MULTIPORT | page 325 |
| LMP 210 - 211                 | 341      |
| LMP 400 - 401 & 430 - 431     | 351      |
| LMP 950 - 951                 | 363      |
| LMP 952 - 953 - 954           | 371      |
| LMD 211                       | 383      |
| LMD 400 - 401 & 431           | 391      |
| LMD 951                       | 407      |

|                                       |          |
|---------------------------------------|----------|
| Filter element according to DIN 24550 | page 415 |
| LDP - LDD                             | 417      |
| LMP 900 - 901                         | 427      |
| LMP 902 - 903                         | 435      |

|             |          |
|-------------|----------|
| INDICATORS  | page 444 |
| ACCESSORIES | page 450 |

[www.sumy.ir](http://www.sumy.ir)

# LMP 110-120-123 series

MULTIPOINT

Maximum working pressure up to 8 MPa (80 bar) - Flow rate up to 175 l/min



### Description

### Technical data

#### Low & Medium Pressure filters

**Maximum working pressure up to 8 MPa (80 bar)**  
**Flow rate up to 175 l/min**

LMP110 is a range of versatile low pressure filter for transmission, protection of sensitive components in low pressure hydraulic systems and filtration of the coolant into the machine tools.

They are directly connected to the lines of the system through the hydraulic fittings.

#### Available features:

- Female threaded connections up to 1", for a maximum return flow rate of 175 l/min
- Fine filtration rating, to get a good cleanliness level into the system
- Bypass valve, to relieve excessive pressure drop across the filter media
- Visual, electrical and electronic differential clogging indicators
- Multiport and multifunction schemes, to meet any type of application.
- LMP112: 3/4" additional input port
- LMP116: 3/4" additional output port
- LMP118: 3/4" bypass port, to send the bypass flow to the reservoir instead of the system
- LMP119: 3/4" relief port, to relief the input pressure in the filter, protecting the components downstream the filter against back pressure caused by the pressure drop (cold starts)
- LMP120: connections placed in the same side
- LMP122: connections placed in the same side and 1" additional output port
- LMP123: 2 and 3 bar integrated relief valve

#### Common applications:

Delivery lines, in any low pressure industrial equipment or mobile machines.

#### Filter housing materials

- Head: Aluminium
- Housing: Cataphoresis - Painted Steel
- Bypass valve: Brass - Aluminium

#### Pressure

- Test pressure: 12 MPa (120 bar)
- Burst pressure:
  - LMP 110: 29 MPa (290 bar)
  - LMP 120/130: 38 MPa (380 bar)
- Pulse pressure fatigue test: 1 000 000 cycles with pressure from 0 to 8 MPa (80 bar)

#### Bypass valve

- Opening pressure 350 kPa (3.5 bar) ±10%
- Other opening pressures on request.

#### Δp element type

- Microfibre filter elements - series N - W: 20 bar
- Wire mesh filter elements - series N: 20 bar
- Fluid flow through the filter element from OUT to IN

#### Seals

- Standard NBR series A
- Optional FPM series V

#### Temperature

From -25 °C to +110 °C

#### Note

LMP MULTIPOINT filters are provided for vertical mounting



### Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series                  | Weights [kg] |      |      |      | Volumes [dm <sup>3</sup> ] |        |      |      |      |      |
|--------------------------------|--------------|------|------|------|----------------------------|--------|------|------|------|------|
|                                | Length       | 1    | 2    | 3    | 4                          | Length | 1    | 2    | 3    | 4    |
| <b>LMP 110-112-116-118-119</b> |              | 1.60 | 1.80 | 2.10 | 2.60                       |        | 0.75 | 0.81 | 1.11 | 1.53 |
| <b>LMP 120-122</b>             |              | 1.90 | 2.10 | 2.40 | 2.90                       |        | 0.75 | 0.81 | 1.11 | 1.53 |
| <b>LMP 123</b>                 |              | 1.70 | 1.90 | 2.20 | 2.70                       |        | 0.75 | 0.81 | 1.11 | 1.53 |



FILTER ASSEMBLY SIZING  
Flow rates [l/min]

|                |          | Filter element design - N Series |     |     |     |     |                   |     |     |
|----------------|----------|----------------------------------|-----|-----|-----|-----|-------------------|-----|-----|
| Filter series  | Length   | A03                              | A06 | A10 | A16 | A25 | M25<br>M60<br>M90 | P10 | P25 |
| <b>LMP 110</b> | <b>1</b> | 40                               | 42  | 65  | 69  | 85  | 163               | 117 | 120 |
|                | <b>2</b> | 49                               | 57  | 83  | 83  | 101 | 163               | 136 | 138 |
|                | <b>3</b> | 66                               | 70  | 92  | 102 | 124 | 164               | 142 | 144 |
|                | <b>4</b> | 86                               | 102 | 118 | 124 | 144 | 165               | 148 | 149 |
| <b>LMP 112</b> | <b>1</b> | 36                               | 38  | 55  | 57  | 67  | 105               | 84  | 86  |
|                | <b>2</b> | 44                               | 49  | 66  | 66  | 76  | 105               | 93  | 94  |
|                | <b>3</b> | 56                               | 58  | 71  | 77  | 87  | 106               | 96  | 97  |
|                | <b>4</b> | 67                               | 77  | 85  | 88  | 97  | 106               | 99  | 99  |
| <b>LMP 116</b> | <b>1</b> | 36                               | 38  | 54  | 56  | 64  | 96                | 79  | 80  |
|                | <b>2</b> | 43                               | 49  | 63  | 64  | 72  | 96                | 86  | 87  |
|                | <b>3</b> | 54                               | 57  | 68  | 73  | 82  | 96                | 88  | 89  |
|                | <b>4</b> | 65                               | 73  | 79  | 82  | 89  | 96                | 91  | 91  |
| <b>LMP 118</b> | <b>1</b> | 40                               | 42  | 65  | 69  | 85  | 163               | 117 | 120 |
|                | <b>2</b> | 49                               | 57  | 83  | 83  | 101 | 163               | 136 | 138 |
|                | <b>3</b> | 66                               | 70  | 92  | 102 | 124 | 164               | 142 | 144 |
|                | <b>4</b> | 86                               | 102 | 118 | 124 | 144 | 165               | 148 | 149 |
| <b>LMP 120</b> | <b>1</b> | 40                               | 43  | 66  | 70  | 87  | 172               | 121 | 125 |
|                | <b>2</b> | 50                               | 58  | 85  | 85  | 104 | 172               | 142 | 144 |
|                | <b>3</b> | 67                               | 71  | 94  | 105 | 129 | 173               | 149 | 151 |
|                | <b>4</b> | 88                               | 106 | 122 | 129 | 151 | 174               | 155 | 157 |
| <b>LMP 122</b> | <b>1</b> | 39                               | 42  | 64  | 67  | 81  | 146               | 109 | 111 |
|                | <b>2</b> | 49                               | 56  | 80  | 80  | 96  | 146               | 124 | 126 |
|                | <b>3</b> | 65                               | 68  | 88  | 96  | 114 | 146               | 129 | 130 |
|                | <b>4</b> | 82                               | 97  | 110 | 115 | 131 | 147               | 134 | 135 |

**Maximum flow rate for a complete low and medium pressure filter with a pressure drop  $\Delta p = 0.7$  bar.**

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.

|                |          | Filter element design - N Series |     |     |     |     |                   |     |     |
|----------------|----------|----------------------------------|-----|-----|-----|-----|-------------------|-----|-----|
| Filter series  | Length   | A03                              | A06 | A10 | A16 | A25 | M25<br>M60<br>M90 | P10 | P25 |
| <b>LMP 123</b> | <b>1</b> | 35                               | 37  | 50  | 52  | 59  | 83                | 70  | 71  |
|                | <b>2</b> | 41                               | 46  | 58  | 58  | 65  | 83                | 76  | 76  |
|                | <b>3</b> | 51                               | 53  | 62  | 65  | 72  | 83                | 77  | 78  |
|                | <b>4</b> | 59                               | 65  | 70  | 72  | 78  | 83                | 79  | 79  |

**Maximum flow rate for a complete low and medium pressure filter with a pressure drop  $\Delta p = 2.7$  bar.**









The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).




You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.

## Pressure drop

### Filter housings $\Delta p$ pressure drop

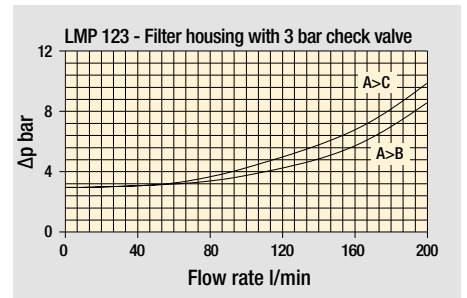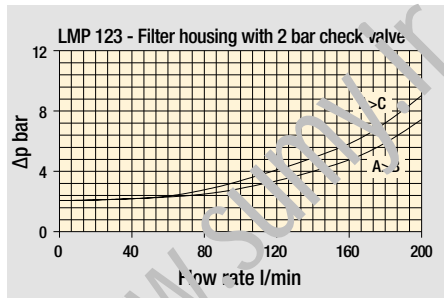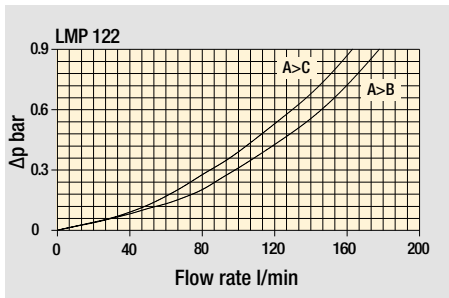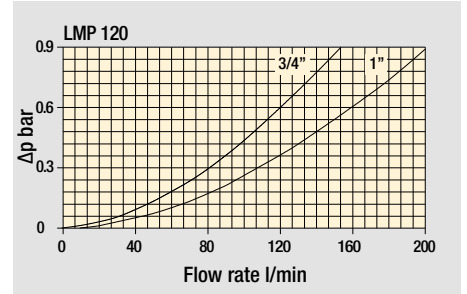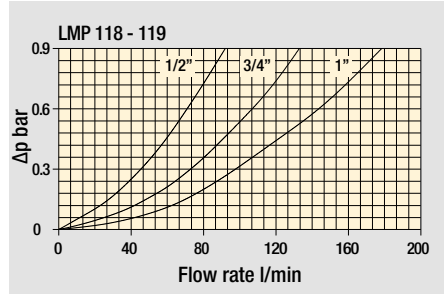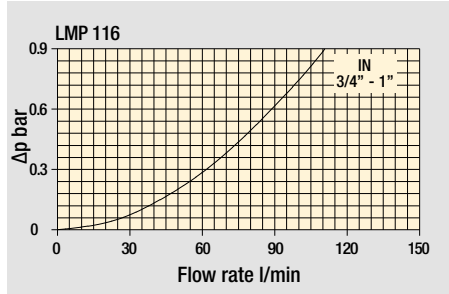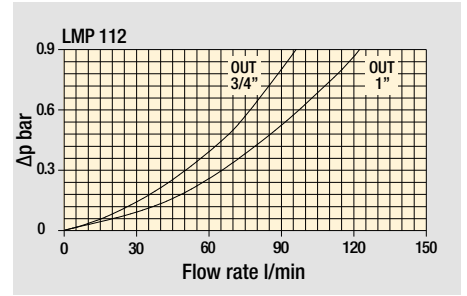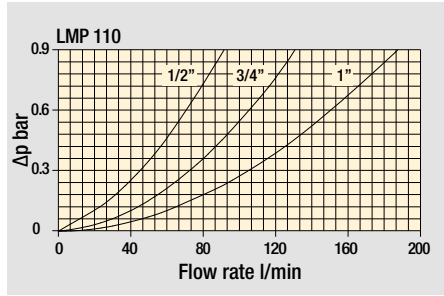



### Bypass valve pressure drop

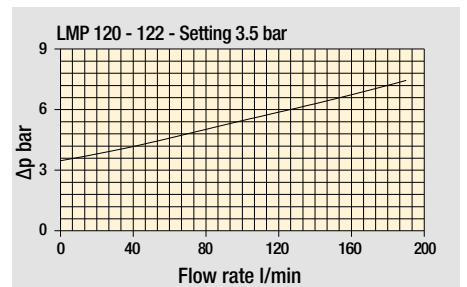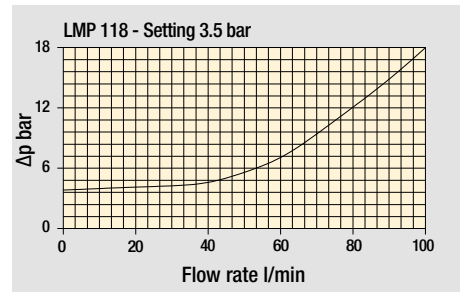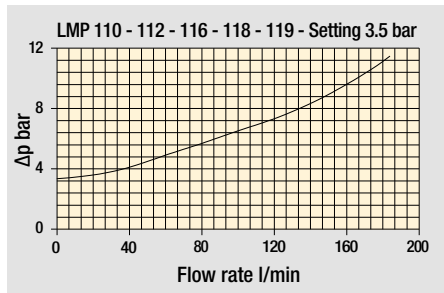



The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.



**LMP 110** In-Line filter



**LMP 120** Port IN-OUT on the same side



**LMP 112** Double IN port



**LMP 122** Lateral OUT port high flow



**LMP 116** Double OUT port


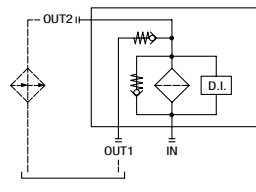
**LMP 123** Bypass valve for heat exchanger high flow  
Type 1


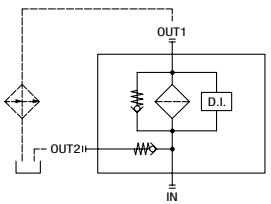
**LMP 118** Bypass lateral  
Always cleaning fluid in OUT port

**LMP 123** Bypass valve for heat exchanger high flow  
Type 2

**LMP 119** Safety valve 6 bar for heat exchanger

## Designation & Ordering code

### COMPLETE FILTER

Series and size **LMP110 | LMP112 | LMP116** Configuration example: **LMP112** **4** **B** **A** **D** **1** **A10** **N** **P01**

**Length**  
1 | 2 | 3 | 4

**Bypass valve**  
**S** Without bypass **B** 3.5 bar

| Seals and treatments                            | Filtration rating |     |     |
|---|-------------------|-----|-----|
|   | Axx               | Mxx | Pxx |
| <b>A</b> NBR                                    | •                 | •   | •   |
| <b>V</b> FPM                                    | •                 | •   | •   |
| <b>W</b> NBR compatible with fluids HFA-HFB-HFC | •                 | •   |     |

| Connections                       | Aux (only LMP 112 - 116) |        |
|-----------------------------------|--------------------------|--------|
|                                   | <b>A</b> G 3/4"          | G 3/4" |
| <b>B</b> G 1"                     | G 3/4"                   |        |
| <b>C</b> 3/4" NPT                 | 3/4" NPT                 |        |
| <b>D</b> 1" NPT                   | 3/4" NPT                 |        |
| <b>E</b> SAE 12 - 1 1/16" - 12 UN | SAE 12 - 1 1/16" - 12 UN |        |
| <b>F</b> SAE 16 - 1 5/16" - 12 UN | SAE 12 - 1 1/16" - 12 UN |        |

**Connection for differential indicator**  
1 Without  
2 With standard connection  
3 With connection on the opposite side  
6 With two connections on both sides

| Filtration rating (filter media)      |  |
|---------------------------------------|--|
| <b>A03</b> Inorganic microfiber 3 µm  | <b>M25</b> Wire mesh 25 µm               |
| <b>A06</b> Inorganic microfiber 6 µm  | <b>M60</b> Wire mesh 60 µm               |
| <b>A10</b> Inorganic microfiber 10 µm | <b>M90</b> Wire mesh 90 µm               |
| <b>A16</b> Inorganic microfiber 16 µm | <b>P10</b> Resin impregnated paper 10 µm |
| <b>A25</b> Inorganic microfiber 25 µm | <b>P25</b> Resin impregnated paper 25 µm |

**Element Δp**  
**N** 20 bar

**Execution**  
**P01** MP Filtri standard  
**Pxx** Customized

### FILTER ELEMENT

Element series and size **CU110** Configuration example: **CU110** **4** **A10** **A** **N** **P01**

**Element length**  
1 | 2 | 3 | 4

| Filtration rating (filter media)      |  |
|---------------------------------------|--|
| <b>A03</b> Inorganic microfiber 3 µm  | <b>M25</b> Wire mesh 25 µm               |
| <b>A06</b> Inorganic microfiber 6 µm  | <b>M60</b> Wire mesh 60 µm               |
| <b>A10</b> Inorganic microfiber 10 µm | <b>M90</b> Wire mesh 90 µm               |
| <b>A16</b> Inorganic microfiber 16 µm | <b>P10</b> Resin impregnated paper 10 µm |
| <b>A25</b> Inorganic microfiber 25 µm | <b>P25</b> Resin impregnated paper 25 µm |

| Seals   | Filtration rating |     |     |
|---|-------------------|-----|-----|
|   | Axx               | Mxx | Pxx |
| <b>A</b> NBR                                    | •                 | •   | •   |
| <b>V</b> FPM                                    | •                 | •   | •   |
| <b>W</b> NBR compatible with fluids HFA-HFB-HFC | •                 | •   |     |

**Element Δp**  
**N** 20 bar



**Execution**  
**P01** MP Filtri standard  
**Pxx** Customized

### ACCESSORIES


|   |         |  |      |
|---|---------|--|------|
| <b>Differential indicators</b>                        | page    |  | page |
| <b>DEA</b> Electrical differential indicator          | 445     | <b>DTA</b> Electronic differential indicator | 448  |
| <b>DEM</b> Electrical differential indicator          | 445-446 | <b>DVA</b> Visual differential indicator     | 448  |
| <b>DLA</b> Electrical / visual differential indicator | 446-447 | <b>DVM</b> Visual differential indicator     | 448  |
| <b>DLE</b> Electrical / visual differential indicator | 447     |  |      |
| <b>Additional features</b>                            | page    |  |      |
| <b>T2</b> Plug  | 449     |  |      |

LMP110 - LMP112  
LMP116

| Filter length | H [mm] |
|---------------|--------|
| 1             | 182    |
| 2             | 215    |
| 3             | 265    |
| 4             | 365    |

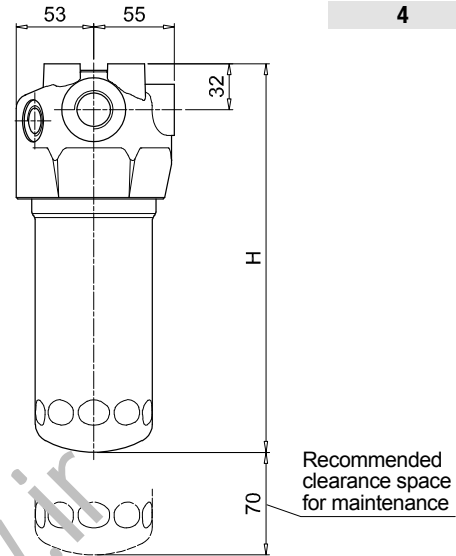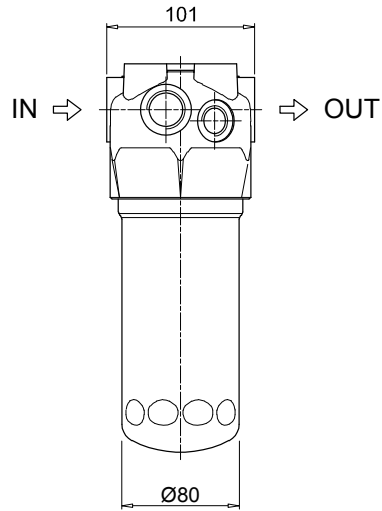


2 - Standard connection for differential indicator  
T2 plug not included




3 - Connection for differential indicator  
on the opposite side  
T2 plug not included


Fixing holes  
Option for Metric and UNC screws




LMP 110



LMP 112



LMP 116



↑  
Aux  
IN

↓  
Aux  
OUT

Designation & Ordering code

**COMPLETE FILTER**

|   |                            |  |            |                               |  |  |  |  |  |  |  |
|---|----------------------------|--|------------|-------------------------------|--|--|--|--|--|--|--|
| <b>Series and size</b>                          |                            | Configuration example: <b>LMP118</b>   <b>4</b>   <b>B</b>   <b>A</b>   <b>D</b>   <b>1</b>   <b>A10</b>   <b>N</b>   <b>P01</b> |            |                               |  |  |  |  |  |  |  |
| <b>LMP118</b>   <b>LMP119</b>                   |                            |  |            |                               |  |  |  |  |  |  |  |
| <b>Length</b>                                   |                            |  |            |                               |  |  |  |  |  |  |  |
| <b>1</b>   <b>2</b>   <b>3</b>   <b>4</b>       |                            |  |            |                               |  |  |  |  |  |  |  |
| <b>Bypass valve</b>                             |                            |  |            |                               |  |  |  |  |  |  |  |
| <b>B</b> 3.5 bar                                |                            |  |            |                               |  |  |  |  |  |  |  |
| <b>Seals and treatments</b>                     |                            | Filtration rating  |            |                               |  |  |  |  |  |  |  |
|   |                            | <b>Axx</b>   | <b>Mxx</b> | <b>Pxx</b>                    |  |  |  |  |  |  |  |
| <b>A</b> NBR                                    |                            | •  | •          | •                             |  |  |  |  |  |  |  |
| <b>V</b> FPM                                    |                            | •  | •          | •                             |  |  |  |  |  |  |  |
| <b>W</b> NBR compatible with fluids HFA-HFB-HFC |                            | •  | •          |                               |  |  |  |  |  |  |  |
| <b>Connections</b>                              |                            | <b>Aux OUT</b>   |            |                               |  |  |  |  |  |  |  |
| <b>A</b>  | G 3/4"                     | G 3/4"   |            |                               |  |  |  |  |  |  |  |
| <b>B</b>  | G 1"                       | G 3/4"   |            |                               |  |  |  |  |  |  |  |
| <b>C</b>  | 3/4" NPT                   | 3/4" NPT   |            |                               |  |  |  |  |  |  |  |
| <b>D</b>  | 1" NPT                     | 3/4" NPT   |            |                               |  |  |  |  |  |  |  |
| <b>E</b>  | SAE 12 - 1 1/16" - 12 UN   | SAE 12 - 1 1/16" - 12 UN   |            |                               |  |  |  |  |  |  |  |
| <b>F</b>  | SAE 16 - 1 5/16" - 12 UN   | SAE 12 - 1 1/16" - 12 UN   |            |                               |  |  |  |  |  |  |  |
| <b>Connection for differential indicator</b>    |                            |  |            |                               |  |  |  |  |  |  |  |
| <b>1</b> Without                                |                            |  |            |                               |  |  |  |  |  |  |  |
| <b>2</b> With standard connection               |                            |  |            |                               |  |  |  |  |  |  |  |
| <b>Filtration rating (filter media)</b>         |                            |  |            |                               |  |  |  |  |  |  |  |
| <b>A03</b>                                      | Inorganic microfiber 3 µm  | <b>M25</b> Wire mesh 25 µm   |            |                               |  |  |  |  |  |  |  |
| <b>A06</b>                                      | Inorganic microfiber 6 µm  | <b>M60</b> Wire mesh 60 µm   |            |                               |  |  |  |  |  |  |  |
| <b>A10</b>                                      | Inorganic microfiber 10 µm | <b>M90</b> Wire mesh 90 µm   |            |                               |  |  |  |  |  |  |  |
| <b>A16</b>                                      | Inorganic microfiber 16 µm | <b>P10</b> Resin impregnated paper 10 µm   |            |                               |  |  |  |  |  |  |  |
| <b>A25</b>                                      | Inorganic microfiber 25 µm | <b>P25</b> Resin impregnated paper 25 µm   |            |                               |  |  |  |  |  |  |  |
|   |                            | <b>Element Δp</b>  |            | <b>Execution</b>              |  |  |  |  |  |  |  |
|   |                            | <b>N</b> 20 bar  |            | <b>P01</b> MP Filtri standard |  |  |  |  |  |  |  |
|   |                            |  |            | <b>Pxx</b> Customized         |  |  |  |  |  |  |  |

**FILTER ELEMENT**


|   |                            |  |            |                               |  |  |  |  |  |  |
|---|----------------------------|--|------------|-------------------------------|--|--|--|--|--|--|
| <b>Element series and size</b>                  |                            | Configuration example: <b>CU110</b>   <b>4</b>   <b>A10</b>   <b>A</b>   <b>N</b>   <b>P01</b> |            |                               |  |  |  |  |  |  |
| <b>CU110</b>                                    |                            |  |            |                               |  |  |  |  |  |  |
| <b>Element length</b>                           |                            |  |            |                               |  |  |  |  |  |  |
| <b>1</b>   <b>2</b>   <b>3</b>   <b>4</b>       |                            |  |            |                               |  |  |  |  |  |  |
| <b>Filtration rating (filter media)</b>         |                            |  |            |                               |  |  |  |  |  |  |
| <b>A03</b>                                      | Inorganic microfiber 3 µm  | <b>M25</b> Wire mesh 25 µm   |            |                               |  |  |  |  |  |  |
| <b>A06</b>                                      | Inorganic microfiber 6 µm  | <b>M60</b> Wire mesh 60 µm   |            |                               |  |  |  |  |  |  |
| <b>A10</b>                                      | Inorganic microfiber 10 µm | <b>M90</b> Wire mesh 90 µm   |            |                               |  |  |  |  |  |  |
| <b>A16</b>                                      | Inorganic microfiber 16 µm | <b>P10</b> Resin impregnated paper 10 µm   |            |                               |  |  |  |  |  |  |
| <b>A25</b>                                      | Inorganic microfiber 25 µm | <b>P25</b> Resin impregnated paper 25 µm   |            |                               |  |  |  |  |  |  |
| <b>Seals</b>                                    |                            | Filtration rating  |            |                               |  |  |  |  |  |  |
|   |                            | <b>Axx</b>   | <b>Mxx</b> | <b>Pxx</b>                    |  |  |  |  |  |  |
| <b>A</b> NBR                                    |                            | •  | •          | •                             |  |  |  |  |  |  |
| <b>V</b> FPM                                    |                            | •  | •          | •                             |  |  |  |  |  |  |
| <b>W</b> NBR compatible with fluids HFA-HFB-HFC |                            | •  | •          |                               |  |  |  |  |  |  |
|   |                            | <b>Element Δp</b>  |            | <b>Execution</b>              |  |  |  |  |  |  |
|   |                            | <b>N</b> 20 bar  |            | <b>P01</b> MP Filtri standard |  |  |  |  |  |  |
|   |                            |  |            | <b>Pxx</b> Customized         |  |  |  |  |  |  |

**ACCESSORIES**


|                                |  |         |            |                                   |      |
|--------------------------------|--|---------|------------|-----------------------------------|------|
| <b>Differential indicators</b> |  | page    |            |                                   | page |
| <b>DEA</b>                     | Electrical differential indicator          | 445     | <b>DTA</b> | Electronic differential indicator | 448  |
| <b>DEM</b>                     | Electrical differential indicator          | 445-446 | <b>DVA</b> | Visual differential indicator     | 448  |
| <b>DLA</b>                     | Electrical / visual differential indicator | 446-447 | <b>DVM</b> | Visual differential indicator     | 448  |
| <b>DLE</b>                     | Electrical / visual differential indicator | 447     |            |                                   |      |
| <b>Additional features</b>     |  | page    |            |                                   |      |
| <b>T2</b>                      | Plug                                       | 449     |            |                                   |      |

LMP118 - LMP119



| Filter length | H [mm] |
|---------------|--------|
| 1             | 182    |
| 2             | 215    |
| 3             | 265    |
| 4             | 365    |

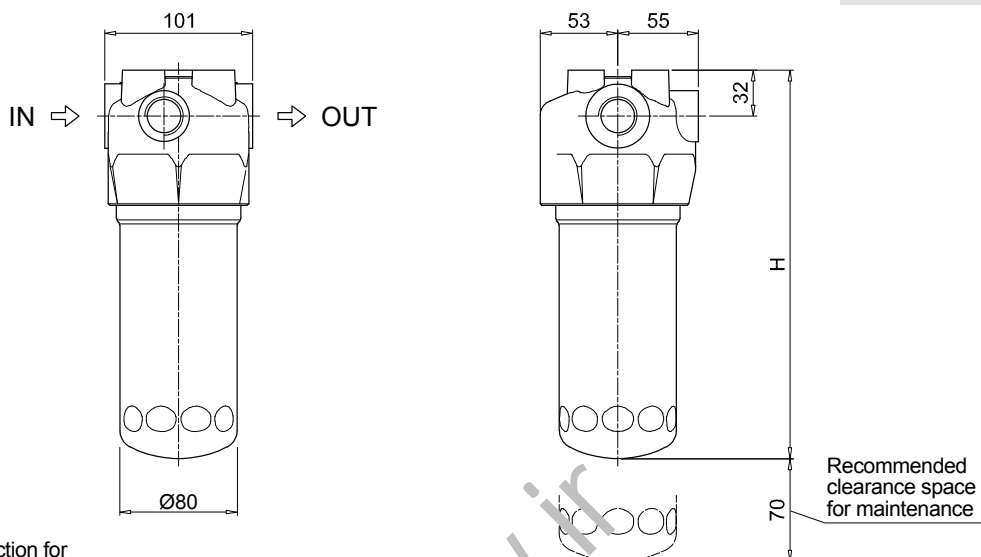

Connection for differential indicator  
T2 plug not included



Fixing holes  
Option for Metric and UNC screws

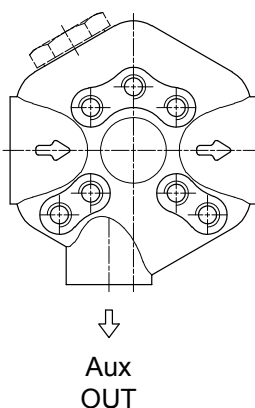

Designation & Ordering code

**COMPLETE FILTER**

|   |  |  |     |                 |  |                               |  |  |  |  |  |
|---|--|--|-----|-----------------|--|-------------------------------|--|--|--|--|--|
| Series and size                                 |  | Configuration example: <b>LMP120</b>   <b>4</b>   <b>B</b>   <b>A</b>   <b>D</b>   <b>1</b>   <b>A10</b>   <b>N</b>   <b>P01</b> |     |                 |  |                               |  |  |  |  |  |
| <b>LMP120</b>   <b>LMP122</b>                   |  |  |     |                 |  |                               |  |  |  |  |  |
| Length  |  |  |     |                 |  |                               |  |  |  |  |  |
| <b>1</b>   <b>2</b>   <b>3</b>   <b>4</b>       |  |  |     |                 |  |                               |  |  |  |  |  |
| Bypass valve                                    |  |  |     |                 |  |                               |  |  |  |  |  |
| <b>S</b> Without bypass                         |  | <b>B</b> 3.5 bar   |     |                 |  |                               |  |  |  |  |  |
| Seals and treatments                            |  | Filtration rating  |     |                 |  |                               |  |  |  |  |  |
|   |  | Axx  | Mxx | Pxx             |  |                               |  |  |  |  |  |
| <b>A</b> NBR                                    |  | •  | •   | •               |  |                               |  |  |  |  |  |
| <b>V</b> FPM                                    |  | •  | •   | •               |  |                               |  |  |  |  |  |
| <b>W</b> NBR compatible with fluids HFA-HFB-HFC |  | •  | •   |                 |  |                               |  |  |  |  |  |
| Connections                                     |  | LMP120   |     | LMP122          |  |                               |  |  |  |  |  |
| <b>A</b> G 3/4"                                 |  | •  |     |                 |  |                               |  |  |  |  |  |
| <b>B</b> G 1"                                   |  | •  |     | •               |  |                               |  |  |  |  |  |
| <b>C</b> 3/4" NPT                               |  | •  |     |                 |  |                               |  |  |  |  |  |
| <b>D</b> 1" NPT                                 |  | •  |     | •               |  |                               |  |  |  |  |  |
| <b>E</b> SAE 12 - 1 1/16" - 12 UN               |  | •  |     |                 |  |                               |  |  |  |  |  |
| <b>F</b> SAE 16 - 1 5/16" - 12 UN               |  | •  |     | •               |  |                               |  |  |  |  |  |
| Connection for differential indicator           |  |  |     |                 |  |                               |  |  |  |  |  |
| <b>1</b> Without                                |  |  |     |                 |  |                               |  |  |  |  |  |
| <b>2</b> With standard connection               |  |  |     |                 |  |                               |  |  |  |  |  |
| Filtration rating (filter media)                |  |  |     |                 |  |                               |  |  |  |  |  |
| <b>A03</b> Inorganic microfiber 3 µm            |  | <b>M25</b> Wire mesh 25 µm   |     |                 |  |                               |  |  |  |  |  |
| <b>A06</b> Inorganic microfiber 6 µm            |  | <b>M60</b> Wire mesh 60 µm   |     |                 |  |                               |  |  |  |  |  |
| <b>A10</b> Inorganic microfiber 10 µm           |  | <b>M90</b> Wire mesh 90 µm   |     |                 |  |                               |  |  |  |  |  |
| <b>A16</b> Inorganic microfiber 16 µm           |  | <b>P10</b> Resin impregnated paper 10 µm   |     |                 |  |                               |  |  |  |  |  |
| <b>A25</b> Inorganic microfiber 25 µm           |  | <b>P25</b> Resin impregnated paper 25 µm   |     |                 |  |                               |  |  |  |  |  |
|   |  |  |     | Element Δp      |  | Execution                     |  |  |  |  |  |
|   |  |  |     | <b>N</b> 20 bar |  | <b>P01</b> MP Filtri standard |  |  |  |  |  |
|   |  |  |     |                 |  | <b>Pxx</b> Customized         |  |  |  |  |  |



**FILTER ELEMENT**

|   |  |  |     |                 |  |                               |  |  |  |  |  |
|---|--|--|-----|-----------------|--|-------------------------------|--|--|--|--|--|
| Element series and size                         |  | Configuration example: <b>CU110</b>   <b>4</b>   <b>A10</b>   <b>A</b>   <b>N</b>   <b>P01</b> |     |                 |  |                               |  |  |  |  |  |
| <b>CU110</b>                                    |  |  |     |                 |  |                               |  |  |  |  |  |
| Element length                                  |  |  |     |                 |  |                               |  |  |  |  |  |
| <b>1</b>   <b>2</b>   <b>3</b>   <b>4</b>       |  |  |     |                 |  |                               |  |  |  |  |  |
| Filtration rating (filter media)                |  |  |     |                 |  |                               |  |  |  |  |  |
| <b>A03</b> Inorganic microfiber 3 µm            |  | <b>M25</b> Wire mesh 25 µm   |     |                 |  |                               |  |  |  |  |  |
| <b>A06</b> Inorganic microfiber 6 µm            |  | <b>M60</b> Wire mesh 60 µm   |     |                 |  |                               |  |  |  |  |  |
| <b>A10</b> Inorganic microfiber 10 µm           |  | <b>M90</b> Wire mesh 90 µm   |     |                 |  |                               |  |  |  |  |  |
| <b>A16</b> Inorganic microfiber 16 µm           |  | <b>P10</b> Resin impregnated paper 10 µm   |     |                 |  |                               |  |  |  |  |  |
| <b>A25</b> Inorganic microfiber 25 µm           |  | <b>P25</b> Resin impregnated paper 25 µm   |     |                 |  |                               |  |  |  |  |  |
| Seals   |  | Filtration rating  |     |                 |  |                               |  |  |  |  |  |
|   |  | Axx  | Mxx | Pxx             |  |                               |  |  |  |  |  |
| <b>A</b> NBR                                    |  | •  | •   | •               |  |                               |  |  |  |  |  |
| <b>V</b> FPM                                    |  | •  | •   | •               |  |                               |  |  |  |  |  |
| <b>W</b> NBR compatible with fluids HFA-HFB-HFC |  | •  | •   |                 |  |                               |  |  |  |  |  |
|   |  |  |     | Element Δp      |  | Execution                     |  |  |  |  |  |
|   |  |  |     | <b>N</b> 20 bar |  | <b>P01</b> MP Filtri standard |  |  |  |  |  |
|   |  |  |     |                 |  | <b>Pxx</b> Customized         |  |  |  |  |  |

**ACCESSORIES**

|   |  |         |  |      |
|---|--|---------|--|------|
| <b>Differential indicators</b>                        |  | page    |  | page |
| <b>DEA</b> Electrical differential indicator          |  | 445     | <b>DTA</b> Electronic differential indicator | 448  |
| <b>DEM</b> Electrical differential indicator          |  | 445-446 | <b>DVA</b> Visual differential indicator     | 448  |
| <b>DLA</b> Electrical / visual differential indicator |  | 446-447 | <b>DVM</b> Visual differential indicator     | 448  |
| <b>DLE</b> Electrical / visual differential indicator |  | 447     |  |      |
| <b>Additional features</b>                            |  | page    |  |      |
| <b>T2</b> Plug  |  | 449     |  |      |



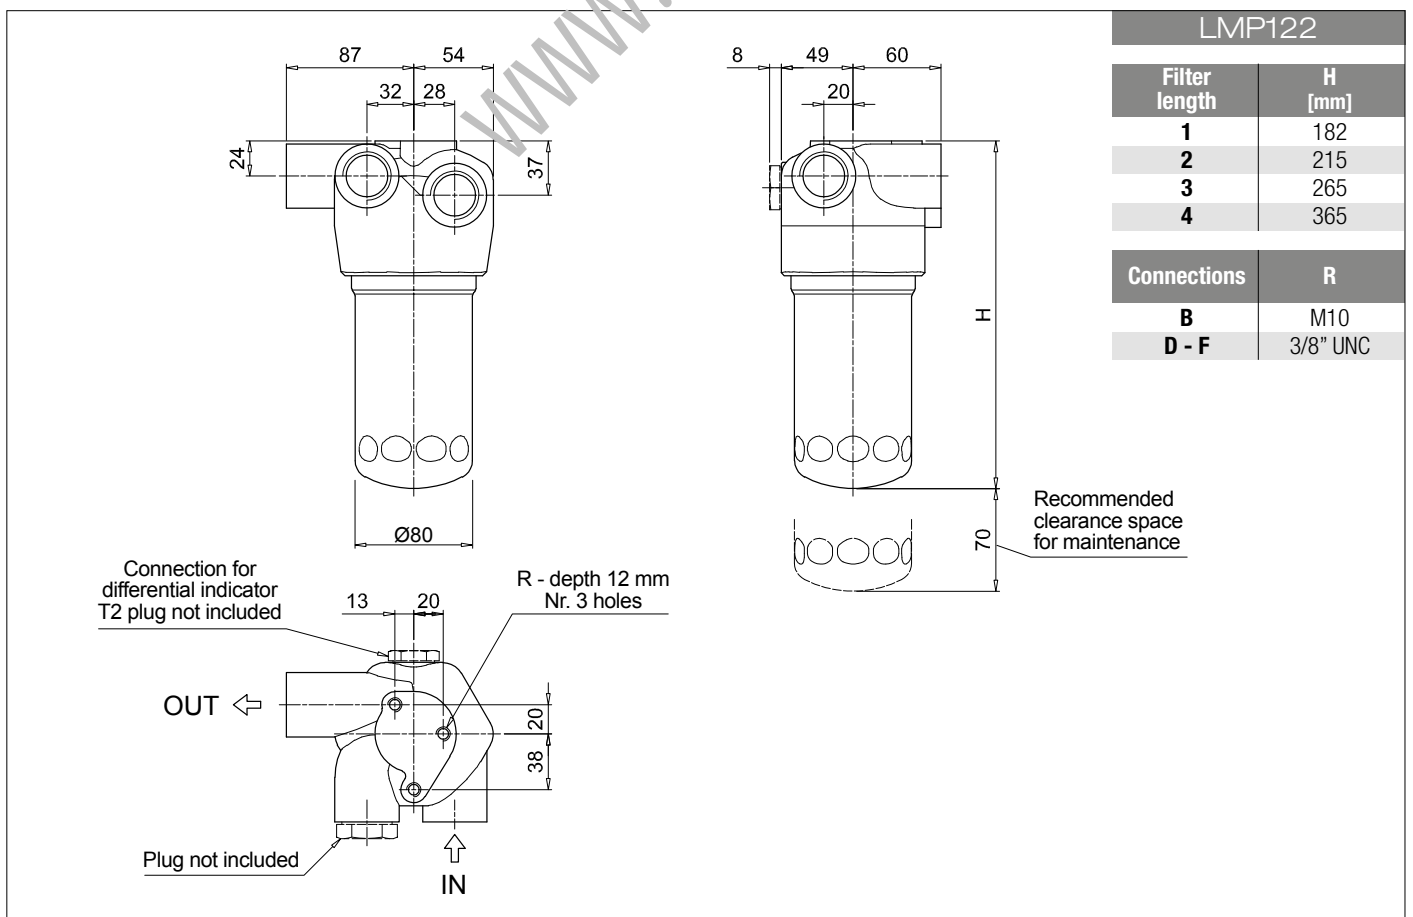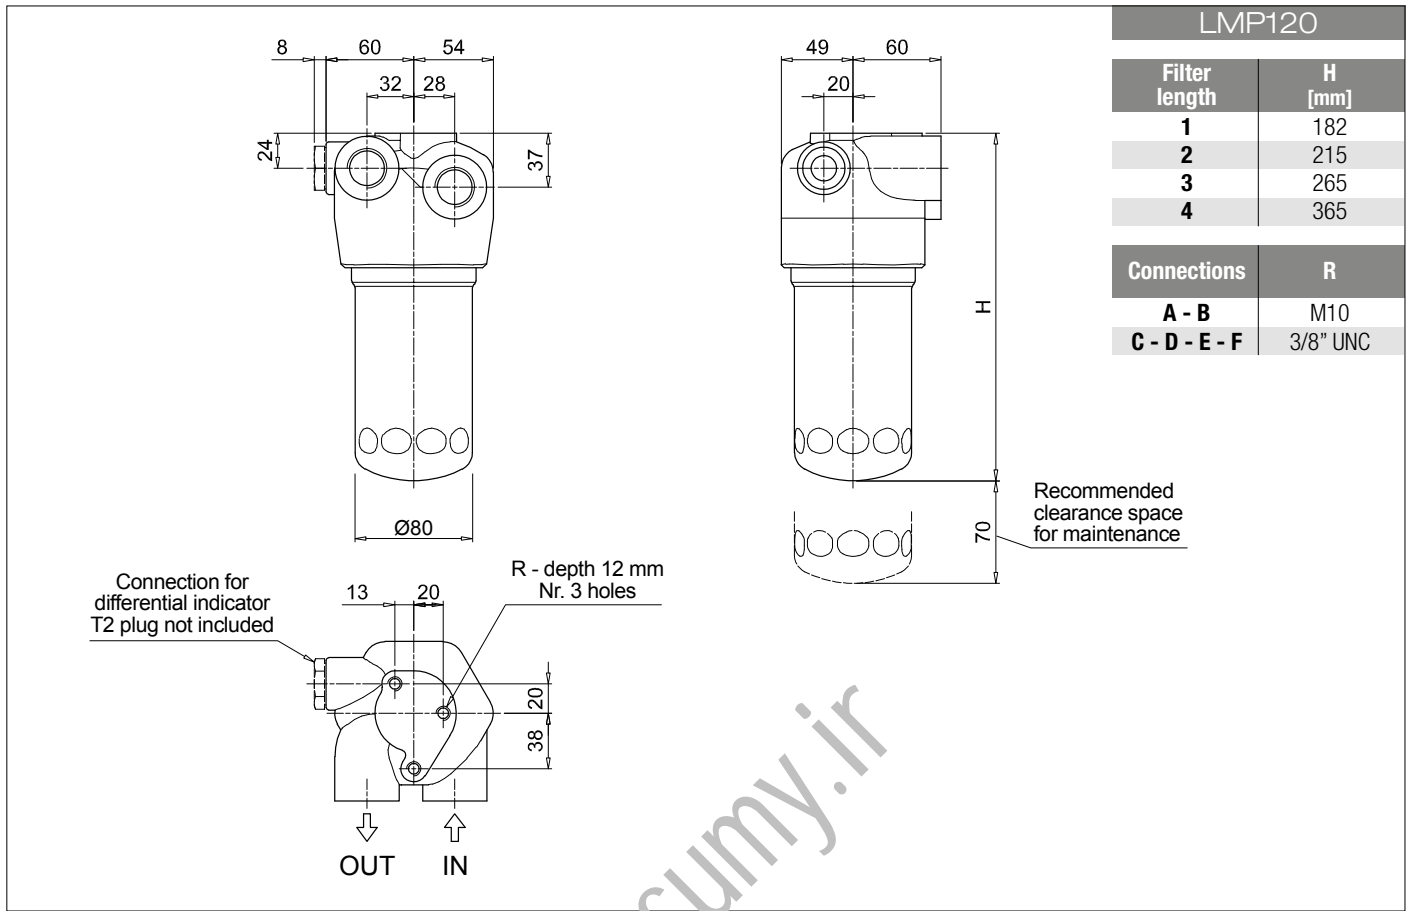

Designation & Ordering code

**COMPLETE FILTER**

Series and size **LMP123** Configuration example: **LMP123** | **4** | **R** | **A** | **F** | **1** | **A10** | **N** | **P01**

**LMP123**

Length  
**1** | **2** | **3** | **4**

| Valves   | Bypass  | OUT to cooler | Check valve |
|----------|---------|---------------|-------------|
| <b>C</b> | without | front         | 2 bar       |
| <b>D</b> |         |               | 3 bar       |
| <b>G</b> |         | side          | 2 bar       |
| <b>H</b> |         |               | 3 bar       |
| <b>M</b> | 3.5 bar | front         | 2 bar       |
| <b>N</b> |         |               | 3 bar       |
| <b>Q</b> |         | side          | 2 bar       |
| <b>R</b> |         |               | 3 bar       |

| Seals and treatments                            | Filtration rating |     |     |
|---|-------------------|-----|-----|
|   | Axx               | Mxx | Pxx |
| <b>A</b> NBR                                    | •                 | •   | •   |
| <b>V</b> FPM                                    | •                 | •   | •   |
| <b>W</b> NBR compatible with fluids HFA-HFB-HFC | •                 | •   |     |

| Connections |                          |
|-------------|--------------------------|
| <b>B</b>    | G 1"                     |
| <b>F</b>    | SAE 16 - 1 5/16" - 12 UN |

| Connection for differential indicator |                          |
|---------------------------------------|--------------------------|
| <b>1</b>                              | Without                  |
| <b>2</b>                              | With standard connection |

| Filtration rating (filter media) |                               |
|----------------------------------|-------------------------------|
| <b>A03</b>                       | Inorganic microfiber 3 µm     |
| <b>A06</b>                       | Inorganic microfiber 6 µm     |
| <b>A10</b>                       | Inorganic microfiber 10 µm    |
| <b>A16</b>                       | Inorganic microfiber 16 µm    |
| <b>A25</b>                       | Inorganic microfiber 25 µm    |
| <b>M25</b>                       | Wire mesh 25 µm               |
| <b>M60</b>                       | Wire mesh 60 µm               |
| <b>M90</b>                       | Wire mesh 90 µm               |
| <b>P10</b>                       | Resin impregnated paper 10 µm |
| <b>P25</b>                       | Resin impregnated paper 25 µm |

| Element Δp      | Execution                     |
|-----------------|-------------------------------|
| <b>N</b> 20 bar | <b>P01</b> MP Filtri standard |
|                 | <b>Pxx</b> Customized         |

**FILTER ELEMENT**

Element series and size **CU110** Configuration example: **CU110** | **4** | **A10** | **A** | **N** | **P01**

**CU110**

Element length  
**1** | **2** | **3** | **4**

| Filtration rating (filter media) |                               |
|----------------------------------|-------------------------------|
| <b>A03</b>                       | Inorganic microfiber 3 µm     |
| <b>A06</b>                       | Inorganic microfiber 6 µm     |
| <b>A10</b>                       | Inorganic microfiber 10 µm    |
| <b>A16</b>                       | Inorganic microfiber 16 µm    |
| <b>A25</b>                       | Inorganic microfiber 25 µm    |
| <b>M25</b>                       | Wire mesh 25 µm               |
| <b>M60</b>                       | Wire mesh 60 µm               |
| <b>M90</b>                       | Wire mesh 90 µm               |
| <b>P10</b>                       | Resin impregnated paper 10 µm |
| <b>P25</b>                       | Resin impregnated paper 25 µm |


| Seals   | Filtration rating |     |     |
|---|-------------------|-----|-----|
|   | Axx               | Mxx | Pxx |
| <b>A</b> NBR                                    | •                 | •   | •   |
| <b>V</b> FPM                                    | •                 | •   | •   |
| <b>W</b> NBR compatible with fluids HFA-HFB-HFC | •                 | •   |     |

| Element Δp      | Execution                     |
|-----------------|-------------------------------|
| <b>N</b> 20 bar | <b>P01</b> MP Filtri standard |
|                 | <b>Pxx</b> Customized         |

**ACCESSORIES**

| Differential indicators                               | page    |  | page |
|---|---------|--|------|
| <b>DEA</b> Electrical differential indicator          | 445     | <b>DTA</b> Electronic differential indicator | 448  |
| <b>DEM</b> Electrical differential indicator          | 445-446 | <b>DVA</b> Visual differential indicator     | 448  |
| <b>DLA</b> Electrical / visual differential indicator | 446-447 | <b>DVM</b> Visual differential indicator     | 448  |
| <b>DLE</b> Electrical / visual differential indicator | 447     |  |      |

| Additional features | page |
|---------------------|------|
| <b>T2</b> Plug      | 449  |

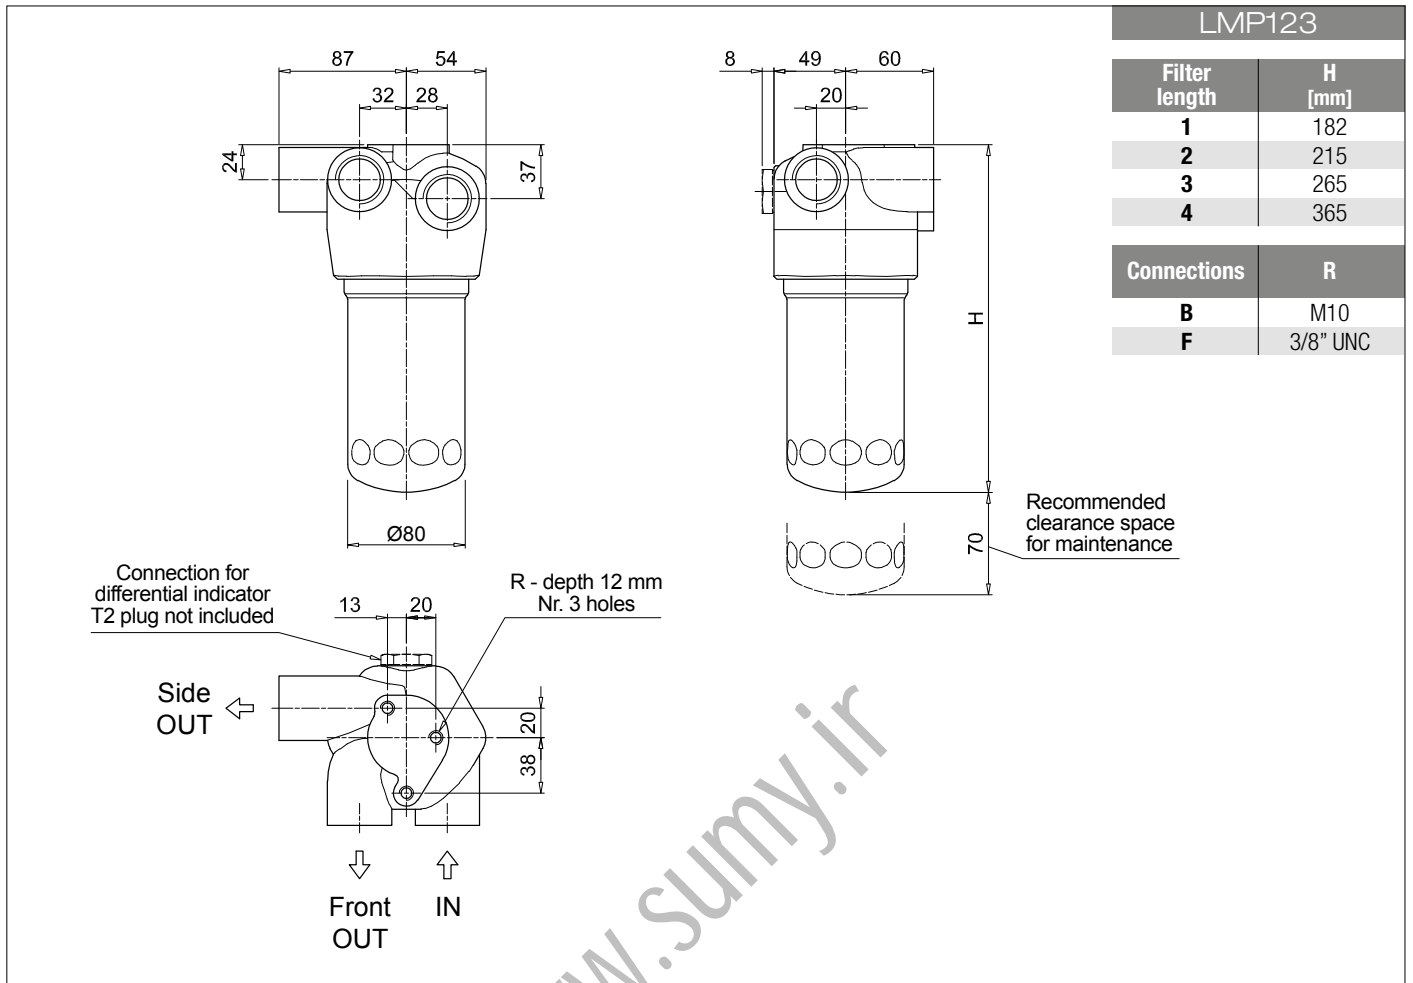


www.sumy.ir

Order number for spare parts

LMP 110 - 112 - 116 - 118 - 119

LMP 120

LMP 122 - 123

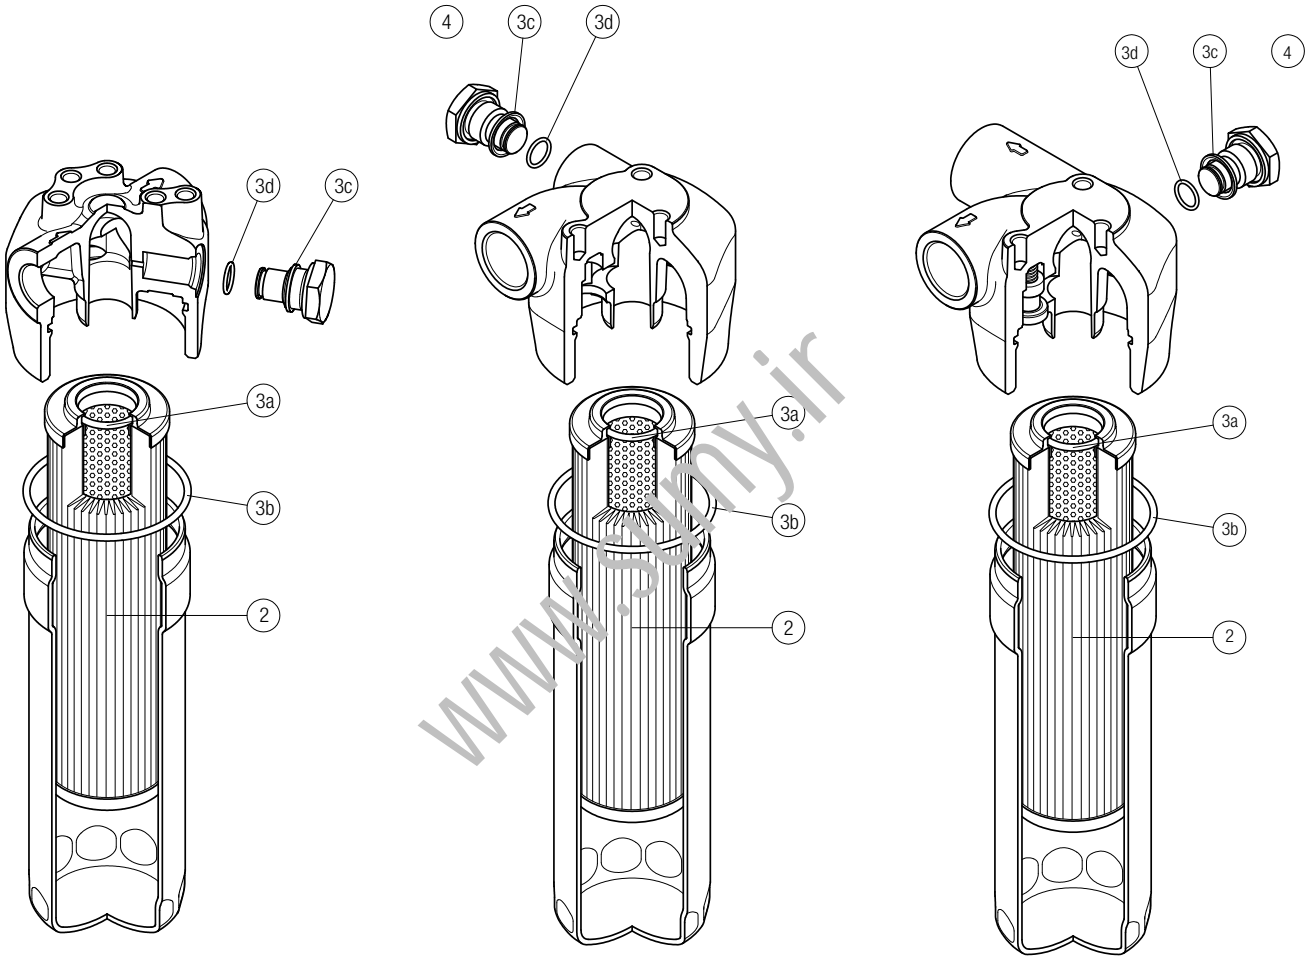

| Item:                    | Q.ty: 1 pc.     |                      | Q.ty: 1 pc. |                           | Q.ty: 1 pc. |  |
|--------------------------|-----------------|----------------------|-------------|---------------------------|-------------|--|
| Filter series            | Filter element  | Seal Kit code number |             | Indicator connection plug |             |  |
| LMP 110-112-116 -118-119 | See order table | NBR                  | FPM         | NBR                       | FPM         |  |
| LMP 120                  |                 | 02050478             | 02050479    | T2H                       | T2V         |  |
| LMP 122-123              |                 |                      |             |                           |             |  |

[www.sumy.ir](http://www.sumy.ir)

[www.sumy.ir](http://www.sumy.ir)

# LMP 210-211

Maximum working pressure up to 6 MPa (60 bar) - Flow rate up to 365 l/min



# LMP 210-211 GENERAL INFORMATION

## Description

## Technical data

### Low & Medium Pressure filters

**Maximum working pressure up to 6 MPa (60 bar)**  
**Flow rate up to 365 l/min**

LMP210 is a range of versatile low pressure filter for transmission, protection of sensitive components in low pressure hydraulic systems and filtration of the coolant into the machine tools.

They are also suitable for the off-line filtration of small reservoirs. They are directly connected to the lines of the system through the hydraulic fittings.

#### Available features:

- Flanged connections up to 1 1/2", for a maximum flow rate of 365 l/min (LMP210)
- Female threaded connections up to 1 1/2", for a maximum return flow rate of 365 l/min (LMP211)
- Fine filtration rating, to get a good cleanliness level into the system
- Water removal elements, to remove the free water from the hydraulic fluid. For further information, see the Contamination Management document and the dedicate leaflet.
- Bypass valve, to relieve excessive pressure drop across the filter media
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

Delivery lines, in any low pressure industrial equipment or mobile machines

### Filter housing materials

- Head: Aluminium
- Bowl: Cataphoretic Painted Steel
- Bypass valve: AISI 304 - Nylon

### Pressure

- Test pressure: 9 MPa (90 bar)
- Burst pressure: 21 MPa (210 bar)
- Pulse pressure fatigue test: 1 000 000 cycles with pressure from 0 to 6 MPa (60 bar)

### Bypass valve

- Opening pressure 350 kPa (3.5 bar)  $\pm 10\%$
- Other opening pressures on request.

### $\Delta p$ element type

- Microfibre filter elements - series N: 20 bar
- Fluid flow through the filter element from OUT to IN

### Seals

- Standard NBR series A
- Optional: FPM series V

### Temperature

From -25 °C to +110 °C

### Connections

Inlet/Outlet In-Line

### Note

LMP 210 - 211 filters are provided for vertical mounting



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series      | Weights [kg] |      |      | Volumes [dm <sup>3</sup> ] |        |      |      |      |
|--------------------|--------------|------|------|----------------------------|--------|------|------|------|
|                    | Length       | 1    | 2    | 3                          | Length | 1    | 2    | 3    |
| <b>LMP 210-211</b> |              | 3.10 | 4.80 | 6.40                       |        | 1.60 | 2.10 | 2.80 |



# GENERAL INFORMATION LMP 210-211

## FILTER ASSEMBLY SIZING Flow rates [l/min]

| Filter series | Length | Filter element design - N Series |     |     |     |     |     |     |     |     |     |
|---------------|--------|----------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|               |        | A03                              | A06 | A10 | A16 | A25 | M25 | M60 | M90 | P10 | P25 |
| LMP 210       | 1      | 106                              | 130 | 190 | 200 | 221 | 286 | 287 | 287 | 261 | 265 |
|               | 2      | 153                              | 175 | 220 | 237 | 249 | 288 | 289 | 290 | 265 | 269 |
|               | 3      | 204                              | 214 | 248 | 260 | 265 | 289 | 290 | 291 | 277 | 281 |
| LMP 211       | 1      | 118                              | 149 | 227 | 240 | 269 | 358 | 359 | 360 | 324 | 330 |
|               | 2      | 178                              | 207 | 268 | 292 | 307 | 361 | 362 | 363 | 329 | 335 |
|               | 3      | 247                              | 260 | 306 | 323 | 329 | 362 | 363 | 364 | 345 | 351 |




### Maximum flow rate for a complete low and medium pressure filter with a pressure drop $\Delta p = 0.7$ bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).


You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.

## Hydraulic symbols

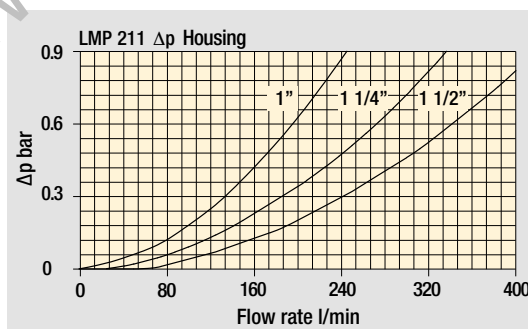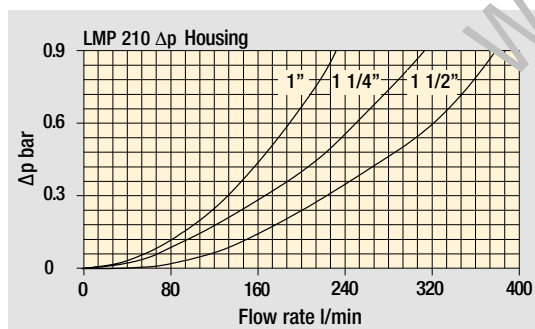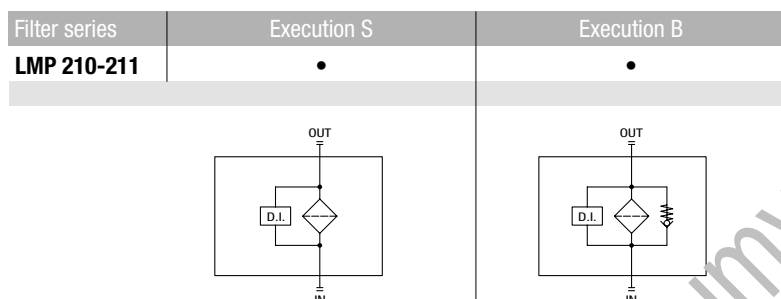

## Pressure drop

Filter housings  
 $\Delta p$  pressure drop

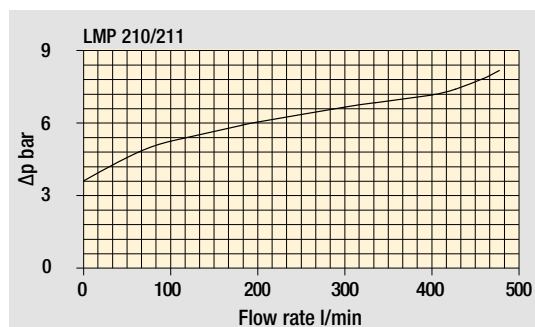

Bypass valve  
pressure drop

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

# LMP 210

## Designation & Ordering code

### COMPLETE FILTER

|  |   |     |     |  |  |  |  |  |  |  |
|--|---|-----|-----|--|--|--|--|--|--|--|
| <b>Series and size</b>                   | Configuration example: <b>LMP210</b>   <b>3</b>   <b>B</b>   <b>A</b>   <b>F1</b>   <b>A10</b>   <b>N</b>   <b>P01</b>  |     |     |  |  |  |  |  |  |  |
| <b>LMP210</b>                            |   |     |     |  |  |  |  |  |  |  |
| <b>Length</b>                            | 1   2   3   |     |     |  |  |  |  |  |  |  |
| <b>Bypass valve</b>                      | S Without bypass   B 3.5 bar  |     |     |  |  |  |  |  |  |  |
| <b>Seals and treatments</b>              | Filtration rating   |     |     |  |  |  |  |  |  |  |
| A NBR                                    | Axx   | Mxx | Pxx |  |  |  |  |  |  |  |
| V FPM                                    |   |     |     |  |  |  |  |  |  |  |
| W NBR compatible with fluids HFA-HFB-HFC |   |     |     |  |  |  |  |  |  |  |
| <b>Connections</b>                       | F1 1" SAE 3000 psi/M<br>F2 1 1/4" SAE 3000 psi/M<br>F3 1 1/2" SAE 3000 psi/M<br>F4 1" SAE 3000 psi/UNC<br>F5 1 1/4" SAE 3000 psi/UNC<br>F6 1 1/2" SAE 3000 psi/UNC  |     |     |  |  |  |  |  |  |  |
| <b>Filtration rating (filter media)</b>  | A03 Inorganic microfiber 3 µm   M25 Wire mesh 25 µm<br>A06 Inorganic microfiber 6 µm   M60 Wire mesh 60 µm<br>A10 Inorganic microfiber 10 µm   M90 Wire mesh 90 µm<br>A16 Inorganic microfiber 16 µm   P10 Resin impregnated paper 10 µm<br>A25 Inorganic microfiber 25 µm   P25 Resin impregnated paper 25 µm<br>WA025 Water absorber inorganic microfiber 25 µm |     |     |  |  |  |  |  |  |  |
|  | <b>Element Δp</b>   |     |     |  |  | <b>Execution</b>                         |  |  |  |  |
|  | N 20 bar  |     |     |  |  | P01 MP Filtri standard<br>Pxx Customized |  |  |  |  |

### FILTER ELEMENT


|  |   |     |     |  |  |  |  |
|--|---|-----|-----|--|--|--|--|
| <b>Element series and size</b>           | Configuration example: <b>CU210</b>   <b>3</b>   <b>A10</b>   <b>A</b>   <b>N</b>   <b>P01</b>  |     |     |  |  |  |  |
| <b>CU210</b>                             |   |     |     |  |  |  |  |
| <b>Element length</b>                    | 1   2   3   |     |     |  |  |  |  |
| <b>Filtration rating (filter media)</b>  | A03 Inorganic microfiber 3 µm   M25 Wire mesh 25 µm<br>A06 Inorganic microfiber 6 µm   M60 Wire mesh 60 µm<br>A10 Inorganic microfiber 10 µm   M90 Wire mesh 90 µm<br>A16 Inorganic microfiber 16 µm   P10 Resin impregnated paper 10 µm<br>A25 Inorganic microfiber 25 µm   P25 Resin impregnated paper 25 µm<br>WA025 Water absorber inorganic microfiber 25 µm |     |     |  |  |  |  |
|  | <b>Seals</b>  |     |     | <b>Filtration rating</b>                 |  |  |  |
| A NBR                                    | Axx   | Mxx | Pxx |  |  |  |  |
| V FPM                                    |   |     |     |  |  |  |  |
| W NBR compatible with fluids HFA-HFB-HFC |   |     |     |  |  |  |  |
|  | <b>Element Δp</b>   |     |     | <b>Execution</b>                         |  |  |  |
|  | N 20 bar  |     |     | P01 MP Filtri standard<br>Pxx Customized |  |  |  |

### ACCESSORIES

|  |         |                                       |      |
|--|---------|---------------------------------------|------|
| <b>Differential indicators</b>                 | page    |                                       | page |
| DEA Electrical differential indicator          | 445     | DTA Electronic differential indicator | 448  |
| DEM Electrical differential indicator          | 445-446 | DVA Visual differential indicator     | 448  |
| DLA Electrical / visual differential indicator | 446-447 | DVM Visual differential indicator     | 448  |
| DLE Electrical / visual differential indicator | 447     |                                       |      |
| <b>Additional features</b>                     | page    |                                       |      |
| T2 Plug  | 449     |                                       |      |

# LMP 210

## Dimensions

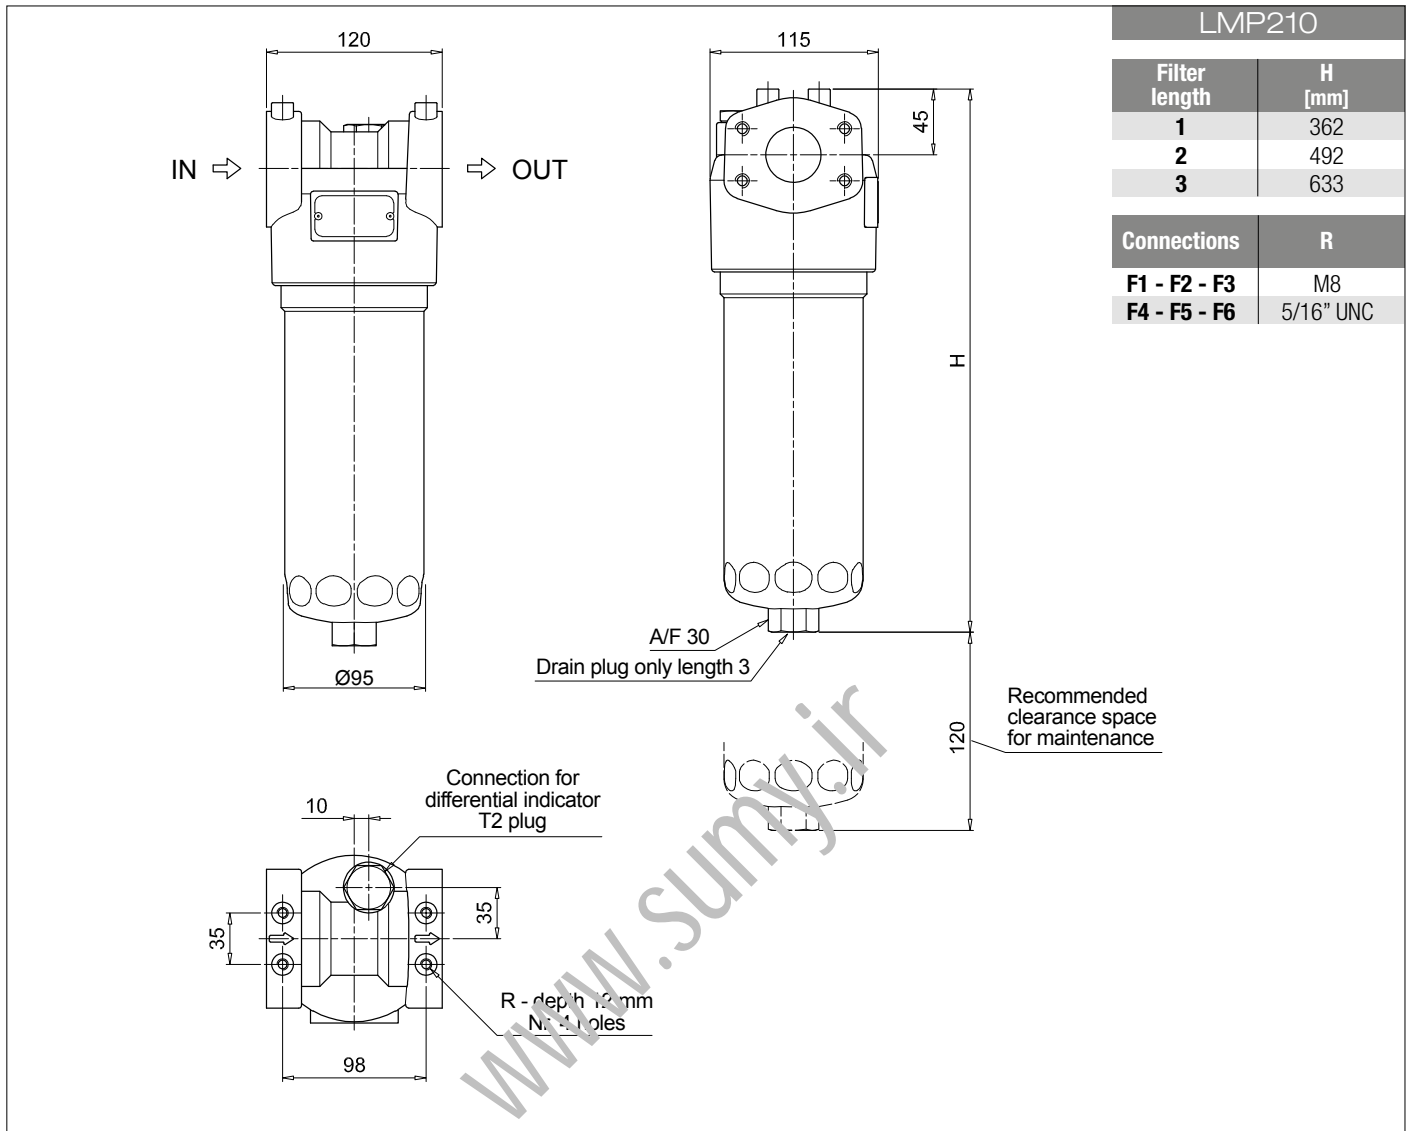

| LMP210        |           |
|---------------|-----------|
| Filter length | H [mm]    |
| 1             | 362       |
| 2             | 492       |
| 3             | 633       |
| Connections   | R         |
| F1 - F2 - F3  | M8        |
| F4 - F5 - F6  | 5/16" UNC |

# LMP 211

## Designation & Ordering code

### COMPLETE FILTER




|   |  |     |                   |                 |  |                  |  |  |  |  |
|---|--|-----|-------------------|-----------------|--|------------------|--|--|--|--|
| <b>Series and size</b>                          | Configuration example: <b>LMP211</b>   <b>3</b>   <b>B</b>   <b>A</b>   <b>D</b>   <b>6</b>   <b>A10</b>   <b>N</b>   <b>P01</b> |     |                   |                 |  |                  |  |  |  |  |
| <b>LMP211</b>                                   |  |     |                   |                 |  |                  |  |  |  |  |
| <b>Length</b>                                   | 1   2   3  |     |                   |                 |  |                  |  |  |  |  |
| <b>Bypass valve</b>                             | S Without bypass   B 3.5 bar   |     |                   |                 |  |                  |  |  |  |  |
| <b>Seals and treatments</b>                     | Filtration rating  |     |                   |                 |  |                  |  |  |  |  |
| A NBR   | Axx  | Mxx | Pxx               |                 |  |                  |  |  |  |  |
| V FPM   | •  | •   | •                 |                 |  |                  |  |  |  |  |
| W NBR compatible with fluids HFA-HFB-HFC        | •  | •   |                   |                 |  |                  |  |  |  |  |
| <b>Connections</b>                              |  |     |                   |                 |  |                  |  |  |  |  |
| A G 1"  |  |     |                   |                 |  |                  |  |  |  |  |
| B G 1 1/4"                                      |  |     |                   |                 |  |                  |  |  |  |  |
| C G 1 1/2"                                      |  |     |                   |                 |  |                  |  |  |  |  |
| D 1" NPT  |  |     |                   |                 |  |                  |  |  |  |  |
| E 1 1/4" NPT                                    |  |     |                   |                 |  |                  |  |  |  |  |
| F 1 1/2" NPT                                    |  |     |                   |                 |  |                  |  |  |  |  |
| G SAE 16 - 1 5/16" - 12 UN                      |  |     |                   |                 |  |                  |  |  |  |  |
| H SAE 20 - 1 5/8" - 12 UN                       |  |     |                   |                 |  |                  |  |  |  |  |
| I SAE 24 - 1 7/8" - 12 UN                       |  |     |                   |                 |  |                  |  |  |  |  |
| <b>Connection for differential indicator</b>    | 6 With plugged connection  |     |                   |                 |  |                  |  |  |  |  |
| <b>Filtration rating (filter media)</b>         |  |     |                   |                 |  |                  |  |  |  |  |
| A03 Inorganic microfiber 3 µm                   | M25 Wire mesh 25 µm  |     |                   |                 |  |                  |  |  |  |  |
| A06 Inorganic microfiber 6 µm                   | M60 Wire mesh 60 µm  |     |                   |                 |  |                  |  |  |  |  |
| A10 Inorganic microfiber 10 µm                  | M90 Wire mesh 90 µm  |     |                   |                 |  |                  |  |  |  |  |
| A16 Inorganic microfiber 16 µm                  | P10 Resin impregnated paper 10 µm  |     |                   |                 |  |                  |  |  |  |  |
| A25 Inorganic microfiber 25 µm                  | P25 Resin impregnated paper 25 µm  |     |                   |                 |  |                  |  |  |  |  |
| WA025 Water absorber inorganic microfiber 25 µm |  |     |                   |                 |  |                  |  |  |  |  |
|   |  |     | <b>Element Δp</b> | <b>N</b> 20 bar |  |                  |  |  |  |  |
|   |  |     |                   |                 |  | <b>Execution</b> | <b>P01</b> MP Filtri standard<br><b>Pxx</b> Customized |  |  |  |

### FILTER ELEMENT

|   |  |     |                   |                 |  |                  |  |  |
|---|--|-----|-------------------|-----------------|--|------------------|--|--|
| <b>Element series and size</b>                  | Configuration example: <b>CU210</b>   <b>3</b>   <b>A10</b>   <b>A</b>   <b>N</b>   <b>P01</b> |     |                   |                 |  |                  |  |  |
| <b>CU210</b>                                    |  |     |                   |                 |  |                  |  |  |
| <b>Element length</b>                           | 1   2   3  |     |                   |                 |  |                  |  |  |
| <b>Filtration rating (filter media)</b>         |  |     |                   |                 |  |                  |  |  |
| A03 Inorganic microfiber 3 µm                   | M25 Wire mesh 25 µm  |     |                   |                 |  |                  |  |  |
| A06 Inorganic microfiber 6 µm                   | M60 Wire mesh 60 µm  |     |                   |                 |  |                  |  |  |
| A10 Inorganic microfiber 10 µm                  | M90 Wire mesh 90 µm  |     |                   |                 |  |                  |  |  |
| A16 Inorganic microfiber 16 µm                  | P10 Resin impregnated paper 10 µm  |     |                   |                 |  |                  |  |  |
| A25 Inorganic microfiber 25 µm                  | P25 Resin impregnated paper 25 µm  |     |                   |                 |  |                  |  |  |
| WA025 Water absorber inorganic microfiber 25 µm |  |     |                   |                 |  |                  |  |  |
| <b>Seals</b>                                    | Filtration rating  |     |                   |                 |  |                  |  |  |
| A NBR   | Axx  | Mxx | Pxx               |                 |  |                  |  |  |
| V FPM   | •  | •   | •                 |                 |  |                  |  |  |
| W NBR compatible with fluids HFA-HFB-HFC        | •  | •   |                   |                 |  |                  |  |  |
|   |  |     | <b>Element Δp</b> | <b>N</b> 20 bar |  |                  |  |  |
|   |  |     |                   |                 |  | <b>Execution</b> | <b>P01</b> MP Filtri standard<br><b>Pxx</b> Customized |  |

### ACCESSORIES

|  |         |                                       |      |
|--|---------|---------------------------------------|------|
| <b>Differential indicators</b>                 | page    |                                       | page |
| DEA Electrical differential indicator          | 445     | DTA Electronic differential indicator | 448  |
| DEM Electrical differential indicator          | 445-446 | DVA Visual differential indicator     | 448  |
| DLA Electrical / visual differential indicator | 446-447 | DVM Visual differential indicator     | 448  |
| DLE Electrical / visual differential indicator | 447     |                                       |      |
| <b>Additional features</b>                     | page    |                                       |      |
| T2 Plug  | 449     |                                       |      |

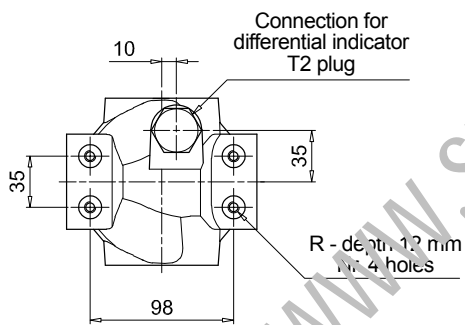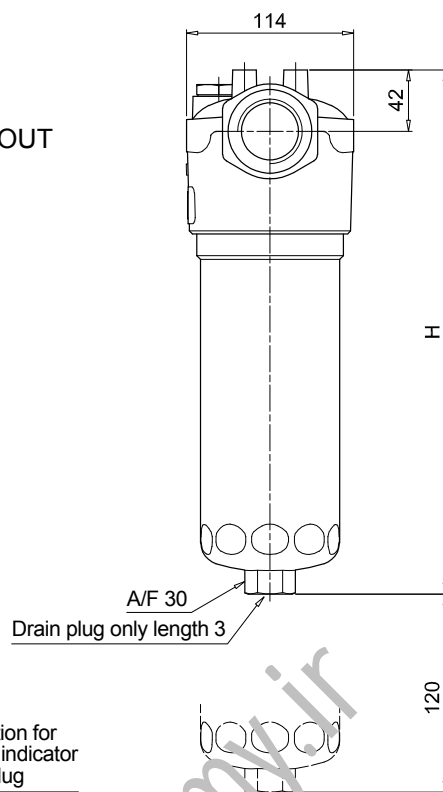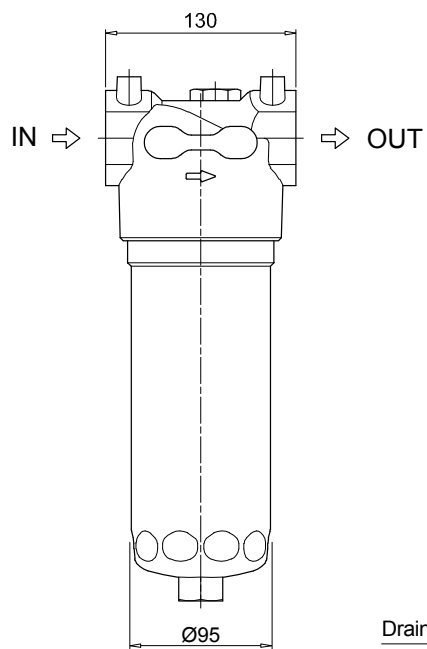

| LMP211        |           |
|---------------|-----------|
| Filter length | H [mm]    |
| 1             | 358       |
| 2             | 488       |
| 3             | 629       |
| Connections   | R         |
| A-B-C         | M8        |
| D-E-F-G-H-I   | 5/16" UNC |



www.sumitir

# LMP 210-211 SPARE PARTS

Order number for spare parts

LMP 210

LMP 211

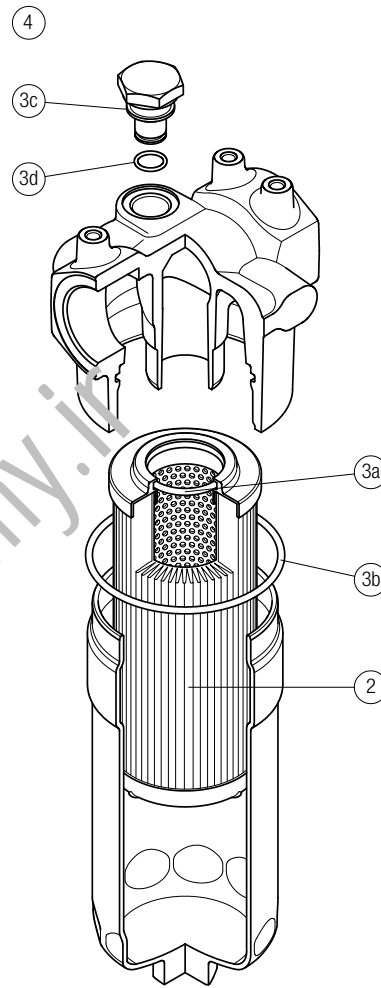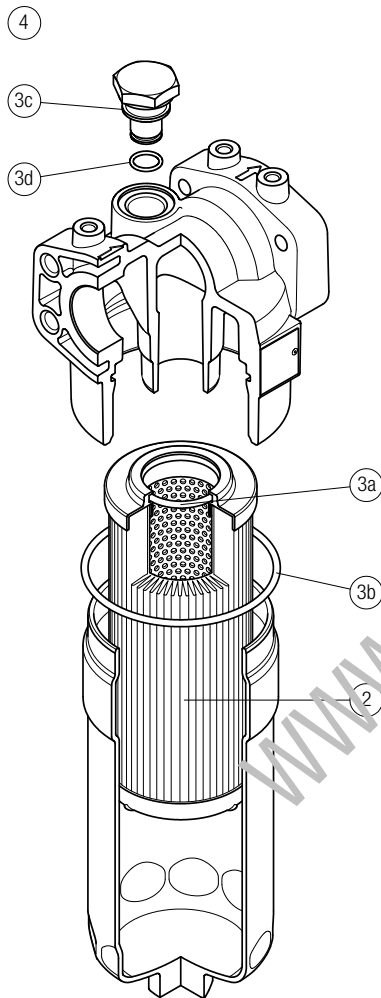

| Item:         | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          | Q.ty: 1 pc.               |     |
|---------------|-----------------|----------------------|----------|---------------------------|-----|
| Filter series | Filter element  | Seal Kit code number |          | Indicator connection plug |     |
| LMP 210-211   | See order table | NBR                  | FPM      | NBR                       | FPM |
|               | 2               | 02050435             | 02050436 | T2H                       | T2V |

[www.sumy.ir](http://www.sumy.ir)

[www.sumy.ir](http://www.sumy.ir)



# LMP 400-401 & 430-431 series

Maximum working pressure up to 6 MPa (60 bar) - Flow rate up to 780 l/min



## Description

## Technical data

### Low & Medium Pressure filters

**Maximum working pressure up to 6 MPa (60 bar)**  
**Flow rate up to 780 l/min**

LMP400 is a range of low pressure filter with large filtration surface mainly suitable for lubrication, off-line filtration of the reservoirs and filtration equipment.

They are directly connected to the lines of the system through the hydraulic fittings.

#### Available features:

- Female threaded connections up to 2" and flanged connections up to 2 1/2", for a maximum flow rate of 780 l/min
- In line or 90° connections, to meet any type of application
- Base-mounting design also available, for ease of the replacement of the filter element
- Fine filtration rating, to get a good cleanliness level into the system
- Water removal elements, to remove the free water from the hydraulic fluid. For further information, see the Contamination Management document and the dedicate leaflet.
- Bypass valve, to relieve excessive pressure drop across the filter media
- Vent ports, to avoid air trapped into the filter going into the system
- Drain ports, to remove the fluid from the housing prior the maintenance work
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

- Off-line filtration of reservoirs
- Filtration systems

### Filter housing materials

- Head: Anodized Aluminium
- Housing: Anodized Aluminium
- Bypass valve: Steel

### Pressure LMP 400 length 2 - 3 - 4

- Working pressure: 6 MPa (60 bar)
- Test pressure: 9 MPa (90 bar)
- Burst pressure: 21 MPa (210 bar)
- Pulse pressure fatigue test: 1 000 000 cycles with pressure from 0 to 6 MPa (60 bar)

### Pressure LMP 400 length 5 - 6

- Working pressure: 5 MPa (50 bar)
- Test pressure: 7.5 MPa (75 bar)
- Burst pressure: 15 MPa (150 bar)
- Pulse pressure fatigue test: 1 000 000 cycles with pressure from 0 to 5 MPa (50 bar)

### Bypass valve

- Opening pressure 350 kPa (3.5 bar) ±10%
- Other opening pressures on request.

### Δp element type

- Microfiltration filter elements - series N - W: 20 bar
- Fluid flow through the filter element from OUT to IN

### Seals

- Standard NBR series A
- Optional FPM series V

### Temperature

From -25 °C to +110 °C

### Connections

LMP 400 - 430: In-line Inlet/Outlet  
 LMP 401 - 431: 90° Inlet/Outlet

### Note

LMP 400 filters are provided for vertical mounting



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series                    | Weights [kg] |      |      |      |       | Volumes [dm <sup>3</sup> ] |        |      |      |      |      |       |
|----------------------------------|--------------|------|------|------|-------|----------------------------|--------|------|------|------|------|-------|
|                                  | Length       | 2    | 3    | 4    | 5     | 6                          | Length | 2    | 3    | 4    | 5    | 6     |
| <b>LMP 400-401 &amp; 430-431</b> |              | 7.20 | 8.10 | 8.80 | 11.90 | 14.40                      |        | 3.50 | 5.00 | 6.50 | 9.50 | 13.50 |

| Filter series | Length | Filter element design - N Series |     |     |     |     |                   |     |     |
|---------------|--------|----------------------------------|-----|-----|-----|-----|-------------------|-----|-----|
|               |        | A03                              | A06 | A10 | A16 | A25 | M25<br>M60<br>M90 | P10 | P25 |
| LMP 400       | 2      | 205                              | 244 | 370 | 411 | 515 | 720               | 524 | 556 |
|               | 3      | 280                              | 333 | 474 | 515 | 602 | 760               | 637 | 660 |
|               | 4      | 347                              | 400 | 535 | 564 | 637 | 769               | 660 | 688 |
|               | 5      | 459                              | 501 | 610 | 660 | 717 | 781               | 700 | 721 |
|               | 6      | 504                              | 575 | 676 | 689 | 728 | 783               | 708 | 727 |
| LMP 401       | 2      | 200                              | 236 | 347 | 382 | 468 | 628               | 475 | 501 |
|               | 3      | 268                              | 315 | 434 | 468 | 537 | 659               | 565 | 582 |
|               | 4      | 328                              | 373 | 484 | 507 | 565 | 665               | 582 | 603 |
|               | 5      | 423                              | 456 | 544 | 582 | 626 | 674               | 613 | 629 |
|               | 6      | 459                              | 516 | 594 | 604 | 634 | 676               | 619 | 633 |
| LMP 430       | 5      | 459                              | 501 | 610 | 660 | 717 | 781               | 700 | 721 |
|               | 6      | 504                              | 575 | 676 | 689 | 728 | 783               | 708 | 727 |
| LMP 431       | 5      | 423                              | 456 | 544 | 582 | 626 | 674               | 613 | 629 |
|               | 6      | 459                              | 516 | 594 | 604 | 634 | 676               | 619 | 633 |


**Maximum flow rate for a complete low and medium pressure filter with a pressure drop  $\Delta p = 0.7$  bar.**

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.



For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.


LMP 430-431: execution P02

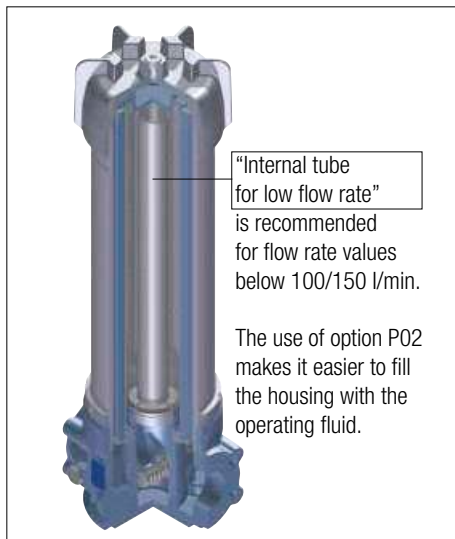

Hydraulic symbols

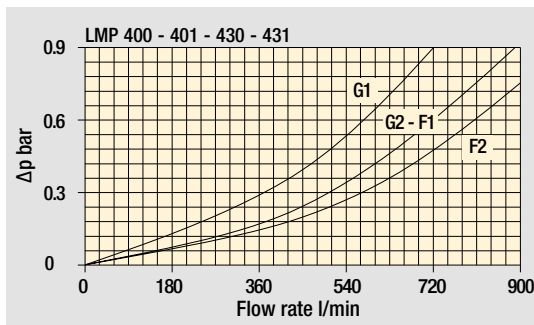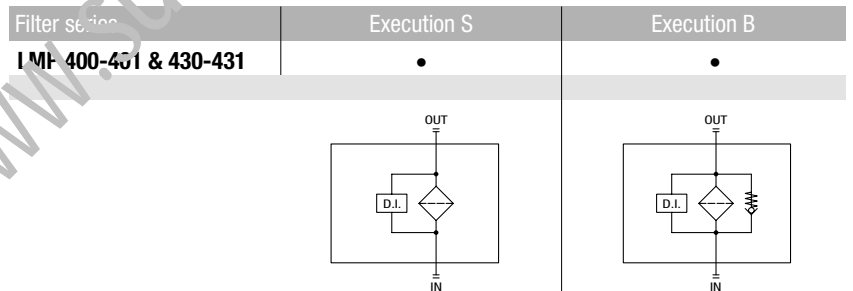

Filter housings  $\Delta p$  pressure drop

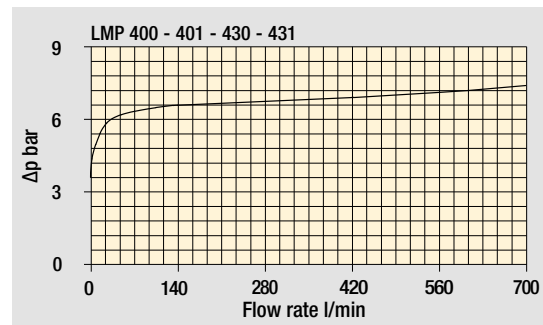

Pressure drop

Bypass valve pressure drop

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

# LMP 400-401

## Designation & Ordering code

### COMPLETE FILTER

|  |  |  |            |               |          |          |          |          |   |   |  |
|--|--|--|------------|---------------|----------|----------|----------|----------|---|---|--|
| Series and size<br><b>LMP400   LMP401</b>                      |  | Configuration example: <b>LMP401</b>   <b>3</b>   <b>B</b>   <b>A</b>   <b>G1</b>   <b>A10</b>   <b>N</b>   <b>P01</b> |            |               |          |          |          |          |   |   |  |
| Length<br><b>2</b>   <b>3</b>   <b>4</b>   <b>5</b>   <b>6</b> |  |  |            |               |          |          |          |          |   |   |  |
| Bypass valve<br><b>S</b> Without bypass   <b>B</b> 3.5 bar     |  |  |            |               |          |          |          |          |   |   |  |
| Seals and treatments   |  | Filtration rating  |            |               |          |          |          |          |   |   |  |
|  |  | <b>Axx</b>   | <b>Mxx</b> | <b>Pxx</b>    |          |          |          |          |   |   |  |
| <b>A</b> NBR   |  | •  | •          | •             |          |          |          |          |   |   |  |
| <b>V</b> FPM   |  | •  | •          | •             |          |          |          |          |   |   |  |
| <b>W</b> NBR compatible with fluids HFA-HFB-HFC                |  | •  | •          |               |          |          |          |          |   |   |  |
| Connections  |  |  |            |               |          |          |          |          |   |   |  |
| <b>G1</b> G 1 1/2"   |  | <b>F1</b> 2" SAE 3000 psi/M  |            |               |          |          |          |          |   |   |  |
| <b>G2</b> G 2"   |  | <b>F2</b> 2 1/2" SAE 3000 psi/M  |            |               |          |          |          |          |   |   |  |
| <b>G3</b> 1 1/2" NPT   |  | <b>F3</b> 2" SAE 3000 psi/UNC  |            |               |          |          |          |          |   |   |  |
| <b>G4</b> 2" NPT   |  | <b>F4</b> 2 1/2" SAE 3000 psi/UNC  |            |               |          |          |          |          |   |   |  |
| <b>G5</b> SAE 24 - 1 7/8" - 12 UN                              |  |  |            |               |          |          |          |          |   |   |  |
| <b>G6</b> SAE 32 - 2 1/2" - 12 UN                              |  |  |            |               |          |          |          |          |   |   |  |
| Filtration rating (filter media)                               |  |  |            |               |          |          |          |          |   |   |  |
| <b>A03</b> Inorganic microfiber 3 µm                           |  | <b>M25</b> Wire mesh 25 µm   |            |               |          |          |          |          |   |   |  |
| <b>A06</b> Inorganic microfiber 6 µm                           |  | <b>M60</b> Wire mesh 60 µm   |            |               |          |          |          |          |   |   |  |
| <b>A10</b> Inorganic microfiber 10 µm                          |  | <b>M90</b> Wire mesh 90 µm   |            |               |          |          |          |          |   |   |  |
| <b>A16</b> Inorganic microfiber 16 µm                          |  | <b>P10</b> Resin impregnated paper 10 µm   |            |               |          |          |          |          |   |   |  |
| <b>A25</b> Inorganic microfiber 25 µm                          |  | <b>P25</b> Resin impregnated paper 25 µm   |            |               |          |          |          |          |   |   |  |
| <b>WA025</b> Water absorber inorganic microfiber 25 µm         |  |  |            |               |          |          |          |          |   |   |  |
| Element Δp<br><b>N</b> 20 bar                                  |  | Execution  |            | Filter length |          |          |          |          |   |   |  |
|  |  |  |            | <b>2</b>      | <b>3</b> | <b>4</b> | <b>5</b> | <b>6</b> |   |   |  |
|  |  | <b>P01</b> MP Filtri standard  |            | •             | •        | •        | •        | •        |   |   |  |
|  |  | <b>P02</b> Maintenance from the bottom of the housing  |            |               |          |          |          |          | • | • |  |
|  |  | <b>Pxx</b> Customized  |            |               |          |          |          |          |   |   |  |

### FILTER ELEMENT



|  |  |  |            |               |          |          |          |          |  |  |  |
|--|--|--|------------|---------------|----------|----------|----------|----------|--|--|--|
| Element series and size<br><b>CU400</b>                                |  | Configuration example: <b>CU400</b>   <b>3</b>   <b>A10</b>   <b>A</b>   <b>N</b>   <b>P01</b> |            |               |          |          |          |          |  |  |  |
| Element length<br><b>2</b>   <b>3</b>   <b>4</b>   <b>5</b>   <b>6</b> |  |  |            |               |          |          |          |          |  |  |  |
| Filtration rating (filter media)                                       |  |  |            |               |          |          |          |          |  |  |  |
| <b>A03</b> Inorganic microfiber 3 µm                                   |  | <b>M25</b> Wire mesh 25 µm   |            |               |          |          |          |          |  |  |  |
| <b>A06</b> Inorganic microfiber 6 µm                                   |  | <b>M60</b> Wire mesh 60 µm   |            |               |          |          |          |          |  |  |  |
| <b>A10</b> Inorganic microfiber 10 µm                                  |  | <b>M90</b> Wire mesh 90 µm   |            |               |          |          |          |          |  |  |  |
| <b>A16</b> Inorganic microfiber 16 µm                                  |  | <b>P10</b> Resin impregnated paper 10 µm   |            |               |          |          |          |          |  |  |  |
| <b>A25</b> Inorganic microfiber 25 µm                                  |  | <b>P25</b> Resin impregnated paper 25 µm   |            |               |          |          |          |          |  |  |  |
| <b>WA025</b> Water absorber inorganic microfiber 25 µm                 |  |  |            |               |          |          |          |          |  |  |  |
| Seals  |  | Filtration rating  |            |               |          |          |          |          |  |  |  |
|  |  | <b>Axx</b>   | <b>Mxx</b> | <b>Pxx</b>    |          |          |          |          |  |  |  |
| <b>A</b> NBR   |  | •  | •          | •             |          |          |          |          |  |  |  |
| <b>V</b> FPM   |  | •  | •          | •             |          |          |          |          |  |  |  |
| <b>W</b> NBR compatible with fluids HFA-HFB-HFC                        |  | •  | •          |               |          |          |          |          |  |  |  |
| Element Δp<br><b>N</b> 20 bar  |  | Execution  |            | Filter length |          |          |          |          |  |  |  |
|  |  |  |            | <b>2</b>      | <b>3</b> | <b>4</b> | <b>5</b> | <b>6</b> |  |  |  |
|  |  | <b>P01</b> MP Filtri standard  |            | •             | •        | •        | •        | •        |  |  |  |
|  |  | <b>Pxx</b> Customized  |            |               |          |          |          |          |  |  |  |

### ACCESSORIES

|   |  |         |  |  |      |
|---|--|---------|--|--|------|
| <b>Differential indicators</b>                        |  | page    |  |  | page |
| <b>DEA</b> Electrical differential indicator          |  | 445     | <b>DTA</b> Electronic differential indicator |  | 448  |
| <b>DEM</b> Electrical differential indicator          |  | 445-446 | <b>DVA</b> Visual differential indicator     |  | 448  |
| <b>DLA</b> Electrical / visual differential indicator |  | 446-447 | <b>DVM</b> Visual differential indicator     |  | 448  |
| <b>DLE</b> Electrical / visual differential indicator |  | 447     |  |  |      |
| <b>Additional features</b>                            |  | page    |  |  |      |
| <b>T2</b> Plug  |  | 449     |  |  |      |



# LMP 400-401

## Dimensions

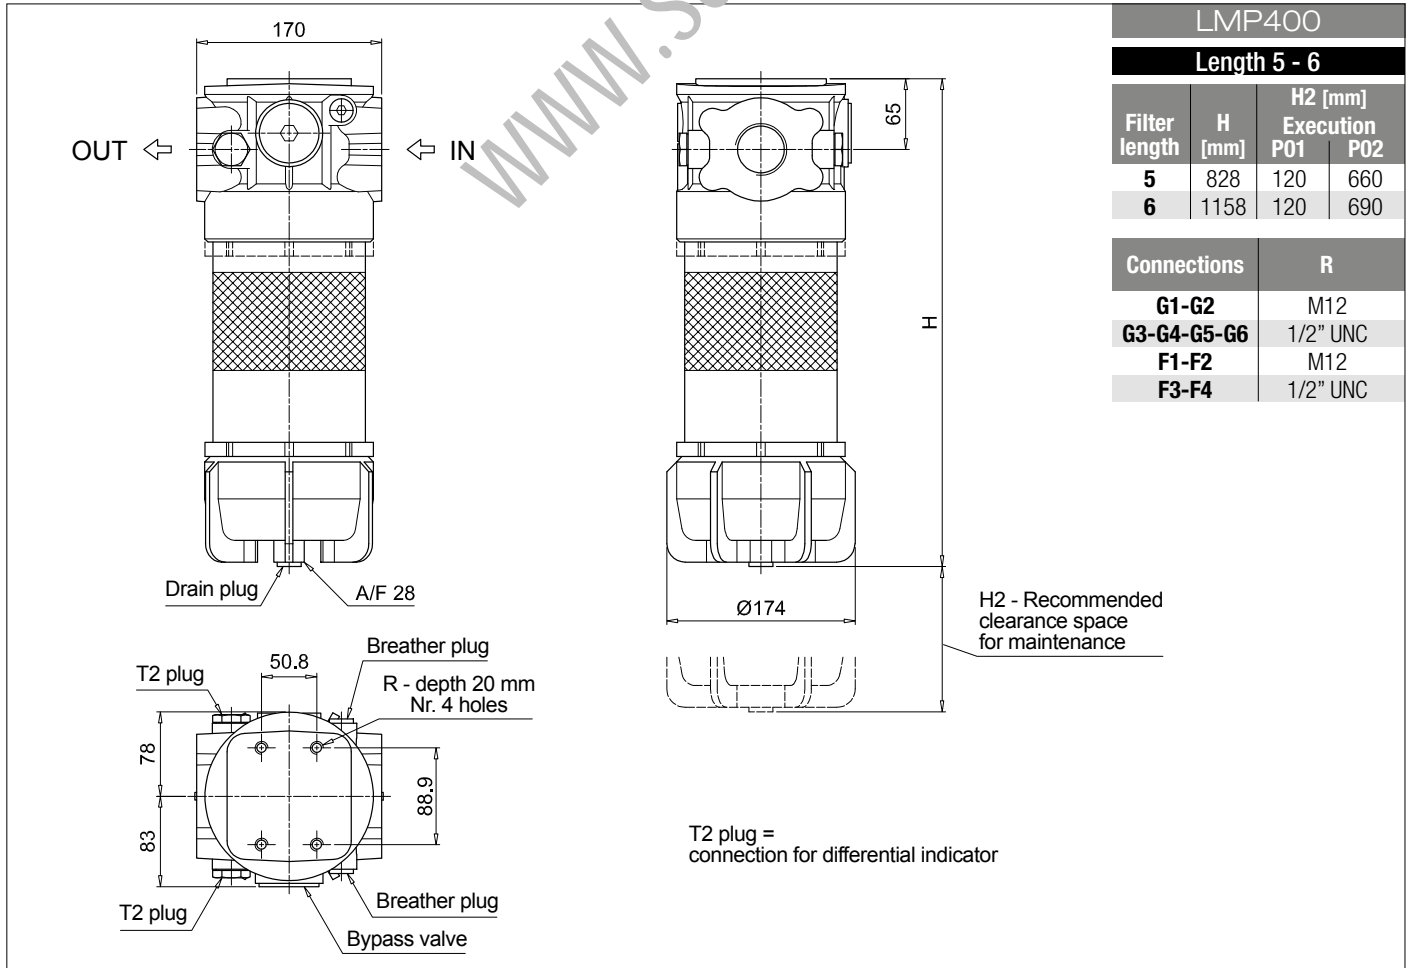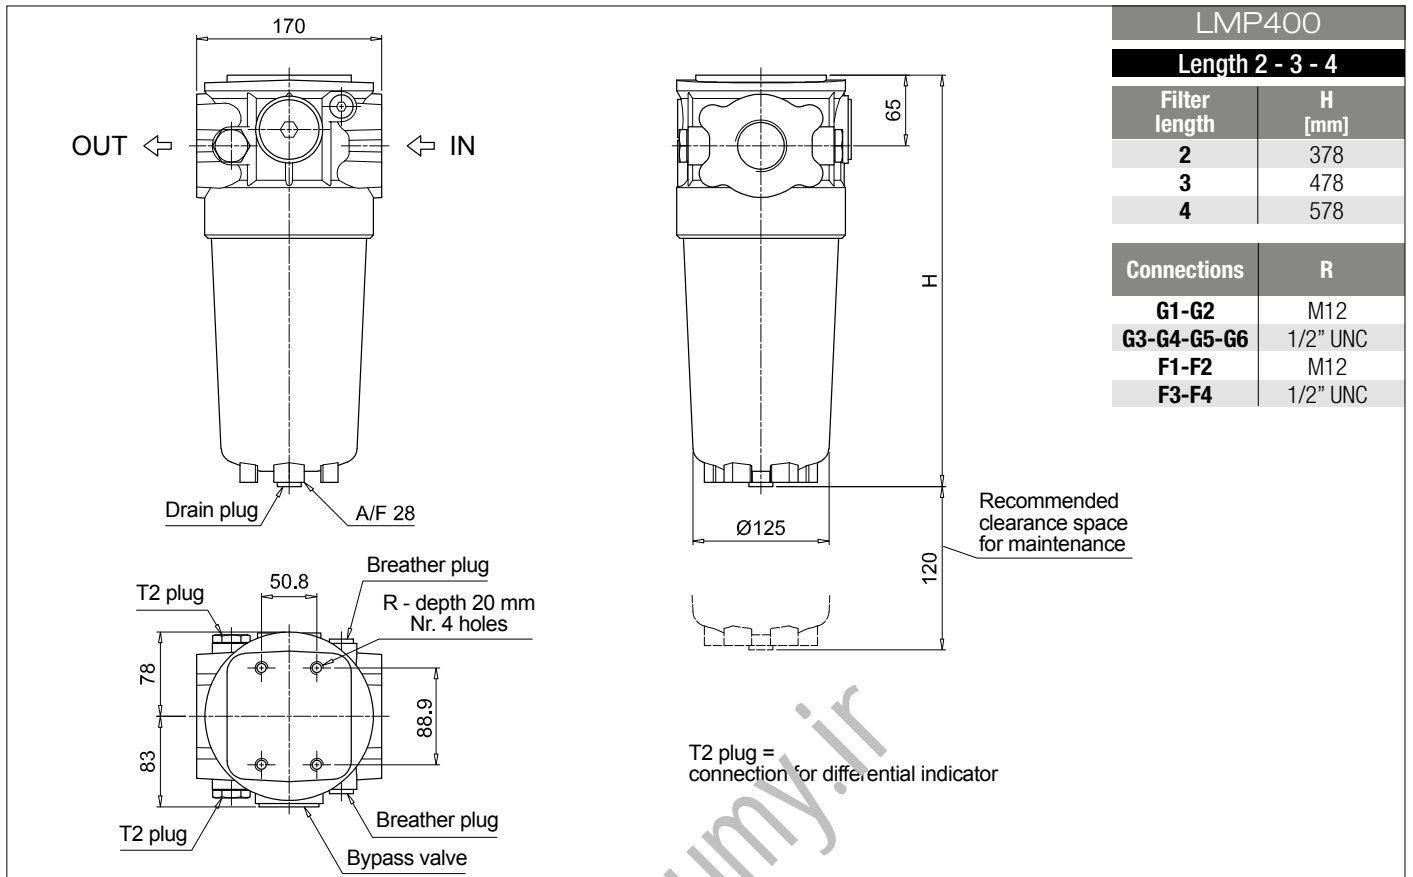

# LMP 400-401

## Dimensions

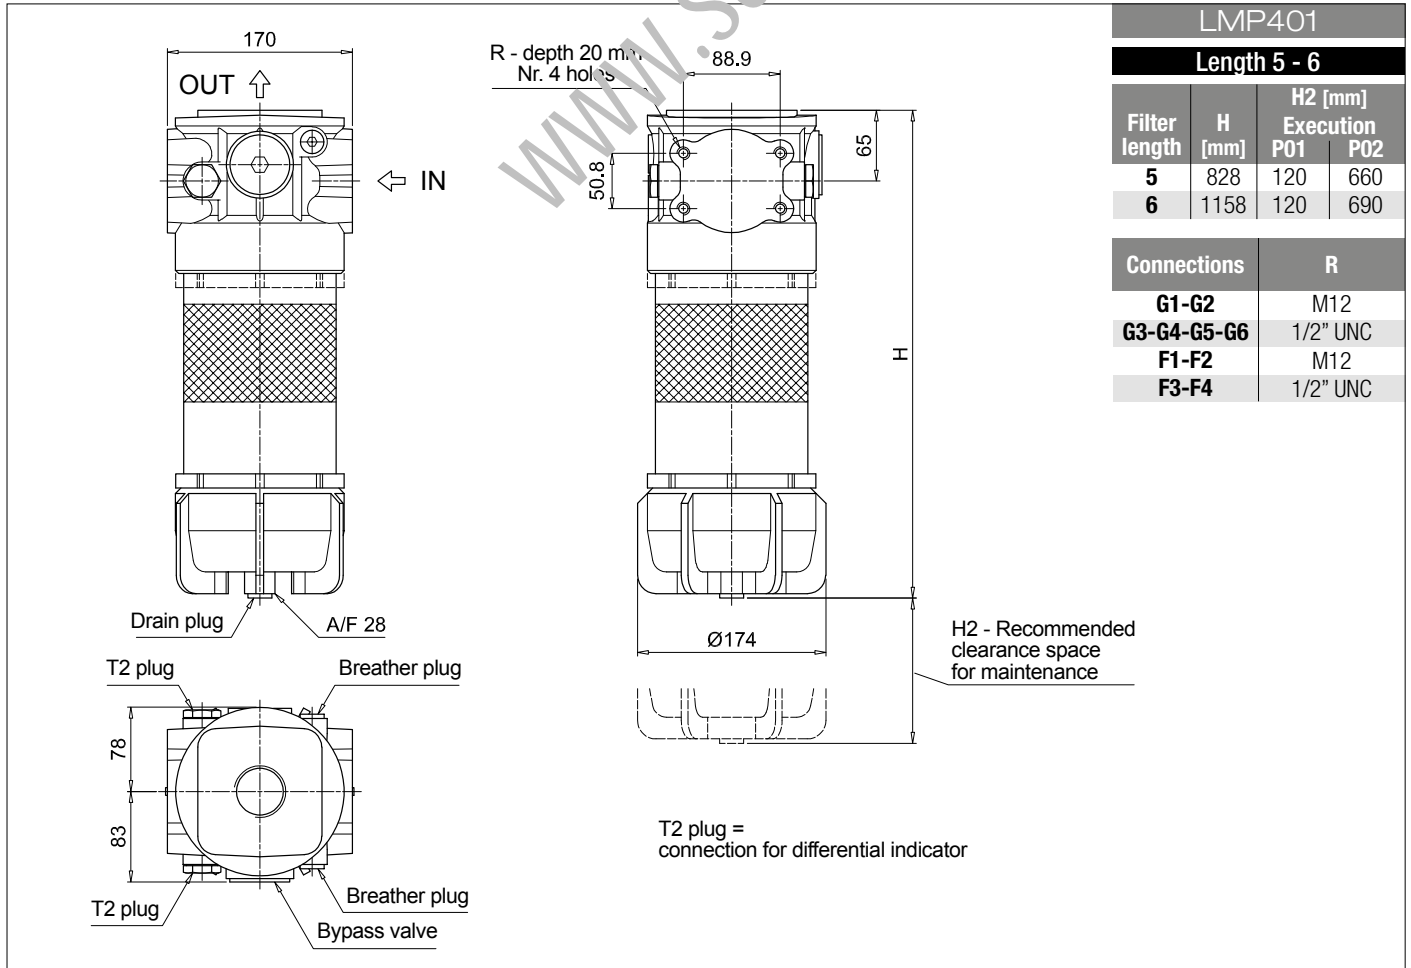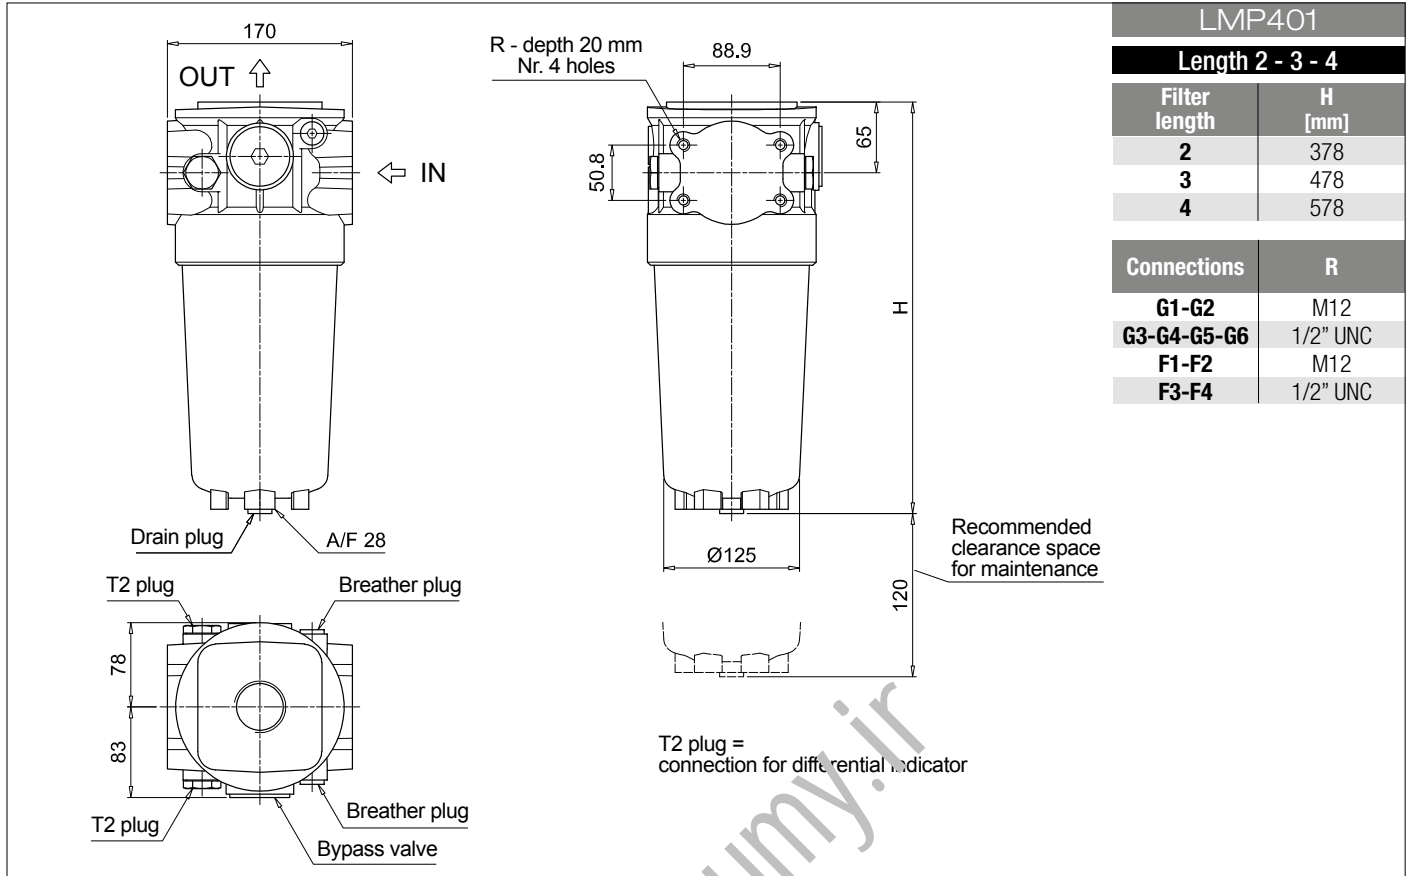

[www.sumy.ir](http://www.sumy.ir)

# LMP 430-431

## Designation & Ordering code

### COMPLETE FILTER

|  |  |  |     |     |   |  |  |  |  |  |  |
|--|--|--|-----|-----|---|--|--|--|--|--|--|
| Series and size<br><b>LMP430</b>   <b>LMP431</b>           |  | Configuration example: <b>LMP431</b>   <b>5</b>   <b>B</b>   <b>A</b>   <b>G1</b>   <b>A10</b>   <b>N</b>   <b>P01</b> |     |     |   |  |  |  |  |  |  |
| Length<br><b>5</b>   <b>6</b>                              |  |  |     |     |   |  |  |  |  |  |  |
| Bypass valve<br><b>S</b> Without bypass   <b>B</b> 3.5 bar |  |  |     |     |   |  |  |  |  |  |  |
| Seals and treatments                                       |  | Filtration rating  |     |     |   |  |  |  |  |  |  |
|  |  | Axx  | Mxx | Pxx |   |  |  |  |  |  |  |
| <b>A</b> NBR   |  | •  | •   | •   |   |  |  |  |  |  |  |
| <b>V</b> FPM   |  | •  | •   | •   |   |  |  |  |  |  |  |
| <b>W</b> NBR compatible with fluids HFA-HFB-HFC            |  | •  | •   |     |   |  |  |  |  |  |  |
| Connections  |  |  |     |     |   |  |  |  |  |  |  |
| <b>G1</b> G 1 1/2"   |  | <b>F1</b> 2" SAE 3000 psi/M  |     |     |   |  |  |  |  |  |  |
| <b>G2</b> G 2"   |  | <b>F2</b> 2 1/2" SAE 3000 psi/M  |     |     |   |  |  |  |  |  |  |
| <b>G3</b> 1 1/2" NPT                                       |  | <b>F3</b> 2" SAE 3000 psi/UNC  |     |     |   |  |  |  |  |  |  |
| <b>G4</b> 2" NPT   |  | <b>F4</b> 2 1/2" SAE 3000 psi/UNC  |     |     |   |  |  |  |  |  |  |
| <b>G5</b> SAE 24 - 1 7/8" - 12 UN                          |  |  |     |     |   |  |  |  |  |  |  |
| <b>G6</b> SAE 32 - 2 1/2" - 12 UN                          |  |  |     |     |   |  |  |  |  |  |  |
| Filtration rating (filter media)                           |  |  |     |     |   |  |  |  |  |  |  |
| <b>A03</b> Inorganic microfiber 3 µm                       |  | <b>M25</b> Wire mesh 25 µm   |     |     |   |  |  |  |  |  |  |
| <b>A06</b> Inorganic microfiber 6 µm                       |  | <b>M60</b> Wire mesh 60 µm   |     |     |   |  |  |  |  |  |  |
| <b>A10</b> Inorganic microfiber 10 µm                      |  | <b>M90</b> Wire mesh 90 µm   |     |     |   |  |  |  |  |  |  |
| <b>A16</b> Inorganic microfiber 16 µm                      |  | <b>P10</b> Resin impregnated paper 10 µm   |     |     |   |  |  |  |  |  |  |
| <b>A25</b> Inorganic microfiber 25 µm                      |  | <b>P25</b> Resin impregnated paper 25 µm   |     |     |   |  |  |  |  |  |  |
| <b>WA025</b> Water absorber inorganic microfiber 25 µm     |  |  |     |     |   |  |  |  |  |  |  |
|  |  | Element Δp   |     |     | Execution                                       |  |  |  |  |  |  |
|  |  | <b>N</b> 20 bar  |     |     | <b>P01</b> MP Filtri standard                   |  |  |  |  |  |  |
|  |  |  |     |     | <b>P02</b> With internal tube for low flow rate |  |  |  |  |  |  |
|  |  |  |     |     | <b>Pxx</b> Customized                           |  |  |  |  |  |  |



### FILTER ELEMENT

|  |  |  |     |     |                               |  |  |  |  |  |  |
|--|--|--|-----|-----|-------------------------------|--|--|--|--|--|--|
| Element series and size<br><b>CU400</b>                |  | Configuration example: <b>CU400</b>   <b>5</b>   <b>A10</b>   <b>A</b>   <b>N</b>   <b>P01</b> |     |     |                               |  |  |  |  |  |  |
| Element length<br><b>5</b>   <b>6</b>                  |  |  |     |     |                               |  |  |  |  |  |  |
| Filtration rating (filter media)                       |  |  |     |     |                               |  |  |  |  |  |  |
| <b>A03</b> Inorganic microfiber 3 µm                   |  | <b>M25</b> Wire mesh 25 µm   |     |     |                               |  |  |  |  |  |  |
| <b>A06</b> Inorganic microfiber 6 µm                   |  | <b>M60</b> Wire mesh 60 µm   |     |     |                               |  |  |  |  |  |  |
| <b>A10</b> Inorganic microfiber 10 µm                  |  | <b>M90</b> Wire mesh 90 µm   |     |     |                               |  |  |  |  |  |  |
| <b>A16</b> Inorganic microfiber 16 µm                  |  | <b>P10</b> Resin impregnated paper 10 µm   |     |     |                               |  |  |  |  |  |  |
| <b>A25</b> Inorganic microfiber 25 µm                  |  | <b>P25</b> Resin impregnated paper 25 µm   |     |     |                               |  |  |  |  |  |  |
| <b>WA025</b> Water absorber inorganic microfiber 25 µm |  |  |     |     |                               |  |  |  |  |  |  |
| Seals  |  | Filtration rating  |     |     |                               |  |  |  |  |  |  |
|  |  | Axx  | Mxx | Pxx |                               |  |  |  |  |  |  |
| <b>A</b> NBR   |  | •  | •   | •   |                               |  |  |  |  |  |  |
| <b>V</b> FPM   |  | •  | •   | •   |                               |  |  |  |  |  |  |
| <b>W</b> NBR compatible with fluids HFA-HFB-HFC        |  | •  | •   |     |                               |  |  |  |  |  |  |
|  |  | Element Δp   |     |     | Execution                     |  |  |  |  |  |  |
|  |  | <b>N</b> 20 bar  |     |     | <b>P01</b> MP Filtri standard |  |  |  |  |  |  |
|  |  |  |     |     | <b>Pxx</b> Customized         |  |  |  |  |  |  |

### ACCESSORIES


|   |  |         |  |      |
|---|--|---------|--|------|
| Differential indicators                               |  | page    |  | page |
| <b>DEA</b> Electrical differential indicator          |  | 445     | <b>DTA</b> Electronic differential indicator | 448  |
| <b>DEM</b> Electrical differential indicator          |  | 445-446 | <b>DVA</b> Visual differential indicator     | 448  |
| <b>DLA</b> Electrical / visual differential indicator |  | 446-447 | <b>DVM</b> Visual differential indicator     | 448  |
| <b>DLE</b> Electrical / visual differential indicator |  | 447     |  |      |
| Additional features                                   |  | page    |  |      |
| <b>T2</b> Plug  |  | 449     |  |      |



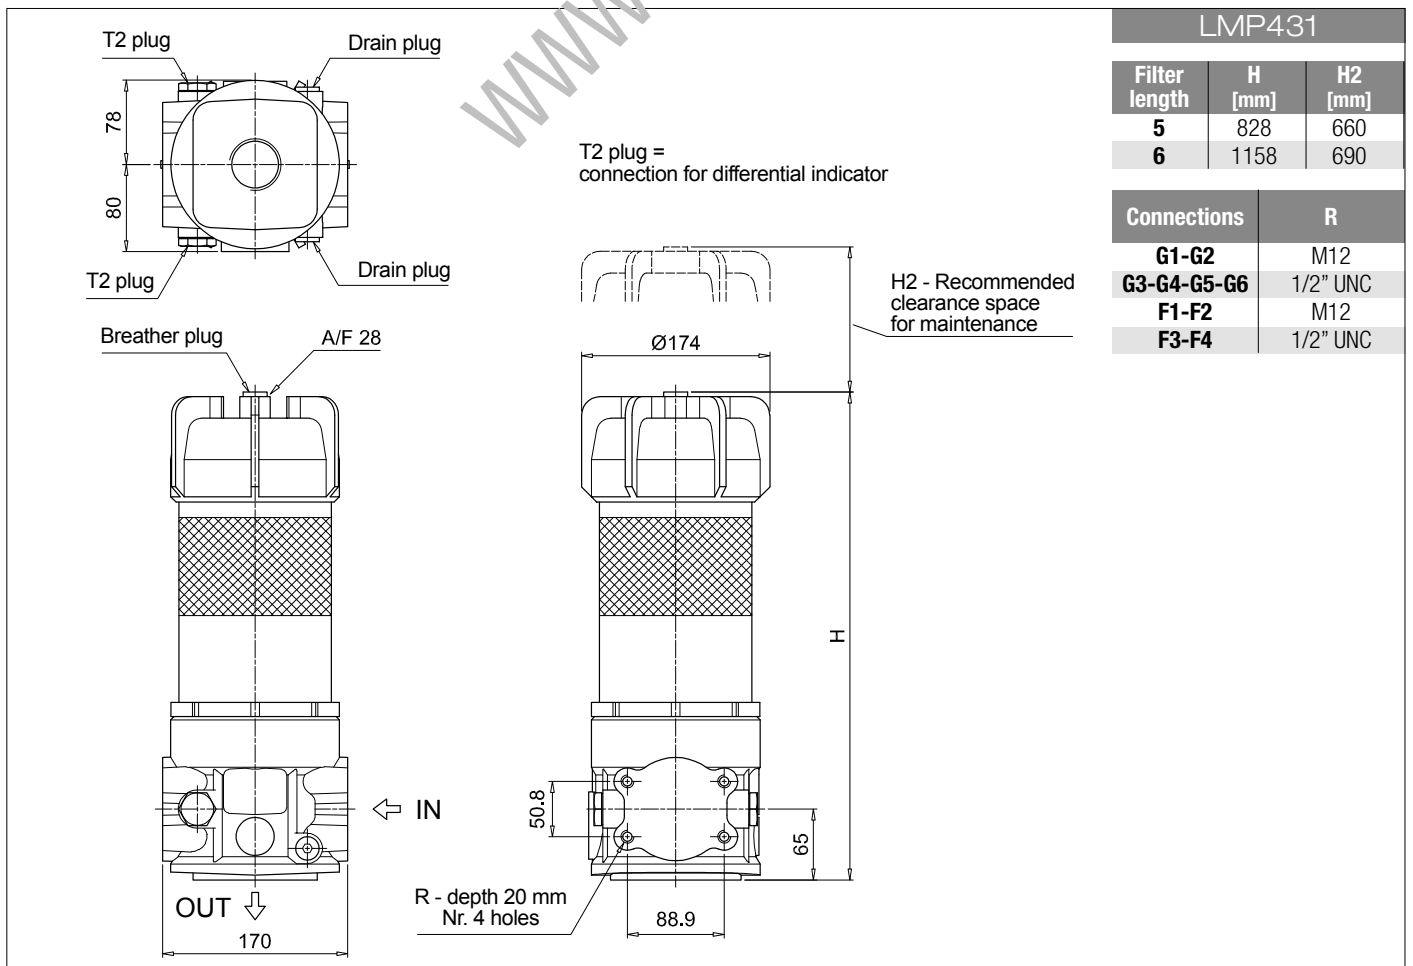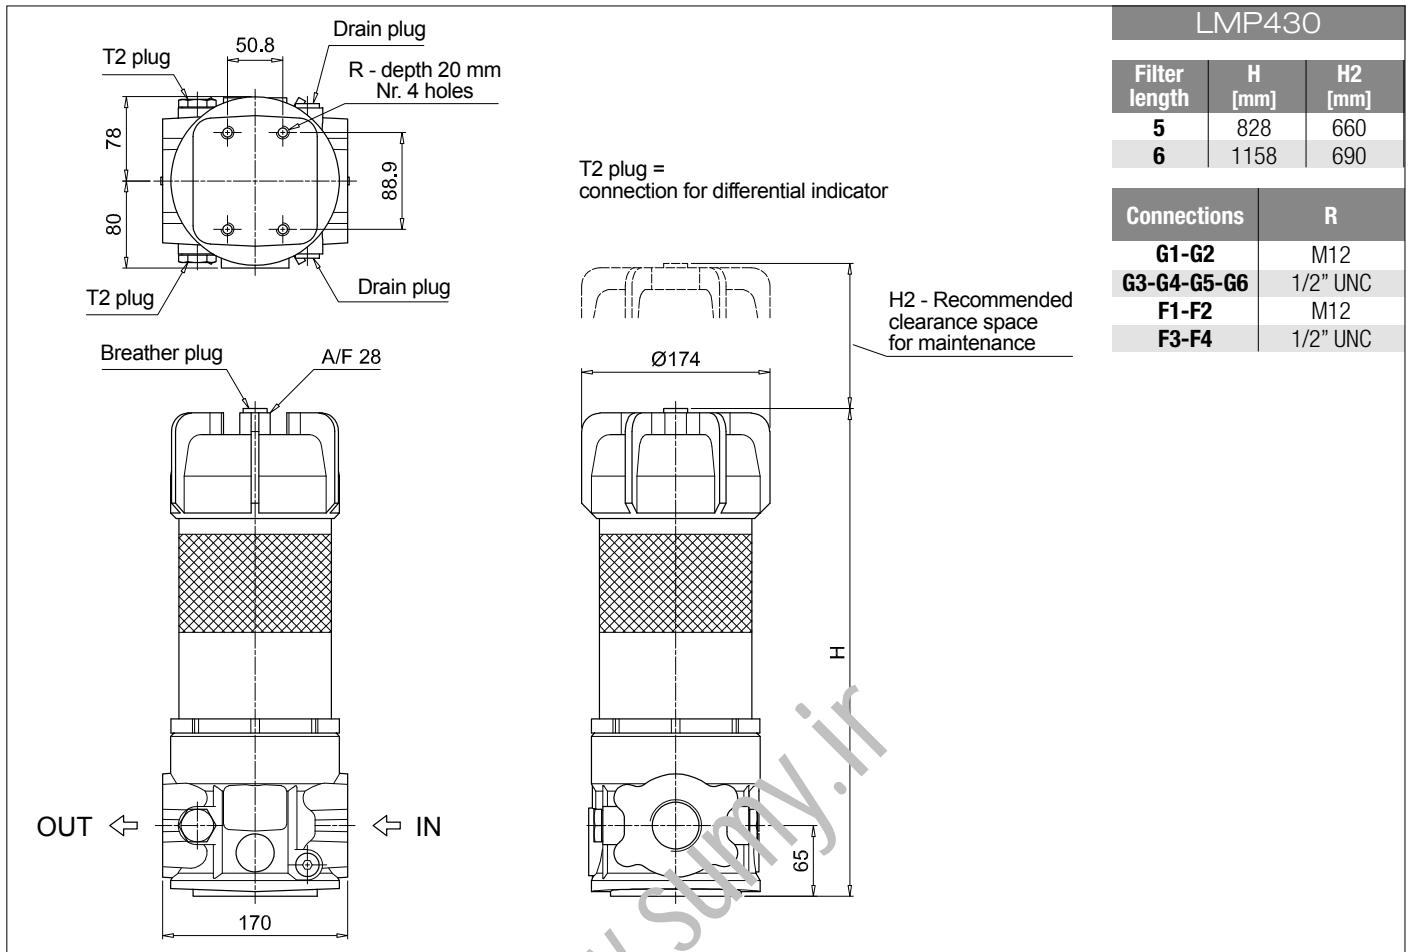


Order number for spare parts


**LMP 400 - 401**  
length 2 - 3 - 4

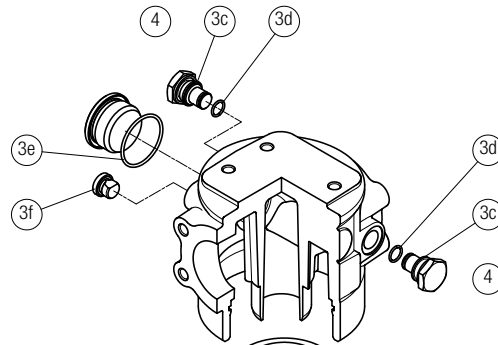

**LMP 400 - 401**  
length 5 - 6

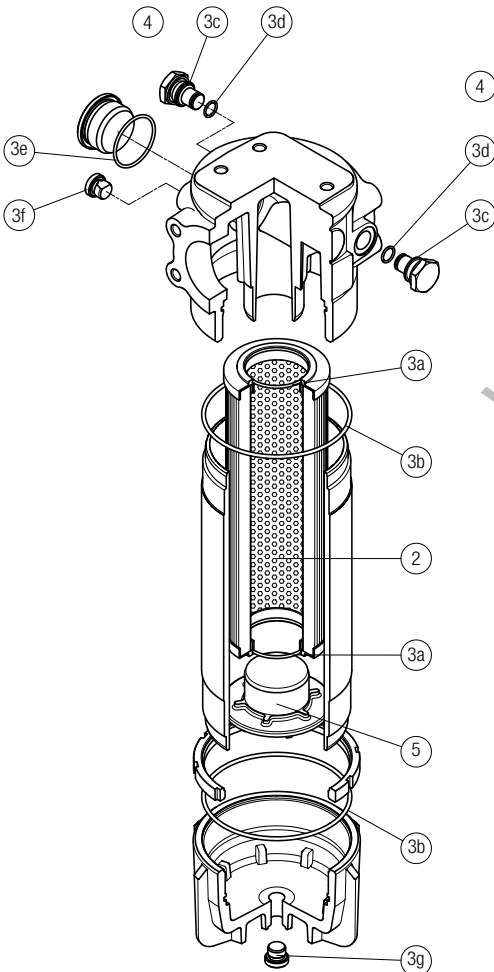

**LMP 430 - 431**  
length 5 - 6

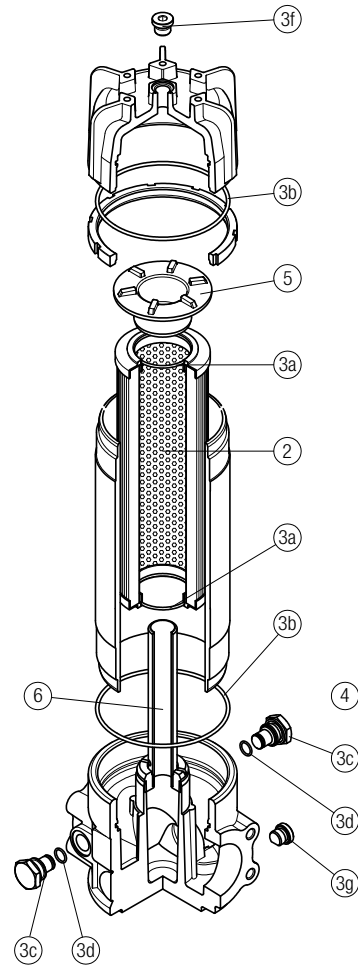

| Item:                    | Q.ty: 1 pc.     | Q.ty: 1 pc.                     | Q.ty: 2 pcs.                         | Q.ty: 2 pcs.                            | Q.ty: 1 pc.                                       |
|--------------------------|-----------------|---------------------------------|--------------------------------------|---|---|
| Filter series            | Filter element  | Seal Kit code number<br>NBR FPM | Indicator connection plug<br>NBR FPM | Housing spigot<br>no bypass with bypass | Internal tube for low flow rate,<br>execution P02 |
| LMP 400-401 length 2-3-4 | See order table | 02050391 02050392               | T2H T2V                              | 01044108                                |   |
| LMP 400-401 length 5-6   | See order table | 02050393 02050394               |                                      | 01044108                                |   |
| LMP 430-431 length 5-6   | See order table | 02050393 02050394               |                                      | 02001414                                | Length 5: 02025041   Length 6: 02025042           |

[www.sumy.ir](http://www.sumy.ir)

[www.sumy.ir](http://www.sumy.ir)

# LMP 950-951 series

Maximum working pressure up to 3 MPa (30 bar) - Flow rate up to 2400 l/min



# LMP 950-951 GENERAL INFORMATION

## Description

## Technical data

### Low & Medium Pressure filters

**Maximum working pressure up to 3 MPa (30 bar)**  
**Flow rate up to 2400 l/min**

LMP950 is a range of low pressure filter with large filtration surface mainly suitable for lubrication, off-line filtration of the reservoirs and filtration equipment.

They are directly connected to the lines of the system through the hydraulic fittings.

#### Available features:

- Flanged connections up to 4", for a maximum flow rate of 2400 l/min
- In line or 90° connections, to meet any type of application
- Base-mounting design, for ease of the replacement of the filter element
- Fine filtration rating, to get a good cleanliness level into the system
- Water removal elements, to remove the free water from the hydraulic fluid. For further information, see the Contamination Management document and the dedicate leaflet.
- Bypass valve, to relieve excessive pressure drop across the filter media
- Vent ports, to avoid air trapped into the filter going into the system
- Drain ports, to remove the fluid from the housing prior the maintenance work
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

- Off-line filtration of reservoirs
- Filtration systems
- Lubrication systems

### Filter housing materials

- Head: Anodized Aluminium
- Housing: Anodized Aluminium
- Bypass valve: Anodized Aluminium

### Pressure

- Test pressure: 4,5 MPa (45 bar)
- Burst pressure: 12 MPa (120 bar)
- Pulse pressure fatigue test: 1 000 000 cycles with pressure from 0 to 3 MPa (30 bar)

### Bypass valve

- Opening pressure 350 kPa (3.5 bar) ±10%
- Other opening pressures on request.

### Δp element type

- Microfibre filter elements - series N: 20 bar
- Fluid flow through the filter element from OUT to IN

### Seals

- Standard NBR series A
- Optional FPM series V

### Temperature

from -25 °C to +110 °C

### Connections

LMP 950: In-line Inlet/Outlet  
 LMP 951: 90° Inlet/Outlet

### Note

LMP 950 - 951 filters are provided for vertical mounting



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series      | Weights [kg] |      |      | Volumes [dm <sup>3</sup> ] |    |    |
|--------------------|--------------|------|------|----------------------------|----|----|
|                    | Length       | 2    | 3    | Length                     | 2  | 3  |
| <b>LMP 950-951</b> |              | 25.1 | 33.5 |                            | 15 | 28 |

| Filter series | Length | Filter element design - N Series |      |      |      |      |                   |
|---------------|--------|----------------------------------|------|------|------|------|-------------------|
|               |        | A03                              | A06  | A10  | A16  | A25  | M25<br>M60<br>M90 |
| LMP 950       | 2      | 613                              | 756  | 953  | 1219 | 1515 | 2170              |
|               | 3      | 1148                             | 1219 | 1502 | 1713 | 1808 | 2293              |
| LMP 951       | 2      | 635                              | 789  | 1007 | 1308 | 1649 | 2420              |
|               | 3      | 1226                             | 1308 | 1634 | 1881 | 1993 | 2566              |


### Maximum flow rate for a complete low and medium pressure filter with a pressure drop $\Delta p = 0.7$ bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.


For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.

### Execution P02



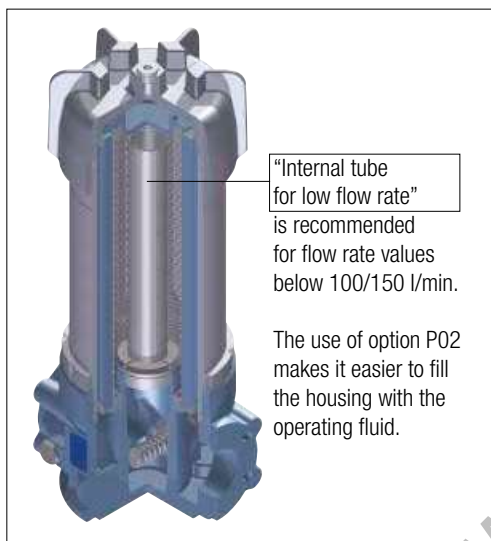


### Hydraulic symbols

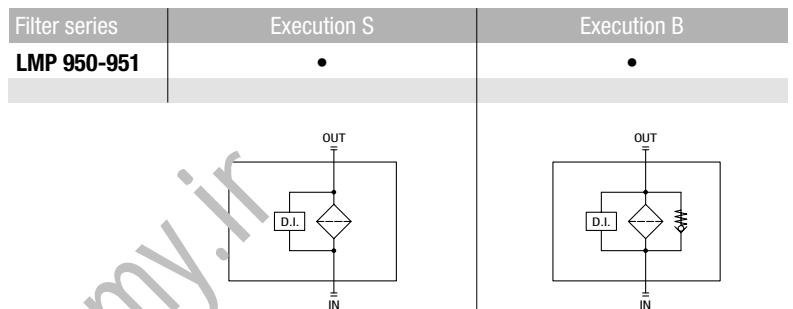

### Pressure drop

Filter housings  $\Delta p$  pressure drop

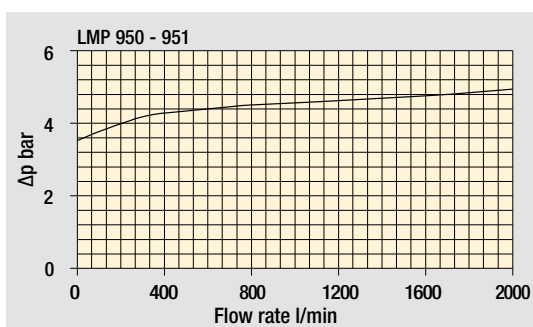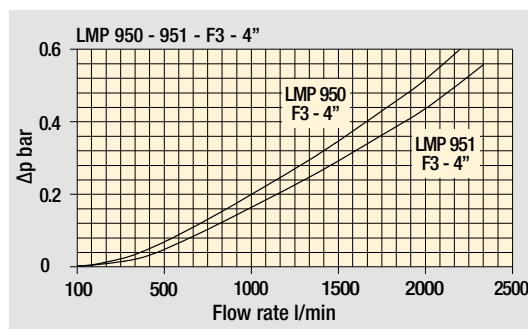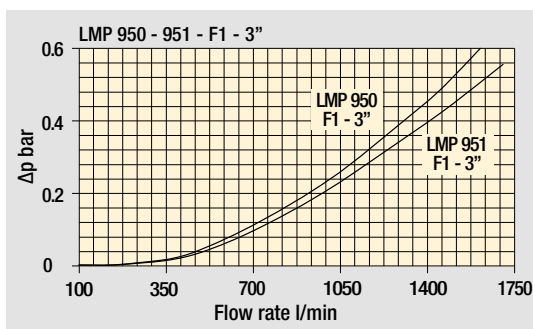

Bypass valve pressure drop

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

# LMP 950-951

## Designation & Ordering code

### COMPLETE FILTER

|   |   |
|---|---|
| <b>Series and size</b><br><b>LMP950   LMP951</b>  | Configuration example: <b>LMP951</b> <b>2</b> <b>B</b> <b>A</b> <b>F2</b> <b>A10</b> <b>N</b> <b>P01</b>                      |
| <b>Length</b><br><b>2   3</b>   |   |
| <b>Bypass valve</b><br><b>S</b> Without bypass <b>B</b> 3.5 bar   |   |
| <b>Seals and treatments</b><br><b>A</b> NBR<br><b>V</b> FPM   |   |
| <b>Connections</b><br><b>F1</b> 3" SAE 3000 psi/M<br><b>F2</b> 3" SAE 3000 psi/UNC<br><b>F3</b> 4" SAE 3000 psi/M<br><b>F4</b> 4" SAE 3000 psi/UNC  |   |
| <b>Filtration rating (filter media)</b><br><b>A03</b> Inorganic microfiber 3 µm <b>M25</b> Wire mesh 25 µm<br><b>A06</b> Inorganic microfiber 6 µm <b>M60</b> Wire mesh 60 µm<br><b>A10</b> Inorganic microfiber 10 µm <b>M90</b> Wire mesh 90 µm<br><b>A16</b> Inorganic microfiber 16 µm<br><b>A25</b> Inorganic microfiber 25 µm<br><b>WA025</b> Water absorber inorganic microfiber 25 µm |   |
| <b>Element Δp</b><br><b>N</b> 20 bar  | <b>Execution</b><br><b>P01</b> MP Filtri standard<br><b>P02</b> With internal tube for low flow rate<br><b>Pxx</b> Customized |

### FILTER ELEMENT

|   |  |
|---|--|
| <b>Element series and size</b><br><b>CU950</b>  | Configuration example: <b>CU950</b> <b>2</b> <b>A10</b> <b>A</b> <b>N</b> <b>P01</b> |
| <b>Element length</b><br><b>2   3</b>   |  |
| <b>Filtration rating (filter media)</b><br><b>A03</b> Inorganic microfiber 3 µm <b>M25</b> Wire mesh 25 µm<br><b>A06</b> Inorganic microfiber 6 µm <b>M60</b> Wire mesh 60 µm<br><b>A10</b> Inorganic microfiber 10 µm <b>M90</b> Wire mesh 90 µm<br><b>A16</b> Inorganic microfiber 16 µm<br><b>A25</b> Inorganic microfiber 25 µm<br><b>WA025</b> Water absorber inorganic microfiber 25 µm |  |
| <b>Seals</b><br><b>A</b> NBR<br><b>V</b> FPM  |  |
| <b>Element Δp</b><br><b>N</b> 20 bar  | <b>Execution</b><br><b>P01</b> MP Filtri standard<br><b>Pxx</b> Customized           |



### ACCESSORIES

|   |         |  |      |
|---|---------|--|------|
| <b>Differential indicators</b>                        | page    |  | page |
| <b>DEA</b> Electrical differential indicator          | 445     | <b>DTA</b> Electronic differential indicator | 448  |
| <b>DEM</b> Electrical differential indicator          | 445-446 | <b>DVA</b> Visual differential indicator     | 448  |
| <b>DLA</b> Electrical / visual differential indicator | 446-447 | <b>DVM</b> Visual differential indicator     | 448  |
| <b>DLE</b> Electrical / visual differential indicator | 447     |  |      |
| <b>Additional features</b>                            | page    |  | page |
| <b>T2</b> Plug  | 449     | <b>CFA</b> Retaining clamp                   | 450  |



# LMP 950-951


## Dimensions

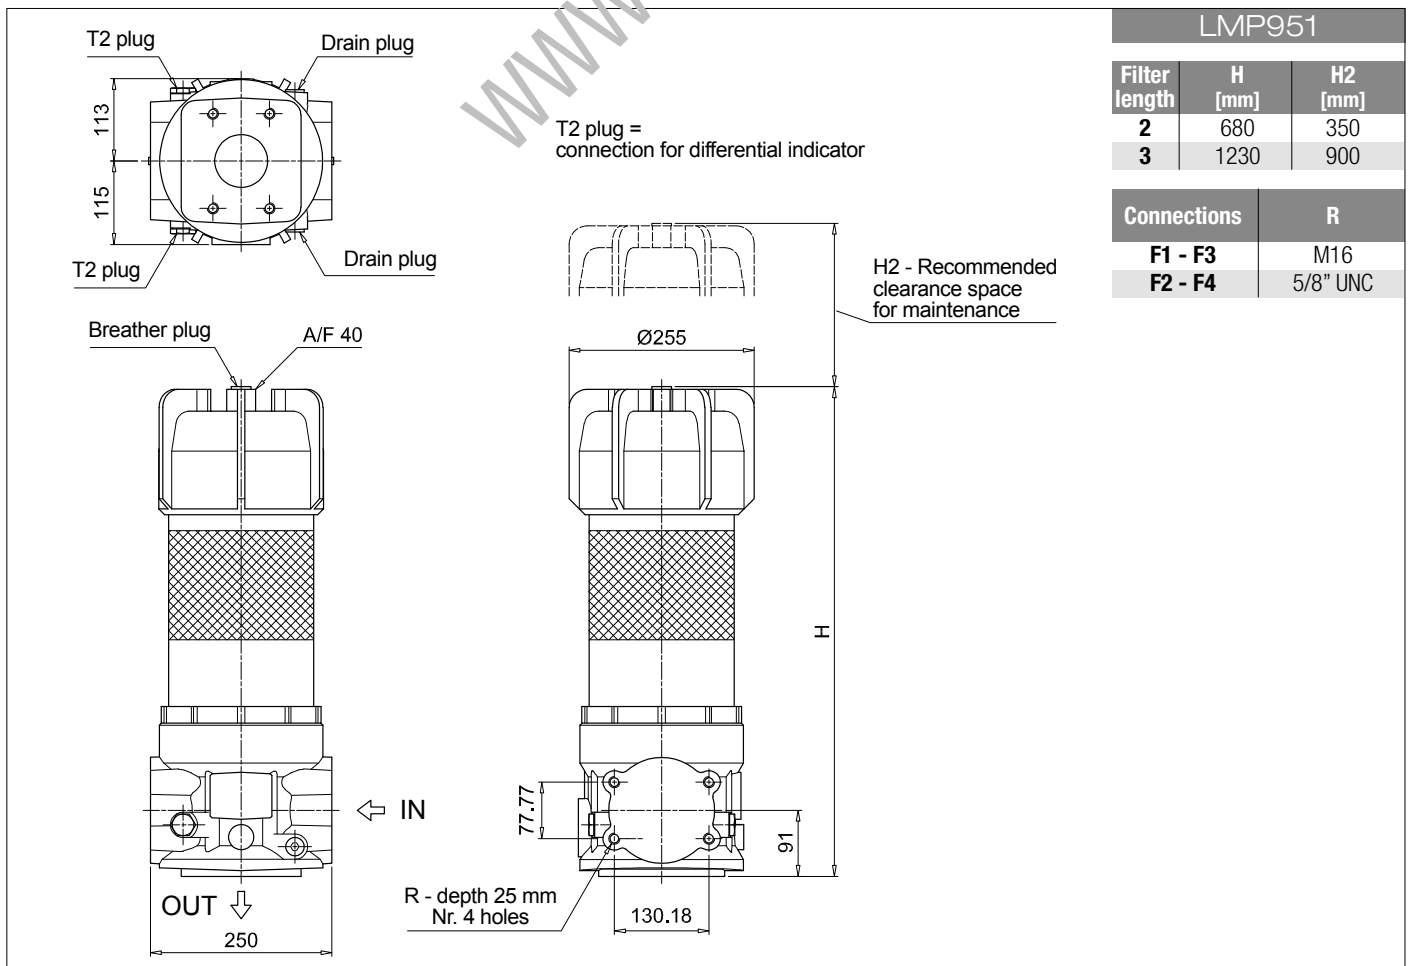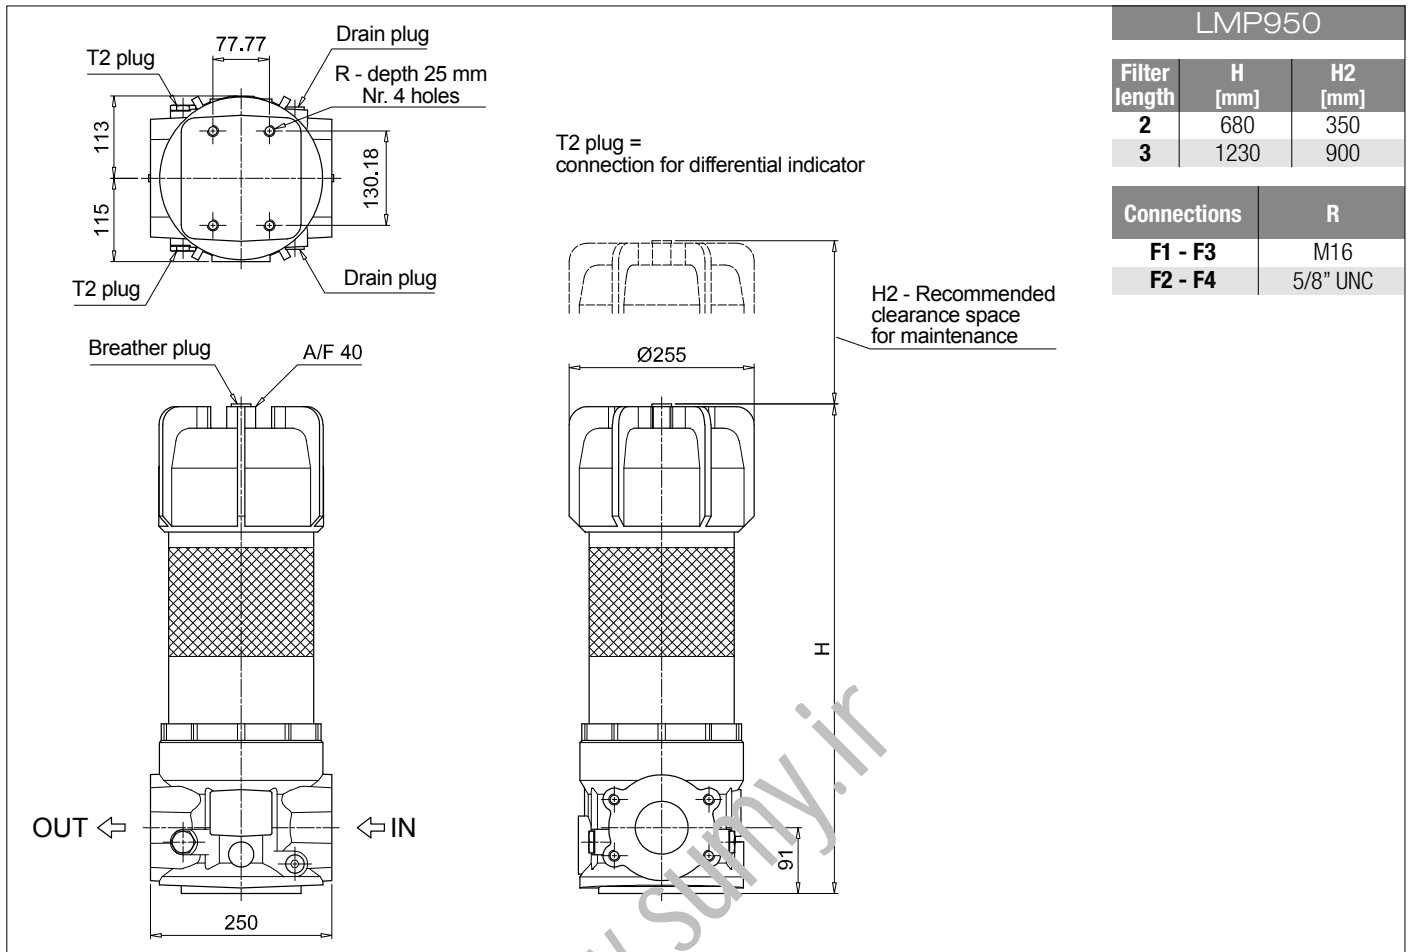

# LMP 950-951 SPARE PARTS

Order number for spare parts

LMP 950 - 951

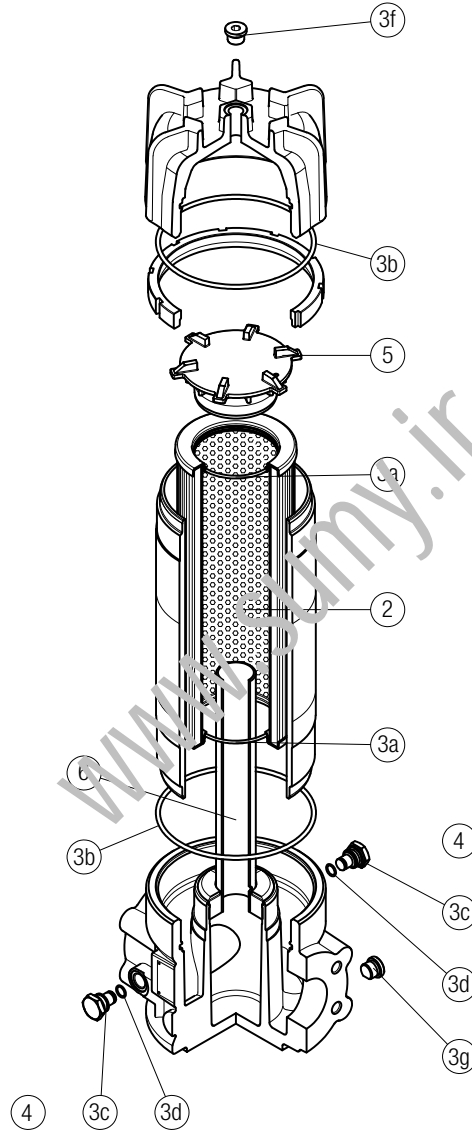

| Item:                  | Q.ty: 2 pcs.    |                      | Q.ty: 1 pc. |                           | Q.ty: 2 pcs. |                | Q.ty: 1 pc. |  | Q.ty: 1 pc. |  |
|------------------------|-----------------|----------------------|-------------|---------------------------|--------------|----------------|-------------|--|-------------|--|
| Filter series          | Filter element  | Seal Kit code number |             | Indicator connection plug |              | Housing spigot |             | Internal tube for low flow rate, exec. P02 |             |  |
| LMP 950-951 length 2-3 | See order table | NBR                  | FPM         | NBR                       | FPM          | no bypass      | with bypass | length 2                                   | length 3    |  |
|                        |                 | 02050367             | 02050368    | T2H                       | T2V          | 01044106       | 02001379    | 02025032                                   | 02025033    |  |

[www.sumy.ir](http://www.sumy.ir)

[www.sumy.ir](http://www.sumy.ir)

# LMP 952-953-954 series

Maximum working pressure up to 2.5 MPa (25 bar) - Flow rate up to 4500 l/min



# LMP 952-953-954 GENERAL INFORMATION

## Description

## Technical data

### Low & Medium Pressure filters

**Maximum working pressure up to 2.5 MPa (25 bar)**  
**Flow rate up to 4500 l/min**

LMP952, LMP953 and LMP954 are ranges of low pressure filter with large filtration surface mainly suitable for lubrication, off-line filtration of the reservoirs and filtration equipment.

Multiple LMP950 filters are connected to a manifold to reduce the pressure drop caused by the filter media and to increase the life time of the filter element.

They are directly connected to the lines of the system through the hydraulic fittings.

#### Available features:

- 4" flanged connections, for a maximum flow rate of 4500 l/min
- Base-mounting design, for ease of the replacement of the filter element
- Fine filtration rating, to get a good cleanliness level into the system
- Water removal elements, to remove the free water from the hydraulic fluid. For further information, see the Contamination Management document and the dedicate leaflet.
- Bypass valve, to relieve excessive pressure drop across the filter media
- Vent ports, to avoid air trapped into the filter going into the system
- Drain ports, to remove the fluid from the housing prior the maintenance work
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

- Off-line filtration of reservoirs
- Filtration systems

### Filter housing materials

- Head: Anodized Aluminium
- Housing: Anodized Aluminium
- Manifolds: Welded - Phosphatized Steel
- Bypass valve: Anodized Aluminium

### Pressure

Test pressure: 3.5 MPa (35 bar)

### Bypass valve

- Opening pressure 350 kPa (3.5 bar)  $\pm 10\%$
- Other opening pressures on request.

### $\Delta p$ element type

- Microfibre filter elements - series N: 20 bar
- Fluid flow through the filter element from OUT to IN

### Number of filter elements

- LMP 952: 2 filter elements CU950-3
- LMP 953: 3 filter elements CU950-3
- LMP 954: 4 filter elements CU950-3

### Seals

- Standard NBR series A
- Optional FPM series V

### Temperature

From -25 °C to +110 °C

### Connections

LMP 952-953-954:  
In-line Inlet/Outlet

### Note

LMP 952 - 953 - 954 filters are provided for vertical mounting



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series  | Weights [kg] |     | Volumes [dm <sup>3</sup> ] |     |
|----------------|--------------|-----|----------------------------|-----|
|                | Length       | 3   | Length                     | 3   |
| <b>LMP 952</b> |              | 96  |                            | 66  |
| <b>LMP 953</b> |              | 138 |                            | 99  |
| <b>LMP 954</b> |              | 192 |                            | 132 |

| Filter series  | Length   | Filter element design - N Series |      |      |      |      |                   |
|----------------|----------|----------------------------------|------|------|------|------|-------------------|
|                |          | A03                              | A06  | A10  | A16  | A25  | M25<br>M60<br>M90 |
| <b>LMP 952</b> | <b>3</b> | 2172                             | 2294 | 2766 | 3106 | 3256 | 3998              |
| <b>LMP 953</b> | <b>3</b> | 2842                             | 2964 | 3403 | 3696 | 3820 | 4395              |
| <b>LMP 954</b> | <b>3</b> | 3259                             | 3372 | 3770 | 4026 | 4133 | 4618              |

### Maximum flow rate for a complete low and medium pressure filter with a pressure drop $\Delta p = 0.7$ bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.




### Hydraulic symbols

| Filter series  | Execution S - Execution B | Execution S - Execution B | Execution S - Execution B |
|----------------|---------------------------|---------------------------|---------------------------|
| <b>LMP 952</b> | •                         | •                         | •                         |
| <b>LMP 953</b> | •                         | •                         | •                         |
| <b>LMP 954</b> | •                         | •                         | •                         |
|                |                           |                           |                           |
|                |                           |                           |                           |




# LMP 952-953-954 GENERAL INFORMATION

## Pressure drop


### Filter housings $\Delta p$ pressure drop

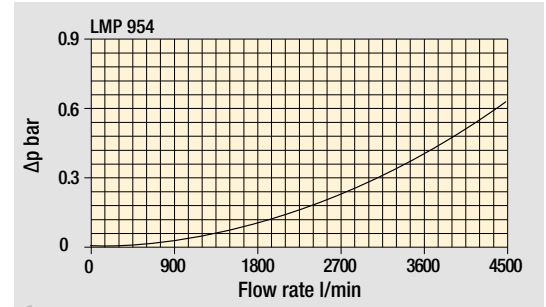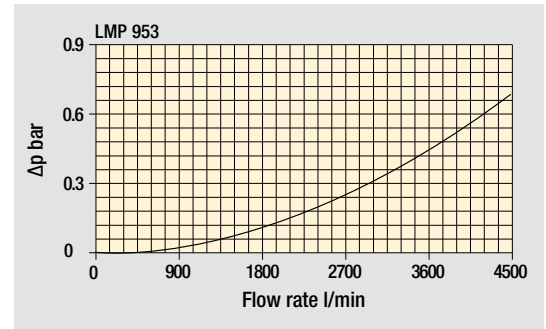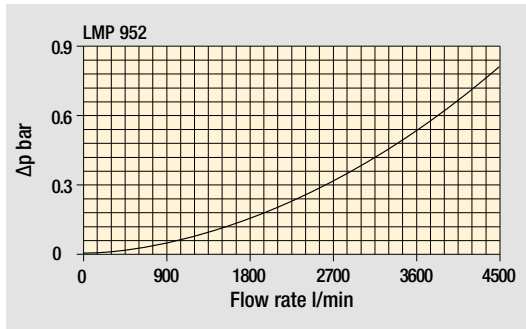

### Pressure drop of filter complete with cartridge, oil viscosity 30 mm<sup>2</sup>/s (cSt)

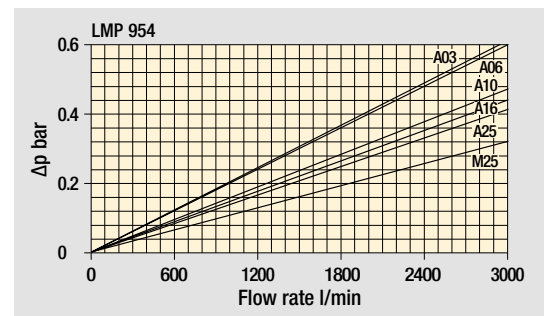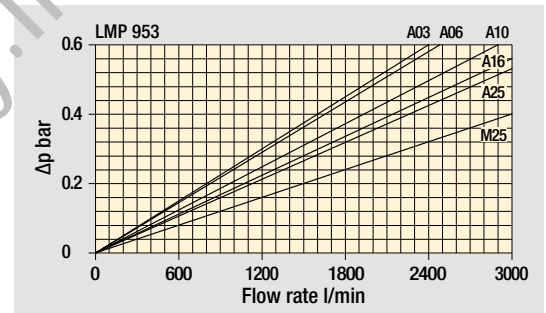
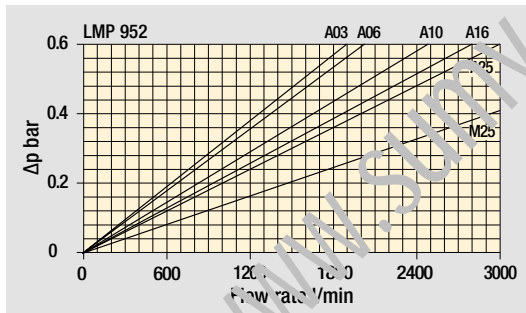


### Bypass valve pressure drop

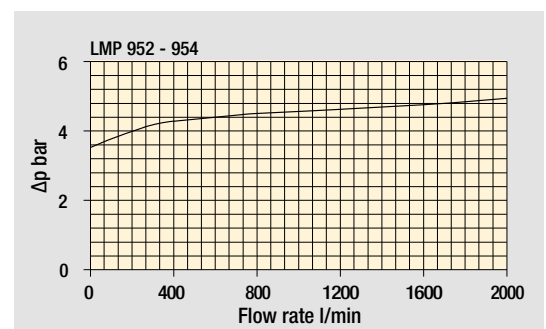


The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.



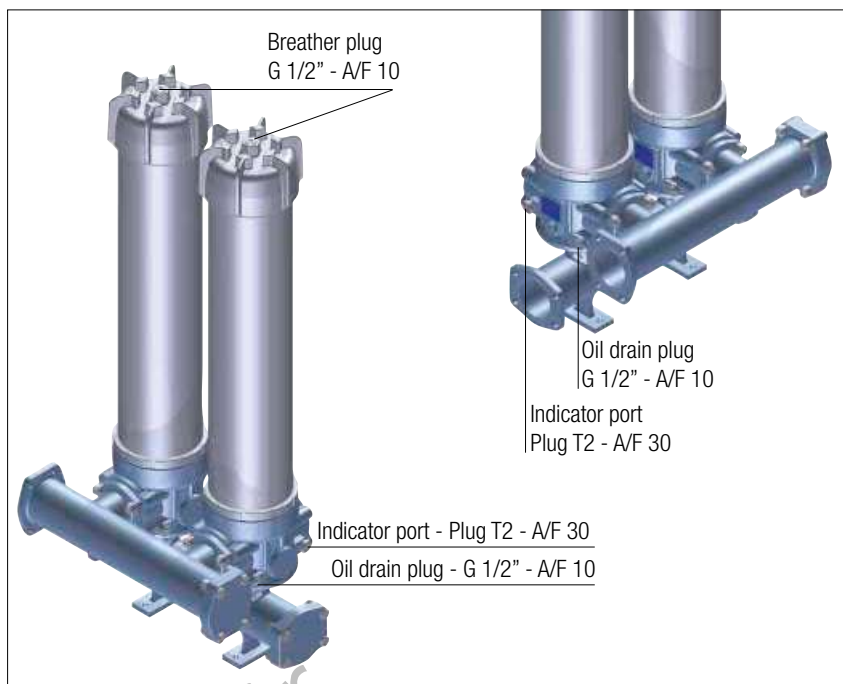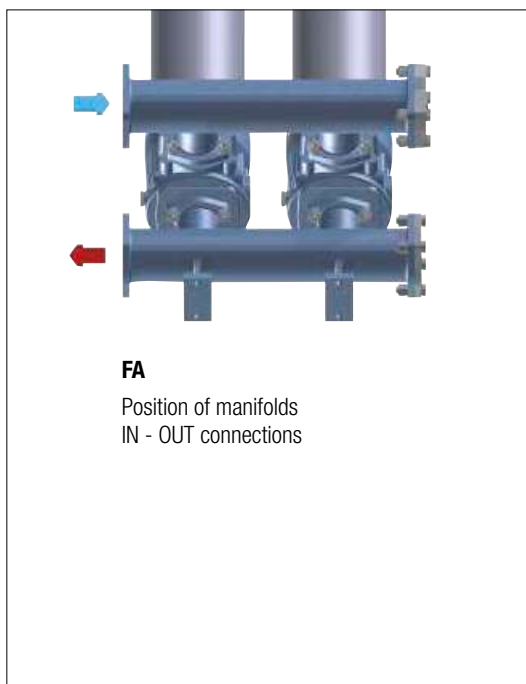


## Execution P02

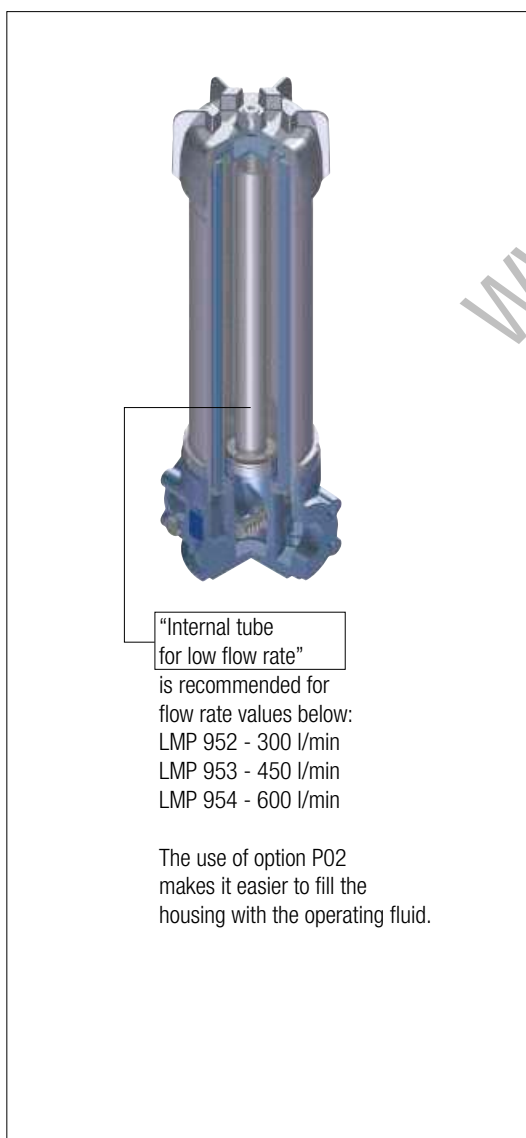

## CMV4 & CUV4 Flange options

| Code | Thread   | Materials   |
|------|----------|---|
| CMV4 | G 1 1/4" | 1 - 4" SAE flange<br>2 - O-R 4437 (FPM) for flange<br>3 - Plug G 1-1/4"<br>4 - O-R 3168 for plug (FPM)<br>5 - No. 4 Hex bolt screws UNI-EN 24017 M16 x 65-10.9<br>6 - No. 4 Spring washers UNI 1751-B 16<br>7 - No. 4 Nuts UNI 5587 - M16 |
| CUV4 | SAE 20   | 1 - 4" SAE flange<br>2 - O-R 4437 (FPM) for flange<br>3 - Plug SAE 20 1 5/8" - 12 UN<br>4 - 1147 O-R for plug (FPM)<br>5 - No. 4 Hex bolt screws 5/8" UNC x 2 1/2"<br>6 - No. 4 Spring washers UNI 1751-B 16<br>7 - No. 4 Nuts 5/8" UNC   |

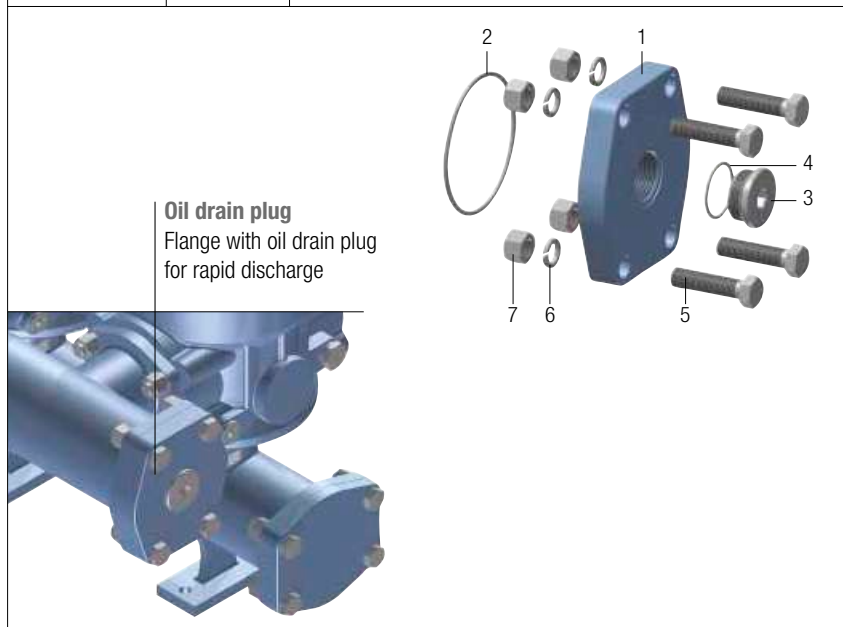

# LMP 952-953-954

## Designation & Ordering code

### COMPLETE FILTER

|  |                               |   |           |   |    |  |   |     |
|--|-------------------------------|---|-----------|---|----|--|---|-----|
| <b>Series and size</b><br>LMP952   LMP953   LMP954 | Configuration example: LMP952 | 3 | B         | A | FA | A10  | N | P01 |
| <b>Length</b><br>3                                 |                               |   |           |   |    |  |   |     |
| <b>Bypass valve</b><br>S Without bypass            |                               |   | B 3.5 bar |   |    |  |   |     |
| <b>Seals and treatments</b><br>A NBR<br>V FPM      |                               |   |           |   |    |  |   |     |
| <b>Connections</b><br>FA 4" SAE 3000 psi           |                               |   |           |   |    |  |   |     |
| <b>Filtration rating (filter media)</b>            |                               |   |           |   |    |  |   |     |
| A03 Inorganic microfiber 3 µm                      | M25 Wire mesh 25 µm           |   |           |   |    |  |   |     |
| A06 Inorganic microfiber 6 µm                      | M60 Wire mesh 60 µm           |   |           |   |    |  |   |     |
| A10 Inorganic microfiber 10 µm                     | M90 Wire mesh 90 µm           |   |           |   |    |  |   |     |
| A16 Inorganic microfiber 16 µm                     |                               |   |           |   |    |  |   |     |
| A25 Inorganic microfiber 25 µm                     |                               |   |           |   |    |  |   |     |
| WA025 Water absorber inorganic microfiber 25 µm    |                               |   |           |   |    |  |   |     |
|  | <b>Element Δp</b><br>N 20 bar |   |           |   |    |  |   |     |
|  |                               |   |           |   |    | <b>Execution</b><br>P01 MP Filtri standard<br>P02 With internal tube for low flow rate<br>Pxx Customized |   |     |

### FILTER ELEMENT

|   |                               |   |     |   |   |  |
|---|-------------------------------|---|-----|---|---|--|
| <b>Element series and size</b><br>CU950         | Configuration example: CU950  | 3 | A10 | A | N | P01  |
| <b>Element length</b><br>3                      |                               |   |     |   |   |  |
| <b>Filter series and size</b>                   |                               |   |     |   |   |  |
| LMP952  | Nr. 2 filter elements         |   |     |   |   |  |
| LMP953  | Nr. 3 filter elements         |   |     |   |   |  |
| LMP954  | Nr. 4 filter elements         |   |     |   |   |  |
| <b>Filtration rating (filter media)</b>         |                               |   |     |   |   |  |
| A03 Inorganic microfiber 3 µm                   | M25 Wire mesh 25 µm           |   |     |   |   |  |
| A06 Inorganic microfiber 6 µm                   | M60 Wire mesh 60 µm           |   |     |   |   |  |
| A10 Inorganic microfiber 10 µm                  | M90 Wire mesh 90 µm           |   |     |   |   |  |
| A16 Inorganic microfiber 16 µm                  |                               |   |     |   |   |  |
| A25 Inorganic microfiber 25 µm                  |                               |   |     |   |   |  |
| WA025 Water absorber inorganic microfiber 25 µm |                               |   |     |   |   |  |
| <b>Seals</b><br>A NBR<br>V FPM                  |                               |   |     |   |   |  |
|   | <b>Element Δp</b><br>N 20 bar |   |     |   |   |  |
|   |                               |   |     |   |   | <b>Execution</b><br>P01 MP Filtri standard<br>Pxx Customized |


### ACCESSORIES

|  |         |                                       |      |
|--|---------|---------------------------------------|------|
| <b>Differential indicators</b>                 | page    |                                       | page |
| DEA Electrical differential indicator          | 445     | DTA Electronic differential indicator | 448  |
| DEM Electrical differential indicator          | 445-446 | DVA Visual differential indicator     | 448  |
| DLA Electrical / visual differential indicator | 446-447 | DVM Visual differential indicator     | 448  |
| DLE Electrical / visual differential indicator | 447     |                                       |      |
| <b>Additional features</b>                     | page    |                                       |      |
| T2 Plug  | 449     |                                       |      |

# LMP 952-953-954

Dimensions

LMP952

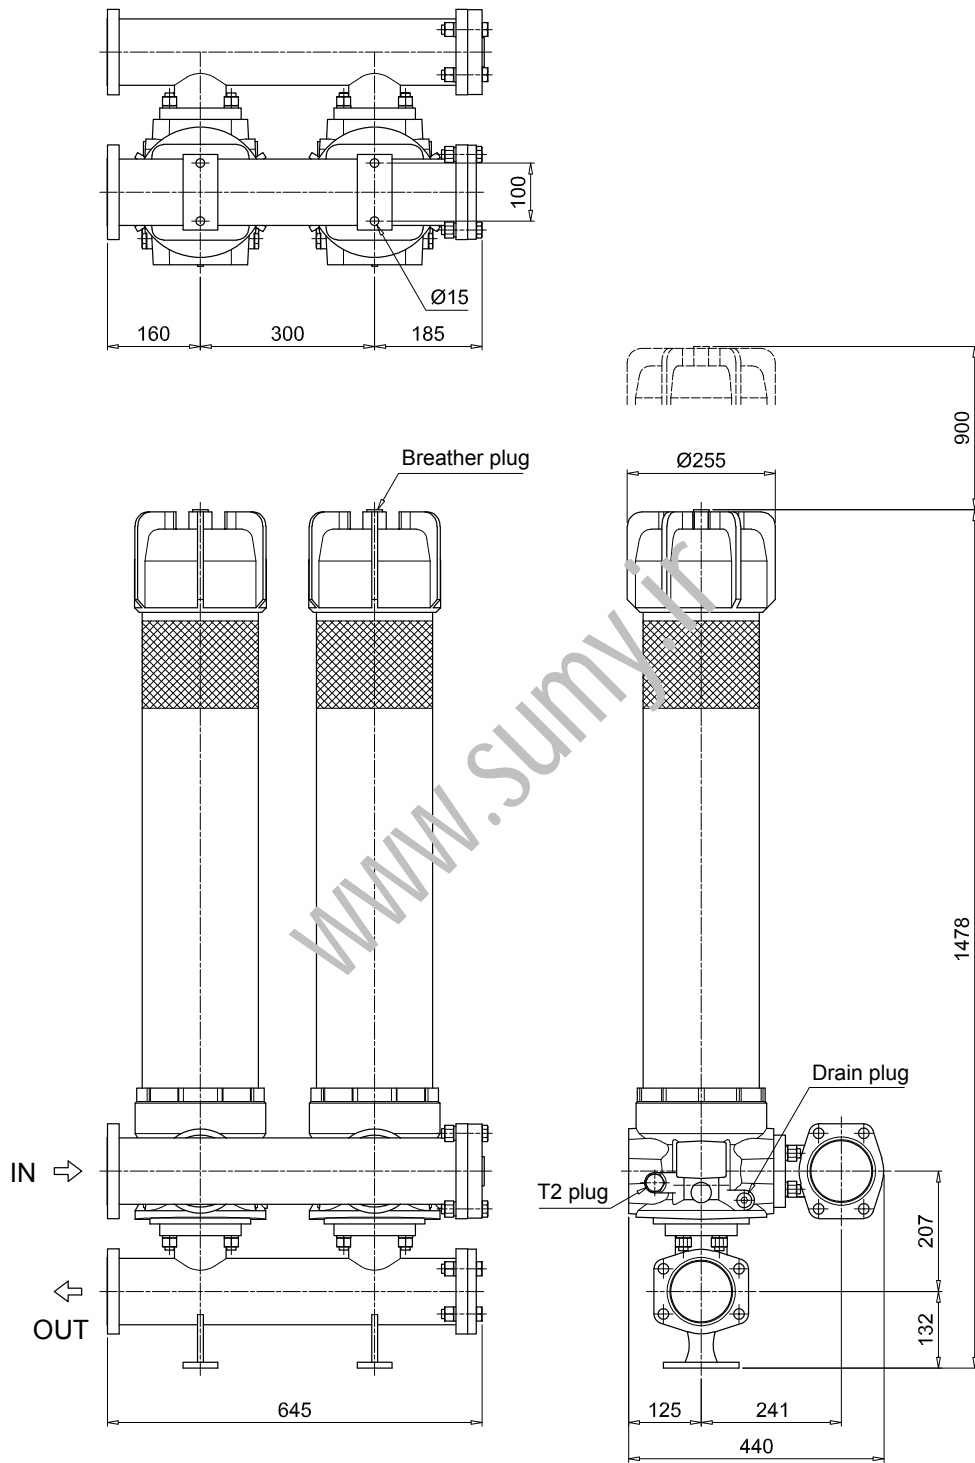


T2 plug =  
connection for differential indicator

# LMP 952-953-954

## Dimensions

LMP953

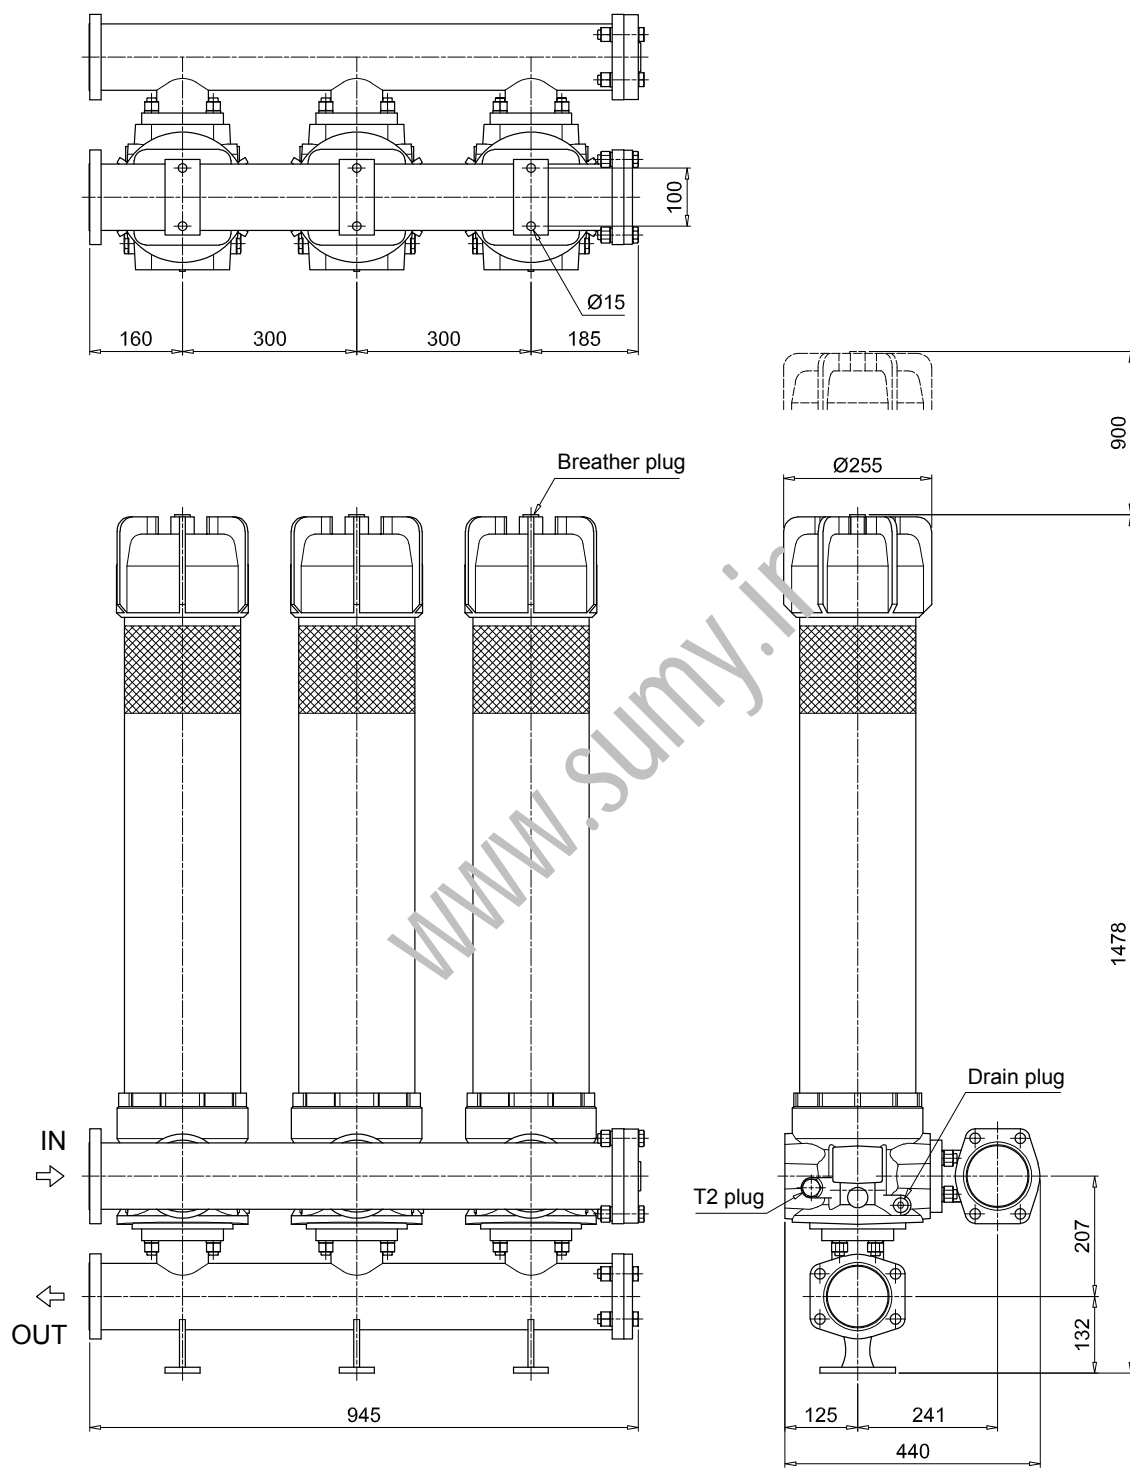


T2 plug =  
connection for differential indicator

# LMP 952-953-954

Dimensions

LMP954

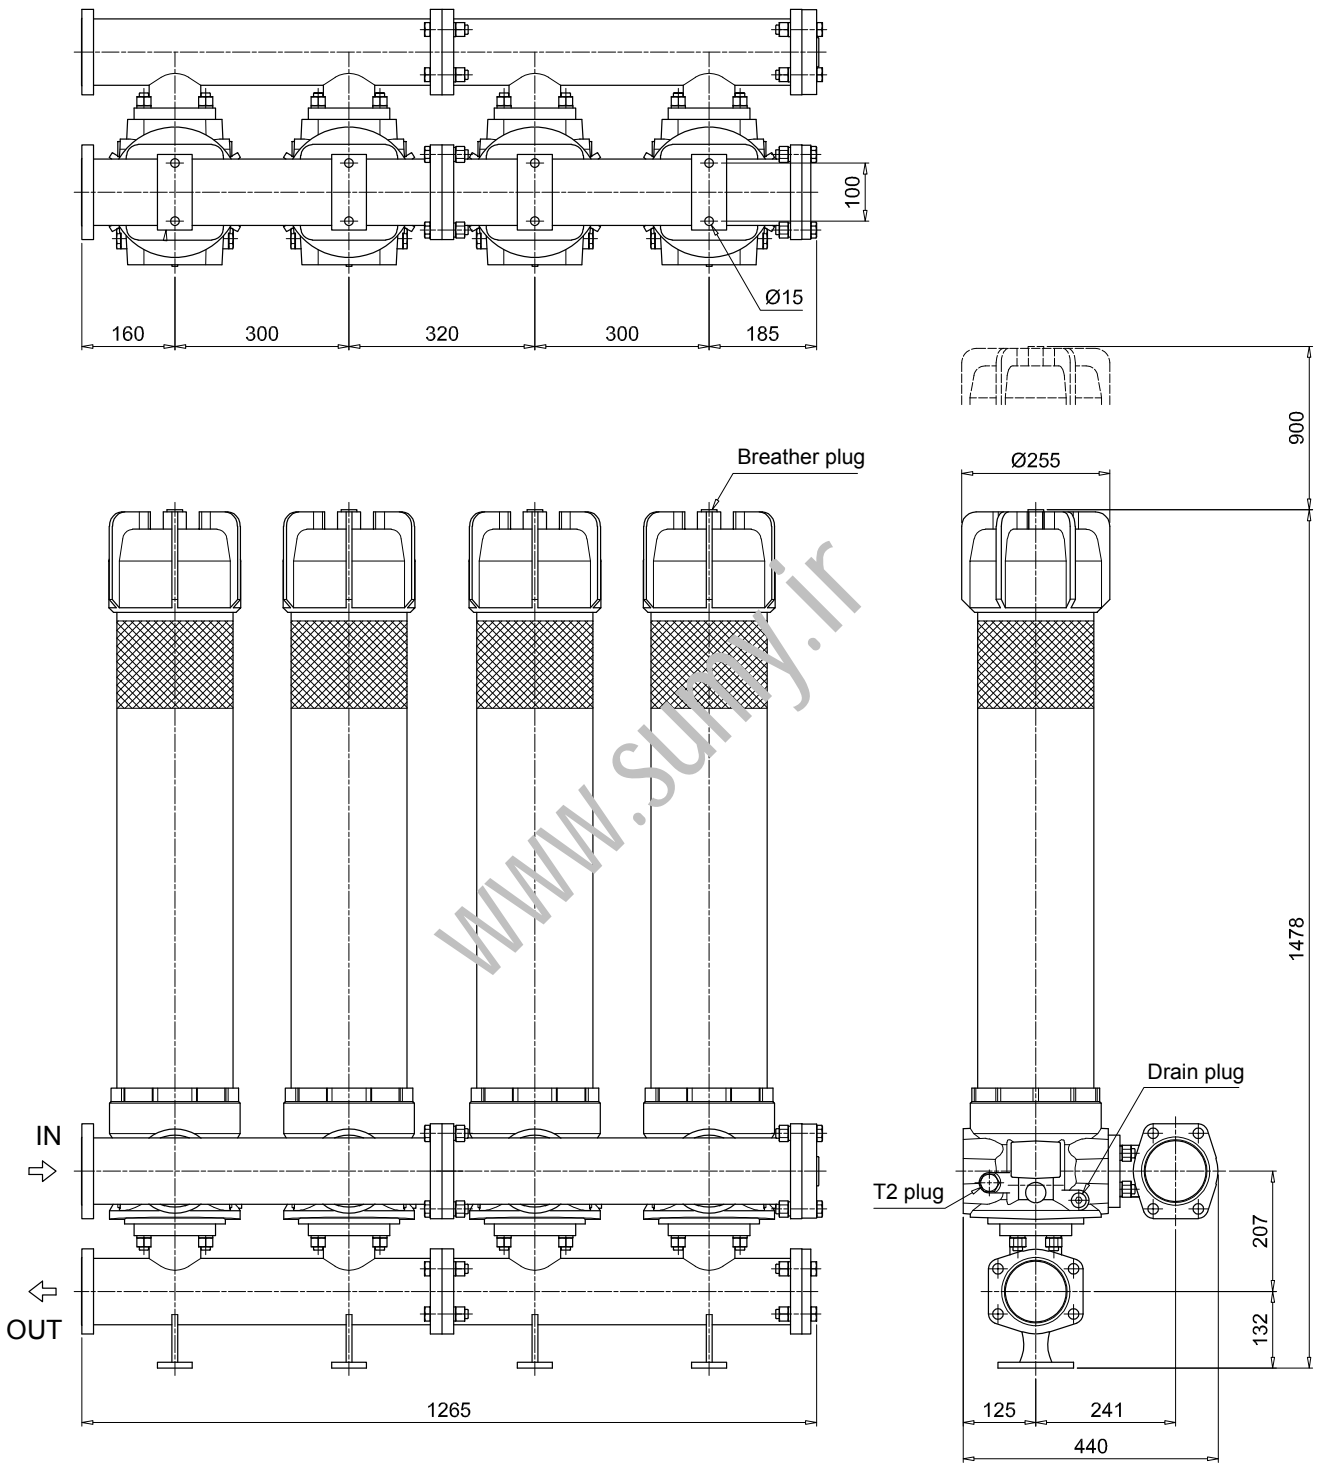


T2 plug =  
connection for differential indicator

# LMP 952-953-954 SPARE PARTS

Order number for spare parts

LMP 952 - 953 - 954

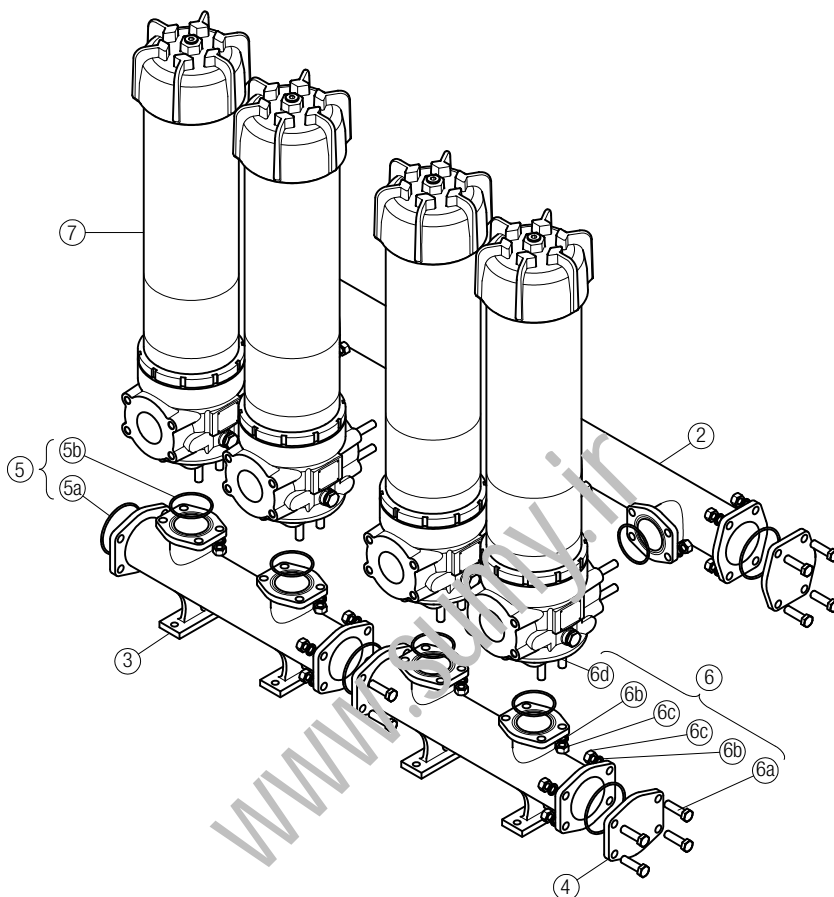

Item 7:  
for complete filter code and  
spare parts, see  
LMP 950 - 951 series chapter

Quantity:  
- filter spare parts:  
LMP 952 - 2 pcs.  
LMP 953 - 3 pcs.  
LMP 954 - 4 pcs.

- filter seal kit:  
LMP 952 - 2 pcs.  
LMP 953 - 3 pcs.  
LMP 954 - 4 pcs.

| Item:         | 2      |             | 3        |                                     | 4        |                    | 5 (5a-5b) |          | 6 (6a ÷ 6d)            |          | 7      |                    |
|---------------|--------|-------------|----------|-------------------------------------|----------|--------------------|-----------|----------|------------------------|----------|--------|--------------------|
| Filter series | Q.ty   | Manifold IN | OUT      | 4" SAE 3000 psi plugged flange Q.ty | Q.ty     | Manifolds seal kit |           | Q.ty     | Threaded fasteners kit |          | Q.ty   | Filter             |
| LMP 952       | 1 pc.  | 01039270    | 01039271 | 2 pcs.                              | 01042012 | 1 pc.              | 02050404  | 02050405 | 1 pc.                  | 02049051 | 2 pcs. | LMP9513xxF1xxxNP0x |
| LMP 953       | 1 pc.  | 01039337    | 01039338 | 2 pcs.                              |          | 1 pc.              | 02050404  | 02050405 | 1 pc.                  | 02049052 | 3 pcs. |                    |
| LMP 954       | 2 pcs. | 01039270    | 01039271 | 2 pcs.                              |          | 1 pc.              | 02050406  | 02050407 | 1 pc.                  | 02049053 | 4 pcs. |                    |

[www.sumy.ir](http://www.sumy.ir)

[www.sumy.ir](http://www.sumy.ir)



# LMD 211 series

Maximum working pressure up to 6 MPa (60 bar) - Flow rate up to 200 l/min



# LMD 211 GENERAL INFORMATION

## Description

## Technical data

### Low & Medium Pressure filters

#### Duplex

**Maximum working pressure up to 6 MPa (60 bar)**

**Flow rate up to 200 l/min**

LMD211 is a range of versatile low pressure duplex filter with integrated changeover function to allow the filter element replacement without the system shut-down.

They are directly connected to the lines of the system through the hydraulic fittings.

#### Available features:

- Female threaded connections up to 1 1/2" and flanged connections up to 1 1/2", for a maximum flow rate of 200 l/min
- Fine filtration rating, to get a good cleanliness level into the system
- Water removal elements, to remove the free water from the hydraulic fluid. For further information, see the Contamination Management document and the dedicate leaflet.
- Balancing valve integrated in the changeover lever, to equalize the housing pressure before the switch
- Bypass valve, to relieve excessive pressure drop across the filter media
- Vent ports, to avoid air trapped into the filter going into the system
- Drain ports, to remove the fluid from the housing prior the maintenance work
- Optional sampling ports, to get samples of fluid or to connect additional instrument to the system
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

- Systems where shut-down causes high costs
- Systems where shut-down causes safety issues

#### Filter housing materials

- Head: Aluminium
- Bowl: Cataphoretic Painted Steel
- Bypass valve: AISI 304 - Nylon

#### Pressure

- Test pressure: 9 MPa (90 bar)
- Burst pressure: 21 MPa (210 bar)
- Pulse pressure fatigue test: 1 000 000 cycles with pressure from 0 to 6 MPa (60 bar)

#### Bypass valve

- Opening pressure 350 kPa (3.5 bar)  $\pm 10\%$
- Other opening pressures on request.

#### $\Delta p$ element type

- Microfibre filter elements - series N: 20 bar
- Fluid flow through the filter element from OUT to IN

#### Seals

- Standard NBR series A
- Optional: FPM series V

#### Temperature

From -25° C to +110° C

#### Connections

Inlet/Outlet In-Line

#### Note

LMD 211 filters are provided for vertical mounting



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series  | Weights [kg] |     |      |      | Volumes [dm <sup>3</sup> ] |     |     |     |
|----------------|--------------|-----|------|------|----------------------------|-----|-----|-----|
|                | Length       | 1   | 2    | 3    | Length                     | 1   | 2   | 3   |
| <b>LMD 211</b> |              | 9.5 | 11.2 | 12.8 |                            | 4.1 | 4.6 | 5.3 |

| Filter series | Length | Filter element design - N Series |     |     |     |     |     |     |     |     |     |
|---------------|--------|----------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|               |        | A03                              | A06 | A10 | A16 | A25 | M25 | M60 | M90 | P10 | P25 |
| LMD 211       | 1      | 90                               | 95  | 140 | 147 | 156 | 191 | 192 | 192 | 177 | 181 |
|               | 2      | 113                              | 121 | 158 | 162 | 173 | 192 | 192 | 193 | 181 | 183 |
|               | 3      | 131                              | 146 | 166 | 169 | 177 | 193 | 194 | 194 | 184 | 187 |

### Maximum flow rate for a complete low and medium pressure filter with a pressure drop $\Delta p = 0.7$ bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.



For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure.

Please, contact our Sales Department for further additional information.


### Hydraulic symbols

| Filter series | Style S | Style B |
|---------------|---------|---------|
| LMD 211       | •       | •       |




### Pressure drop

Filter housings  $\Delta p$  pressure drop

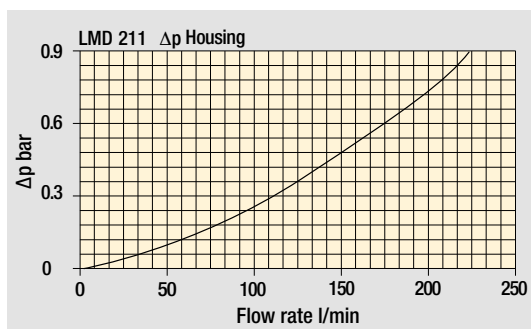

Bypass valve pressure drop

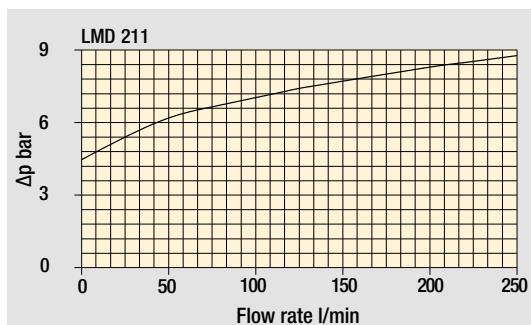

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

# LMD 211

## Designation & Ordering code

### COMPLETE FILTER

|  |   |     |     |  |  |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
|--|---|-----|-----|--|--|--|--|--|--|--|--------------------------------------|----------------------------|--------------------------------------|----------------------------|---------------------------------------|----------------------------|---------------------------------------|--|---------------------------------------|--|
| <b>Series and size</b>                                 | Configuration example: <b>LMD211</b>   <b>3</b>   <b>B</b>   <b>A</b>   <b>C</b>   <b>6</b>   <b>A10</b>   <b>N</b>   <b>P01</b>  |     |     |  |  |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| <b>LMD211</b>  |   |     |     |  |  |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| <b>Length</b>  | 1   2   3   |     |     |  |  |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| <b>Bypass valve</b>                                    | S Without bypass   B 3.5 bar  |     |     |  |  |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| <b>Seals and treatments</b>                            | Filtration rating   |     |     |  |  |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| A NBR  | Axx   | Mxx | Pxx |  |  |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| V FPM  | •   | •   | •   |  |  |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| W NBR compatible with fluids HFA-HFB-HFC               | •   | •   |     |  |  |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| <b>Connections</b>                                     | C G 1 1/2"  |     |     |  |  |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| F 1 1/2" NPT   |   |     |     |  |  |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| I SAE 24 - 1 7/8" - 12 UN                              |   |     |     |  |  |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| L 1 1/2" SAE 3000 psi/M + G 1 1/4"                     |   |     |     |  |  |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| M 1 1/2" SAE 3000 psi/UNC + 1 1/4" NPT                 |   |     |     |  |  |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| N 1 1/2" SAE 3000 psi/UNC + SAE 20 - 1 5/8" UN         |   |     |     |  |  |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| <b>Connection for differential indicator</b>           | 6 With plugged connection   |     |     |  |  |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| <b>Filtration rating (filter media)</b>                | <table border="0"> <tr> <td><b>A03</b> Inorganic microfiber 3 µm</td> <td><b>M25</b> Wire mesh 25 µm</td> </tr> <tr> <td><b>A06</b> Inorganic microfiber 6 µm</td> <td><b>M60</b> Wire mesh 60 µm</td> </tr> <tr> <td><b>A10</b> Inorganic microfiber 10 µm</td> <td><b>M90</b> Wire mesh 90 µm</td> </tr> <tr> <td><b>A16</b> Inorganic microfiber 16 µm</td> <td><b>P10</b> Resin impregnated paper 10 µm</td> </tr> <tr> <td><b>A25</b> Inorganic microfiber 25 µm</td> <td><b>P25</b> Resin impregnated paper 25 µm</td> </tr> </table> |     |     |  |  |  |  |  |  |  | <b>A03</b> Inorganic microfiber 3 µm | <b>M25</b> Wire mesh 25 µm | <b>A06</b> Inorganic microfiber 6 µm | <b>M60</b> Wire mesh 60 µm | <b>A10</b> Inorganic microfiber 10 µm | <b>M90</b> Wire mesh 90 µm | <b>A16</b> Inorganic microfiber 16 µm | <b>P10</b> Resin impregnated paper 10 µm | <b>A25</b> Inorganic microfiber 25 µm | <b>P25</b> Resin impregnated paper 25 µm |
| <b>A03</b> Inorganic microfiber 3 µm                   | <b>M25</b> Wire mesh 25 µm  |     |     |  |  |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| <b>A06</b> Inorganic microfiber 6 µm                   | <b>M60</b> Wire mesh 60 µm  |     |     |  |  |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| <b>A10</b> Inorganic microfiber 10 µm                  | <b>M90</b> Wire mesh 90 µm  |     |     |  |  |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| <b>A16</b> Inorganic microfiber 16 µm                  | <b>P10</b> Resin impregnated paper 10 µm  |     |     |  |  |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| <b>A25</b> Inorganic microfiber 25 µm                  | <b>P25</b> Resin impregnated paper 25 µm  |     |     |  |  |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| <b>WA025</b> Water absorber inorganic microfiber 25 µm |   |     |     |  |  |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
|  | <b>Element Δp</b>   |     |     | <b>Execution</b>                         |  |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
|  | N 20 bar  |     |     | P01 MP Filtri standard<br>Pxx Customized |  |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |


### FILTER ELEMENT

|  |   |     |     |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
|--|---|-----|-----|--|--|--|--|--|--------------------------------------|----------------------------|--------------------------------------|----------------------------|---------------------------------------|----------------------------|---------------------------------------|--|---------------------------------------|--|
| <b>Element series and size</b>                         | Configuration example: <b>CU210</b>   <b>3</b>   <b>A10</b>   <b>A</b>   <b>N</b>   <b>P01</b>  |     |     |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| <b>CU210</b>   |   |     |     |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| <b>Element length</b>                                  | 1   2   3   |     |     |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| <b>Filtration rating (filter media)</b>                | <table border="0"> <tr> <td><b>A03</b> Inorganic microfiber 3 µm</td> <td><b>M25</b> Wire mesh 25 µm</td> </tr> <tr> <td><b>A06</b> Inorganic microfiber 6 µm</td> <td><b>M60</b> Wire mesh 60 µm</td> </tr> <tr> <td><b>A10</b> Inorganic microfiber 10 µm</td> <td><b>M90</b> Wire mesh 90 µm</td> </tr> <tr> <td><b>A16</b> Inorganic microfiber 16 µm</td> <td><b>P10</b> Resin impregnated paper 10 µm</td> </tr> <tr> <td><b>A25</b> Inorganic microfiber 25 µm</td> <td><b>P25</b> Resin impregnated paper 25 µm</td> </tr> </table> |     |     |  |  |  |  |  | <b>A03</b> Inorganic microfiber 3 µm | <b>M25</b> Wire mesh 25 µm | <b>A06</b> Inorganic microfiber 6 µm | <b>M60</b> Wire mesh 60 µm | <b>A10</b> Inorganic microfiber 10 µm | <b>M90</b> Wire mesh 90 µm | <b>A16</b> Inorganic microfiber 16 µm | <b>P10</b> Resin impregnated paper 10 µm | <b>A25</b> Inorganic microfiber 25 µm | <b>P25</b> Resin impregnated paper 25 µm |
| <b>A03</b> Inorganic microfiber 3 µm                   | <b>M25</b> Wire mesh 25 µm  |     |     |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| <b>A06</b> Inorganic microfiber 6 µm                   | <b>M60</b> Wire mesh 60 µm  |     |     |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| <b>A10</b> Inorganic microfiber 10 µm                  | <b>M90</b> Wire mesh 90 µm  |     |     |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| <b>A16</b> Inorganic microfiber 16 µm                  | <b>P10</b> Resin impregnated paper 10 µm  |     |     |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| <b>A25</b> Inorganic microfiber 25 µm                  | <b>P25</b> Resin impregnated paper 25 µm  |     |     |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| <b>WA025</b> Water absorber inorganic microfiber 25 µm |   |     |     |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| <b>Seals</b>   | Filtration rating   |     |     |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| A NBR  | Axx   | Mxx | Pxx |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| V FPM  | •   | •   | •   |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
| W NBR compatible with fluids HFA-HFB-HFC               | •   | •   |     |  |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
|  | <b>Element Δp</b>   |     |     | <b>Execution</b>                         |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |
|  | N 20 bar  |     |     | P01 MP Filtri standard<br>Pxx Customized |  |  |  |  |                                      |                            |                                      |                            |                                       |                            |                                       |  |                                       |  |

### ACCESSORIES

|   |         |  |      |
|---|---------|--|------|
| <b>Differential indicators</b>                        | page    |  | page |
| <b>DEA</b> Electrical differential indicator          | 445     | <b>DTA</b> Electronic differential indicator | 448  |
| <b>DEM</b> Electrical differential indicator          | 445-446 | <b>DVA</b> Visual differential indicator     | 448  |
| <b>DLA</b> Electrical / visual differential indicator | 446-447 | <b>DVM</b> Visual differential indicator     | 448  |
| <b>DLE</b> Electrical / visual differential indicator | 447     |  |      |
| <b>Additional features</b>                            | page    |  |      |
| <b>T2</b> Plug  | 449     |  |      |


| LMD211        |          |
|---------------|----------|
| Filter length | H [mm]   |
| <b>1</b>      | 383      |
| <b>2</b>      | 513      |
| <b>3</b>      | 651      |
| Connections   | R        |
| <b>C</b>      | M10      |
| <b>F - I</b>  | 3/8" UNC |
| <b>L</b>      | M10      |
| <b>M - N</b>  | 3/8" UNC |

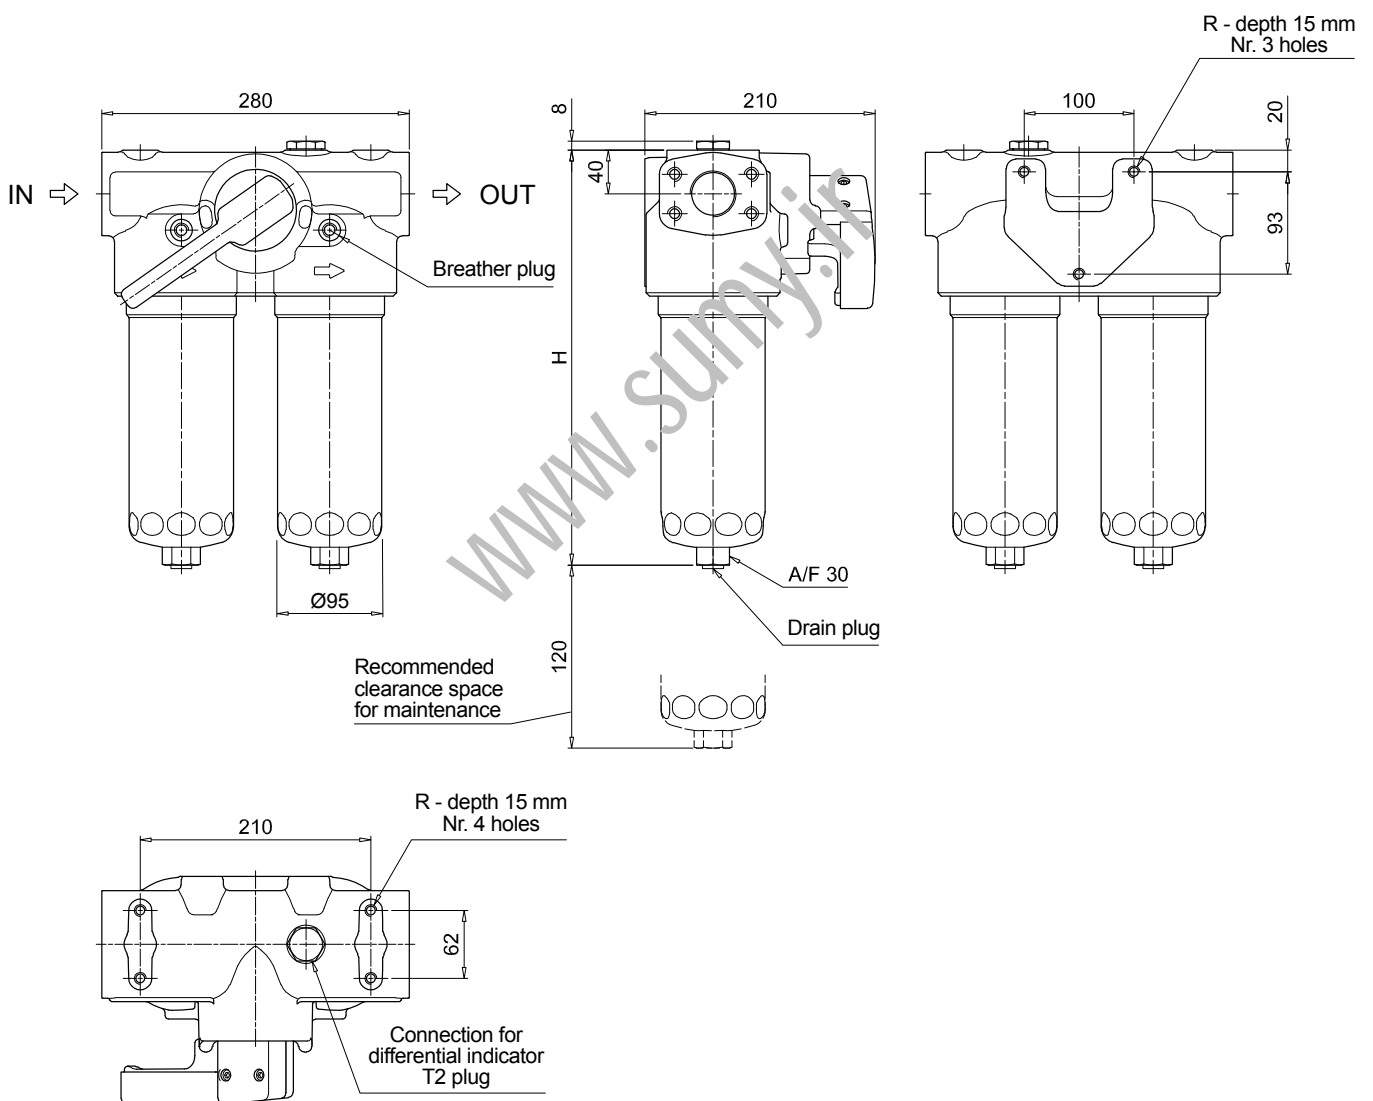

# LMD 211 SPARE PARTS

Order number for spare parts

LMD 211

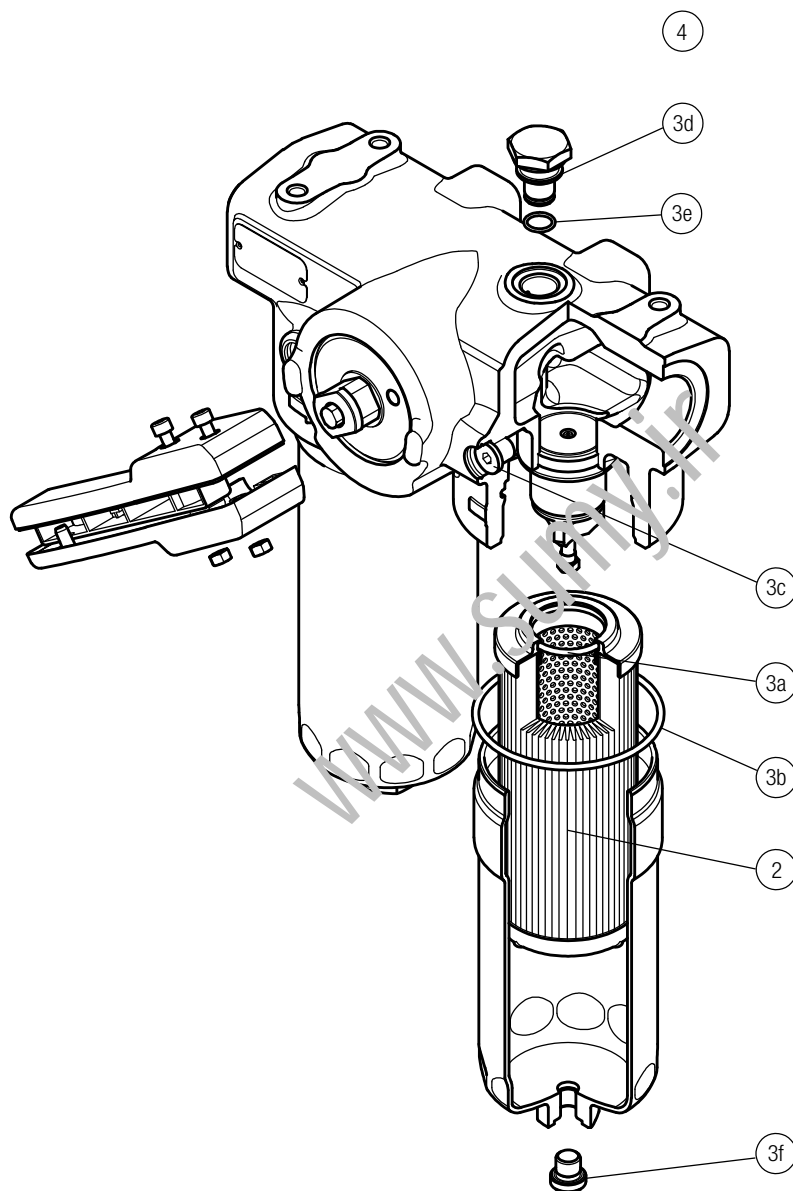

| Item:         | Q.ty: 1 pc.     |                          | Q.ty: 1 pc. |                               | Q.ty: 2 pcs. |  |
|---------------|-----------------|--------------------------|-------------|-------------------------------|--------------|--|
| Filter series | Filter element  | Seal Kit code number NBR | FPM         | Indicator connection plug NBR | FPM          |  |
| <b>LDD</b>    | See order table | 02050671                 | 02050672    | T2H                           | T2V          |  |

[www.sumy.ir](http://www.sumy.ir)

[www.sumy.ir](http://www.sumy.ir)



# LMD 400-401 & 431 series

Maximum working pressure up to 1.6 MPa (16 bar) - Flow rate up to 600 l/min



## Description

## Technical data

**Low & Medium Pressure filters****Duplex****Maximum working pressure up to 1.6 MPa (16 bar)****Flow rate up to 600 l/min**

LMD400 is a range of versatile low pressure duplex filter with integrated changeover function to allow the filter element replacement without the system shut-down.

They are directly connected to the lines of the system through the hydraulic fittings.

**Available features:**

- 2 1/2" flanged connections, for a maximum flow rate of 600 l/min
- LMD400: In-line connections
- LMD401: In-line connections with compact design
- LMD431: In-line connections with compact design and base mounting
- Base-mounting design also available, for ease of the replacement of the filter element
- Fine filtration rating, to get a good cleanliness level into the system
- Water removal elements, to remove the free water from the hydraulic fluid. For further information, see the Contamination Management document and the dedicate leaflet.
- Balancing valve, to equalize the housing pressure before the switch
- Bypass valve, to relieve excessive pressure drop across the filter media
- Vent ports, to avoid air trapped into the filter going into the system
- Drain ports, to remove the fluid from the housing prior the maintenance work
- Visual, electrical and electronic differential clogging indicators

**Common applications:**

- Systems where shut-down causes high costs
- Systems where shut-down causes safety issues

**Filter housing materials**

- Head: Anodized Aluminium
- Housing: Anodized Aluminium
- Manifolds: Steel - Painted black
- Bypass valve: Steel
- 3-way ball valve: Steel housings - Stainless Steel ball
- Valve: Phosphatized Steel - Stainless Steel

**Pressure**

Test pressure: 2.5 MPa (25 bar)

**Bypass valve**

- Opening pressure 350 kPa (3.5 bar)  $\pm 10\%$
- Other opening pressures on request.

 **$\Delta p$  element type**

- Microfibre filter elements - series N - W: 20 bar
- Fluid flow through the filter element from OUT to IN

**Seals**

FPM series V

**Temperature**

from -25° C to +110° C

**Connections**

- LMD 400-401: In-line Inlet/Outlet
- LMD 401: Same side
- LMD 400-401-431: In-Line

**Note**

LMP 400 - 401 - 431 filters are provided for vertical mounting

Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series        | Weights [kg] |    |    |   | Volumes [dm <sup>3</sup> ] |    |    |   |
|----------------------|--------------|----|----|---|----------------------------|----|----|---|
|                      | Length       | 4  | 5  | 6 | Length                     | 4  | 5  | 6 |
| <b>LMD 400 - 401</b> | 60           | 65 | 72 |   | 20                         | 28 | 33 |   |
| <b>LMD 431</b>       | -            | 68 | 78 |   | -                          | 28 | 33 |   |

| Filter series        | Length   | Filter element design - N Series |     |     |     |     |                   |     |     |
|----------------------|----------|----------------------------------|-----|-----|-----|-----|-------------------|-----|-----|
|                      |          | A03                              | A06 | A10 | A16 | A25 | M25<br>M60<br>M90 | P10 | P25 |
| <b>LMD 400 - 401</b> | <b>4</b> | 308                              | 349 | 453 | 474 | 530 | 628               | 547 | 567 |
|                      | <b>5</b> | 395                              | 427 | 509 | 547 | 589 | 637               | 577 | 592 |
|                      | <b>6</b> | 429                              | 483 | 558 | 568 | 597 | 639               | 583 | 597 |
| <b>LMD 431</b>       | <b>5</b> | 395                              | 427 | 509 | 547 | 589 | 637               | 577 | 592 |
|                      | <b>6</b> | 429                              | 483 | 558 | 568 | 597 | 639               | 583 | 597 |

**Maximum flow rate for a complete low and medium pressure filter with a pressure drop  $\Delta p = 0.7$  bar.**



The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).


You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.

Hydraulic symbols


| Filter series        | Execution S | Execution B |
|----------------------|-------------|-------------|
| <b>LMD 400 - 401</b> | •           | •           |
| <b>LMD 431</b>       | •           | •           |



Pressure drop  
Filter housings  $\Delta p$  pressure drop

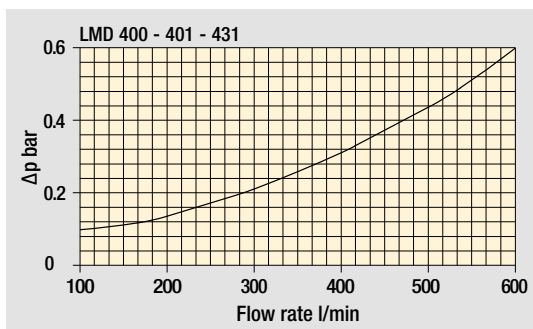


Bypass valve pressure drop

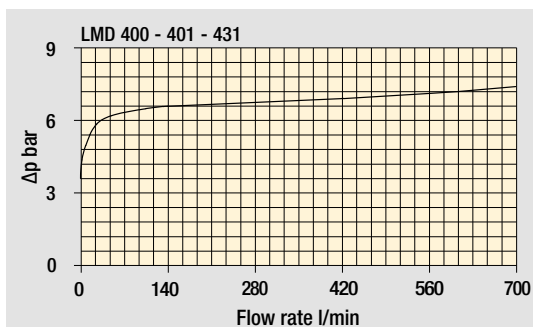


The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

Focus on

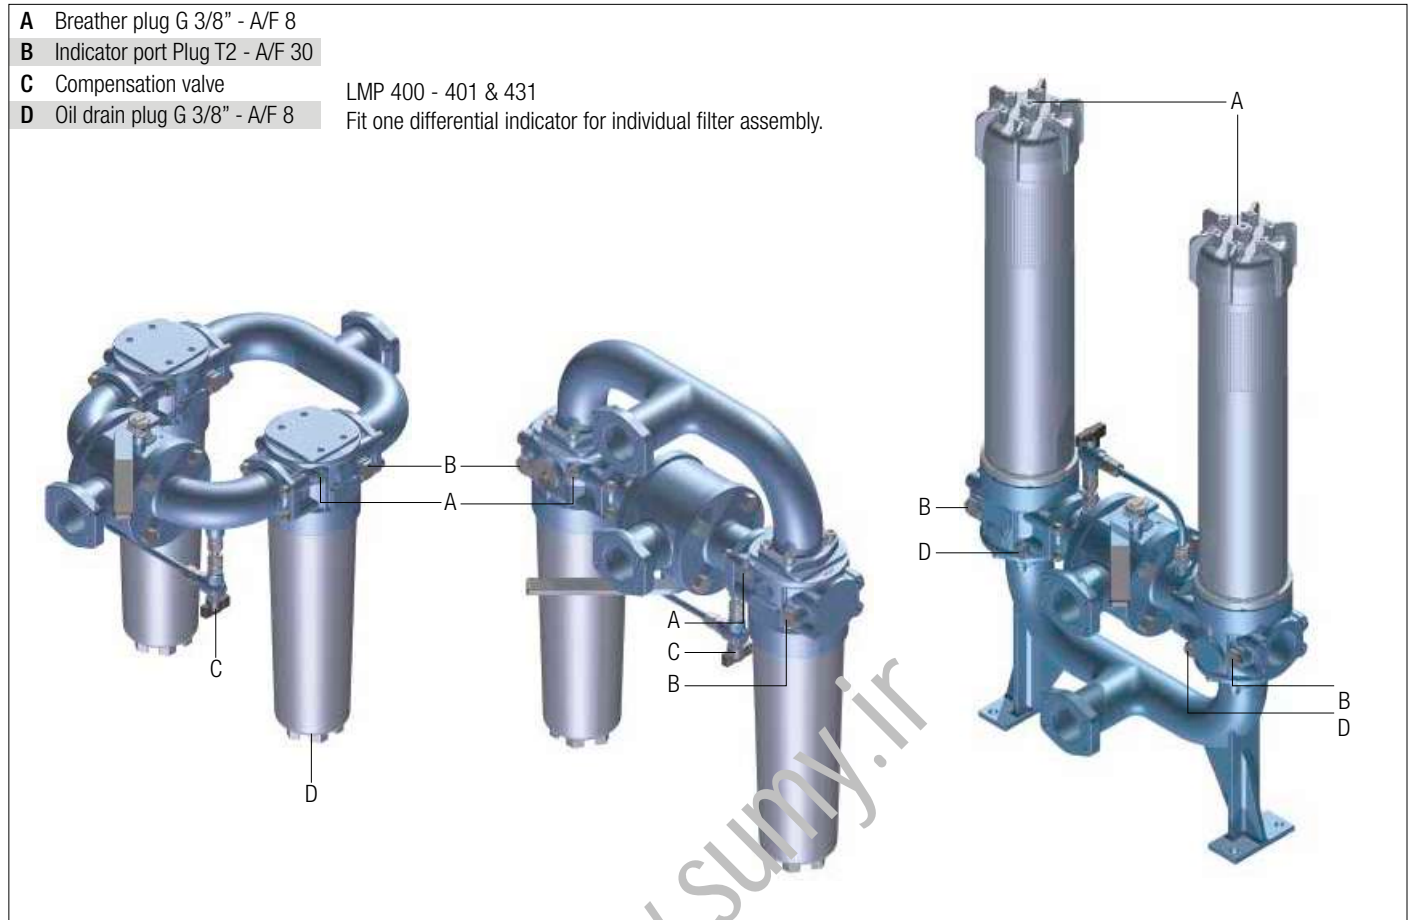

## LMD 431: Execution P02

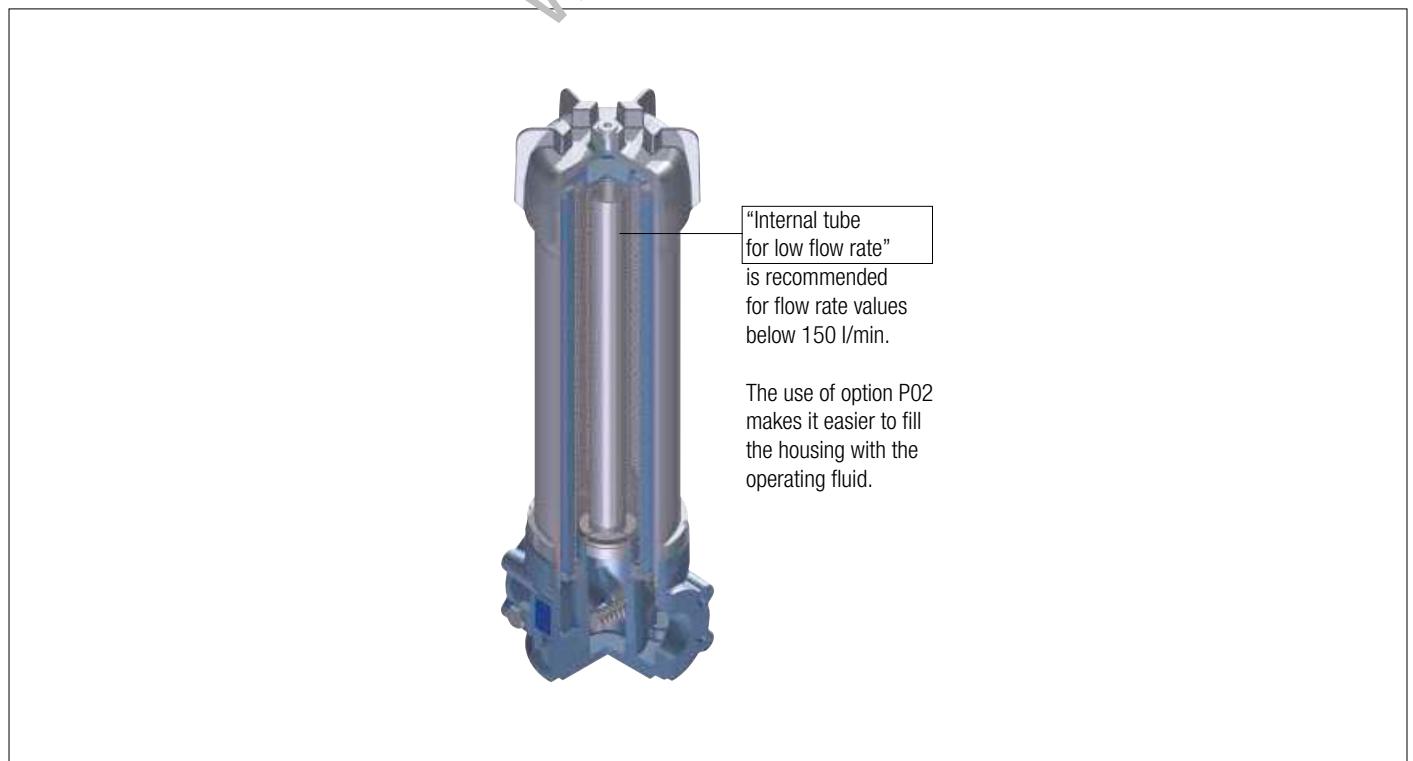

[www.sumy.ir](http://www.sumy.ir)

# LMD 400-401

## Designation & Ordering code

### COMPLETE FILTER

|   |  |  |     |        |  |  |  |  |  |  |  |
|---|--|--|-----|--------|--|--|--|--|--|--|--|
| Series and size                                 |  | Configuration example: <b>LMD401</b>   <b>4</b>   <b>B</b>   <b>V</b>   <b>F1</b>   <b>A10</b>   <b>N</b>   <b>P01</b> |     |        |  |  |  |  |  |  |  |
| <b>LMD400</b>   <b>LMD401</b>                   |  |  |     |        |  |  |  |  |  |  |  |
| Length  |  | 4   5   6  |     |        |  |  |  |  |  |  |  |
| Bypass valve                                    |  | S Without bypass   B 3.5 bar   |     |        |  |  |  |  |  |  |  |
| Seals and treatments                            |  | Filtration rating  |     |        |  |  |  |  |  |  |  |
| V FPM   |  | Axx  | Mxx | Pxx    |  |  |  |  |  |  |  |
| Connections                                     |  | LMD400   |     | LMD401 |  |  |  |  |  |  |  |
| F1 2 1/2" SAE 3000 psi/M                        |  |  |     |        |  |  |  |  |  |  |  |
| F2 2 1/2" SAE 3000 psi/UNC                      |  |  |     |        |  |  |  |  |  |  |  |
| F3 2 1/2" SAE 3000 psi/M, In-line connections   |  |  |     |        |  |  |  |  |  |  |  |
| F4 2 1/2" SAE 3000 psi/UNC, In-line connections |  |  |     |        |  |  |  |  |  |  |  |
| Filtration rating (filter media)                |  |  |     |        |  |  |  |  |  |  |  |
| A03 Inorganic microfiber 3 µm                   |  | M25 Wire mesh 25 µm  |     |        |  |  |  |  |  |  |  |
| A06 Inorganic microfiber 6 µm                   |  | M60 Wire mesh 60 µm  |     |        |  |  |  |  |  |  |  |
| A10 Inorganic microfiber 10 µm                  |  | M90 Wire mesh 90 µm  |     |        |  |  |  |  |  |  |  |
| A16 Inorganic microfiber 16 µm                  |  | P10 Resin impregnated paper 10 µm  |     |        |  |  |  |  |  |  |  |
| A25 Inorganic microfiber 25 µm                  |  | P25 Resin impregnated paper 25 µm  |     |        |  |  |  |  |  |  |  |
| WA025 Water absorber inorganic microfiber 25 µm |  |  |     |        |  |  |  |  |  |  |  |

| Element Δp | Execution                                      | Filter length |   |   |
|------------|--|---------------|---|---|
|            |  | 4             | 5 | 6 |
| N 20 bar   | P01 MP Filtri standard                         | •             | • | • |
|            | P02 Maintenance from the bottom of the housing |               | • | • |
|            | Pxx Customized                                 |               |   |   |

### FILTER ELEMENT

|   |  |  |  |  |  |  |  |
|---|--|--|--|--|--|--|--|
| Element series and size                         |  | Configuration example: <b>CU400</b>   <b>4</b>   <b>A10</b>   <b>V</b>   <b>N</b>   <b>P01</b> |  |  |  |  |  |
| <b>CU400</b>                                    |  |  |  |  |  |  |  |
| Element length                                  |  | 4   5   6  |  |  |  |  |  |
| Filtration rating (filter media)                |  |  |  |  |  |  |  |
| A03 Inorganic microfiber 3 µm                   |  | M25 Wire mesh 25 µm  |  |  |  |  |  |
| A06 Inorganic microfiber 6 µm                   |  | M60 Wire mesh 60 µm  |  |  |  |  |  |
| A10 Inorganic microfiber 10 µm                  |  | M90 Wire mesh 90 µm  |  |  |  |  |  |
| A16 Inorganic microfiber 16 µm                  |  | P10 Resin impregnated paper 10 µm  |  |  |  |  |  |
| A25 Inorganic microfiber 25 µm                  |  | P25 Resin impregnated paper 25 µm  |  |  |  |  |  |
| WA025 Water absorber inorganic microfiber 25 µm |  |  |  |  |  |  |  |

| Seals | Filtration rating |     |     |
|-------|-------------------|-----|-----|
|       | Axx               | Mxx | Pxx |
| V FPM | •                 | •   | •   |

| Element Δp | Execution              |
|------------|------------------------|
| N 20 bar   | P01 MP Filtri standard |
|            | Pxx Customized         |



### ACCESSORIES

| Accessories                                    | page    | Accessories                           | page |
|--|---------|---------------------------------------|------|
| <b>Differential indicators</b>                 |         |                                       |      |
| DEA Electrical differential indicator          | 445     | DTA Electronic differential indicator | 448  |
| DEM Electrical differential indicator          | 445-446 | DVA Visual differential indicator     | 448  |
| DLA Electrical / visual differential indicator | 446-447 | DVM Visual differential indicator     | 448  |
| DLE Electrical / visual differential indicator | 447     |                                       |      |
| <b>Additional features</b>                     |         |                                       |      |
| T2 Plug  | 449     |                                       |      |

# LMD 400-401

## Dimensions

| LMD400      |          |
|-------------|----------|
| Length 4    |          |
| Connections | R        |
| F1          | M12      |
| F2          | 1/2" UNC |
| F3          | M12      |
| F4          | 1/2" UNC |

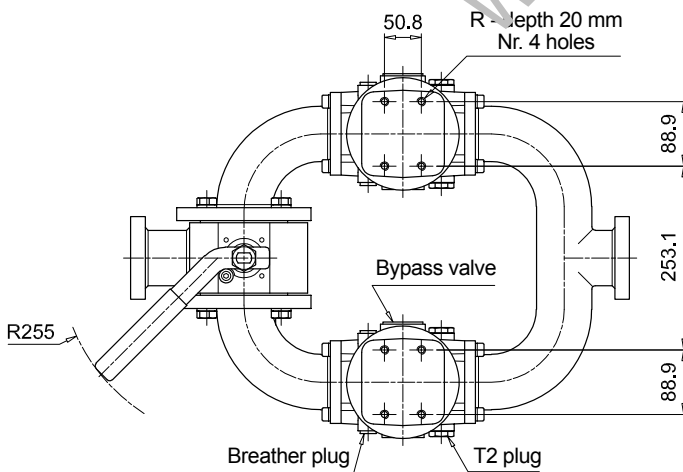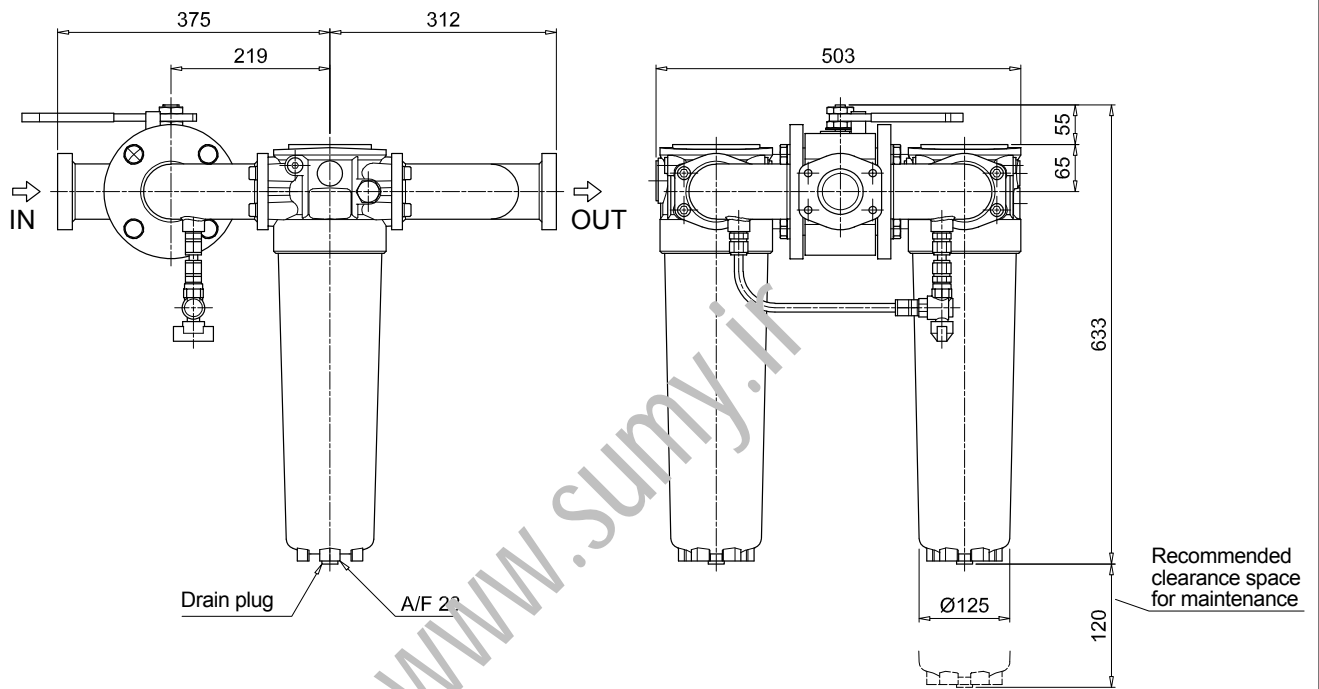

T2 plug =  
Connection for differential indicator

# LMD 400-401



## Dimensions

LMD400


Length 5 - 6

| Filter length | H [mm] | H2 [mm] Execution |     |
|---------------|--------|-------------------|-----|
|               |        | P01               | P02 |
| 5             | 883    | 120               | 660 |
| 6             | 1213   | 120               | 690 |

| Connections | R        |
|-------------|----------|
| F1          | M12      |
| F2          | 1/2" UNC |
| F3          | M12      |
| F4          | 1/2" UNC |

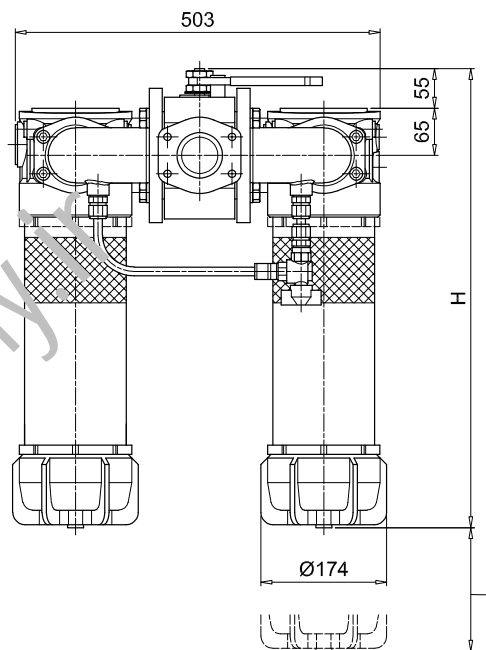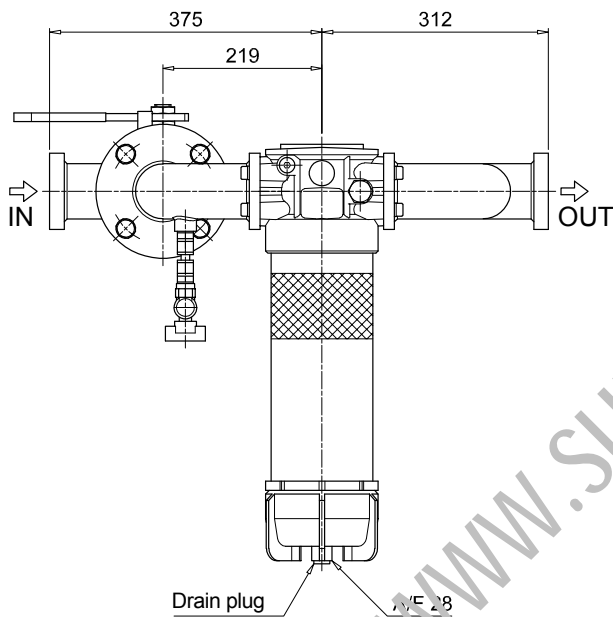

H2 - Recommended clearance space for maintenance

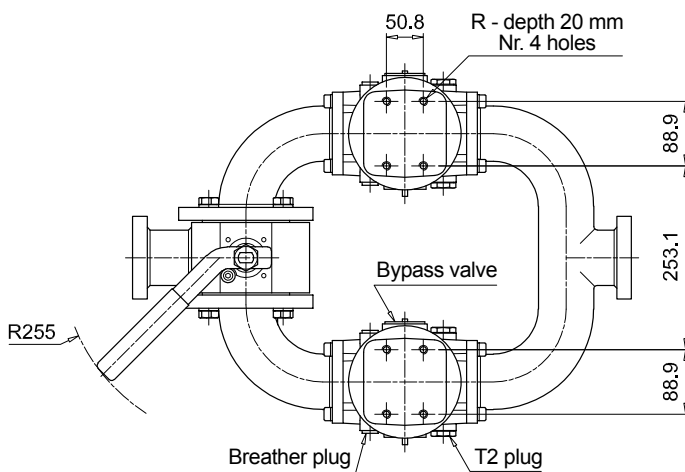




T2 plug =  
Connection for differential indicator



# LMD 400-401

## Dimensions

| LMD401      |          |
|-------------|----------|
| Length 4    |          |
| Connections | R        |
| <b>F1</b>   | M12      |
| <b>F2</b>   | 1/2" UNC |
| <b>F3</b>   | M12      |
| <b>F4</b>   | 1/2" UNC |

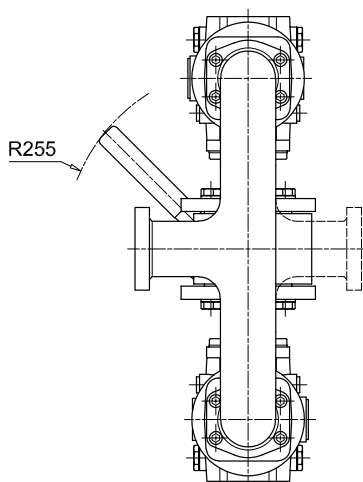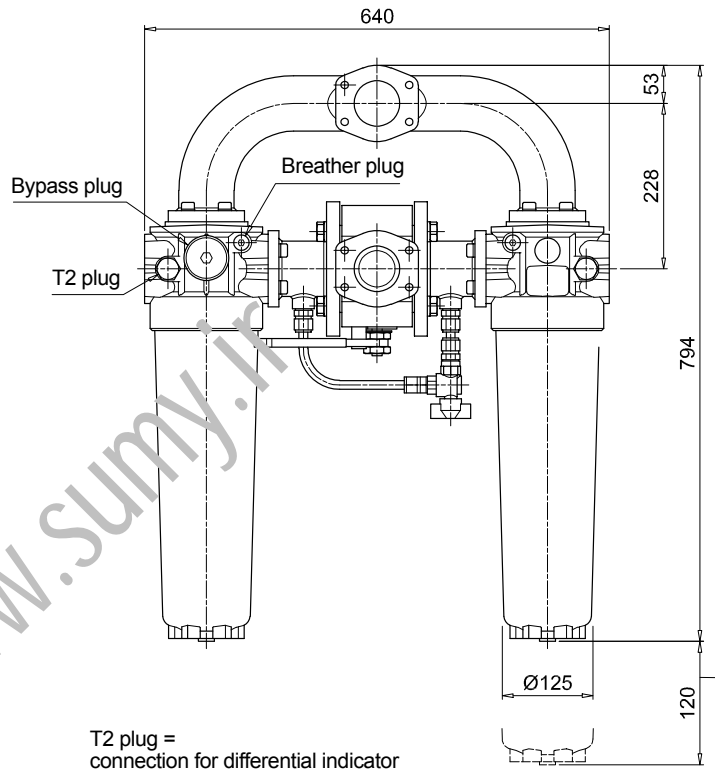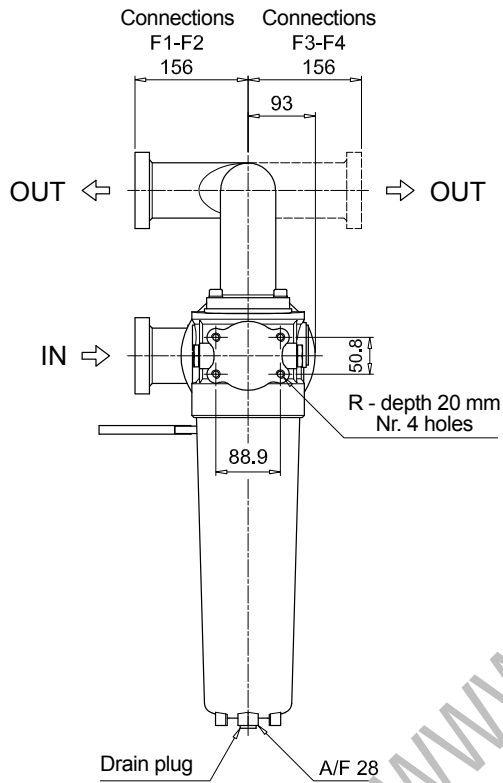

# LMD 400-401



## Dimensions

LMD401


Length 5 - 6

| Filter length | H [mm] | H2 [mm] Execution |     |
|---------------|--------|-------------------|-----|
|               |        | P01               | P02 |
| 5             | 1044   | 120               | 660 |
| 6             | 1374   | 120               | 690 |

| Connections | R        |
|-------------|----------|
| F1          | M12      |
| F2          | 1/2" UNC |
| F3          | M12      |
| F4          | 1/2" UNC |

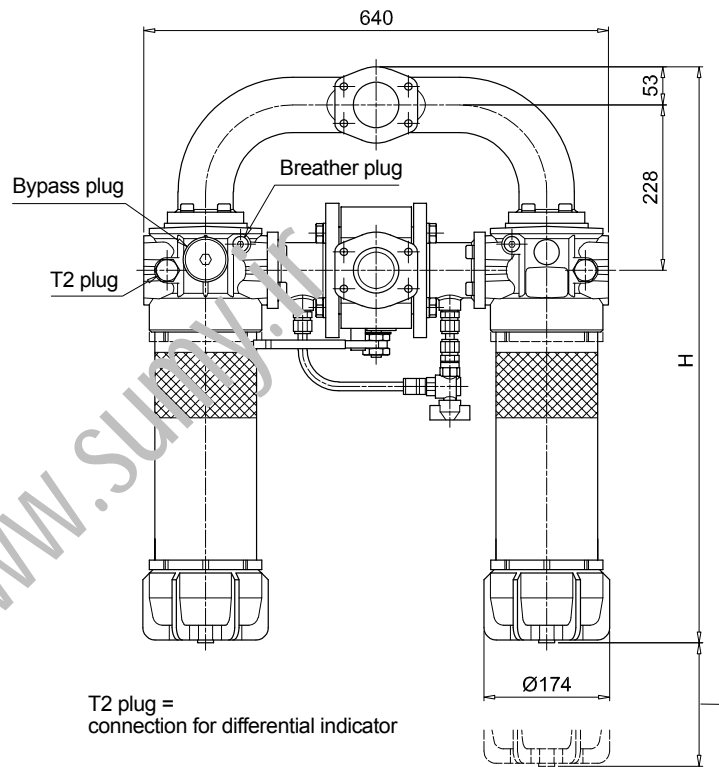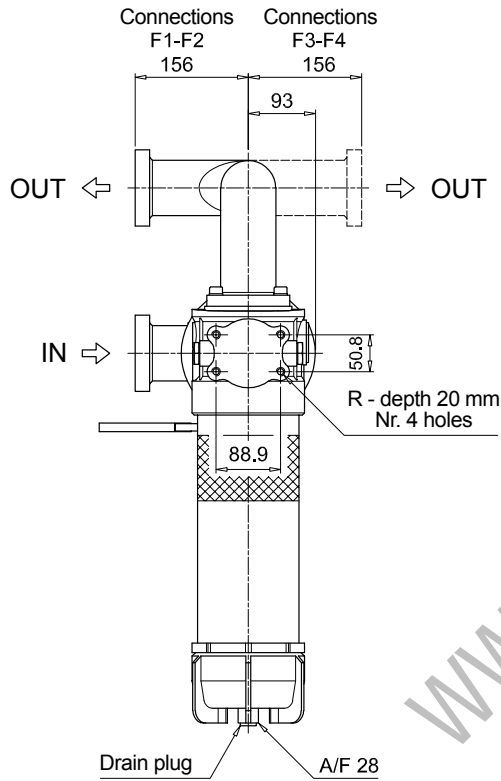

H2 - Recommended clearance space for maintenance

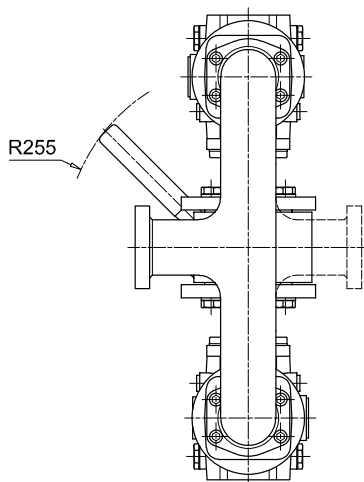

[www.sumy.ir](http://www.sumy.ir)

# LMD 431

## Designation & Ordering code

### COMPLETE FILTER

|  |  |            |            |  |  |  |  |  |  |  |
|--|--|------------|------------|--|--|--|--|--|--|--|
| <b>Series and size</b>                                 | Configuration example: <b>LMD431</b>   <b>5</b>   <b>B</b>   <b>V</b>   <b>F1</b>   <b>A10</b>   <b>N</b>   <b>P01</b> |            |            |  |  |  |  |  |  |  |
| <b>LMD431</b>  |  |            |            |  |  |  |  |  |  |  |
| <b>Length</b>  | <b>5</b>   <b>6</b>  |            |            |  |  |  |  |  |  |  |
| <b>Bypass valve</b>                                    | <b>S</b> Without bypass   <b>B</b> 3.5 bar   |            |            |  |  |  |  |  |  |  |
| <b>Seals and treatments</b>                            | Filtration rating  |            |            |  |  |  |  |  |  |  |
| <b>V</b> FPM   | <b>Axx</b>   | <b>Mxx</b> | <b>Pxx</b> |  |  |  |  |  |  |  |
| <b>V</b> FPM   | •  | •          | •          |  |  |  |  |  |  |  |
| <b>Connections</b>                                     |  |            |            |  |  |  |  |  |  |  |
| <b>F1</b> 2 1/2" SAE 3000 psi/M                        |  |            |            |  |  |  |  |  |  |  |
| <b>F2</b> 2 1/2" SAE 3000 psi/UNC                      |  |            |            |  |  |  |  |  |  |  |
| <b>F3</b> 2 1/2" SAE 3000 psi/M, In-line connections   |  |            |            |  |  |  |  |  |  |  |
| <b>F4</b> 2 1/2" SAE 3000 psi/UNC, In-line connections |  |            |            |  |  |  |  |  |  |  |
| <b>Filtration rating (filter media)</b>                |  |            |            |  |  |  |  |  |  |  |
| <b>A03</b> Inorganic microfiber 3 µm                   | <b>M25</b> Wire mesh 25 µm   |            |            |  |  |  |  |  |  |  |
| <b>A06</b> Inorganic microfiber 6 µm                   | <b>M60</b> Wire mesh 60 µm   |            |            |  |  |  |  |  |  |  |
| <b>A10</b> Inorganic microfiber 10 µm                  | <b>M90</b> Wire mesh 90 µm   |            |            |  |  |  |  |  |  |  |
| <b>A16</b> Inorganic microfiber 16 µm                  | <b>P10</b> Resin impregnated paper 10 µm   |            |            |  |  |  |  |  |  |  |
| <b>A25</b> Inorganic microfiber 25 µm                  | <b>P25</b> Resin impregnated paper 25 µm   |            |            |  |  |  |  |  |  |  |
| <b>WA025</b> Water absorber inorganic microfiber 25 µm |  |            |            |  |  |  |  |  |  |  |
| <b>Element Δp</b>                                      | <b>N</b> 20 bar  |            |            |  |  |  |  |  |  |  |
| <b>Execution</b>                                       | <b>P01</b> MP Filtri standard<br><b>P02</b> With internal tube for low flow rate<br><b>Pxx</b> Customized              |            |            |  |  |  |  |  |  |  |

### FILTER ELEMENT


|  |  |            |            |  |  |  |  |
|--|--|------------|------------|--|--|--|--|
| <b>Element series and size</b>                         | Configuration example: <b>CU400</b>   <b>5</b>   <b>A10</b>   <b>V</b>   <b>N</b>   <b>P01</b> |            |            |  |  |  |  |
| <b>CU400</b>   |  |            |            |  |  |  |  |
| <b>Element length</b>                                  | <b>5</b>   <b>6</b>  |            |            |  |  |  |  |
| <b>Filtration rating (filter media)</b>                |  |            |            |  |  |  |  |
| <b>A03</b> Inorganic microfiber 3 µm                   | <b>M25</b> Wire mesh 25 µm   |            |            |  |  |  |  |
| <b>A06</b> Inorganic microfiber 6 µm                   | <b>M60</b> Wire mesh 60 µm   |            |            |  |  |  |  |
| <b>A10</b> Inorganic microfiber 10 µm                  | <b>M90</b> Wire mesh 90 µm   |            |            |  |  |  |  |
| <b>A16</b> Inorganic microfiber 16 µm                  | <b>P10</b> Resin impregnated paper 10 µm   |            |            |  |  |  |  |
| <b>A25</b> Inorganic microfiber 25 µm                  | <b>P25</b> Resin impregnated paper 25 µm   |            |            |  |  |  |  |
| <b>WA025</b> Water absorber inorganic microfiber 25 µm |  |            |            |  |  |  |  |
| <b>Seals</b>   | Filtration rating  |            |            |  |  |  |  |
| <b>V</b> FPM   | <b>Axx</b>   | <b>Mxx</b> | <b>Pxx</b> |  |  |  |  |
| <b>V</b> FPM   | •  | •          | •          |  |  |  |  |
| <b>Element Δp</b>                                      | <b>N</b> 20 bar  |            |            |  |  |  |  |
| <b>Execution</b>                                       | <b>P01</b> MP Filtri standard<br><b>Pxx</b> Customized   |            |            |  |  |  |  |

### ACCESSORIES

|   |         |  |      |
|---|---------|--|------|
| <b>Differential indicators</b>                        | page    |  | page |
| <b>DEA</b> Electrical differential indicator          | 445     | <b>DTA</b> Electronic differential indicator | 448  |
| <b>DEM</b> Electrical differential indicator          | 445-446 | <b>DVA</b> Visual differential indicator     | 448  |
| <b>DLA</b> Electrical / visual differential indicator | 446-447 | <b>DVM</b> Visual differential indicator     | 448  |
| <b>DLE</b> Electrical / visual differential indicator | 447     |  |      |
| <b>Additional features</b>                            | page    |  |      |
| <b>T2</b> Plug  | 449     |  |      |


### LMD431

| Filter length | H [mm] | H2 [mm] |
|---------------|--------|---------|
| 5             | 1161   | 660     |
| 6             | 1491   | 690     |

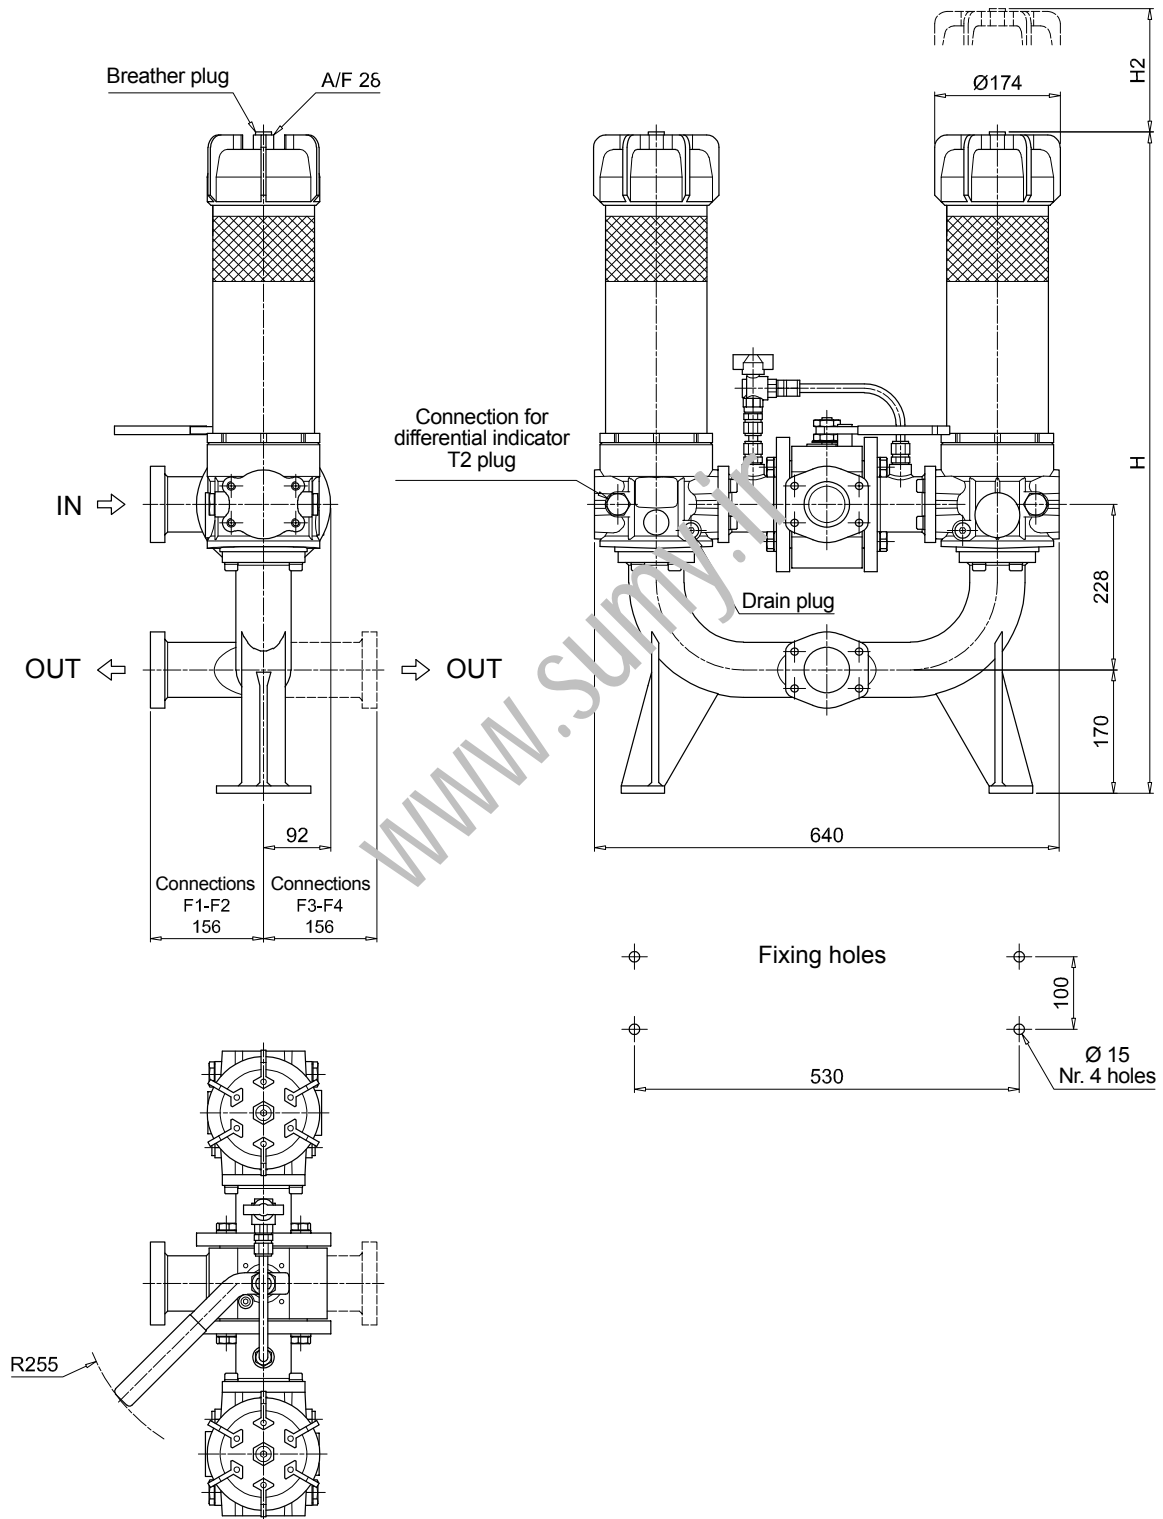



Order number for spare parts

LMD 400

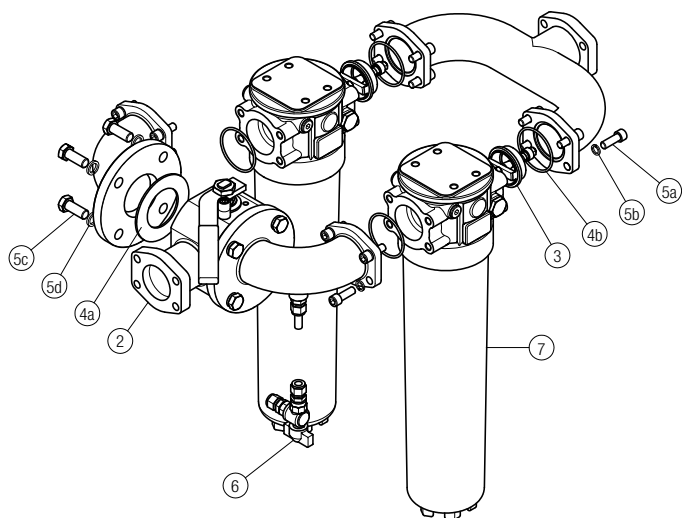

LMD 401

LMD 431

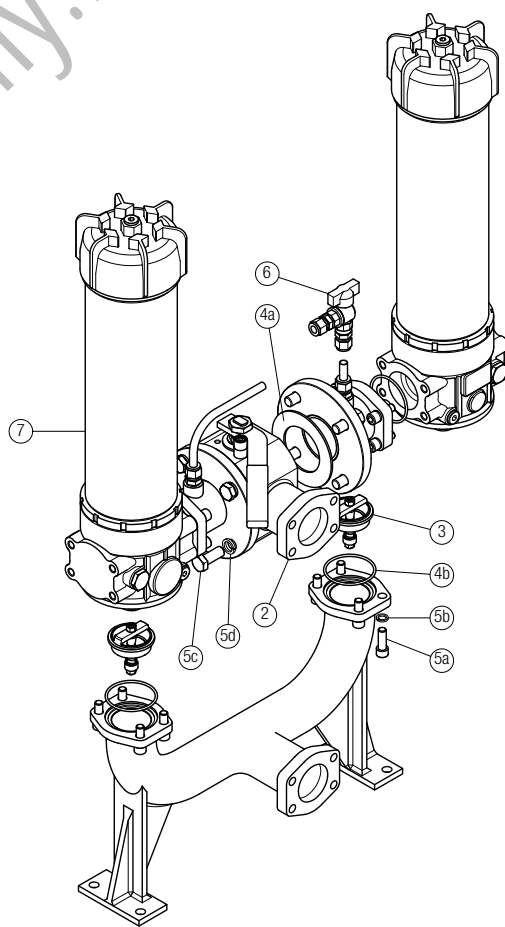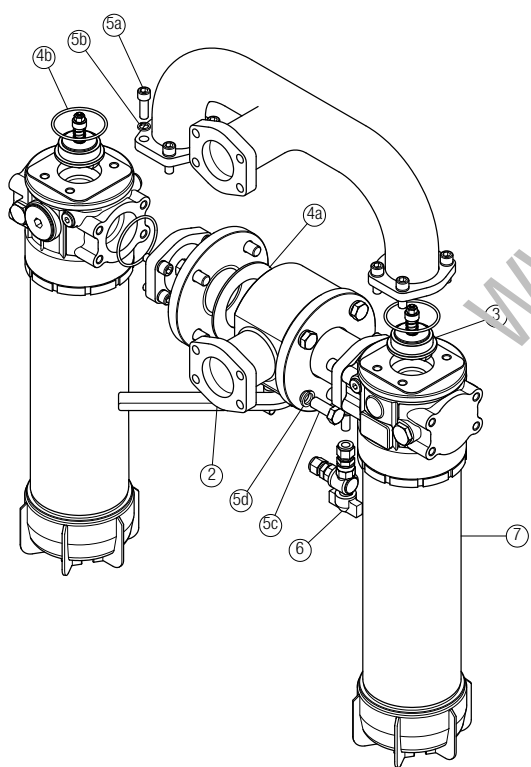

| Item:           | Q.ty: 1 pc.   |          | Q.ty: 2 pcs.  | Q.ty: 1 pc. | Q.ty: 1 pc.            | Q.ty: 1 pc.                      | Q.ty: 2 pcs.              |
|-----------------|---|----------|---------------|-------------|------------------------|----------------------------------|---------------------------|
| Filter series   | 3-way ball valve PN 16<br>2 1/2" SAE 3000 psi/M 2 1/2" SAE 3000 psi/UNC |          | One-way valve | Seal Kit    | Threaded fasteners kit | Kit ball valve with hose fitting | Filter<br>See order table |
| LMD 400-401-431 | 02001440  | 02001441 | 02001429      | 02050399    | 02049062               | 02025043                         | LMP400xF2.....            |

[www.sumy.ir](http://www.sumy.ir)

www.sumy.ir



# LMD 951 series

Maximum working pressure up to 1.6 MPa (16 bar) - Flow rate up to 1200 l/min



# LMD 951 GENERAL INFORMATION

## Description

## Technical data

### Low & Medium Pressure filters

#### Duplex

**Maximum working pressure up to 1.6 MPa (16 bar)**

**Flow rate up to 1200 l/min**

LMD950 is a range of versatile low pressure duplex filter with integrated changeover function to allow the filter element replacement without the system shut-down.

They are directly connected to the lines of the system through the hydraulic fittings.

#### Available features:

- Flanged connections up to 4", for a maximum flow rate of 1200 l/min
- Base-mounting design, for ease of the replacement of the filter element
- Fine filtration rating, to get a good cleanliness level into the system
- Water removal elements, to remove the free water from the hydraulic fluid. For further information, see the Contamination Management document and the dedicate leaflet.
- Balancing valve, to equalize the housing pressure before the switch
- Bypass valve, to relieve excessive pressure drop across the filter media
- Drain ports, to remove the fluid from the housing prior the maintenance work
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

- Systems where shut-down causes high costs
- Systems where shut-down causes safety issues

#### Filter housing materials

- Head: Anodized Aluminium
- Housing: Anodized Aluminium
- Manifolds: Welded - Painted black
- Bypass valve: Steel
- 3-way ball valve: Steel body - Stainless Steel ball
- Check valve: Cast Iron body - AISI 304 leaf

#### Pressure

- SAE + DIN Flange
- Test pressure: 2.5 MPa (25 bar)

#### Bypass valve

- Opening pressure 350 kPa (3.5 bar)  $\pm 10\%$
- Other opening pressures on request.

#### Number of filter elements

LMD 951: 2 filter elements CU950-3

#### $\Delta p$ element type

- Microfibre filter elements - series N: 20 bar
- Fluid flow through the filter element from OUT to IN

#### Seals

NPM series /

#### Temperature

From -25° C to +110° C

#### Connections

- LMD 951: In-line Inlet/Outlet
- Same side

#### Note

LMD 951 filters are provided for vertical mounting



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series  | Weights [kg] |        | Volumes [dm <sup>3</sup> ] |        |
|----------------|--------------|--------|----------------------------|--------|
|                | DN 80        | DN 100 | DN 80                      | DN 100 |
| <b>LMD 951</b> | 102          | 130    | 62                         | 66     |

| Filter series  | Length   | Filter element design - N Series |     |     |      |      |                   |
|----------------|----------|----------------------------------|-----|-----|------|------|-------------------|
|                |          | A03                              | A06 | A10 | A16  | A25  | M25<br>M60<br>M90 |
| <b>LMD 951</b> | <b>3</b> | 853                              | 884 | 995 | 1066 | 1096 | 1233              |


### Maximum flow rate for a complete low and medium pressure filter with a pressure drop $\Delta p = 0.7$ bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.



For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.

### Hydraulic symbols

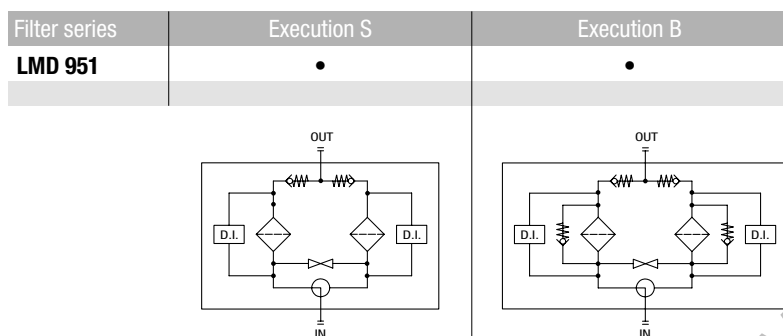


### Pressure drop

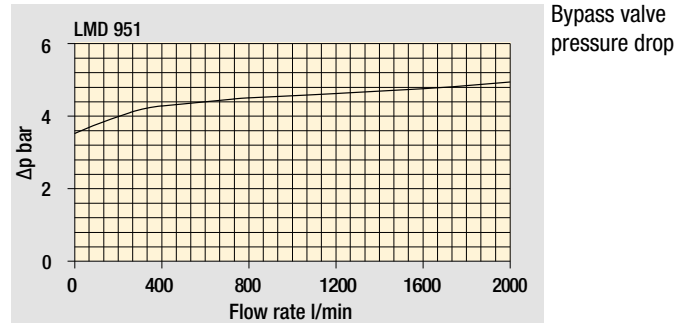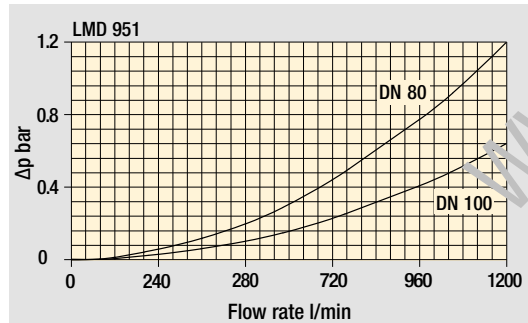


The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

### Focus on

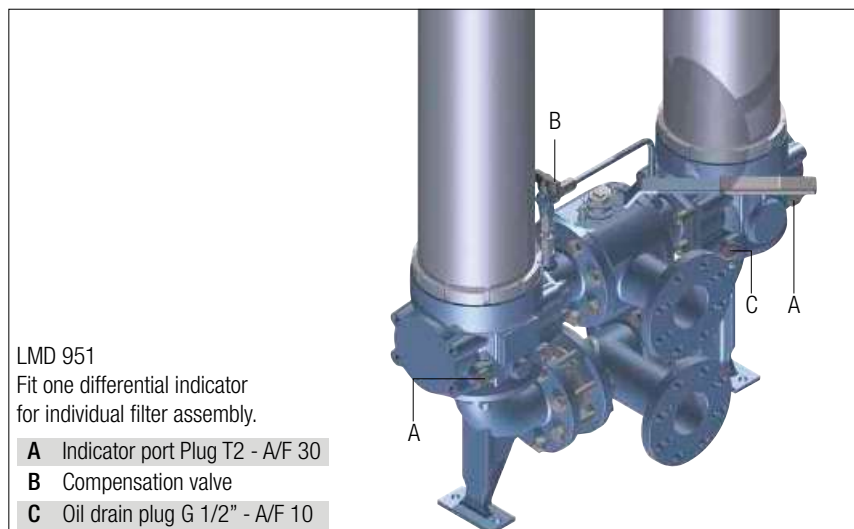

### Execution P02

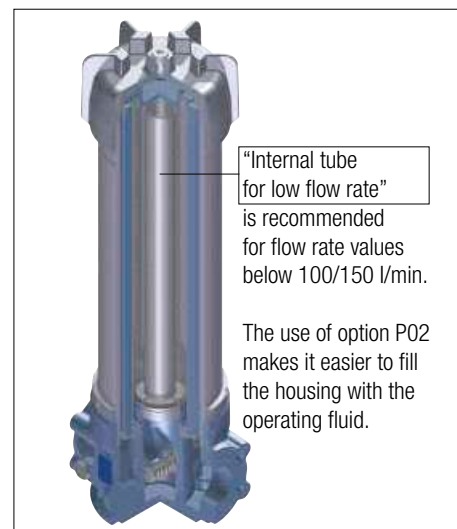

# LMD 951

## Designation & Ordering code

### COMPLETE FILTER


|   |  |  |  |  |  |   |  |  |  |  |
|---|--|--|--|--|--|---|--|--|--|--|
| <b>Series and size</b>                  | Configuration example: <b>LMD951</b> <b>3</b> <b>B</b> <b>V</b> <b>F1</b> <b>A10</b> <b>N</b> <b>P01</b>   |  |  |  |  |   |  |  |  |  |
| <b>LMD951</b>                           |  |  |  |  |  |   |  |  |  |  |
| <b>Length</b>                           | <b>3</b>   |  |  |  |  |   |  |  |  |  |
| <b>Bypass valve</b>                     | <b>S</b> Without bypass <b>B</b> 3.5 bar   |  |  |  |  |   |  |  |  |  |
| <b>Seals and treatments</b>             | <b>V</b> FPM   |  |  |  |  |   |  |  |  |  |
| <b>Connections</b>                      | <b>F1</b> 3" SAE 3000 psi/M<br><b>F2</b> 3" SAE 3000 psi/UNC<br><b>F3</b> 4" SAE 3000 psi/M<br><b>F4</b> 4" SAE 3000 psi/UNC<br><b>F5</b> 3" SAE 3000 psi/M, In-line connections<br><b>F6</b> 3" SAE 3000 psi/UNC, In-line connections<br><b>F7</b> 4" SAE 3000 psi/M, In-line connections<br><b>F8</b> 4" SAE 3000 psi/UNC, In-line connections   |  |  |  |  |   |  |  |  |  |
| <b>Filtration rating (filter media)</b> | <b>A03</b> Inorganic microfiber 3 µm <b>M25</b> Wire mesh 25 µm<br><b>A06</b> Inorganic microfiber 6 µm <b>M60</b> Wire mesh 60 µm<br><b>A10</b> Inorganic microfiber 10 µm <b>M90</b> Wire mesh 90 µm<br><b>A16</b> Inorganic microfiber 16 µm<br><b>A25</b> Inorganic microfiber 25 µm<br><b>WA025</b> Water absorber inorganic microfiber 25 µm |  |  |  |  |   |  |  |  |  |
|   | <b>Element Δp</b>  |  |  |  |  | <b>Execution</b>  |  |  |  |  |
|   | <b>N</b> 20 bar  |  |  |  |  | <b>P01</b> MP Filtri standard<br><b>P02</b> With internal tube for low flow rate<br><b>Pxx</b> Customized |  |  |  |  |

### FILTER ELEMENT

|   |  |  |  |  |  |  |  |
|---|--|--|--|--|--|--|--|
| <b>Element series and size</b>          | Configuration example: <b>CU950</b> <b>3</b> <b>A10</b> <b>V</b> <b>N</b> <b>P01</b>   |  |  |  |  |  |  |
| <b>CU950</b>                            |  |  |  |  |  |  |  |
| <b>Element length</b>                   | <b>3</b>   |  |  |  |  |  |  |
| <b>Filtration rating (filter media)</b> | <b>A03</b> Inorganic microfiber 3 µm <b>M25</b> Wire mesh 25 µm<br><b>A06</b> Inorganic microfiber 6 µm <b>M60</b> Wire mesh 60 µm<br><b>A10</b> Inorganic microfiber 10 µm <b>M90</b> Wire mesh 90 µm<br><b>A16</b> Inorganic microfiber 16 µm<br><b>A25</b> Inorganic microfiber 25 µm<br><b>WA025</b> Water absorber inorganic microfiber 25 µm |  |  |  |  |  |  |
|   | <b>Element Δp</b>  |  |  | <b>Execution</b>                                       |  |  |  |
|   | <b>N</b> 20 bar  |  |  | <b>P01</b> MP Filtri standard<br><b>Pxx</b> Customized |  |  |  |

### ACCESSORIES


|   |         |  |      |
|---|---------|--|------|
| <b>Differential indicators</b>                        | page    |  | page |
| <b>DEA</b> Electrical differential indicator          | 445     | <b>DTA</b> Electronic differential indicator | 448  |
| <b>DEM</b> Electrical differential indicator          | 445-446 | <b>DVA</b> Visual differential indicator     | 448  |
| <b>DLA</b> Electrical / visual differential indicator | 446-447 | <b>DVM</b> Visual differential indicator     | 448  |
| <b>DLE</b> Electrical / visual differential indicator | 447     |  |      |
| <b>Additional features</b>                            | page    |  |      |
| <b>T2</b> Plug  | 449     |  |      |

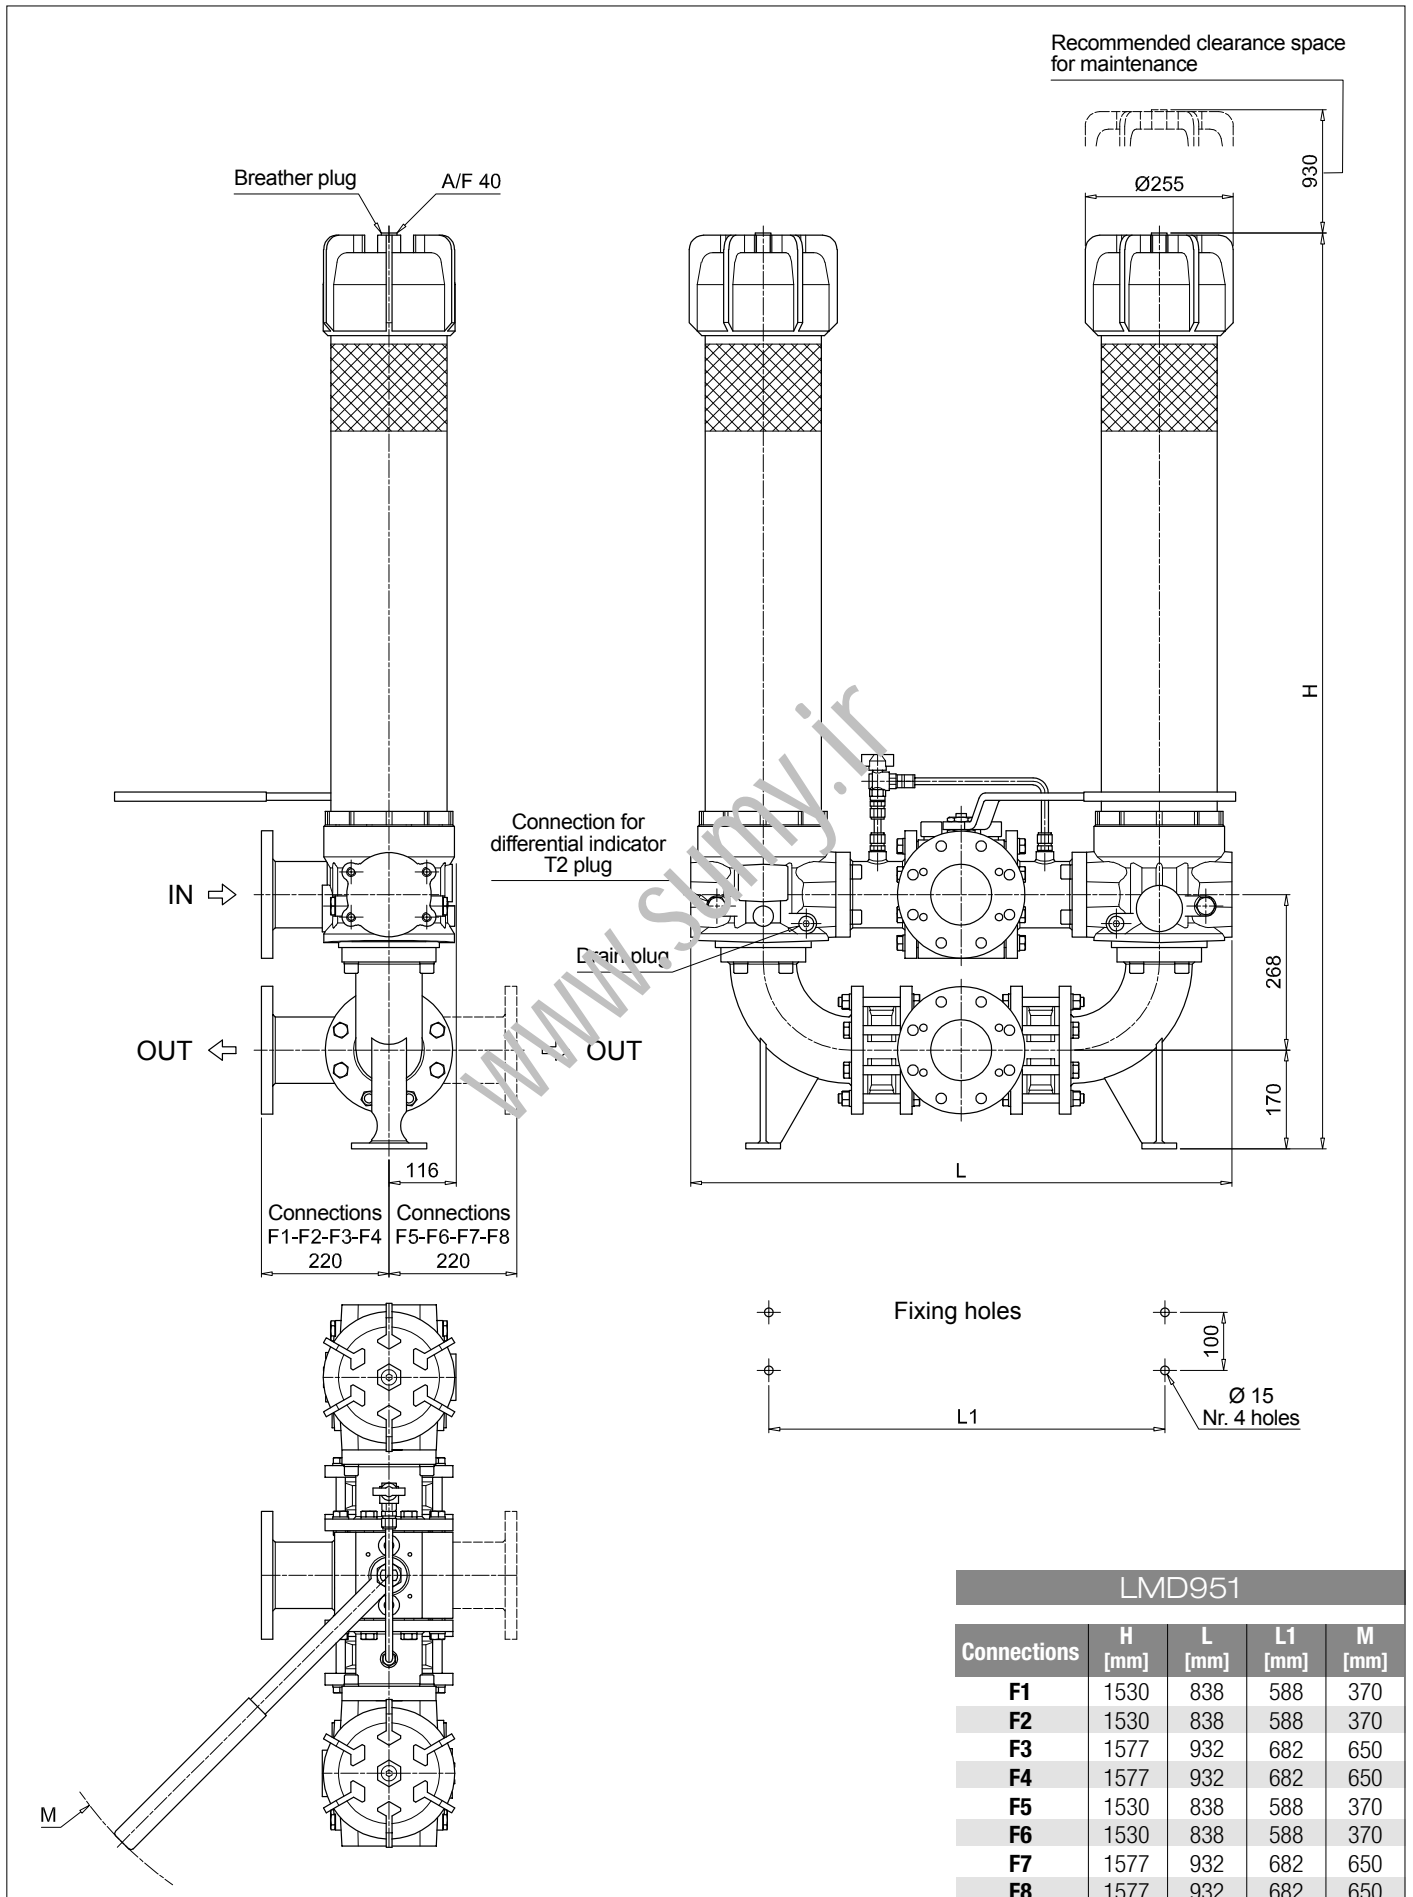

# LMD 951 SPARE PARTS

Order number for spare parts

LMD 951

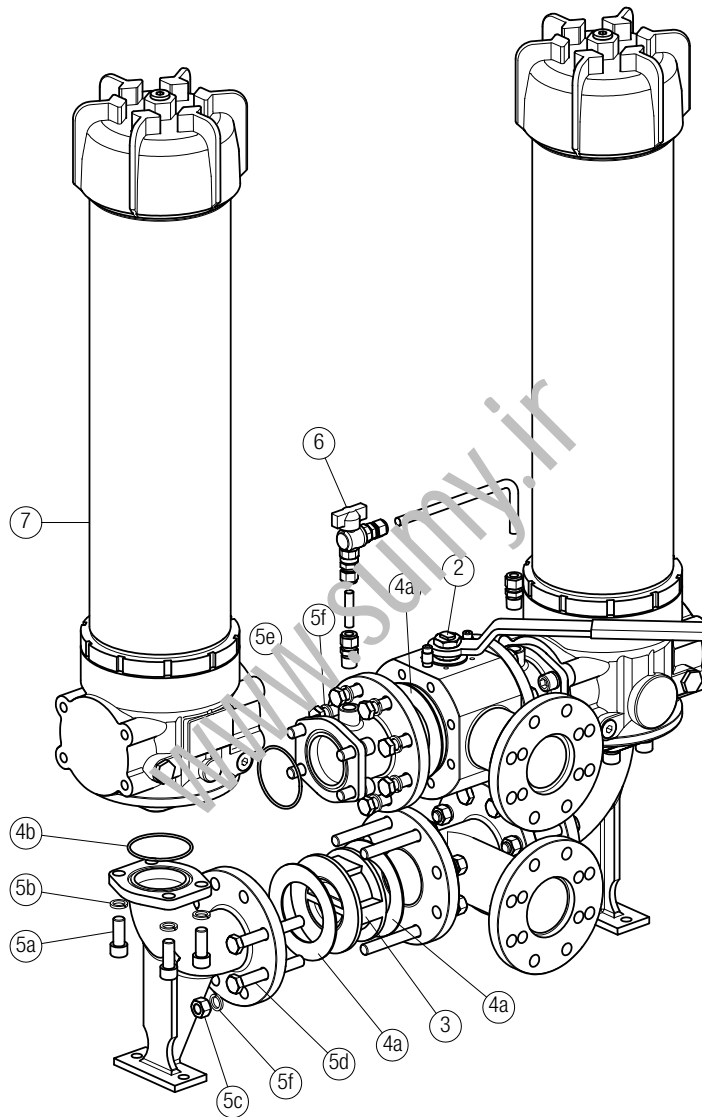

Item 7:  
for complete filter code and  
spare parts, see  
LMP 950 - 951 series chapter

Quantity:  
- filter spare parts: 2 pcs.  
- filter seal kit: 2 pcs.

| Item:   | Q.ty: 1 pc.                   |                                 | Q.ty: 2 pcs.     | Q.ty: 1 pc. | Q.ty: 1 pc.               | Q.ty: 1 pc.                                     | Q.ty: 2 pcs.       |
|---|-------------------------------|---------------------------------|------------------|-------------|---------------------------|---|--------------------|
|   | 2                             |                                 | 3                | 4           | 5 (5a ÷ 5f)               | 6   | 7                  |
| Filter series<br>LMD 951  | 3-way ball valve PN 16        |                                 | One-way<br>valve | Seal Kit    | Threaded<br>fasteners kit | G 1/2" Ball Valve Kit<br>with straight fittings | Filter             |
| <b>F1 - F2 - F5 - F6 / D1 - D3<br/>(3" SAE / DIN PN16 DN 80)</b>  | 3" SAE 3000 psi/M<br>02001135 | 3" SAE 3000 psi/UNC<br>02001438 | 02001418         | 02050388    | 02049056                  | 02025043  | LMP9513xVF1xxxNP01 |
| <b>F3 - F4 - F7 - F8 / D2 - D4<br/>(4" SAE / DIN PN16 DN 100)</b> | 4" SAE 3000 psi/M<br>02001162 | 4" SAE 3000 psi/UNC<br>02001439 | 02001419         | 02050389    | 02049057                  |   | LMP9513xVF3xxxNP01 |

[www.sumy.ir](http://www.sumy.ir)

www.sumy.ir



# DIN 24550 **Filter element according to DIN 24550**

## LDP & LDD series

Maximum working pressure up to 6 MPa (60 bar) - Flow rate up to 360 l/min

## LMP 900-901 series

Maximum working pressure up to 3 MPa (30 bar) - Flow rate up to 2000 l/min

## LMP 902-903 series

Maximum working pressure up to 2 MPa (20 bar) - Flow rate up to 3000 l/min

[www.sumy.ir](http://www.sumy.ir)

# LDP & LDD series

Filter element according to DIN 24550

Maximum working pressure up to 6 MPa (60 bar) - Flow rate up to 360 l/min

# LDP & LDD GENERAL INFORMATION

## Filter element according to DIN 24550

### Descriptions

#### Low & Medium Pressure filters

**Maximum working pressure up to 6 MPa (60 bar)**  
**Flow rate up to 360 l/min**

**LDP** is a range of versatile low pressure filter for transmission, protection of sensitive components in low pressure hydraulic systems and filtration of the coolant into the machine tools.

They are also suitable for the off-line filtration of small reservoirs. They are directly connected to the lines of the system through the hydraulic fittings.

#### Available features:

- Female threaded connections up to 1 1/2", for a maximum return flow rate of 360 l/min
- Filter element designed in accordance with DIN 24550 regulation
- Fine filtration rating, to get a good cleanliness level into the system
- Water removal elements, to remove the free water from the hydraulic fluid. For further information, see the Contamination Management document and the dedicate leaflet.
- Bypass valve, to relieve excessive pressure drop across the filter media
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

Delivery lines, in low pressure industrial equipment or mobile machines

**LDD** is a range of versatile low pressure duplex filter with integrated changeover function to allow the filter element replacement without the system shut-down.

They are directly connected to the lines of the system through the hydraulic fittings.

#### Available features:

- Female threaded connections up to 1 1/2" and flanged connections up to 1 1/2", for a maximum flow rate of 360 l/min
- Filter element designed in accordance with DIN 24550 regulation
- Fine filtration rating, to get a good cleanliness level into the system
- Water removal elements, to remove the free water from the hydraulic fluid. For further information, see the Contamination Management document and the dedicate leaflet.
- Balancing valve integrated in the changeover lever, to equalize the housing pressure before the switch
- Bypass valve, to relieve excessive pressure drop across the filter media
- Vent ports, to avoid air trapped into the filter going into the system
- Drain ports, to remove the fluid from the housing prior the maintenance work
- Optional sampling ports, to get samples of fluid or to connect additional instrument to the system
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

- Systems where shut-down causes high costs
- Systems where shut-down causes safety issues

### Technical data

#### Filter housing materials

- Head: Aluminium
- Bowl: Cataphoretic Painted Steel
- Bypass valve: AISI 304 - Nylon

#### Pressure

- Test pressure: 9 MPa (90 bar)
- Burst pressure: 21 MPa (210 bar)
- Pulse pressure fatigue test: 1 000 000 cycles with pressure from 0 to 6 MPa (60 bar)

#### Bypass valve

- Opening pressure 350 kPa (3.5 bar) ±10%
- Other opening pressures on request.

#### Δp element type

- Microfibre filter elements - series N: 20 bar
- Fluid flow through the filter element from OUT to IN

#### Seals

- Standard NBR series A
- Optional FPM series V

#### Temperature

From -25° C to +110° C

#### Connections

Inlet/Outlet In-Line

#### Note

LDP - LDD filters are provided for vertical mounting



### Weights [kg] and volumes [dm³]

| Filter series  | Weights [kg] | Volumes [dm³] |
|----------------|--------------|---------------|
| <b>LDP 016</b> | 2.0          | 1.2           |
| <b>LDP 025</b> | 3.0          | 1.6           |
| <b>LDP 040</b> | 5.0          | 2.2           |
| <b>LDD 016</b> | 9.3          | 3.6           |
| <b>LDD 025</b> | 9.5          | 4.1           |
| <b>LDD 040</b> | 11.3         | 4.8           |

# GENERAL INFORMATION LDP & LDD

Filter element according to DIN 24550

FILTER ASSEMBLY SIZING  
Flow rates [l/min]

| Filter series  | Filter element design - N Series |     |     |     |     |     |     |     |     |     |
|----------------|----------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|                | A03                              | A06 | A10 | A16 | A25 | M25 | M60 | M90 | P10 | P25 |
| <b>LDP 016</b> | 83                               | 91  | 178 | 198 | 222 | 350 | 353 | 358 | 295 | 309 |
| <b>LDP 025</b> | 124                              | 134 | 227 | 245 | 265 | 357 | 358 | 358 | 319 | 330 |
| <b>LDP 040</b> | 173                              | 191 | 274 | 284 | 311 | 359 | 360 | 361 | 332 | 337 |
| <b>LDD 016</b> | 68                               | 73  | 120 | 130 | 140 | 189 | 190 | 192 | 169 | 174 |
| <b>LDD 025</b> | 93                               | 98  | 142 | 149 | 157 | 191 | 192 | 192 | 178 | 181 |
| <b>LDD 040</b> | 118                              | 126 | 161 | 165 | 175 | 192 | 192 | 193 | 182 | 184 |

**Maximum flow rate for a complete low and medium pressure filter with a pressure drop  $\Delta p = 0.7$  bar.**

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.

## Hydraulic symbols




| Filter series  | Execution S | Execution B | Execution S | Execution B |
|----------------|-------------|-------------|-------------|-------------|
| <b>LDP 016</b> | •           | •           |             |             |
| <b>LDP 025</b> | •           | •           |             |             |
| <b>LDP 040</b> | •           | •           |             |             |
| <b>LDD 016</b> |             |             | •           | •           |
| <b>LDD 025</b> |             |             | •           | •           |
| <b>LDD 040</b> |             |             | •           | •           |

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|--|--|--|--|

## Pressure drop

Filter housings  $\Delta p$  pressure drop

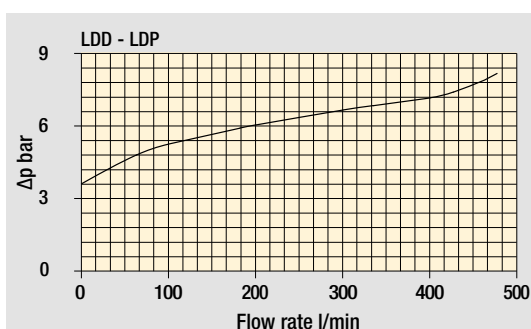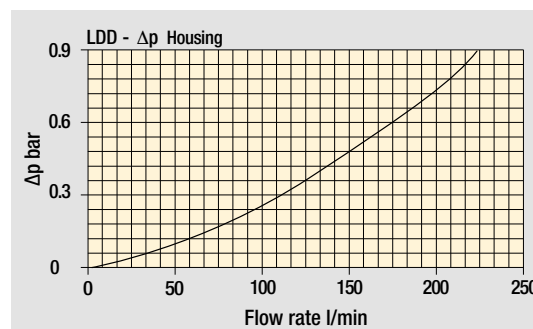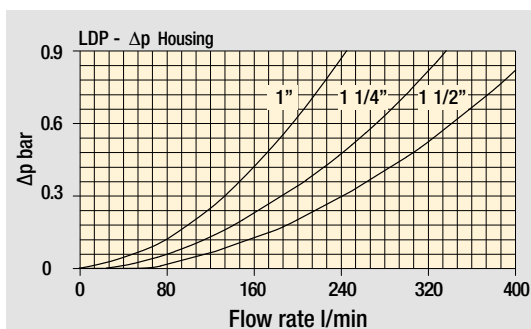

Bypass valve pressure drop

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

# LDP Filter element according to DIN 24550

## Designation & Ordering code

### COMPLETE FILTER


|  |   |  |  |                   |            |                    |                               |  |  |  |  |
|--|---|--|--|-------------------|------------|--------------------|-------------------------------|--|--|--|--|
| <b>Series</b>                                | Configuration example: <b>LDP</b> <b>025</b> <b>B</b> <b>A</b> <b>D</b> <b>6</b> <b>A10</b> <b>N</b> <b>P01</b> |  |  |                   |            |                    |                               |  |  |  |  |
| <b>LDP</b>                                   |   |  |  |                   |            |                    |                               |  |  |  |  |
| <b>Size</b>                                  |   |  |  |                   |            |                    |                               |  |  |  |  |
| <b>016</b>                                   | Element according to DIN 24550 - T3 DN160   |  |  |                   |            |                    |                               |  |  |  |  |
| <b>025</b>                                   | Element according to DIN 24550 - T3 DN250   |  |  |                   |            |                    |                               |  |  |  |  |
| <b>040</b>                                   | Element according to DIN 24550 - T3 DN400   |  |  |                   |            |                    |                               |  |  |  |  |
| <b>Bypass valve</b>                          |   |  |  |                   |            |                    |                               |  |  |  |  |
| <b>S</b>                                     | Without bypass  |  |  |                   |            | <b>B</b>           | 3.5 bar                       |  |  |  |  |
| <b>Seals and treatments</b>                  |   |  |  | Filtration rating |            |                    |                               |  |  |  |  |
| <b>A</b>                                     | NBR   |  |  | <b>Axx</b>        | <b>Mxx</b> | <b>Pxx</b>         |                               |  |  |  |  |
| <b>V</b>                                     | FPM   |  |  | •                 | •          | •                  |                               |  |  |  |  |
| <b>W</b>                                     | NBR compatible with fluids HFA-HFB-HFC  |  |  | •                 | •          |                    |                               |  |  |  |  |
| <b>Connections</b>                           |   |  |  |                   |            |                    |                               |  |  |  |  |
| <b>A</b>                                     | G 1"  |  |  |                   |            | <b>F</b>           | 1 1/2" NPT                    |  |  |  |  |
| <b>B</b>                                     | G 1 1/4"  |  |  |                   |            | <b>G</b>           | SAE 16 - 1 5/16" - 12 UN      |  |  |  |  |
| <b>C</b>                                     | G 1 1/2"  |  |  |                   |            | <b>H</b>           | SAE 20 - 1 5/8" - 12 UN       |  |  |  |  |
| <b>D</b>                                     | 1" NPT  |  |  |                   |            | <b>I</b>           | SAE 24 - 1 7/8" - 12 UN       |  |  |  |  |
| <b>E</b>                                     | 1 1/4" NPT  |  |  |                   |            |                    |                               |  |  |  |  |
| <b>Connection for differential indicator</b> |   |  |  |                   |            |                    |                               |  |  |  |  |
| <b>6</b>                                     | With plugged connection   |  |  |                   |            |                    |                               |  |  |  |  |
| <b>Filtration rating (filter media)</b>      |   |  |  |                   |            |                    |                               |  |  |  |  |
| <b>A03</b>                                   | Inorganic microfiber 3 µm   |  |  |                   |            | <b>M25</b>         | Wire mesh 25 µm               |  |  |  |  |
| <b>A06</b>                                   | Inorganic microfiber 6 µm   |  |  |                   |            | <b>M60</b>         | Wire mesh 60 µm               |  |  |  |  |
| <b>A10</b>                                   | Inorganic microfiber 10 µm  |  |  |                   |            | <b>M90</b>         | Wire mesh 90 µm               |  |  |  |  |
| <b>A16</b>                                   | Inorganic microfiber 16 µm  |  |  |                   |            | <b>P10</b>         | Resin impregnated paper 10 µm |  |  |  |  |
| <b>A25</b>                                   | Inorganic microfiber 25 µm  |  |  |                   |            | <b>P25</b>         | Resin impregnated paper 25 µm |  |  |  |  |
| <b>WA025</b>                                 | Water absorber inorganic microfiber 25 µm   |  |  |                   |            |                    |                               |  |  |  |  |
| <b>Element Δp</b>                            | <b>N</b>  |  |  |                   |            | 20 bar             |                               |  |  |  |  |
| <b>Execution</b>                             | <b>P01</b>  |  |  |                   |            | MP Filtri standard |                               |  |  |  |  |
| <b>Pxx</b>                                   | Customized  |  |  |                   |            |                    |                               |  |  |  |  |

### FILTER ELEMENT

|   |   |  |  |                   |            |                    |                               |  |  |  |  |
|---|---|--|--|-------------------|------------|--------------------|-------------------------------|--|--|--|--|
| <b>Element series</b>                   | Configuration example: <b>DN</b> <b>025</b> <b>A10</b> <b>A</b> <b>N</b> <b>P01</b> |  |  |                   |            |                    |                               |  |  |  |  |
| <b>DN</b>                               |   |  |  |                   |            |                    |                               |  |  |  |  |
| <b>Element size</b>                     |   |  |  |                   |            |                    |                               |  |  |  |  |
| <b>016</b>                              | Element according to DIN 24550 - T3 DN160   |  |  |                   |            |                    |                               |  |  |  |  |
| <b>025</b>                              | Element according to DIN 24550 - T3 DN250   |  |  |                   |            |                    |                               |  |  |  |  |
| <b>040</b>                              | Element according to DIN 24550 - T3 DN400   |  |  |                   |            |                    |                               |  |  |  |  |
| <b>Filtration rating (filter media)</b> |   |  |  |                   |            |                    |                               |  |  |  |  |
| <b>A03</b>                              | Inorganic microfiber 3 µm   |  |  |                   |            | <b>M25</b>         | Wire mesh 25 µm               |  |  |  |  |
| <b>A06</b>                              | Inorganic microfiber 6 µm   |  |  |                   |            | <b>M60</b>         | Wire mesh 60 µm               |  |  |  |  |
| <b>A10</b>                              | Inorganic microfiber 10 µm  |  |  |                   |            | <b>M90</b>         | Wire mesh 90 µm               |  |  |  |  |
| <b>A16</b>                              | Inorganic microfiber 16 µm  |  |  |                   |            | <b>P10</b>         | Resin impregnated paper 10 µm |  |  |  |  |
| <b>A25</b>                              | Inorganic microfiber 25 µm  |  |  |                   |            | <b>P25</b>         | Resin impregnated paper 25 µm |  |  |  |  |
| <b>WA025</b>                            | Water absorber inorganic microfiber 25 µm   |  |  |                   |            |                    |                               |  |  |  |  |
| <b>Seals</b>                            |   |  |  | Filtration rating |            |                    |                               |  |  |  |  |
| <b>A</b>                                | NBR   |  |  | <b>Axx</b>        | <b>Mxx</b> | <b>Pxx</b>         |                               |  |  |  |  |
| <b>V</b>                                | FPM   |  |  | •                 | •          | •                  |                               |  |  |  |  |
| <b>W</b>                                | NBR compatible with fluids HFA-HFB-HFC  |  |  | •                 | •          |                    |                               |  |  |  |  |
| <b>Element Δp</b>                       | <b>N</b>  |  |  |                   |            | 20 bar             |                               |  |  |  |  |
| <b>Execution</b>                        | <b>P01</b>  |  |  |                   |            | MP Filtri standard |                               |  |  |  |  |
| <b>Pxx</b>                              | Customized  |  |  |                   |            |                    |                               |  |  |  |  |

### ACCESSORIES

|                                |  |         |  |
|--------------------------------|--|---------|--|
| <b>Differential indicators</b> | page                                       |         | page   |
| <b>DEA</b>                     | Electrical differential indicator          | 445     | <b>DTA</b> Electronic differential indicator 448 |
| <b>DEM</b>                     | Electrical differential indicator          | 445-446 | <b>DVA</b> Visual differential indicator 448     |
| <b>DLA</b>                     | Electrical / visual differential indicator | 446-447 | <b>DVM</b> Visual differential indicator 448     |
| <b>DLE</b>                     | Electrical / visual differential indicator | 447     |  |
| <b>Additional features</b>     | page                                       |         |  |
| <b>T2</b>                      | Plug                                       | 449     |  |

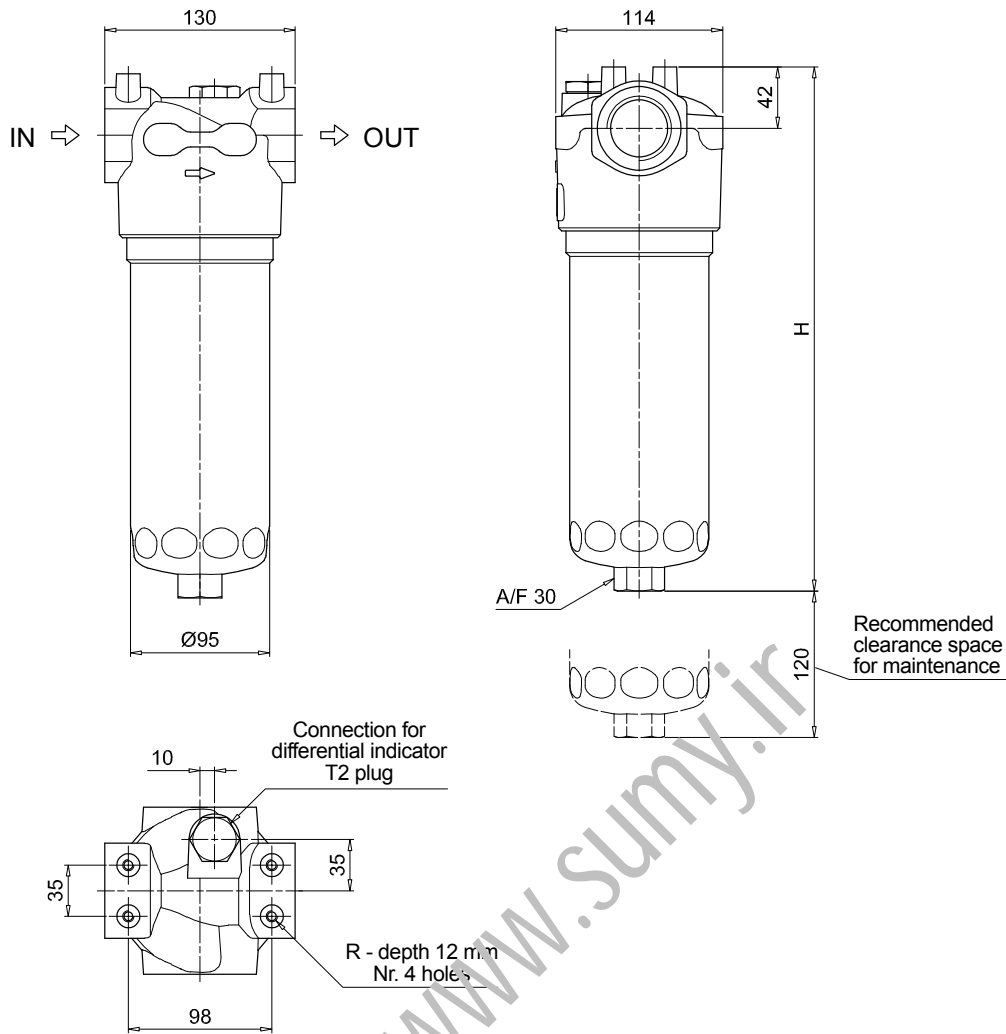

| LDP                |           |
|--------------------|-----------|
| Filter size        | H [mm]    |
| <b>016</b>         | 268       |
| <b>025</b>         | 358       |
| <b>040</b>         | 508       |
| Connections        | R         |
| <b>A-B-C</b>       | M8        |
| <b>D-E-F-G-H-I</b> | 5/16" UNC |

# LDD Filter element according to DIN 24550

## Designation & Ordering code

### COMPLETE FILTER

|  |   |       |            |                         |       |                               |  |  |  |  |
|--|---|-------|------------|-------------------------|-------|-------------------------------|--|--|--|--|
| <b>Series</b>                                | Configuration example: <b>LDD</b>   <b>025</b>   <b>B</b>   <b>A</b>   <b>C</b>   <b>6</b>   <b>A10</b>   <b>N</b>   <b>P01</b> |       |            |                         |       |                               |  |  |  |  |
| <b>LDD</b>                                   |   |       |            |                         |       |                               |  |  |  |  |
| <b>Size</b>                                  |   |       |            |                         |       |                               |  |  |  |  |
| <b>016</b>                                   | Element according to DIN 24550 - T3 DN160   |       |            |                         |       |                               |  |  |  |  |
| <b>025</b>                                   | Element according to DIN 24550 - T3 DN250   |       |            |                         |       |                               |  |  |  |  |
| <b>040</b>                                   | Element according to DIN 24550 - T3 DN400   |       |            |                         |       |                               |  |  |  |  |
| <b>Bypass valve</b>                          |   |       |            |                         |       |                               |  |  |  |  |
| <b>S</b>                                     | Without bypass  |       |            | <b>B</b> 3.5 bar        |       |                               |  |  |  |  |
| <b>Seals and treatments</b>                  |   |       |            | Filtration rating       |       |                               |  |  |  |  |
| <b>A</b>                                     | NBR   | Axx   | Mxx        | Pxx                     |       |                               |  |  |  |  |
| <b>V</b>                                     | FPM   | •     | •          | •                       |       |                               |  |  |  |  |
| <b>W</b>                                     | NBR compatible with fluids HFA-HFB-HFC  | •     | •          |                         |       |                               |  |  |  |  |
| <b>Connections</b>                           |   |       |            |                         |       |                               |  |  |  |  |
| <b>C</b>                                     | G 1 1/2"  |       |            |                         |       |                               |  |  |  |  |
| <b>F</b>                                     | 1 1/2" NPT  |       |            |                         |       |                               |  |  |  |  |
| <b>I</b>                                     | SAE 24 - 1 7/8" - 12 UN   |       |            |                         |       |                               |  |  |  |  |
| <b>L</b>                                     | 1 1/2" SAE 3000 psi/M + G 1 1/4"  |       |            |                         |       |                               |  |  |  |  |
| <b>M</b>                                     | 1 1/2" SAE 3000 psi/UNC + 1 1/4" NPT  |       |            |                         |       |                               |  |  |  |  |
| <b>N</b>                                     | 1 1/2" SAE 3000 psi/UNC + SAE 20 - 1 5/8" UN  |       |            |                         |       |                               |  |  |  |  |
| <b>Connection for differential indicator</b> |   |       |            |                         |       |                               |  |  |  |  |
| <b>6</b>                                     | With plugged connection   |       |            |                         |       |                               |  |  |  |  |
| <b>Filtration rating (filter media)</b>      |   |       |            |                         |       |                               |  |  |  |  |
| <b>A03</b>                                   | Inorganic microfiber  | 3 µm  | <b>M25</b> | Wire mesh               | 25 µm |                               |  |  |  |  |
| <b>A06</b>                                   | Inorganic microfiber  | 6 µm  | <b>M60</b> | Wire mesh               | 60 µm |                               |  |  |  |  |
| <b>A10</b>                                   | Inorganic microfiber  | 10 µm | <b>M90</b> | Wire mesh               | 90 µm |                               |  |  |  |  |
| <b>A16</b>                                   | Inorganic microfiber  | 16 µm | <b>P10</b> | Resin impregnated paper | 10 µm |                               |  |  |  |  |
| <b>A25</b>                                   | Inorganic microfiber  | 25 µm | <b>P25</b> | Resin impregnated paper | 25 µm |                               |  |  |  |  |
| <b>WA025</b>                                 | Water absorber inorganic microfiber 25 µm   |       |            |                         |       |                               |  |  |  |  |
| <b>Element Δp</b>                            | <b>N</b> 20 bar   |       |            |                         |       | <b>Execution</b>              |  |  |  |  |
|  |   |       |            |                         |       | <b>P01</b> MP Filtri standard |  |  |  |  |
|  |   |       |            |                         |       | <b>Pxx</b> Customized         |  |  |  |  |

### FILTER ELEMENT


|   |   |       |            |                         |       |                               |  |  |
|---|---|-------|------------|-------------------------|-------|-------------------------------|--|--|
| <b>Element series</b>                   | Configuration example: <b>DN</b>   <b>025</b>   <b>A10</b>   <b>A</b>   <b>N</b>   <b>P01</b> |       |            |                         |       |                               |  |  |
| <b>DN</b>                               |   |       |            |                         |       |                               |  |  |
| <b>Element size</b>                     |   |       |            |                         |       |                               |  |  |
| <b>016</b>                              | Element according to DIN 24550 - T3 DN160   |       |            |                         |       |                               |  |  |
| <b>025</b>                              | Element according to DIN 24550 - T3 DN250   |       |            |                         |       |                               |  |  |
| <b>040</b>                              | Element according to DIN 24550 - T3 DN400   |       |            |                         |       |                               |  |  |
| <b>Filtration rating (filter media)</b> |   |       |            |                         |       |                               |  |  |
| <b>A03</b>                              | Inorganic microfiber  | 3 µm  | <b>M25</b> | Wire mesh               | 25 µm |                               |  |  |
| <b>A06</b>                              | Inorganic microfiber  | 6 µm  | <b>M60</b> | Wire mesh               | 60 µm |                               |  |  |
| <b>A10</b>                              | Inorganic microfiber  | 10 µm | <b>M90</b> | Wire mesh               | 90 µm |                               |  |  |
| <b>A16</b>                              | Inorganic microfiber  | 16 µm | <b>P10</b> | Resin impregnated paper | 10 µm |                               |  |  |
| <b>A25</b>                              | Inorganic microfiber  | 25 µm | <b>P25</b> | Resin impregnated paper | 25 µm |                               |  |  |
| <b>WA025</b>                            | Water absorber inorganic microfiber 25 µm   |       |            |                         |       |                               |  |  |
| <b>Seals</b>                            |   |       |            | Filtration rating       |       |                               |  |  |
| <b>A</b>                                | NBR   | Axx   | Mxx        | Pxx                     |       |                               |  |  |
| <b>V</b>                                | FPM   | •     | •          | •                       |       |                               |  |  |
| <b>W</b>                                | NBR compatible with fluids HFA-HFB-HFC  | •     | •          |                         |       |                               |  |  |
| <b>Element Δp</b>                       | <b>N</b> 20 bar   |       |            |                         |       | <b>Execution</b>              |  |  |
|   |   |       |            |                         |       | <b>P01</b> MP Filtri standard |  |  |
|   |   |       |            |                         |       | <b>Pxx</b> Customized         |  |  |

### ACCESSORIES

|                                |  |         |  |
|--------------------------------|--|---------|--|
| <b>Differential indicators</b> | page                                       |         | page   |
| <b>DEA</b>                     | Electrical differential indicator          | 445     | <b>DTA</b> Electronic differential indicator 448 |
| <b>DEM</b>                     | Electrical differential indicator          | 445-446 | <b>DVA</b> Visual differential indicator 448     |
| <b>DLA</b>                     | Electrical / visual differential indicator | 446-447 | <b>DVM</b> Visual differential indicator 448     |
| <b>DLE</b>                     | Electrical / visual differential indicator | 447     |  |
| <b>Additional features</b>     | page                                       |         |  |
| <b>T2</b>                      | Plug                                       | 449     |  |



| LDD          |          |
|--------------|----------|
| Filter size  | H [mm]   |
| <b>016</b>   | 293      |
| <b>025</b>   | 383      |
| <b>040</b>   | 533      |
| Connections  | R        |
| <b>C</b>     | M10      |
| <b>F - I</b> | 3/8" UNC |
| <b>L</b>     | M10      |
| <b>M - N</b> | 3/8" UNC |

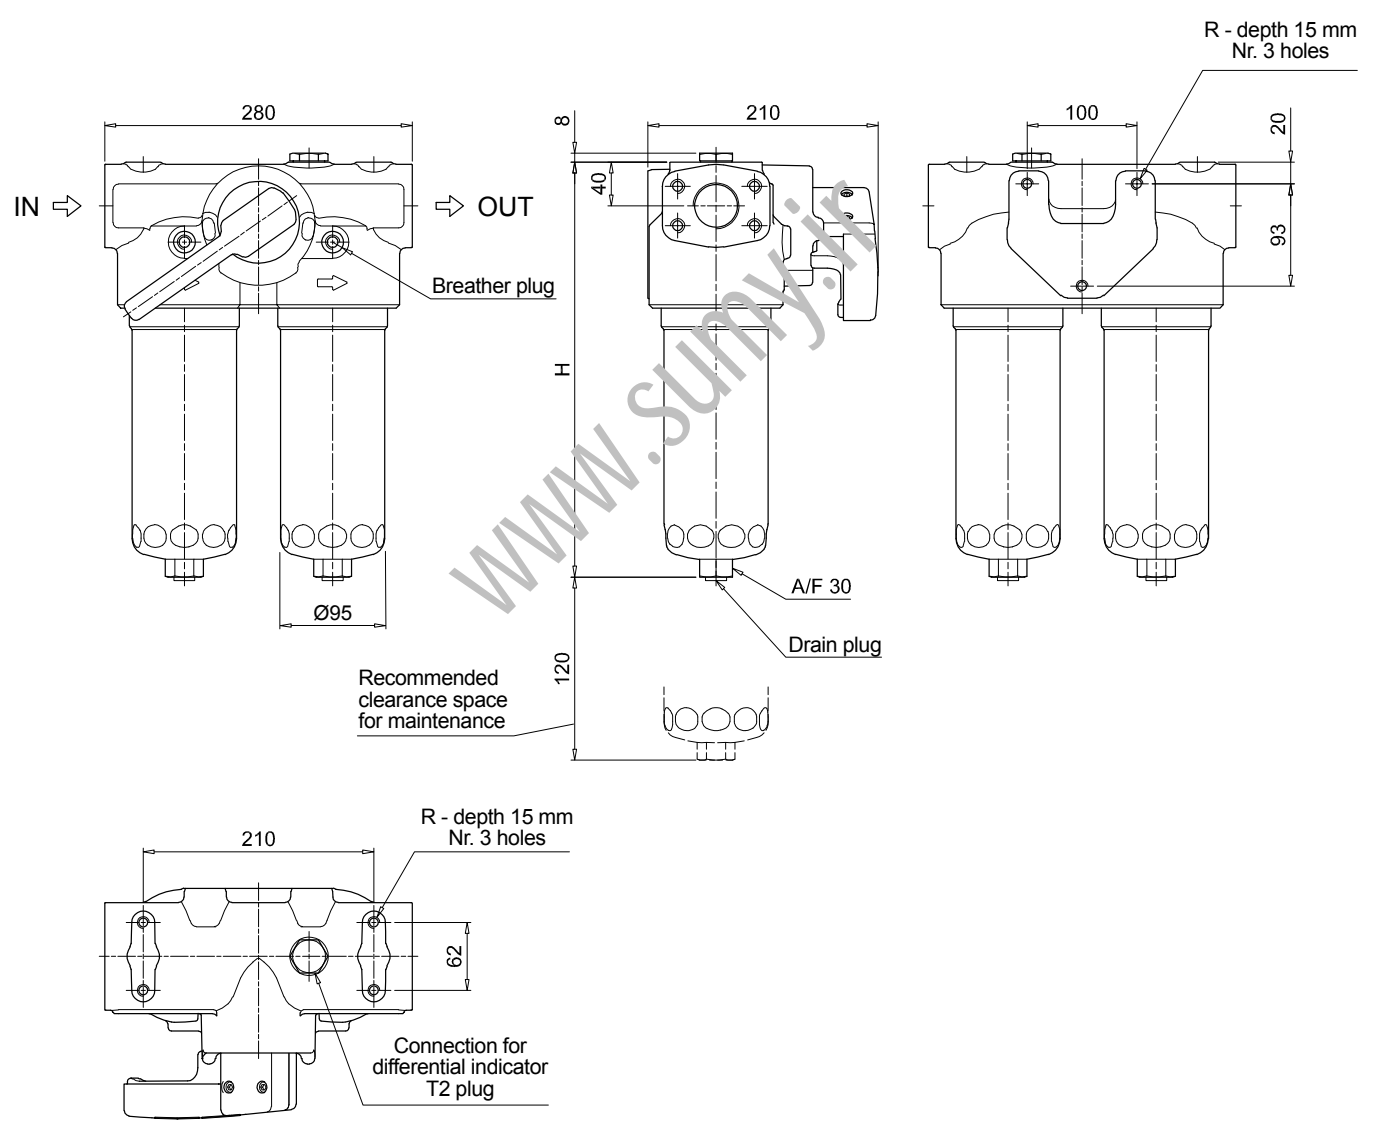


# LDP SPARE PARTS

Filter element according to DIN 24550

Order number for spare parts


LDP

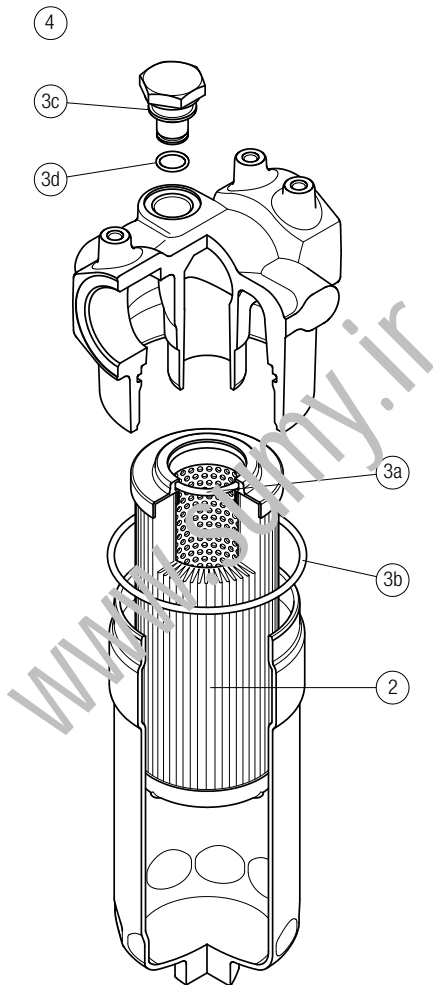

| Item:         | Q.ty: 1 pc.     |                      | Q.ty: 1 pc. |                           | Q.ty: 1 pc. |  |
|---------------|-----------------|----------------------|-------------|---------------------------|-------------|--|
| Filter series | Filter element  | Seal Kit code number |             | Indicator connection plug |             |  |
| LDP           | See order table | NBR                  | FPM         | NBR                       | FPM         |  |
|               | <b>2</b>        | <b>3</b> (3a ÷ 3d)   |             | <b>4</b>                  |             |  |
|               |                 | 02050435             | 02050436    | T2H                       | T2V         |  |

Order number for spare parts

LDD

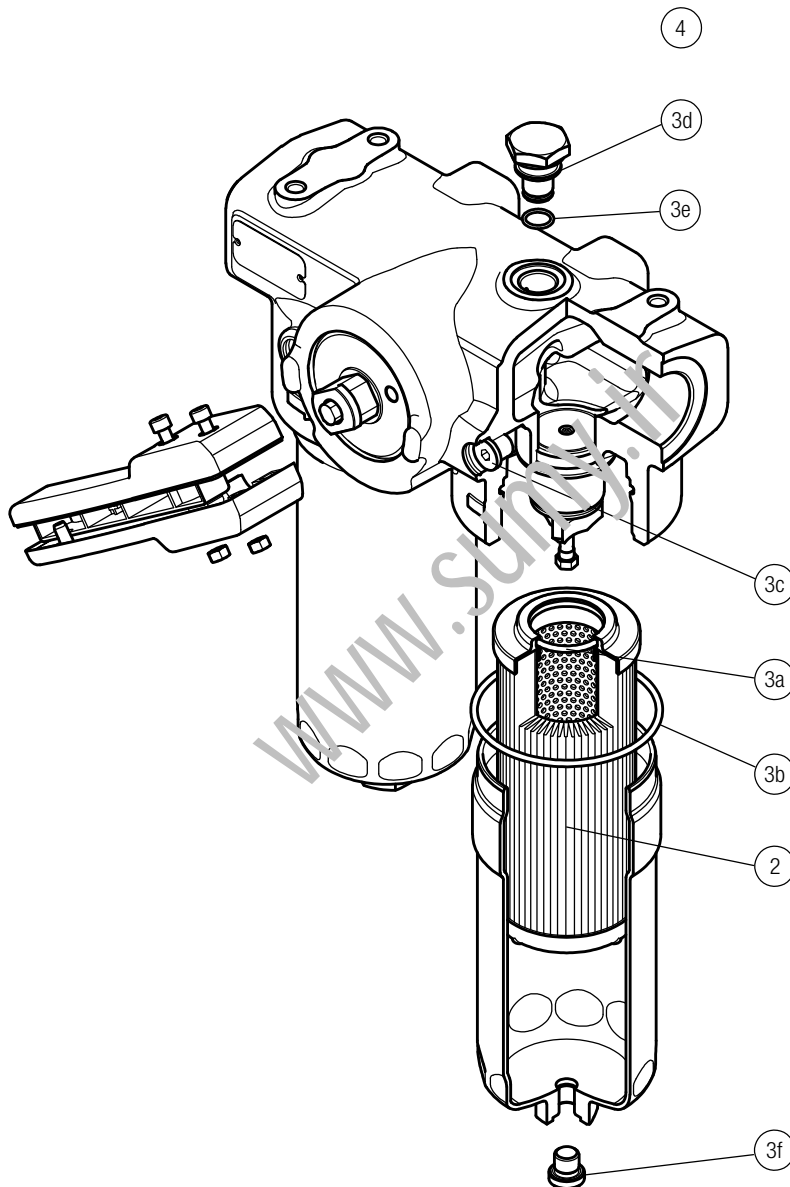

| Item:         | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          | Q.ty: 2 pc.               |     |
|---------------|-----------------|----------------------|----------|---------------------------|-----|
| Filter series | Filter element  | Seal Kit code number |          | Indicator connection plug |     |
| LDD           | See order table | NBR                  | FPM      | NBR                       | FPM |
|               | <b>2</b>        | <b>3</b> (3a ÷ 3i)   |          | <b>4</b>                  |     |
|               |                 | 02050671             | 02050672 | T2H                       | T2V |

www.sumy.ir

# LMP 900-901 series

Filter element according to DIN 24550

Maximum working pressure up to 3 MPa (30 bar) - Flow rate up to 2000 l/min



# LMP 900-901 GENERAL INFORMATION

## Filter element according to DIN 24550

### Description

#### Low & Medium Pressure filters

**Maximum working pressure up to 3 MPa (30 bar)**

**Flow rate up to 2000 l/min**

LMP900 is a range of low pressure filter with large filtration surface mainly suitable for lubrication, off-line filtration of the reservoirs and filtration equipment.

They are directly connected to the lines of the system through the hydraulic fittings.

#### Available features:

- Flanged connections up to 4", for a maximum flow rate of 2000 l/min
- In line or 90° connections, to meet any type of application
- Filter element designed in accordance with DIN 24550 regulation
- Fine filtration rating, to get a good cleanliness level into the system
- Water removal elements, to remove the free water from the hydraulic fluid. For further information, see the Contamination Management document and the dedicate leaflet.
- Bypass valve, to relieve excessive pressure drop across the filter media
- Vent ports, to avoid air trapped into the filter going into the system
- Drain ports, to remove the fluid from the housing prior the maintenance work
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

- Off-line filtration of reservoirs
- Filtration systems
- Lubrication systems

### Technical data

#### Filter housing materials

- Head: Anodized Aluminium
- Housing: Anodized Aluminium
- Manifolds: Anodized Aluminium
- Bypass valve: Steel

#### Pressure

- Test pressure: 4.5 MPa (45 bar)
- Burst pressure: 12 MPa (120 bar)
- Pulse pressure fatigue test: 1 000 000 cycles with pressure from 0 to 3 MPa (30 bar)

#### Bypass valve

- Opening pressure 350 kPa (3.5 bar) ±10%
- Other opening pressures on request.

#### Number of filter elements

LMP 900-1: 1 filter element CU900

LMP 900-2: 2 filter elements CU900

#### Filter elements

Filter element according to DIN 24550

Size: 1000

#### Δp element type

- Microfibre filter elements - series N: 20 bar
- Fluid flow through the filter element from OUT to IN

#### Connections

LMP 900: In-line Inlet/Outlet

LMP 901: 90° Inlet/Outlet

#### Seals

- Standard NBR series A
- Optional FPM series V

#### Temperature

From -25 °C to +110 °C

#### Note

LMP 900 - 901 filters are provided for vertical mounting



### Weights [kg] and volumes [dm³]

| Filter series      | Weights [kg] |      |      | Volumes [dm³] |    |    |
|--------------------|--------------|------|------|---------------|----|----|
|                    | Length       | 1    | 2    | Length        | 1  | 2  |
| <b>LMP 900-901</b> |              | 19.2 | 30.4 |               | 16 | 24 |

# GENERAL INFORMATION LMP 900-901

Filter element according to DIN 24550

FILTER ASSEMBLY SIZING  
Flow rates [l/min]

| Filter series | Length | Filter element design - N Series |      |      |      |      |                   |
|---------------|--------|----------------------------------|------|------|------|------|-------------------|
|               |        | A03                              | A06  | A10  | A16  | A25  | M25<br>M60<br>M90 |
| LMP 900       | 1      | 706                              | 877  | 1264 | 1291 | 1444 | 1803              |
|               | 2      | 1100                             | 1264 | 1556 | 1573 | 1668 | 1867              |
| LMP 901       | 1      | 715                              | 899  | 1337 | 1369 | 1552 | 2000              |
|               | 2      | 1147                             | 1337 | 1689 | 1710 | 1828 | 2081              |

## Maximum flow rate for a complete low and medium pressure filter with a pressure drop $\Delta p = 0.7$ bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.




## LMP 900-901 Length 2



## Hydraulic symbols

| Filter series | Execution S | Execution B |
|---------------|-------------|-------------|
| LMP 900-901   | ●           | ●           |
|               |             |             |

## Pressure drop Filter housings $\Delta p$ pressure drop

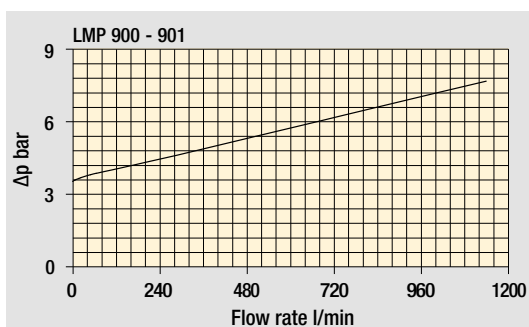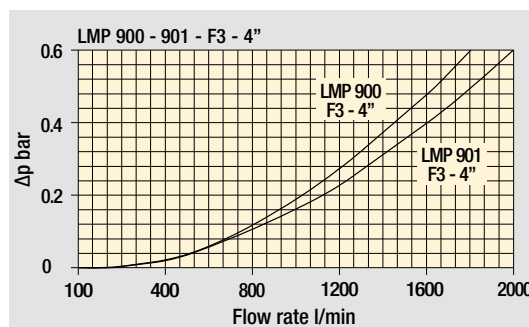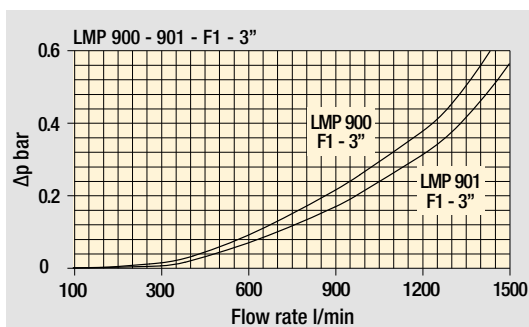

## Bypass valve pressure drop

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

# LMP 900-901 Filter element according to DIN 24550

Designation & Ordering code

## COMPLETE FILTER

|  |   |
|--|---|
| <b>Series and size</b><br><b>LMP900   LMP901</b>   | Configuration example: <b>LMP901</b> <b>2</b> <b>B</b> <b>A</b> <b>F2</b> <b>A10</b> <b>N</b> <b>P01</b>                            |
| <b>Length</b><br><b>1</b>   <b>2</b>   |   |
| <b>Bypass valve</b><br><b>S</b> Without bypass   <b>B</b> 3.5 bar  |   |
| <b>Seals and treatments</b><br><b>A</b> NBR<br><b>V</b> FPM  |   |
| <b>Connections</b><br><b>F1</b> 3" SAE 3000 psi/M<br><b>F2</b> 3" SAE 3000 psi/UNC<br><b>F3</b> 4" SAE 3000 psi/M<br><b>F4</b> 4" SAE 3000 psi/UNC   |   |
| <b>Filtration rating (filter media)</b><br><b>A03</b> Inorganic microfiber 3 µm<br><b>A06</b> Inorganic microfiber 6 µm<br><b>A10</b> Inorganic microfiber 10 µm<br><b>A16</b> Inorganic microfiber 16 µm<br><b>A25</b> Inorganic microfiber 25 µm<br><b>M25</b> Wire mesh 25 µm<br><b>M60</b> Wire mesh 60 µm<br><b>M90</b> Wire mesh 90 µm<br><b>WA025</b> Water absorber inorganic microfiber 25 µm |   |
| <b>Element Δp</b><br><b>N</b> 20 bar   | <b>Execution</b><br><b>P01</b> MP Filtri standard<br><b>F02</b> Maintenance from the bottom of the housing<br><b>Pxx</b> Customized |
|  | <b>Filter length</b><br><b>1</b>   <b>2</b>   |

## FILTER ELEMENT

|  |   |
|--|---|
| <b>Element series and size</b><br><b>CU900</b>   | Configuration example: <b>CU900</b> <b>A10</b> <b>A</b> <b>N</b> <b>P01</b> |
| <b>Length</b><br><b>1</b> Nr. 1 filter element<br><b>2</b> Nr. 2 filter elements   |   |
| <b>Filtration rating (filter media)</b><br><b>A03</b> Inorganic microfiber 3 µm<br><b>A06</b> Inorganic microfiber 6 µm<br><b>A10</b> Inorganic microfiber 10 µm<br><b>A16</b> Inorganic microfiber 16 µm<br><b>A25</b> Inorganic microfiber 25 µm<br><b>M25</b> Wire mesh 25 µm<br><b>M60</b> Wire mesh 60 µm<br><b>M90</b> Wire mesh 90 µm<br><b>WA025</b> Water absorber inorganic microfiber 25 µm |   |
| <b>Seals</b><br><b>A</b> NBR<br><b>V</b> FPM   |   |
| <b>Element Δp</b><br><b>N</b> 20 bar   | <b>Execution</b><br><b>P01</b> MP Filtri standard<br><b>Pxx</b> Customized  |



## ACCESSORIES

|   |                     |  |                     |      |
|---|---------------------|--|---------------------|------|
| <b>Differential indicators</b>                        | page                |  |                     | page |
| <b>DEA</b> Electrical differential indicator          | 445                 | <b>DTA</b> Electronic differential indicator |                     | 448  |
| <b>DEM</b> Electrical differential indicator          | 445-446             | <b>DVA</b> Visual differential indicator     |                     | 448  |
| <b>DLA</b> Electrical / visual differential indicator | 446-447             | <b>DVM</b> Visual differential indicator     |                     | 448  |
| <b>DLE</b> Electrical / visual differential indicator | 447                 |  |                     |      |
| <b>Additional features</b>                            | Filter length       | page   | Filter length       | page |
| <b>T2</b> Plug  | <b>1</b>   <b>2</b> | 449  | <b>1</b>   <b>2</b> | 450  |
|   | •   •               |  | •                   |      |
|   |                     | <b>CFA</b> Retaining clamp                   |                     |      |





# Filter element according to DIN 24550 LMP 900-901

Dimensions

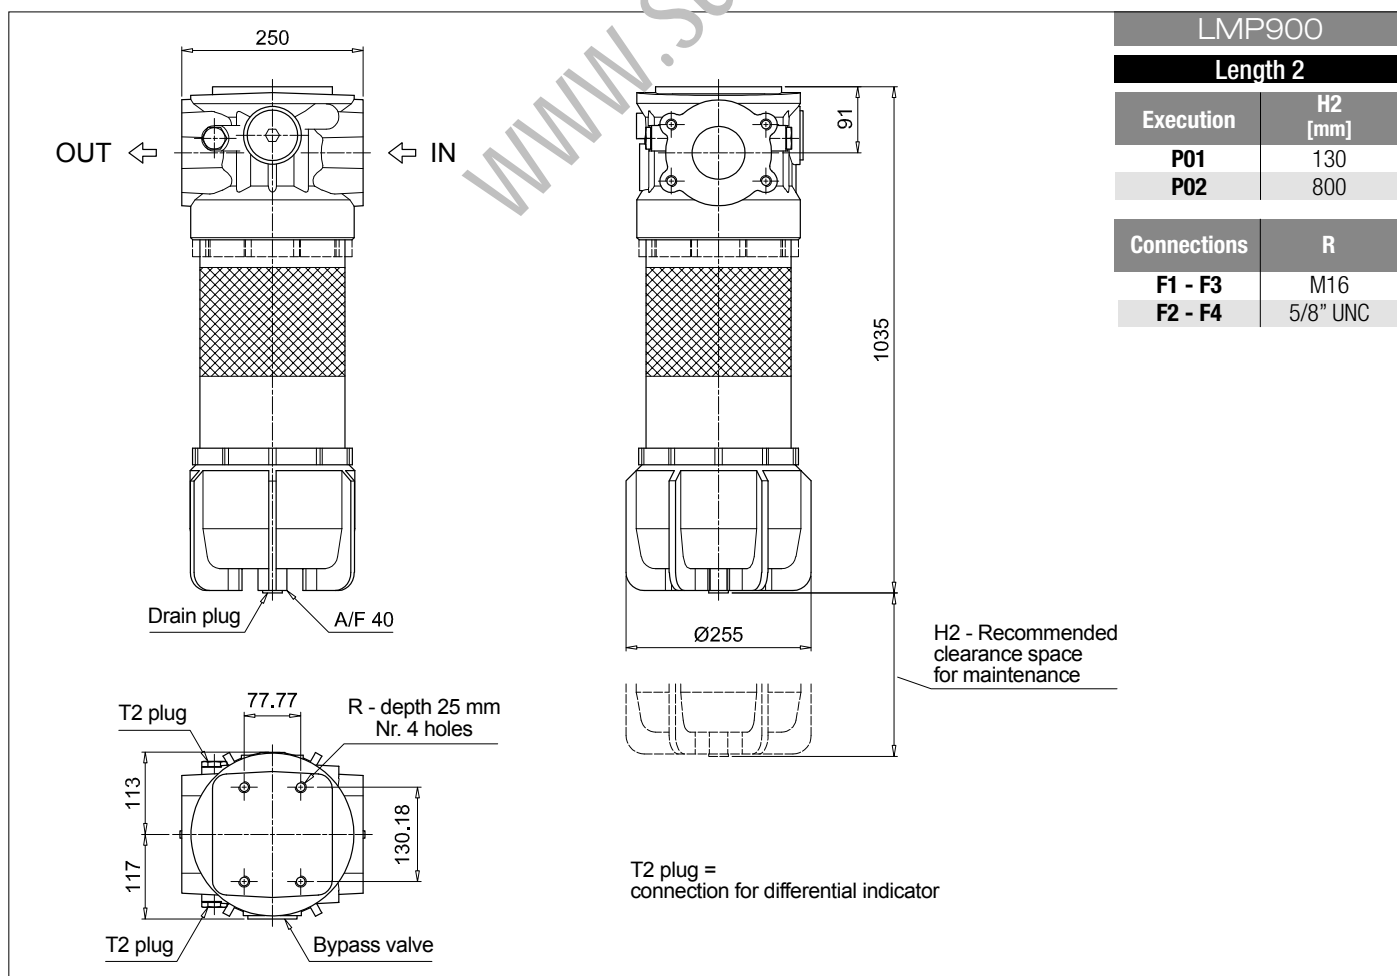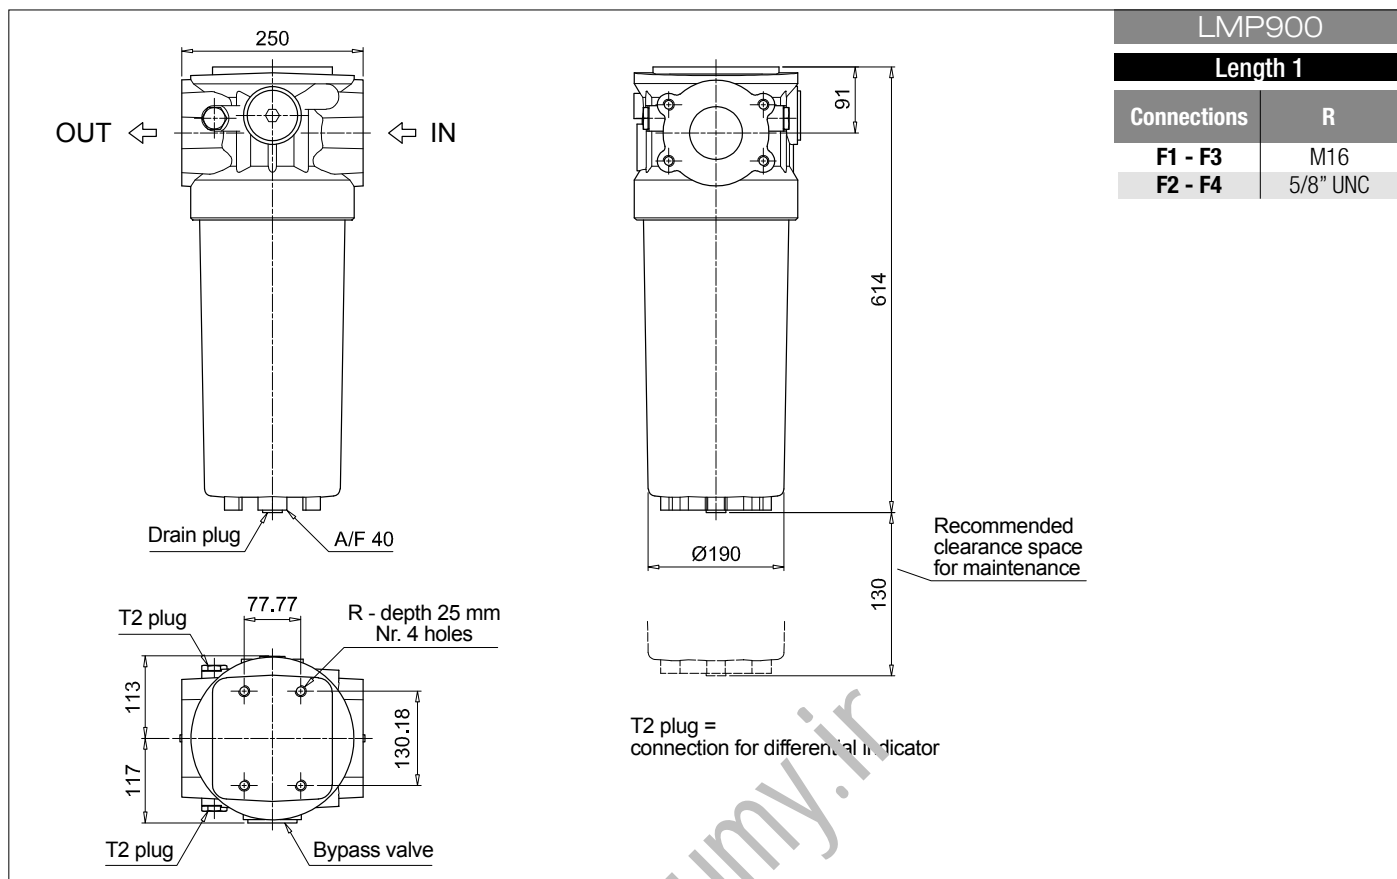


# LMP 900-901 Filter element according to DIN 24550

## Dimensions

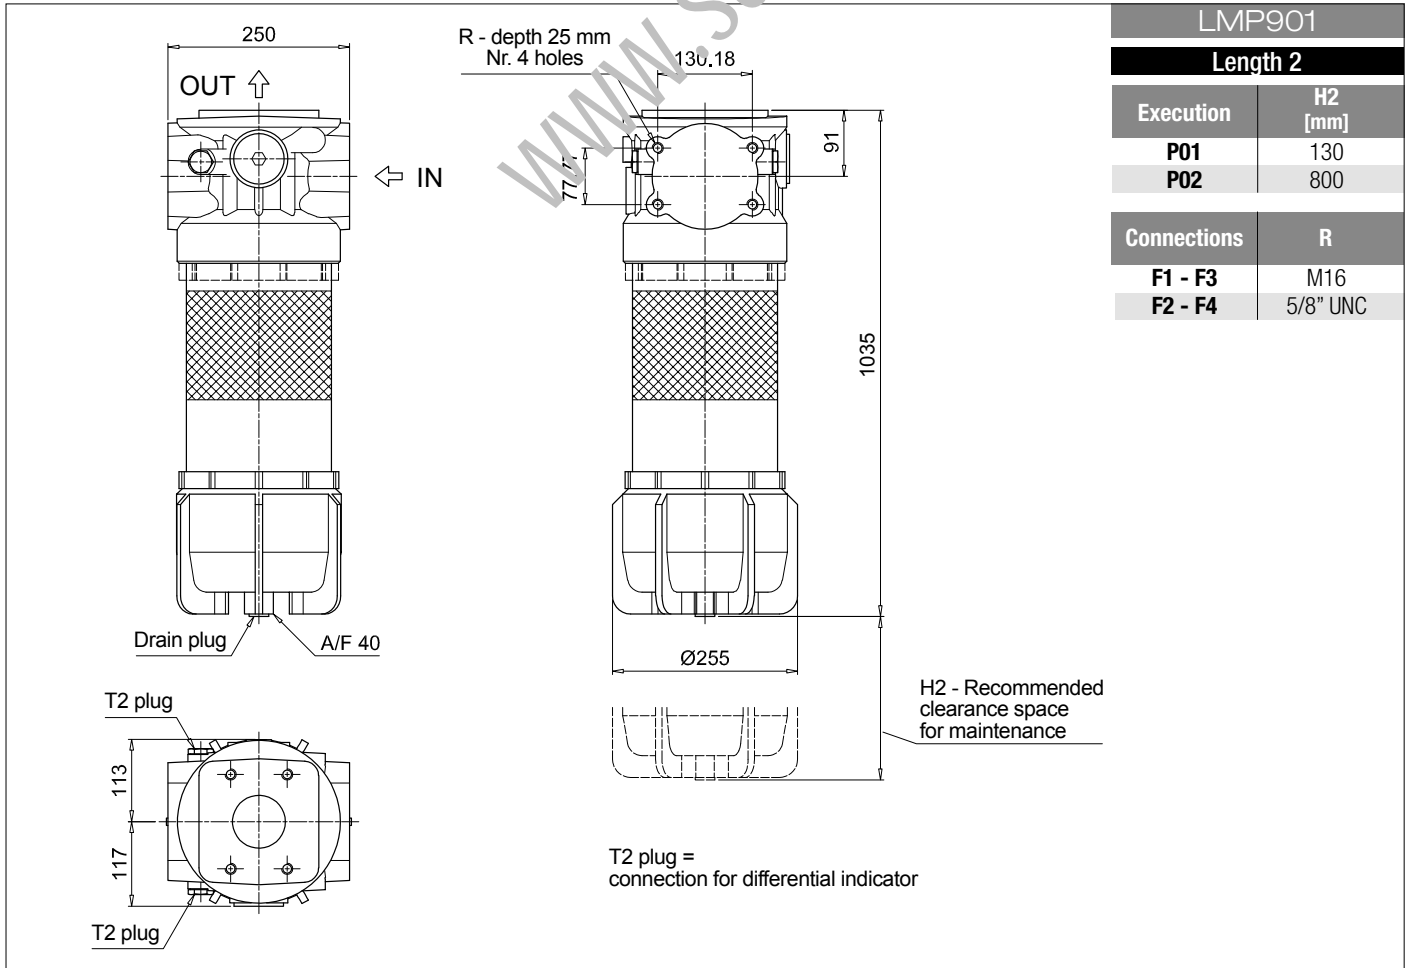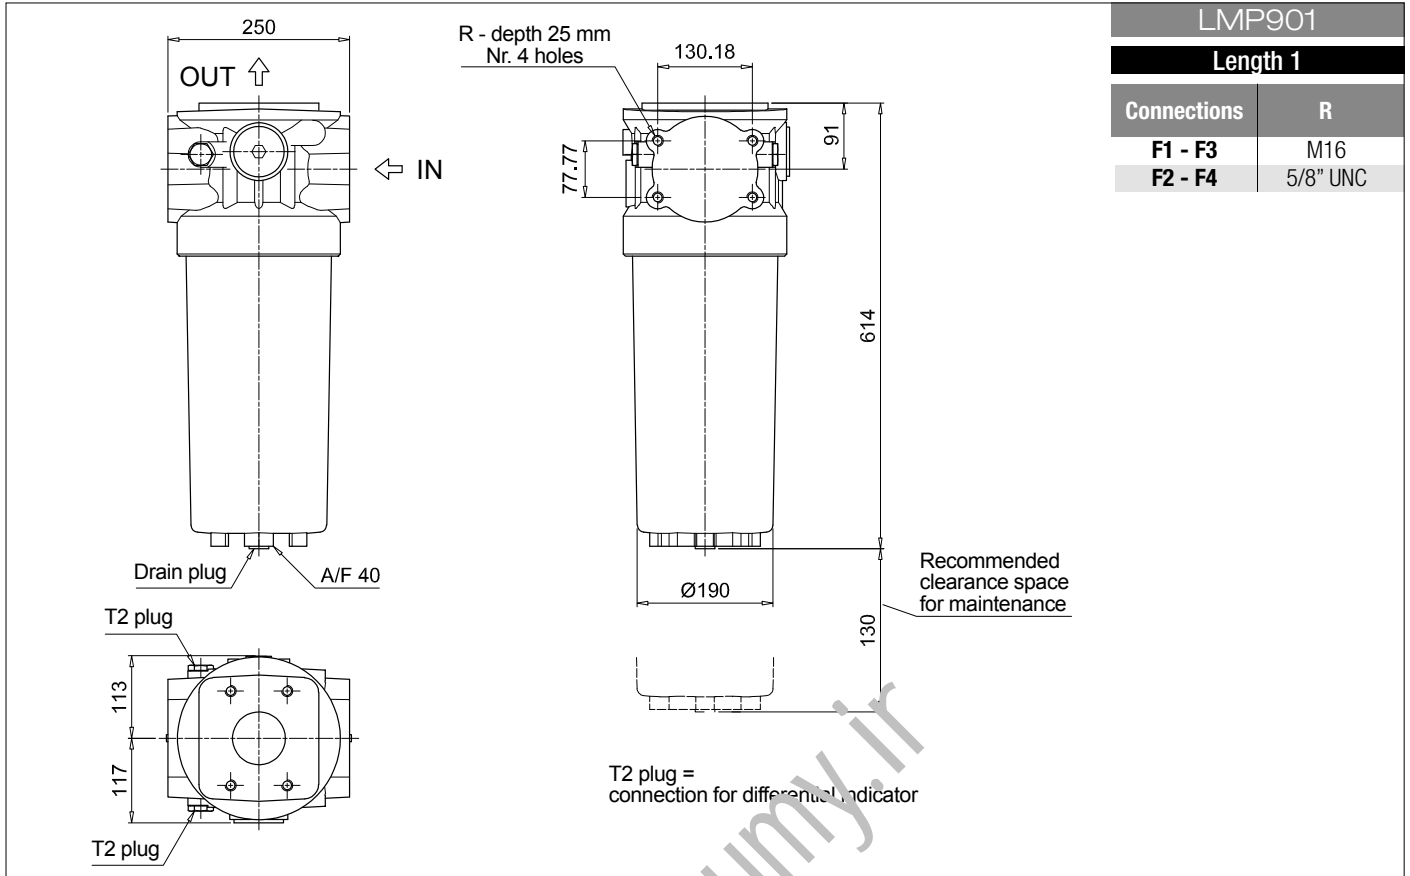

# SPARE PARTS LMP 900-901

Order number for spare parts

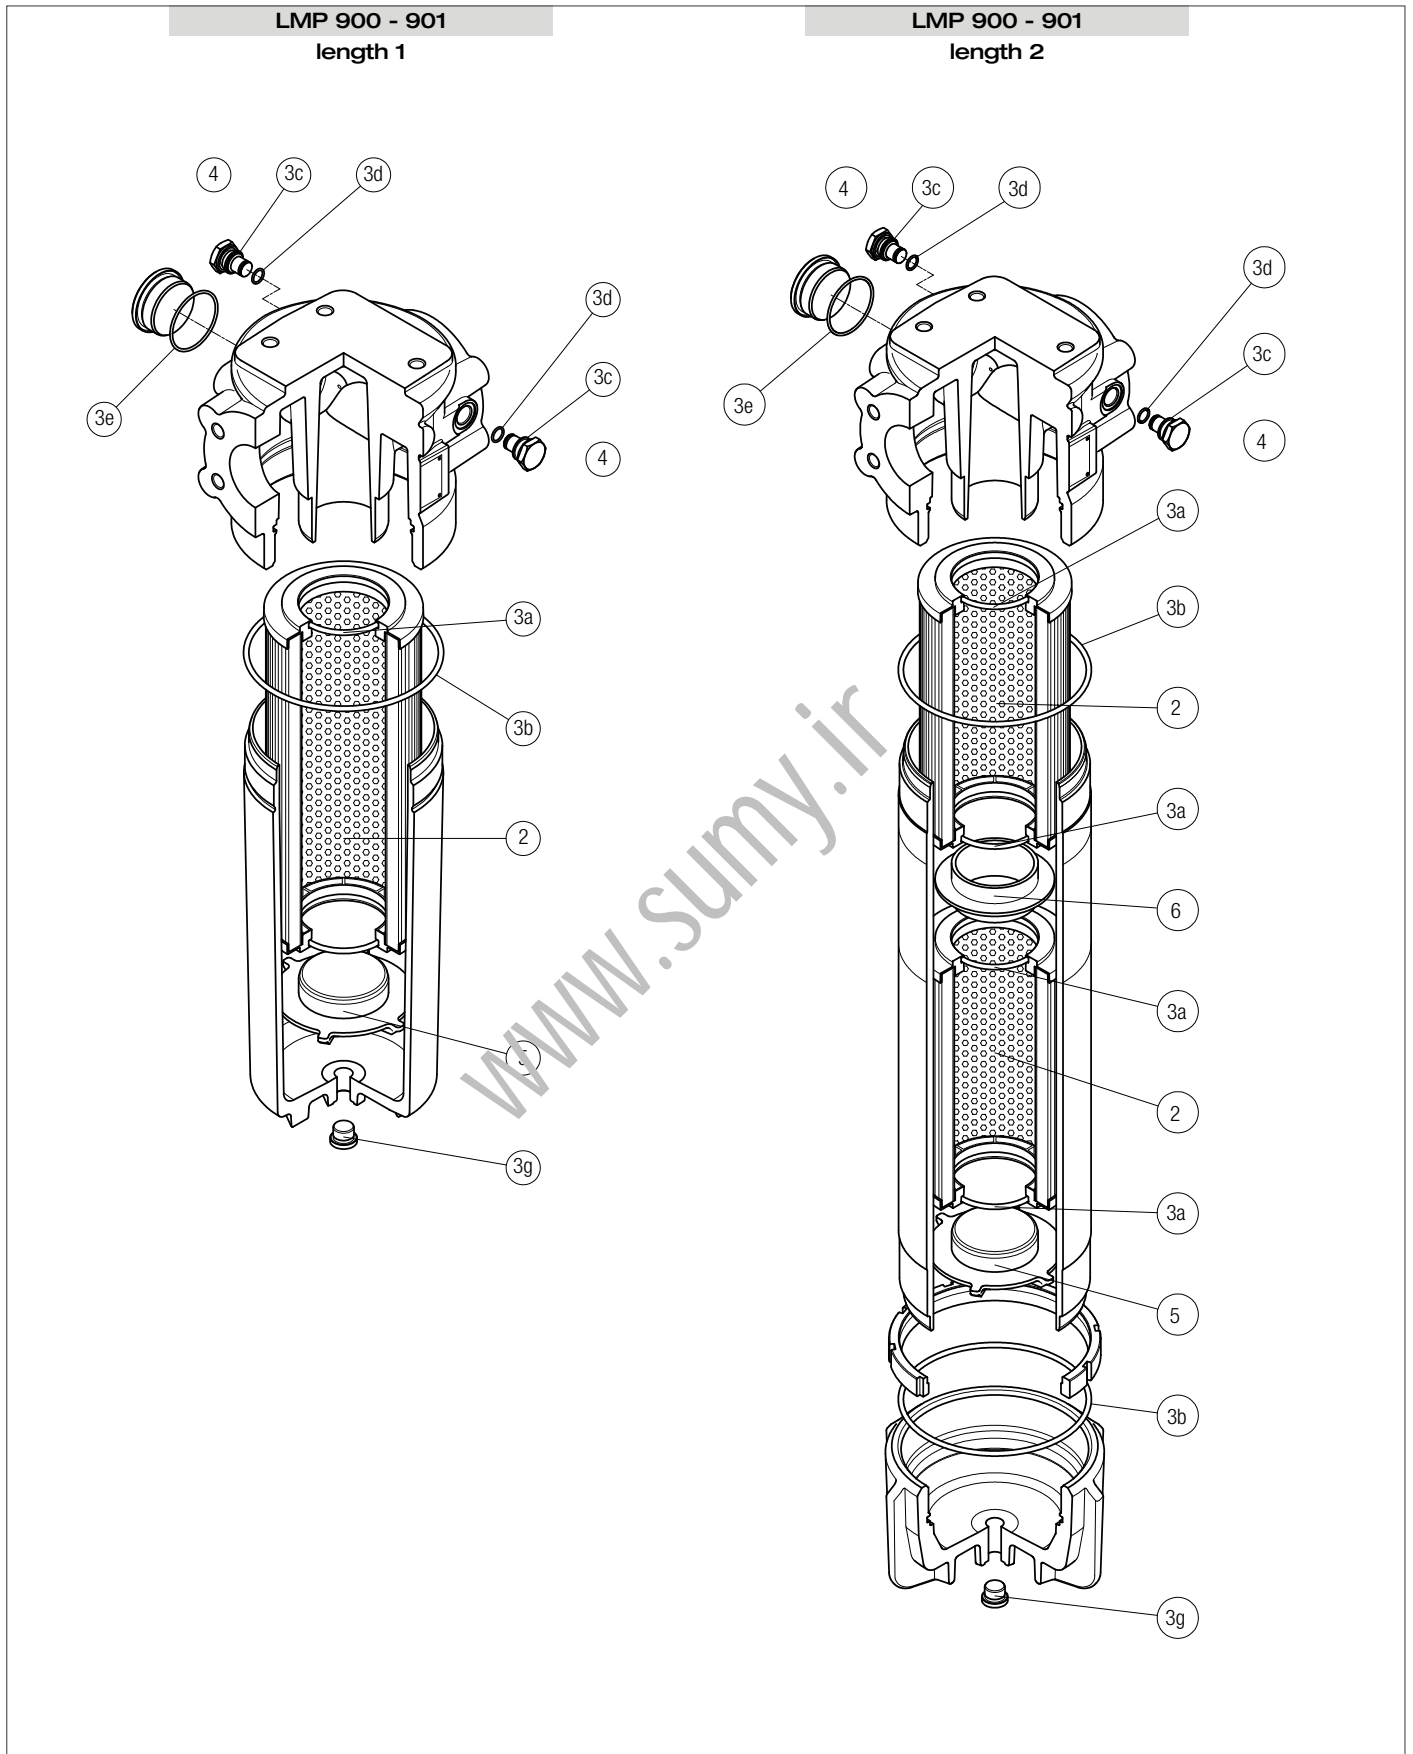

| Item:                | 2              |                      | 3 (3a ÷ 3g)               |                | 4               |     | 5   |       | 6        |       |          |
|----------------------|----------------|----------------------|---------------------------|----------------|-----------------|-----|-----|-------|----------|-------|----------|
| Filter series        | Filter element | Seal Kit code number | Indicator connection plug | Housing spigot | Coupling spigot |     |     |       |          |       |          |
|                      | Q.ty           | Q.ty                 | Q.ty                      | Q.ty           | Q.ty            | NBR | FPM | Q.ty  | Q.ty     | Q.ty  |          |
| LMP 900-901 length 1 | 1 pc.          | See order table      | 1 pc.                     | 02050363       | 2 pcs.          | T2H | T2V | 1 pc. | 01044104 | -     | 01044099 |
| LMP 900-901 length 2 | 2 pcs.         | See order table      | 1 pc.                     | 02050365       | 2 pcs.          | T2H | T2V | 1 pc. | 01044104 | 1 pc. | 01044099 |

www.sumy.ir

# LMP 902-903 series

Filter element according to DIN 24550

Maximum working pressure up to 2 MPa (20 bar) - Flow rate up to 3000 l/min



# LMP 902-903 GENERAL INFORMATION

## Filter element according to DIN 24550

### Description

#### Low & Medium Pressure filters

**Maximum working pressure up to 2 MPa (20 bar)**

**Flow rate up to 3000 l/min**

LMP902 and LMP903 are ranges of low pressure filter with large filtration surface mainly suitable for lubrication, off-line filtration of the reservoirs and filtration equipment.

Multiple LMP950 filters are connected to a manifold to reduce the pressure drop caused by the filter media and to increase the life time of the filter element.

They are directly connected to the lines of the system through the hydraulic fittings.

#### Available features:

- 4" flanged connections, for a maximum flow rate of 3000 l/min
- Filter element designed in accordance with DIN 24550 regulation
- Fine filtration rating, to get a good cleanliness level into the system
- Water removal elements, to remove the free water from the hydraulic fluid.  
For further information, see the Contamination Management document and the dedicate leaflet.
- Bypass valve, to relieve excessive pressure drop across the filter media
- Vent ports, to avoid air trapped into the filter going into the system
- Drain ports, to remove the fluid from the housing prior the maintenance work
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

- Off-line filtration of reservoirs
- Filtration systems

### Technical data

#### Filter housing materials

- Head: Anodized Aluminium
- Housing: Anodized Aluminium
- Manifolds: Welded - Phosphatized Steel
- Bypass valve: Steel
- Size 1000 filter elements complying with DIN 24550 standard

#### Pressure

- Test pressure: 3.5 MPa (35 bar)

#### Bypass valve

- Opening pressure 350 kPa (3.5 bar)  $\pm 10\%$
- Other opening pressures on request.

#### Number of filter elements

LMP 902: 4 filter elements CU900

LMP 903: 6 filter elements CU900

#### Filter elements

Filter element according to DIN 24550

Size: 1000

#### $\Delta p$ element type

- Microfine filter elements - series N: 20 bar
- Fluid flow through the filter element from OUT to IN

#### Connections

LMP 902-903: In-line Inlet/Outlet

#### Seals

- Standard NBR series A
- Optional FPM series V

#### Temperature

From -25 °C to +110 °C

#### Note

LMP 902 - 903 filters are provided for vertical mounting



### Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series  | Weights [kg] |       | Volumes [dm <sup>3</sup> ] |    |
|----------------|--------------|-------|----------------------------|----|
|                | Length       | 2     | Length                     | 2  |
| <b>LMP 902</b> |              | 89.6  |                            | 58 |
| <b>LMP 903</b> |              | 129.2 |                            | 87 |

# GENERAL INFORMATION LMP 902-903

Filter element according to DIN 24550

FILTER ASSEMBLY SIZING  
Flow rates [l/min]

| Filter series  | Length   | Filter element design - N Series |      |      |      |      |                   |
|----------------|----------|----------------------------------|------|------|------|------|-------------------|
|                |          | A03                              | A06  | A10  | A16  | A25  | M25<br>M60<br>M90 |
| <b>LMP 902</b> | <b>2</b> | 2217                             | 2576 | 3241 | 3282 | 3506 | 3987              |
| <b>LMP 903</b> | <b>2</b> | 2838                             | 3170 | 3720 | 3755 | 3926 | 4278              |


### Maximum flow rate for a complete low and medium pressure filter with a pressure drop $\Delta p = 0.7$ bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).


You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.

### Hydraulic symbols

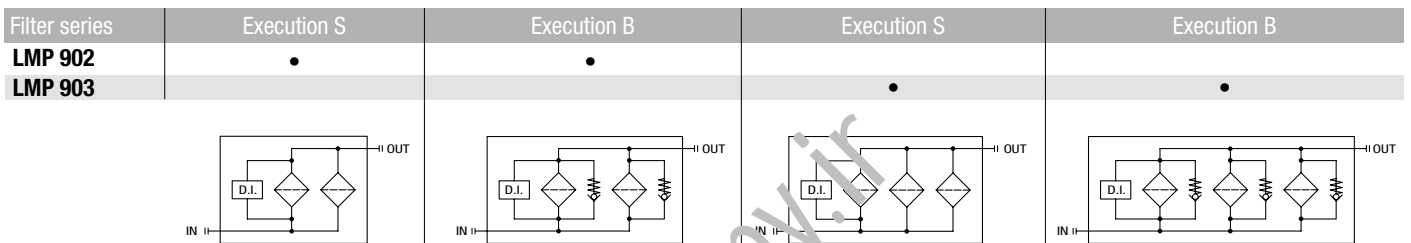


### Pressure drop

Filter housings  $\Delta p$  pressure drop

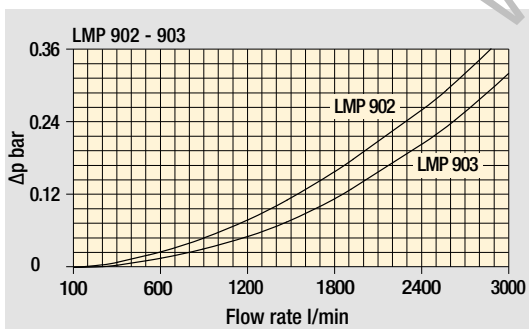

### Bypass valve pressure drop

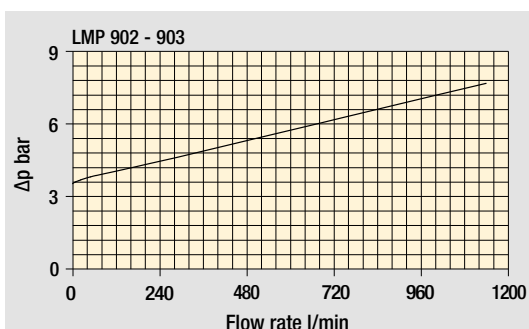


The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.


# LMP 902-903 GENERAL INFORMATION

Filter element according to DIN 24550

## Manifolds

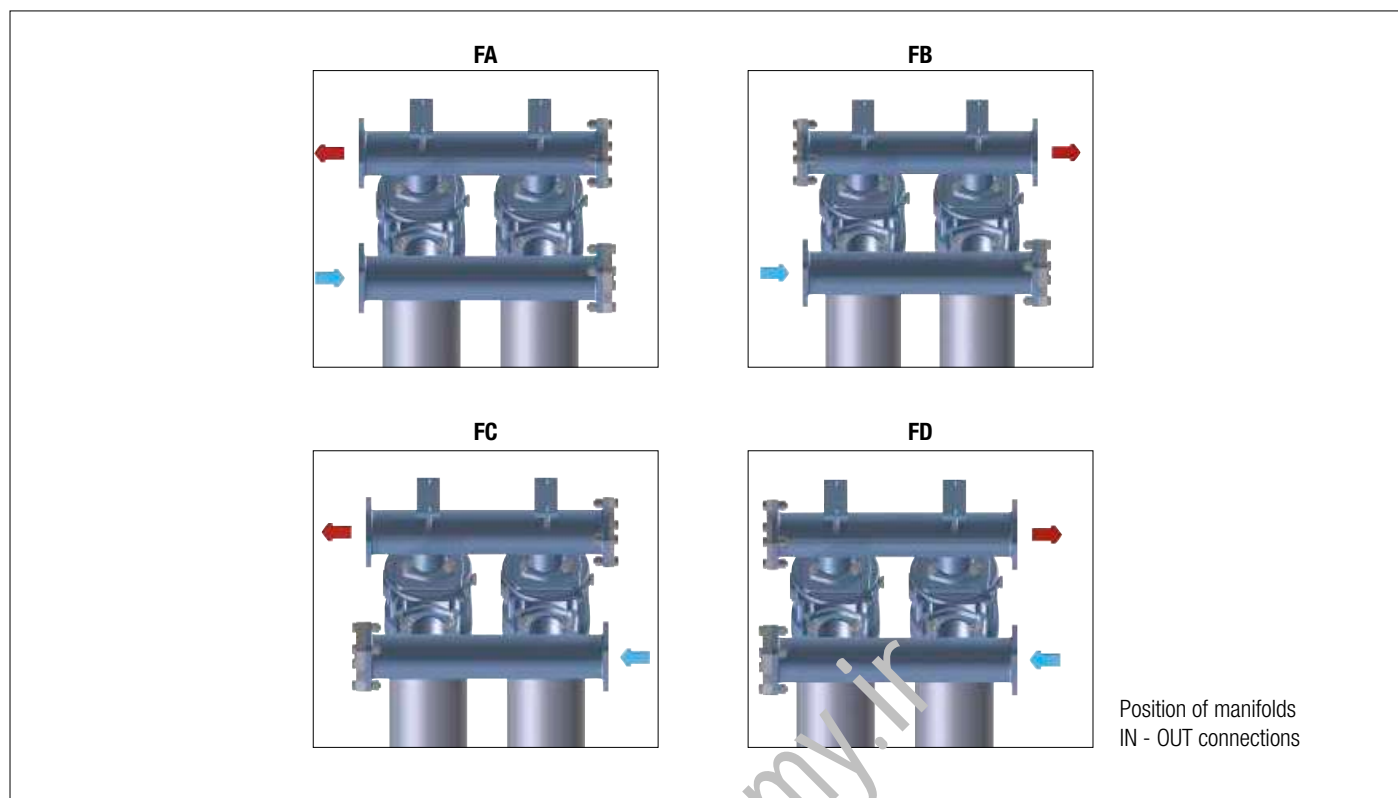

## Focus on

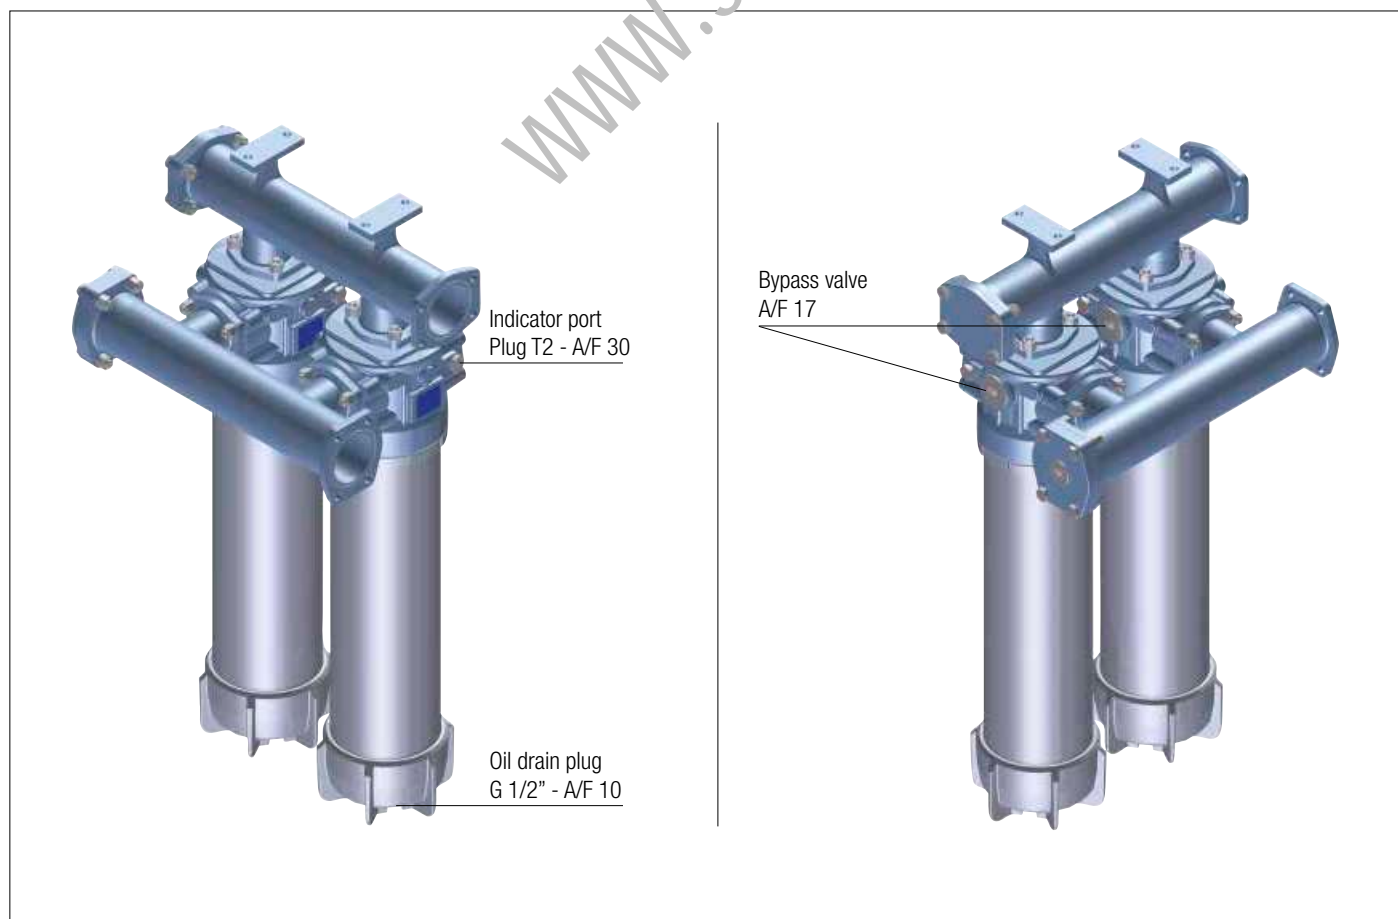



[www.sumy.ir](http://www.sumy.ir)

# LMP 902-903 Filter element according to DIN 24550

## Designation & Ordering code

### COMPLETE FILTER

|   |                            |  |  |  |  |  |  |                   |  |  |
|---|----------------------------|--|--|--|--|--|--|-------------------|--|--|
| <b>Series and size</b>                  |                            | Configuration example: <b>LMP902</b> <b>2</b> <b>B</b> <b>A</b> <b>FA</b> <b>A10</b> <b>N</b> <b>P01</b> |  |  |  |  |  |                   |  |  |
| <b>LMP902</b>   <b>LMP903</b>           |                            |  |  |  |  |  |  |                   |  |  |
| <b>Length</b>                           |                            | 2  |  |  |  |  |  |                   |  |  |
| <b>Bypass valve</b>                     |                            | <b>S</b> Without bypass <b>B</b> 3.5 bar   |  |  |  |  |  |                   |  |  |
| <b>Seals and treatments</b>             |                            | <b>A</b> NBR<br><b>V</b> FPM   |  |  |  |  |  |                   |  |  |
| <b>Connections</b>                      |                            | <b>IN</b>  |  |  |  |  |  |                   | <b>OUT</b>   |  |
| <b>FA</b>                               | 4" SAE 3000 psi            | left   |  |  |  |  |  |                   | left   |  |
| <b>FB</b>                               | 4" SAE 3000 psi            | left   |  |  |  |  |  |                   | right  |  |
| <b>FC</b>                               | 4" SAE 3000 psi            | right  |  |  |  |  |  |                   | left   |  |
| <b>FD</b>                               | 4" SAE 3000 psi            | right  |  |  |  |  |  |                   | right  |  |
| <b>Filtration rating (filter media)</b> |                            |  |  |  |  |  |  |                   |  |  |
| <b>A03</b>                              | Inorganic microfiber 3 µm  |  |  |  |  |  |  | <b>M25</b>        | Wire mesh 25 µm  |  |
| <b>A06</b>                              | Inorganic microfiber 6 µm  |  |  |  |  |  |  | <b>M60</b>        | Wire mesh 60 µm  |  |
| <b>A10</b>                              | Inorganic microfiber 10 µm |  |  |  |  |  |  | <b>M90</b>        | Wire mesh 90 µm  |  |
| <b>A16</b>                              | Inorganic microfiber 16 µm |  |  |  |  |  |  |                   |  |  |
| <b>A25</b>                              | Inorganic microfiber 25 µm |  |  |  |  |  |  |                   |  |  |
| <b>WA025</b>                            |                            | Water absorber inorganic microfiber 25 µm  |  |  |  |  |  |                   |  |  |
|   |                            |  |  |  |  |  |  | <b>Element Δp</b> | <b>Execution</b>                                       |  |
|   |                            |  |  |  |  |  |  | <b>N</b> 20 bar   | <b>P01</b> MP Filtri standard<br><b>Pxx</b> Customized |  |

### FILTER ELEMENT

|   |                            |   |  |  |                   |  |
|---|----------------------------|---|--|--|-------------------|--|
| <b>Element series and size</b>          |                            | Configuration example: <b>CU900</b> <b>A10</b> <b>A</b> <b>N</b> <b>P01</b> |  |  |                   |  |
| <b>CU900</b>                            |                            |   |  |  |                   |  |
| <b>Filter series and size</b>           |                            |   |  |  |                   |  |
| <b>LMP902</b>                           | Nr. 4 filter elements      |   |  |  |                   |  |
| <b>LMP903</b>                           | Nr. 6 filter elements      |   |  |  |                   |  |
| <b>Filtration rating (filter media)</b> |                            |   |  |  |                   |  |
| <b>A03</b>                              | Inorganic microfiber 3 µm  |   |  |  | <b>M25</b>        | Wire mesh 25 µm  |
| <b>A06</b>                              | Inorganic microfiber 6 µm  |   |  |  | <b>M60</b>        | Wire mesh 60 µm  |
| <b>A10</b>                              | Inorganic microfiber 10 µm |   |  |  | <b>M90</b>        | Wire mesh 90 µm  |
| <b>A16</b>                              | Inorganic microfiber 16 µm |   |  |  |                   |  |
| <b>A25</b>                              | Inorganic microfiber 25 µm |   |  |  |                   |  |
| <b>WA025</b>                            |                            | Water absorber inorganic microfiber 25 µm                                   |  |  |                   |  |
| <b>Seals</b>                            |                            | <b>A</b> NBR<br><b>V</b> FPM  |  |  |                   |  |
|   |                            |   |  |  | <b>Element Δp</b> | <b>Execution</b>                                       |
|   |                            |   |  |  | <b>N</b> 20 bar   | <b>P01</b> MP Filtri standard<br><b>Pxx</b> Customized |


### ACCESSORIES

|                                |  |         |            |                                       |
|--------------------------------|--|---------|------------|---------------------------------------|
| <b>Differential indicators</b> |  | page    |            | page                                  |
| <b>DEA</b>                     | Electrical differential indicator          | 445     | <b>DTA</b> | Electronic differential indicator 448 |
| <b>DEM</b>                     | Electrical differential indicator          | 445-446 | <b>DVA</b> | Visual differential indicator 448     |
| <b>DLA</b>                     | Electrical / visual differential indicator | 446-447 | <b>DVM</b> | Visual differential indicator 448     |
| <b>DLE</b>                     | Electrical / visual differential indicator | 447     |            |                                       |
| <b>Additional features</b>     |  | page    |            |                                       |
| <b>T2</b>                      | Plug                                       | 449     |            |                                       |

# Filter element according to DIN 24550 LMP 902-903

Dimensions

LMP902

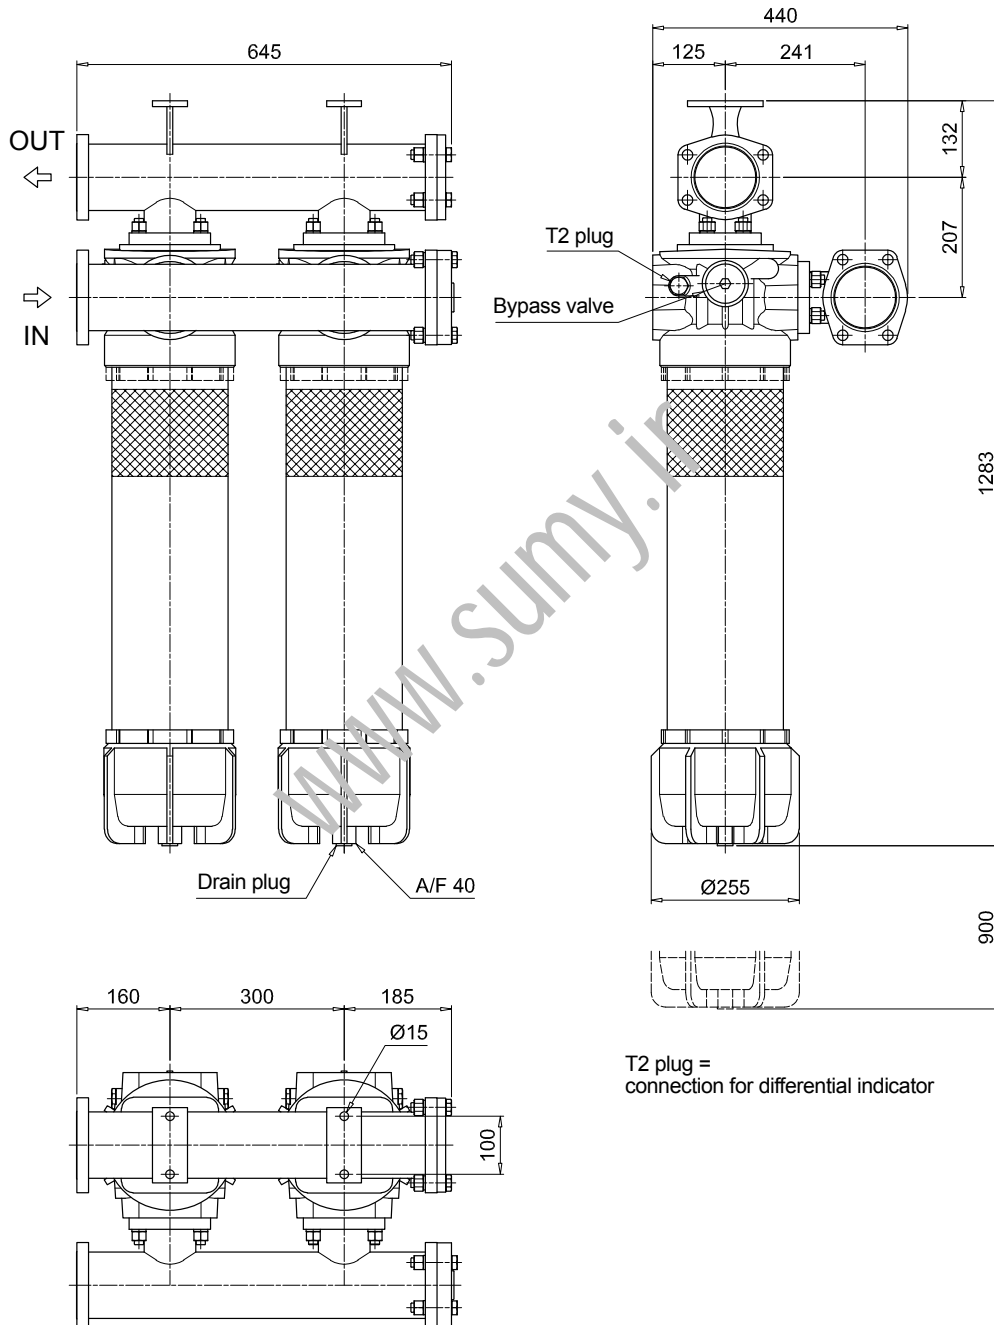


T2 plug =  
connection for differential indicator

# LMP 902-903 Filter element according to DIN 24550

## Dimensions


LMP903

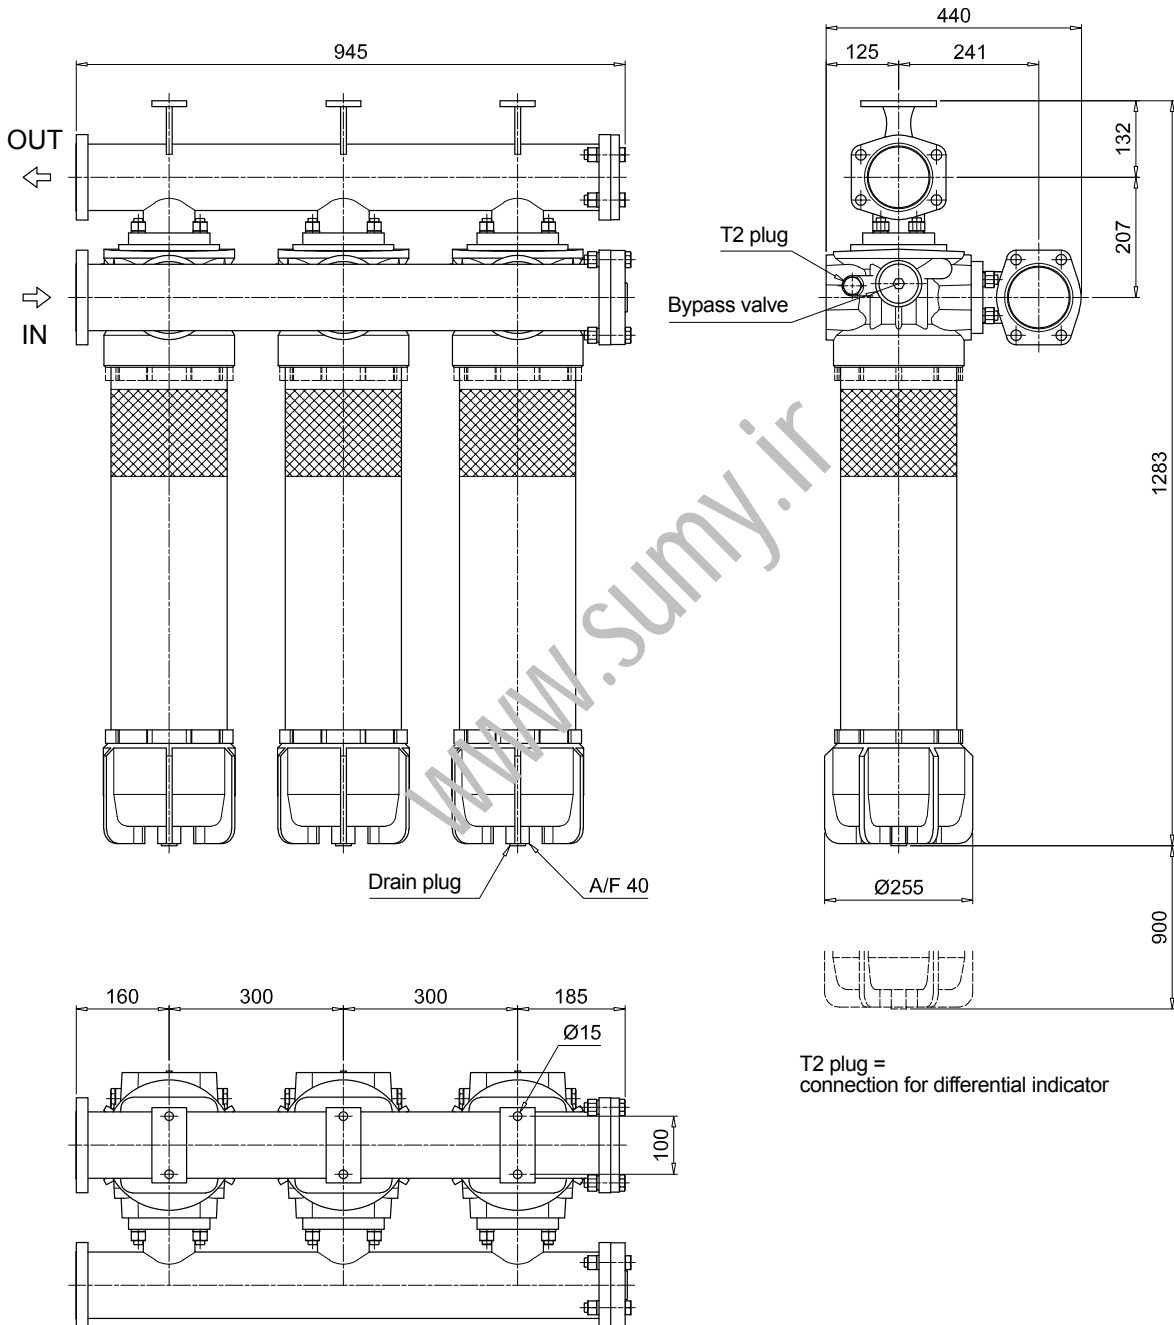

# SPARE PARTS LMP 902-903

Order number for spare parts

LMP 902 - 903

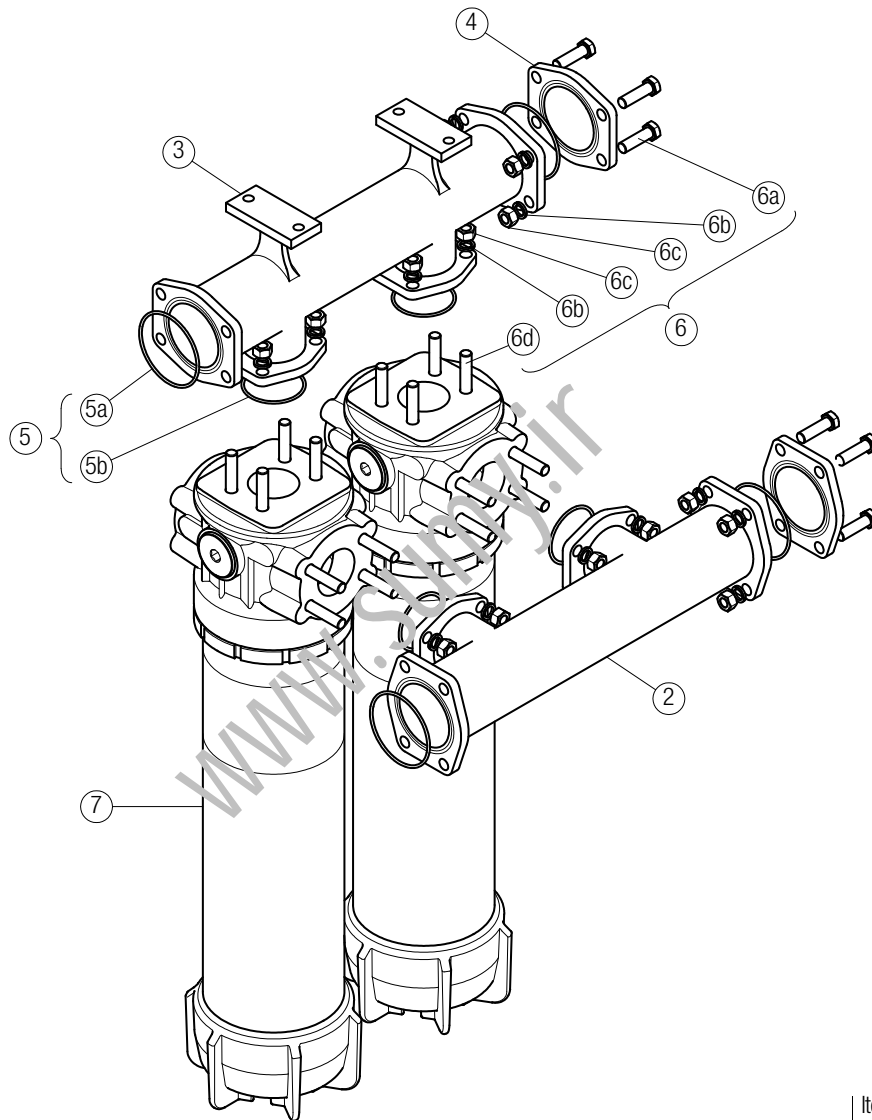

Item 7:  
for complete filter code and  
spare parts, see  
LMP 900 - 901 series chapter

Quantity:  
- filter spare parts:  
LMP 902 - 2 pcs.  
LMP 903 - 3 pcs.

- filter seal kit:  
LMP 902 - 2 pcs.  
LMP 903 - 3 pcs.

| Item:         | 2     |             | 3        | 4      |                                | 5 (5a-5b) |                        |          | 6 (6a ÷ 6d) |                        | 7      |                    |
|---------------|-------|-------------|----------|--------|--------------------------------|-----------|------------------------|----------|-------------|------------------------|--------|--------------------|
| Filter series | Q.ty  | Manifold IN | OUT      | Q.ty   | 4" SAE 3000 psi plugged flange | Q.ty      | Manifolds seal kit NBR | FPM      | Q.ty        | Threaded fasteners kit | Q.ty   | Filter             |
| LMP 902       | 1 pc. | 01039270    | 01039271 | 2 pcs. | 01042012                       | 1 pc.     | 02050404               | 02050405 | 1 pc.       | 02049051               | 2 pcs. | LMP9012xxF1xxxNP02 |
| LMP 903       | 1 pc. | 01039337    | 01039338 | 2 pcs. |                                | 1 pc.     | 02050404               | 02050405 | 1 pc.       | 02049052               | 3 pcs. |                    |

# Clogging indicators

## Differential indicators

### Introduction

Filter elements are efficient only if their Dirt Holding Capacity is fully exploited. This is achieved by using filter housings equipped with clogging indicators.

These devices trip when the clogging of the filter element causes an increase in pressure drop across the filter element.

The indicator is set to alarm before the element becomes fully clogged.

MP Filtri can supply differential pressure indicators with a visual, electrical or both signals.

### Suitable indicator types


#### DIFFERENTIAL INDICATORS

Differential indicators are used on the Pressure line to check the efficiency of the filter element.

They measure the pressure upstream and downstream of the filter element (differential pressure).

Standard items are produced with special connection G 1/2" size.

Also available in Stainless Steel models.

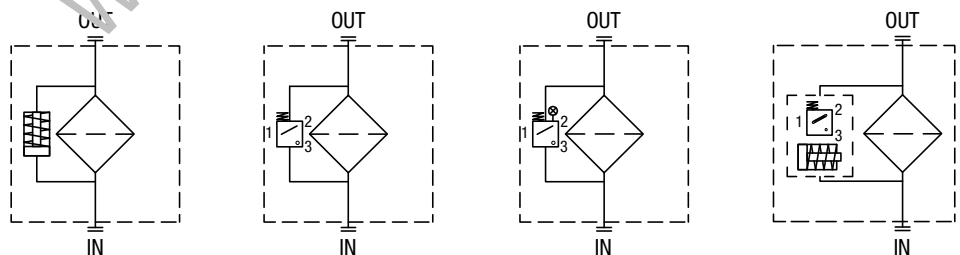

### Quick reference guide

| Filter series   | Visual indicator       | Electrical indicator         | Electrical / Visual indicator  | Electronic indicator |
|---|------------------------|------------------------------|--|----------------------|
| With bypass valve<br>LMP 110 - 112 - 116 - 118 - 119 MULTIPORT<br>LMP 120 - 122 - 123 MULTIPORT<br>LMP 210 - 211 - LDP<br>LMP 400 - 401 & 430 - 431<br>LMP 900 - 901<br>LMP 902 - 903<br>LMP 950 - 951<br>LMP 952 - 953 - 954<br>LMD 211 - 400 - 401 - 431 - 951 - LDD    | DVA20xP01<br>DVM20xP01 | DEA20xA50P01<br>DEM20xAxxP01 | DLA20xA51P01<br>DLA20xA52P01<br>DLA20xA71P01<br>DLE20xA50P01<br>DLE20xF50P01 | DTA20xF70P01         |
| Without bypass valve<br>LMP 110 - 112 - 116 - 118 - 119 MULTIPORT<br>LMP 120 - 122 - 123 MULTIPORT<br>LMP 210 - 211 - LDP<br>LMP 400 - 401 & 430 - 431<br>LMP 900 - 901<br>LMP 902 - 903<br>LMP 950 - 951<br>LMP 952 - 953 - 954<br>LMD 211 - 400 - 401 - 431 - 951 - LDD | DVA50xP01<br>DVM50xP01 | DEA50xA50P01<br>DEM50xAxxP01 | DLA50xA51P01<br>DLA50xA52P01<br>DLA50xA71P01<br>DLE50xA50P01<br>DLE50xF50P01 | DTA50xF70P01         |

| DEA*50                                   |                    |
|--|--------------------|
| <b>Electrical Differential Indicator</b> |                    |
| Settings                                 | Ordering code      |
| 2.0 bar $\pm 10\%$                       | DE A 20 x A 50 P01 |
| 5.0 bar $\pm 10\%$                       | DE A 50 x A 50 P01 |

**Hydraulic symbol**

**Electrical symbol**

**Materials**

- Body: Brass
- Base: Black Nylon
- Contacts: Silver
- Seal: HNBR - FPM

**Technical data**

- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -25 °C to +110 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids  
HFA, HFB, HFC according to ISO 2943
- Degree protection: IP66 according to EN 60529  
IP69K according to ISO 20653

**Electrical data**

- Electrical connection: EN 175301-803
- Resistive load: 0.2 A / 115 Vdc

| DEM*10                                   |                    |
|--|--------------------|
| <b>Electrical Differential Indicator</b> |                    |
| Settings                                 | Ordering code      |
| 2.0 bar $\pm 10\%$                       | DE M 20 x x 10 P01 |
| 5.0 bar $\pm 10\%$                       | DE M 50 x x 10 P01 |

**Hydraulic symbol**

**Electrical symbol**

**Materials**

- Body: Brass
- Base: Black Nylon
- Contacts: Silver
- Seal: HNBR - FPM

**Technical data**

- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -25 °C to +110 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids  
HFA, HFB, HFC according to ISO 2943
- Degree protection: IP66 according to EN 60529

**Electrical data**

- Electrical connection: AMP Superseal series 1.5
- Resistive load: 0.2 A / 115 Vdc
- Switching type: Normally open contacts (NC on request)
- Thermal lockout: Normally open up to 30 °C (option "F")

| DEM*20                                   |                    |
|--|--------------------|
| <b>Electrical Differential Indicator</b> |                    |
| Settings                                 | Ordering code      |
| 2.0 bar $\pm 10\%$                       | DE M 20 x x 20 P01 |
| 5.0 bar $\pm 10\%$                       | DE M 50 x x 20 P01 |

**Hydraulic symbol**

**Electrical symbol**

**Materials**

- Body: Brass
- Base: Black Nylon
- Contacts: Silver
- Seal: HNBR - FPM

**Technical data**

- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -25 °C to +110 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids  
HFA, HFB, HFC according to ISO 2943
- Degree protection: IP66 according to EN 60529

**Electrical data**

- Electrical connection: AMP Time junior
- Resistive load: 0.2 A / 115 Vdc
- Switching type: Normally open contacts (NC on request)
- Thermal lockout: Normally open up to 30 °C (option "F")





| DLA*71  |                    |
|---|--------------------|
| <b>Electrical/Visual Differential Indicator</b> |                    |
| Settings  | Ordering code      |
| 2.0 bar $\pm 10\%$                              | DL A 20 x A 71 P01 |
| 5.0 bar $\pm 10\%$                              | DL A 50 x A 71 P01 |

**Hydraulic symbol**

**Electrical symbol**

**Materials**

- Body: Brass
- Base: Black Nylon
- Contacts: Silver
- Seal: HNBR - FPM

**Technical data**

- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -25 °C to +110 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids  
HFA, HFB, HFC according to ISO 2943
- Degree protection: IP65 according to EN 60529  
IP69K according to ISO 20653

**Electrical data**

- Electrical connection: IEC 61076-2-101 D (M12)
- Lamps: 24 Vdc
- Resistive load: 0.4 A / 24 Vdc

| DLE*A50   |                    |
|---|--------------------|
| <b>Electrical/Visual Differential Indicator</b> |                    |
| Settings  | Ordering code      |
| 2.0 bar $\pm 10\%$                              | DL E 20 x A 50 P01 |
| 5.0 bar $\pm 10\%$                              | DL E 50 x A 50 P01 |

**Hydraulic symbol**

**Electrical symbol**

**Materials**

- Body: Brass
- Base: Black Nylon
- Contacts: Silver
- Seal: HNBR - FPM

**Technical data**

- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -25 °C to +110 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids  
HFA, HFB, HFC according to ISO 2943
- Degree protection: IP65 according to EN 60529

**Electrical data**

- Electrical connections: EN 175301-803
- Resistive load: 5 A / 250 Vac
- Available the connector with lamps

| DLE*F50   |                    |
|---|--------------------|
| <b>Electrical/Visual Differential Indicator</b> |                    |
| Settings  | Ordering code      |
| 2.0 bar $\pm 10\%$                              | DL E 20 x F 50 P01 |
| 5.0 bar $\pm 10\%$                              | DL E 50 x F 50 P01 |

**Hydraulic symbol**

**Electrical symbol**

**Materials**

- Body: Brass
- Base: Black Nylon
- Contacts: Silver
- Seal: HNBR - FPM

**Technical data**

- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -25 °C to +110 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids  
HFA, HFB, HFC according to ISO 2943
- Degree protection: IP65 according to EN 60529

**Electrical data**

- Electrical connections: EN 175301-803
- Resistive load: 5 A / 250 Vac
- Thermal lockout setting: +30 °C

# DIFFERENTIAL INDICATORS

## Dimensions

| DTA*70                                   |                    |
|--|--------------------|
| <b>Electronic Differential Indicator</b> |                    |
| Settings                                 | Ordering code      |
| 2.0 bar $\pm$ 10%                        | DT A 20 x x 70 P01 |
| 5.0 bar $\pm$ 10%                        | DT A 50 x x 70 P01 |

**Hydraulic symbol**

**Materials**

- Body: Brass
- Internal parts: Brass - Nylon
- Contacts: Silver
- Seal: HNBR - FPM

**Technical data**

- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943
- Degree protection: IP67 according to EN 60529

**Electrical data**

- Electrical connection: IEC 61076-2-101 D (M12)
- Power supply: 24 Vdc
- Analogue output: From 4 to 20 mA
- Thermal lockout: 30 °C (all output signals stalled up to 30 °C)

| DVA                                  |               |
|--------------------------------------|---------------|
| <b>Visual Differential Indicator</b> |               |
| Settings                             | Ordering code |
| 2.0 bar $\pm$ 10%                    | DV A 20 x P01 |
| 5.0 bar $\pm$ 10%                    | DV A 50 x P01 |

**Hydraulic symbol**

**Material:**

- Body: Brass
- Internal parts: Brass - Nylon
- Contacts: Silver
- Seal: HNBR - FPM

**Technical data**

- Reset: Automatic reset
- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -25 °C to +110 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943
- Degree protection: IP65 according to EN 60529

| DVM                                  |               |
|--------------------------------------|---------------|
| <b>Visual Differential Indicator</b> |               |
| Settings                             | Ordering code |
| 2.0 bar $\pm$ 10%                    | DV M 20 x P01 |
| 5.0 bar $\pm$ 10%                    | DV M 50 x P01 |

**Hydraulic symbol**

**Materials**

- Body: Brass
- Internal parts: Brass - Nylon
- Contacts: Silver
- Seal: HNBR - FPM

**Technical data**

- Reset: Manual reset
- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -25 °C to +110 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943
- Degree protection: IP65 according to EN 60529

| T2             |               |
|----------------|---------------|
| Indicator plug |               |
| Seal           | Ordering code |
| HNBR           | T2 H          |
| FPM            | T2 V          |

10

A/F 30  
Max tightening torque: 50 N·m

**Materials**

- Body: Phosphatized steel
- Seal: HNBR / FPM

### DESIGNATION & ORDERING CODE - DIFFERENTIAL INDICATORS

|  |                          |    |   |    |   |   |    |     |
|--|--------------------------|----|---|----|---|---|----|-----|
| <b>Series</b>                                      | Configuration example 1: | DE | M | 20 | H | F | 50 | P01 |
| <b>DE</b> Electrical differential indicator        | Configuration example 2: | DL | E | 50 | V | A | 71 | P01 |
| <b>DL</b> Electrical/Visual differential indicator | Configuration example 3: | DT | A | 20 | H | F | 70 | P01 |
| <b>DT</b> Electronic differential indicator        | Configuration example 4: | DV | M | 50 | V |   |    | P01 |
| <b>DV</b> Visual differential indicator            |                          |    |   |    |   |   |    |     |

| Type                                      | DE | DL | DT | DV                            |
|---|----|----|----|-------------------------------|
| <b>A</b> Standard type                    | •  | •  | •  | <b>A</b> With automatic reset |
| <b>M</b> With wired electrical connection | •  |    |    | <b>M</b> With manual reset    |
| <b>E</b> For high power supply            |    | •  |    |                               |

| Pressure setting  | DEA | DEM | DLA | DLE | DT | DV |
|-------------------|-----|-----|-----|-----|----|----|
| <b>20</b> 2.0 bar |     |     |     |     |    |    |
| <b>50</b> 5.0 bar |     |     |     |     |    |    |

| Seals         | DEA | DEM | DLA | DLE | DT | DV |
|---------------|-----|-----|-----|-----|----|----|
| <b>H</b> HNBR | •   | •   | •   | •   |    |    |
| <b>V</b> FPM  |     |     |     |     | •  | •  |

| Electrical connections   | DEA | DEM | DLA | DLE | DT | DV |
|--|-----|-----|-----|-----|----|----|
| <b>10</b> Connection AMP Superseal series 1.5                              |     | •   |     |     |    |    |
| <b>20</b> Connection AMP Timer Junior                                      |     | •   |     |     |    |    |
| <b>30</b> Connection Deutsch DT-04-2-P                                     |     | •   |     |     |    |    |
| <b>35</b> Connection Deutsch DT-04-3-P                                     |     | •   |     |     |    |    |
| <b>50</b> Connection EN 175301-803   | •   |     |     | •   |    |    |
| <b>51</b> Connection EN 175301-803, transparent base with lamps 24 Vdc     |     |     | •   |     |    |    |
| <b>52</b> Connection EN 175301-803, transparent base with lamps 110 Vdc    |     |     | •   |     |    |    |
| <b>70</b> Connection IEC 61076-2-101 D (M12)                               |     |     |     |     | •  |    |
| <b>71</b> Connection IEC 61076-2-101 D (M12), black base with lamps 24 Vdc |     |     | •   |     |    |    |

| Option                        |
|-------------------------------|
| <b>P01</b> MP Filtri standard |
| <b>Pxx</b> Customized         |


### DESIGNATION & ORDERING CODE - DIFFERENTIAL INDICATOR PLUG

| Series                   | Configuration example |
|--------------------------|-----------------------|
| <b>T2</b> Indicator plug | T2 H                  |

| Seals         |
|---------------|
| <b>H</b> HNBR |
| <b>V</b> FPM  |

# Accessories

## RETAINING CLAMP

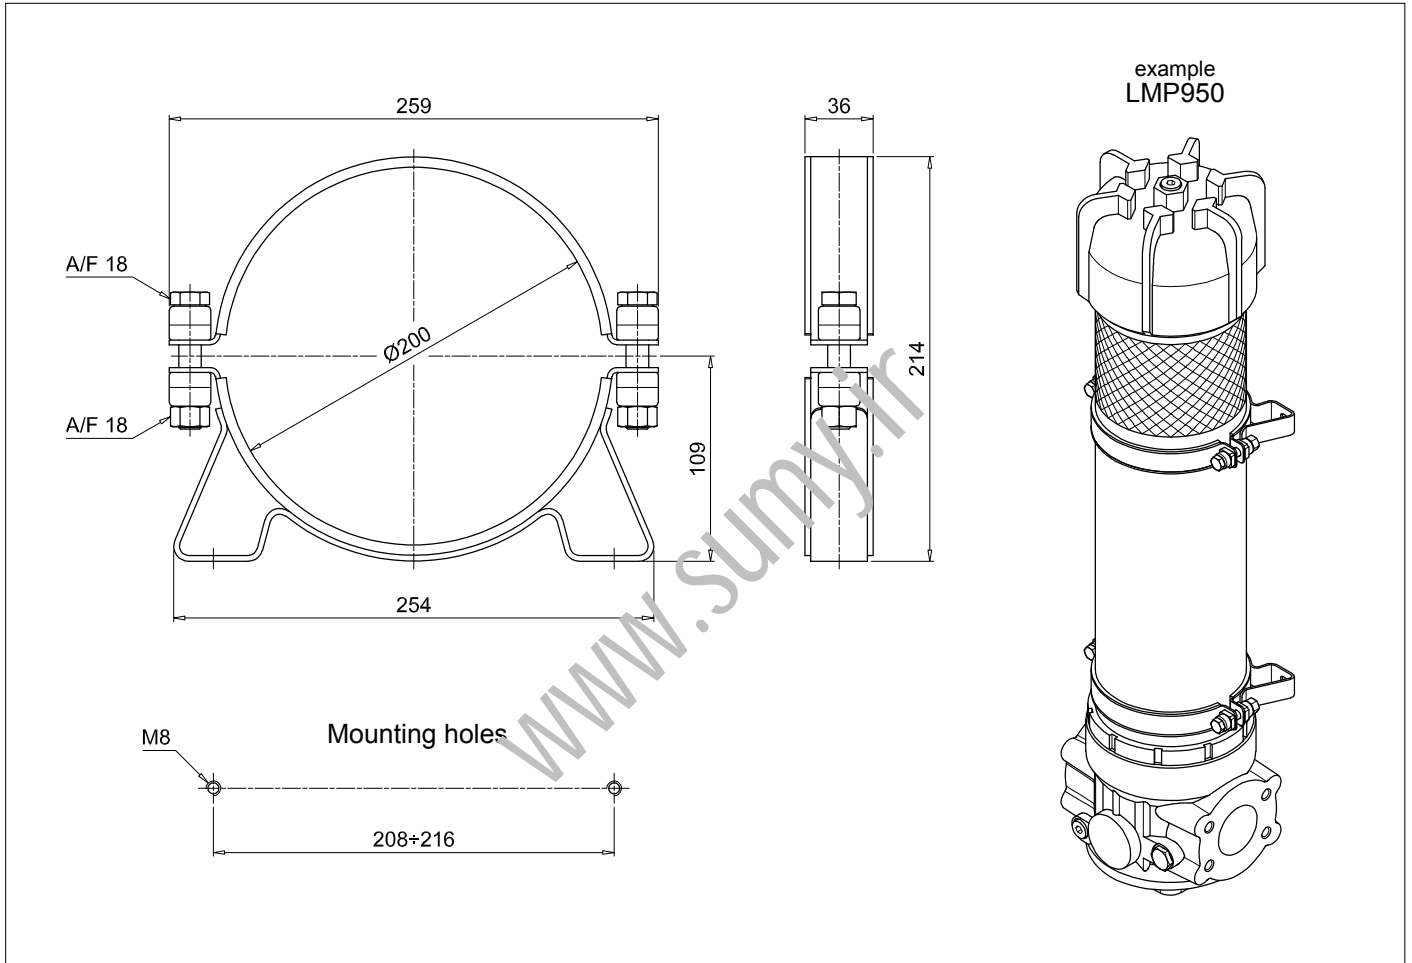

Series  
**CFA** Retaining clamp

Configuration example: **CFA** **20** **M** **P01**

Size  
**20**

Screw  
**M** Metric

Execution  
**P01** MP Filtri standard

www.sumy.ir

High pressure filters are used as process filters to protect individual valves or the entire hydraulic circuit from contamination as per ISO 4406.

9 versions are available with operating pressures range from 110 bar up to 560 bar.

A range of products is available to resolve all filter mounting problems, in the following configurations:

- In-line, with threaded and flange mounting
- Manifold top mounting
- Manifold side mounting
- Manifold mounting, to DIN 24340 CETOP R 35 H
- Manifold threaded/flange mounting in the top extraction filter cartridge version
- Duplex versions for continuous operation requirements

FMP series is specifically designed and suitable for:

- feed pumps of hydrostatic drives
- pressure lubrication
- hydraulic systems in the high pressure range

FMM series is optimized for the protection of servo and proportional hydraulics:

- in agricultural machinery
- in construction machinery
- in commercial vehicles

HPB are kits designed for the direct integration into the control block; they can be easily integrated into the block through a simple cavity.

FHP & FFA series are the typical high-pressure filters optimized for industrial applications.

FHM series is designed for intermediate plate construction, CETOP design.

FHB series is designed for block mounting; the filter head can be screwed in from the outside.

FHF series is designed to assemble HF4 filter element according to SAE J2066.

FHD series is the duplex high pressure filter; with two independent filter heads, the flow can be switched without interruption during operation.

The range includes a complete set of valves:

- Bypass valve
- Check valve
- Bypass + check valve
- Reverse-flow valve
- Reverse-flow + bypass valve

## FILTER SIZING

For the proper corrective factor Y see chapter at page 25

# High pressure filters



|         |          |
|---------|----------|
| FMP 039 | page 455 |
| FMP     | 463      |
| FHP     | 475      |
| FMM     | 493      |
| FHA 051 | 503      |
| FHM     | 511      |

|            |          |
|------------|----------|
| FHB        | page 529 |
| FHF 325    | 543      |
| FHD        | 553      |
| HPB        | 567      |
| INDICATORS | 576      |

[www.sumy.ir](http://www.sumy.ir)



# FMP 039 series

Maximum working pressure up to 11 MPa (110 bar) - Flow rate up to 80 l/min



# FMP 039 GENERAL INFORMATION

## Description

## Technical data

### High Pressure filters

#### In-line

**Maximum working pressure up to 11 MPa (110 bar)**

**Flow rate up to 80 l/min**

FMP039 is a range of versatile medium pressure filter for transmission, protection of sensitive components in medium pressure hydraulic systems and filtration of the coolant into the machine tools. They are directly connected to the lines of the system through the hydraulic fittings.

#### Available features:

- 1/2" female threaded connections, for a maximum flow rate of 80 l/min
- Fine filtration rating, to get a good cleanliness level into the system
- Bypass valve, to relieve excessive pressure drop across the filter media
- Low collapse filter element "N", for use with filters provided with bypass valve
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

Delivery lines, in any medium pressure industrial equipment or mobile machines

#### Filter housing materials

- Head: Anodized aluminium
- Housing: Anodized aluminium
- Bypass valve: Steel

#### Pressure

- Test pressure: 17 MPa (170 bar)
- Burst pressure: 33 MPa (330 bar)
- Pulse pressure fatigue test: 1 000 000 cycles with pressure from 0 to 11 MPa (110 bar)

#### Bypass valve

- Opening pressure 600 kPa (6 bar)  $\pm 10\%$
- Other opening pressures on request.

#### $\Delta p$ element type

- Microfibre filter elements - series N: 20 bar
- Wire mesh filter elements - series N: 20 bar
- Fluid flow through the filter element from OUT to IN.

#### Seals

- Standard NBR series A
- Optional FPM series V

#### Temperature

From -25 °C to +110 °C

#### Connections

In-line Inlet/Outlet

#### Note

FMP 039 filters are provided for vertical mounting



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series  | Weights [kg] |      |      |      | Volumes [dm <sup>3</sup> ] |      |      |      |
|----------------|--------------|------|------|------|----------------------------|------|------|------|
|                | Length       | 2    | 3    | 4    | Length                     | 2    | 3    | 4    |
| <b>FMP 039</b> |              | 0.60 | 0.70 | 0.80 |                            | 0.19 | 0.26 | 0.34 |

## Executions

**Execution 1:**  
without indicator connection

**Execution 6:**  
double indicator connection (A - B)

**A:** Closure cap with standard T2 steel. The position of the cap is reversible.

**B:** Standard closure cap with plastic thread protection. If necessary, a second T2 plug is available, see ordering information.

Special connections on request

| Filter series  | Length   | Filter element design - N Series |     |     |     |     |     |
|----------------|----------|----------------------------------|-----|-----|-----|-----|-----|
|                |          | A03                              | A06 | A10 | A16 | A25 | M25 |
| <b>FMP 039</b> | <b>2</b> | 20                               | 26  | 45  | 52  | 61  | 97  |
|                | <b>3</b> | 35                               | 39  | 56  | 64  | 76  | 98  |
|                | <b>4</b> | 44                               | 48  | 66  | 71  | 82  | 92  |

### Maximum flow rate for a complete pressure filter with a pressure drop $\Delta p = 1.5$ bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).


You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.

### Hydraulic symbols


| Filter series  | Style S | Style B |
|----------------|---------|---------|
| <b>FMP 039</b> | •       | •       |
|                |         |         |

### Pressure drop

Filter housings  $\Delta p$  pressure drop

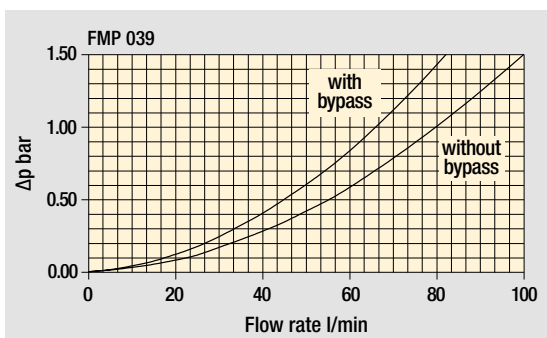

Bypass valve pressure drop

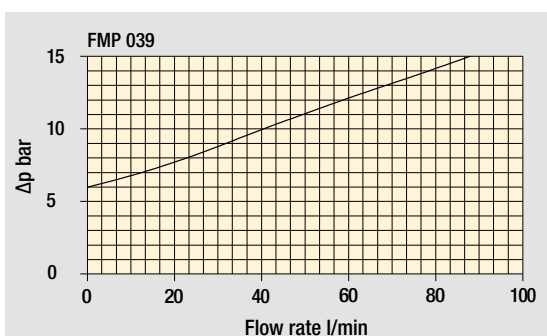

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

# FMP 039

## Designation & Ordering code

### COMPLETE FILTER


|  |  |                   |  |  |  |  |  |  |  |                               |
|--|--|-------------------|--|--|--|--|--|--|--|-------------------------------|
| <b>Series and size</b>                       | Configuration example: <b>FMP039</b>   <b>3</b>   <b>B</b>   <b>A</b>   <b>B</b>   <b>6</b>   <b>A03</b>   <b>N</b>   <b>P01</b> |                   |  |  |  |  |  |  |  |                               |
| <b>FMP039</b>                                |  |                   |  |  |  |  |  |  |  |                               |
| <b>Length</b>                                |  |                   |  |  |  |  |  |  |  |                               |
| <b>2</b>   <b>3</b>   <b>4</b>               |  |                   |  |  |  |  |  |  |  |                               |
| <b>Valves</b>                                |  |                   |  |  |  |  |  |  |  |                               |
| <b>S</b> Without bypass                      |  |                   |  |  |  |  |  |  |  |                               |
| <b>B</b> 6 bar                               |  |                   |  |  |  |  |  |  |  |                               |
| <b>Seals</b>                                 |  |                   |  |  |  |  |  |  |  |                               |
| <b>A</b> NBR                                 |  |                   |  |  |  |  |  |  |  |                               |
| <b>V</b> FPM                                 |  |                   |  |  |  |  |  |  |  |                               |
| <b>Connections</b>                           |  |                   |  |  |  |  |  |  |  |                               |
| <b>A</b> G 1/2"                              |  |                   |  |  |  |  |  |  |  |                               |
| <b>B</b> 1/2" NPT                            |  |                   |  |  |  |  |  |  |  |                               |
| <b>C</b> SAE 8 - 3/4" - 16 UNF               |  |                   |  |  |  |  |  |  |  |                               |
| <b>Connection for differential indicator</b> |  |                   |  |  |  |  |  |  |  |                               |
| <b>1</b> Without                             |  |                   |  |  |  |  |  |  |  |                               |
| <b>6</b> With two connections on both sides  |  |                   |  |  |  |  |  |  |  |                               |
| <b>Filtration rating (filter media)</b>      |  |                   |  |  |  |  |  |  |  |                               |
| <b>A03</b> Inorganic microfiber 3 µm         | <b>A16</b> Inorganic microfiber 16 µm  |                   |  |  |  |  |  |  |  |                               |
| <b>A06</b> Inorganic microfiber 6 µm         | <b>A25</b> Inorganic microfiber 25 µm  |                   |  |  |  |  |  |  |  |                               |
| <b>A10</b> Inorganic microfiber 10 µm        | <b>M25</b> Wire mesh 25 µm   |                   |  |  |  |  |  |  |  |                               |
|  |  | <b>Element Δp</b> |  |  |  |  |  |  |  | <b>Execution</b>              |
|  |  | <b>N</b> 20 bar   |  |  |  |  |  |  |  | <b>P01</b> MP Filtri standard |
|  |  |                   |  |  |  |  |  |  |  | <b>Pxx</b> Customized         |

### FILTER ELEMENT

|   |  |                   |  |  |  |                               |
|---|--|-------------------|--|--|--|-------------------------------|
| <b>Element series and size</b>          | Configuration example: <b>HP039</b>   <b>3</b>   <b>A03</b>   <b>A</b>   <b>N</b>   <b>P01</b> |                   |  |  |  |                               |
| <b>HP039</b>                            |  |                   |  |  |  |                               |
| <b>Element length</b>                   |  |                   |  |  |  |                               |
| <b>2</b>   <b>3</b>   <b>4</b>          |  |                   |  |  |  |                               |
| <b>Filtration rating (filter media)</b> |  |                   |  |  |  |                               |
| <b>A03</b> Inorganic microfiber 3 µm    | <b>A16</b> Inorganic microfiber 16 µm  |                   |  |  |  |                               |
| <b>A06</b> Inorganic microfiber 6 µm    | <b>A25</b> Inorganic microfiber 25 µm  |                   |  |  |  |                               |
| <b>A10</b> Inorganic microfiber 10 µm   | <b>M25</b> Wire mesh 25 µm   |                   |  |  |  |                               |
| <b>Seals</b>                            |  |                   |  |  |  |                               |
| <b>A</b> NBR                            |  |                   |  |  |  |                               |
| <b>V</b> FPM                            |  |                   |  |  |  |                               |
|   |  | <b>Element Δp</b> |  |  |  | <b>Execution</b>              |
|   |  | <b>N</b> 20 bar   |  |  |  | <b>P01</b> MP Filtri standard |
|   |  |                   |  |  |  | <b>Pxx</b> Customized         |

### ACCESSORIES


| <b>Differential indicators</b> |  | page    |            |  | page |
|--------------------------------|--|---------|------------|--|------|
| <b>DEA</b>                     | Electrical differential indicator                | 577     | <b>DLE</b> | Electrical / visual differential indicator | 580  |
| <b>DEH</b>                     | Hazardous area electronic differential indicator | 577-578 | <b>DTA</b> | Electronic differential indicator          | 581  |
| <b>DEM</b>                     | Electrical differential indicator                | 578-579 | <b>DVA</b> | Visual differential indicator              | 581  |
| <b>DLA</b>                     | Electrical / visual differential indicator       | 579-580 | <b>DVM</b> | Visual differential indicator              | 581  |
| <b>Additional features</b>     |  | page    |            |  |      |
| <b>T2</b>                      | Plug   | 582     |            |  |      |

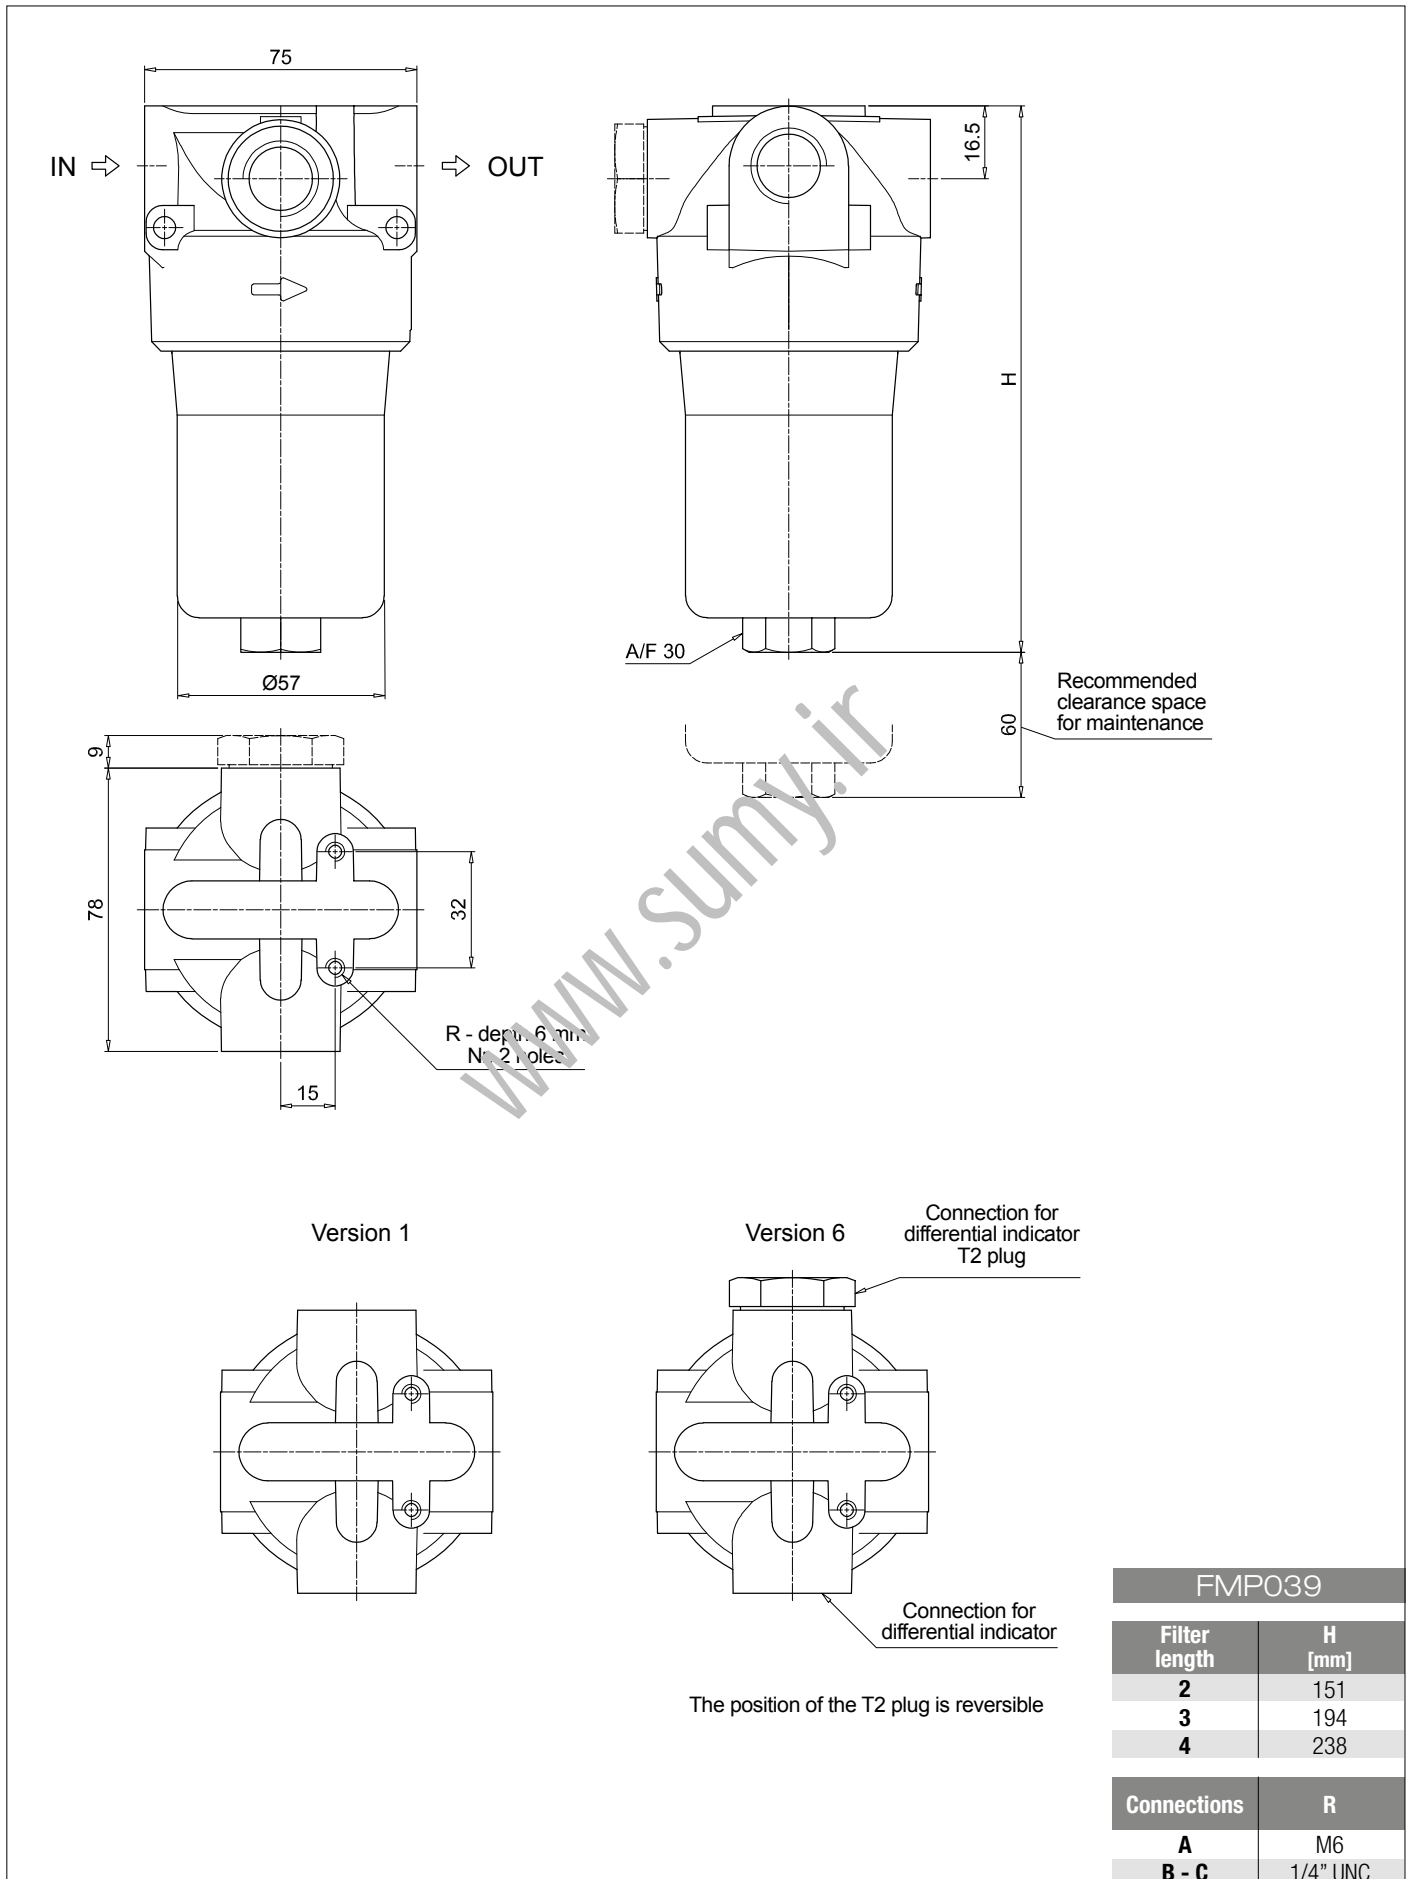

# FMP 039 SPARE PARTS

Order number for spare parts

FMP 039

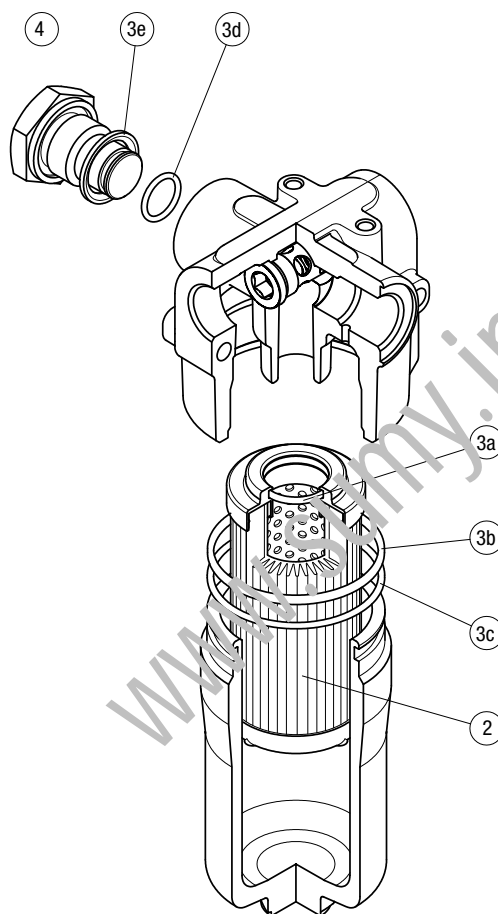

| Item:          | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          |
|----------------|-----------------|----------------------|----------|
| Filter series  | Filter element  | Seal Kit code number |          |
|                |                 | NBR                  | FPM      |
| <b>FMP 039</b> | See order table | 02050509             | 02050510 |

[www.sumy.ir](http://www.sumy.ir)

[www.sumy.ir](http://www.sumy.ir)



# FMP series

Maximum working pressure up to 32 MPa (320 bar) - Flow rate up to 500 l/min



### High Pressure filters

#### In-line

**Maximum working pressure up to 32 MPa (320 bar)**

**Flow rate up to 500 l/min**

FMP is a range of versatile high pressure filter for protection of sensitive components in high pressure hydraulic systems in the industrial equipment.

They are directly connected to the lines of the system through the hydraulic fittings.

#### Available features:

- Female threaded connections up to 1 1/2" and flanged connections up to 1 1/2", for a maximum flow rate of 500 l/min
- Fine filtration rating, to get a good cleanliness level into the system
- Bypass valve, to relieve excessive pressure drop across the filter media
- Check valve, to protect the system against reverse flow
- Low collapse filter element "N", for use with filters provided with bypass valve
- High collapse filter element "H", for use with filters not provided with bypass valve
- Low collapse filter element with external support "R", for filter element protection against the back pressure caused by the check valve in filters provided with the bypass valve
- High collapse filter element with external support "S", for filter element protection against the back pressure caused by the check valve in filters not provided with the bypass valve
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

Delivery lines, in any high pressure industrial equipment or mobile machines

#### Filter housing materials

- Head: Phosphatized cast iron
- Housing: Phosphatized steel
- Bypass valve: Brass
- Reverse Flow: Steel (only for series FMP 320)
- Check valve: Steel

#### Pressure

- Test pressure: 48 MPa (480 bar)
- Burst pressure: 96 MPa (960 bar)
- Pulse pressure fatigue test: 1 000 000 cycles with pressure from 0 to 32 MPa (320 bar)

#### Bypass valve

- Opening pressure 600 kPa (6 bar)  $\pm$ 10%
- Other opening pressures on request.

#### $\Delta p$ element type

- Microfibre filter elements - series N-R: 20 bar
- Microfibre filter elements - series H-S: 210 bar
- Wire mesh filter elements - series N: 20 bar
- Fluid flow through the filter element from OUT to IN

#### Seals

- Standard NBR series A
- Optional FPM series V

#### Temperature

From -25 °C to +110 °C

#### Connections

In-line Inlet/Outlet

#### Note

FMP filters are provided for vertical mounting



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series  | Weights [kg] |       |       |       |       | Volumes [dm <sup>3</sup> ] |      |      |      |      |
|----------------|--------------|-------|-------|-------|-------|----------------------------|------|------|------|------|
|                | Length       | 1     | 2     | 3     | 4     | Length                     | 1    | 2    | 3    | 4    |
| <b>FMP 065</b> |              | 3.26  | 3.62  | 4.83  | -     |                            | 0.36 | 0.47 | 0.84 | -    |
| <b>FMP 135</b> |              | 5.61  | 7.21  | 8.27  | -     |                            | 0.45 | 0.78 | 1.00 | -    |
| <b>FMP 320</b> |              | 10.95 | 13.08 | 15.37 | 17.85 |                            | 1.03 | 1.75 | 2.52 | 3.35 |

| Filter series  | Length   | Filter element design - N Series |     |     |     |     |     |
|----------------|----------|----------------------------------|-----|-----|-----|-----|-----|
|                |          | A03                              | A06 | A10 | A16 | A25 | M25 |
| <b>FMP 065</b> | <b>1</b> | 23                               | 30  | 48  | 54  | 72  | 105 |
|                | <b>2</b> | 31                               | 45  | 60  | 65  | 82  | 106 |
|                | <b>3</b> | 52                               | 60  | 80  | 84  | 94  | 108 |
| <b>FMP 135</b> | <b>1</b> | 69                               | 73  | 120 | 129 | 171 | 201 |
|                | <b>2</b> | 110                              | 117 | 149 | 152 | 211 | 232 |
|                | <b>3</b> | 151                              | 152 | 192 | 195 | 212 | 233 |
| <b>FMP 320</b> | <b>1</b> | 130                              | 144 | 244 | 296 | 361 | 477 |
|                | <b>2</b> | 267                              | 291 | 417 | 438 | 492 | 509 |
|                | <b>3</b> | 348                              | 390 | 476 | 493 | 503 | 519 |
|                | <b>4</b> | 389                              | 415 | 483 | 502 | 525 | 534 |

### Maximum flow rate for a complete pressure filter with a pressure drop $\Delta p = 1.5$ bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).




You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.

### Hydraulic symbols




| Filter series  | Style S - E | Style B - C | Style T | Style D |
|----------------|-------------|-------------|---------|---------|
| <b>FMP 065</b> | •           | •           | •       | •       |
| <b>FMP 135</b> | •           | •           | •       | •       |
| <b>FMP 320</b> | •           | •           | •       | •       |

## Pressure drop

### Filter housings $\Delta p$ pressure drop

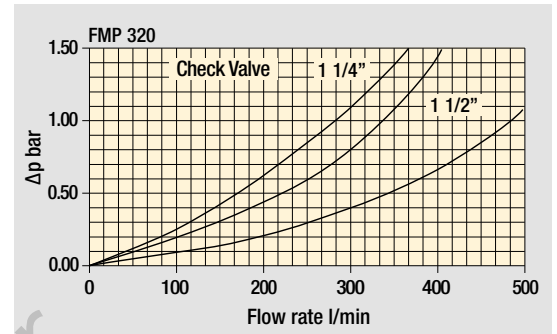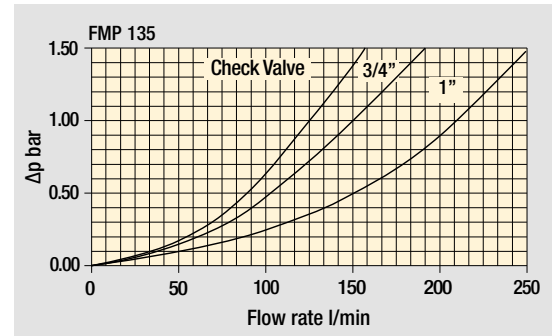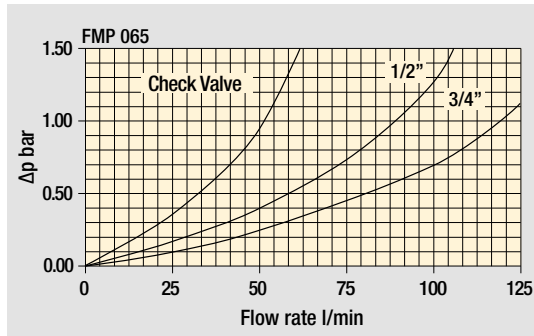


### Bypass valve pressure drop

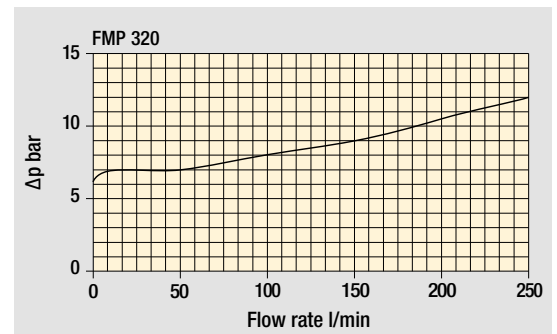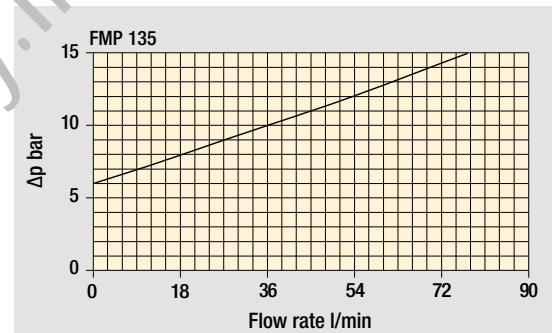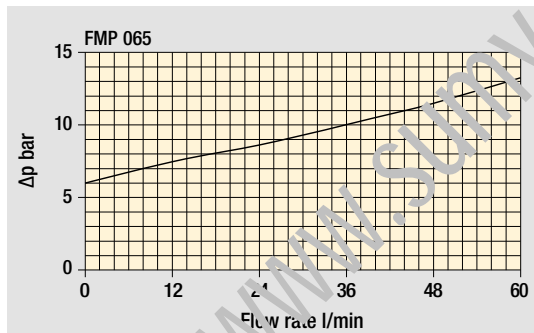

### Valves

#### Filter housing with check valve

- 1 - Reverse flow
- 2 - In filter direction

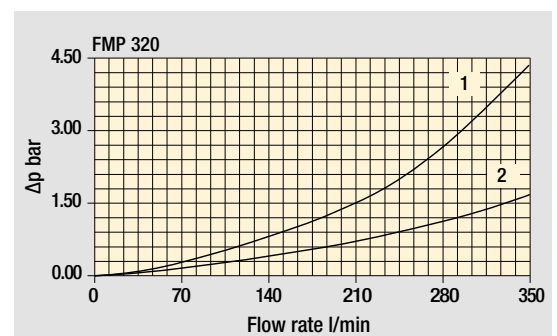

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

[www.sumy.ir](http://www.sumy.ir)

# FMP FMP065 - FMP135 - FMP320

## Designation & Ordering code

### COMPLETE FILTER

Series and size Configuration example: **FMP065** | **3** | **T** | **A** | **G1** | **M25** | **S** | **P01**

**FMP065** | **FMP135** | **FMP320**

| Length | FMP065 | FMP135 | FMP320 |
|--------|--------|--------|--------|
| 1      | •      | •      | •      |
| 2      | •      | •      | •      |
| 3      | •      | •      | •      |
| 4      |        |        | •      |

#### Valves

|  |   |
|--|---|
| <b>S</b> Without bypass                            | <b>C</b> With bypass 6 bar, plug on the opposite side |
| <b>E</b> Without bypass, plug on the opposite side | <b>T</b> With check valve, without bypass             |
| <b>B</b> With bypass 6 bar                         | <b>D</b> With check valve, with bypass                |

#### Seals

|              |              |
|--------------|--------------|
| <b>A</b> NBR | <b>V</b> FPM |
|--------------|--------------|

| Connections | FMP065                   | FMP135                   | FMP320                  |
|-------------|--------------------------|--------------------------|-------------------------|
| <b>G1</b>   | G 1/2"                   | G 3/4"                   | G 1 1/4"                |
| <b>G2</b>   | G 3/4"                   | G 1"                     | G 1 1/2"                |
| <b>G3</b>   | 1/2" NPT                 | 3/4" NPT                 | 1 1/4" NPT              |
| <b>G4</b>   | 3/4" NPT                 | 1" NPT                   | 1 1/2" NPT              |
| <b>G5</b>   | SAE 8 - 3/4" - 16 UNF    | SAE 12 - 1 1/16" - 12 UN | SAE 20 - 1 5/8" - 12 UN |
| <b>G6</b>   | SAE 12 - 1 1/16" - 12 UN | SAE 16 - 1 5/16" - 12 UN | SAE 24 - 1 7/8" - 12 UN |
| <b>F1</b>   | -                        | 3/4" SAE 3000 psi/M      | 1 1/4" SAE 3000 psi/M   |
| <b>F2</b>   | -                        | 1" SAE 3000 psi/M        | 1 1/2" SAE 3000 psi/M   |
| <b>F3</b>   | -                        | 3/4" SAE 3000 psi/UNC    | 1 1/4" SAE 3000 psi/UNC |
| <b>F4</b>   | -                        | 1" SAE 3000 psi/UNC      | 1 1/2" SAE 3000 psi/UNC |

#### Filtration rating (filter media)

|                                 |       |
|---------------------------------|-------|
| <b>A03</b> Inorganic microfiber | 3 µm  |
| <b>A06</b> Inorganic microfiber | 6 µm  |
| <b>A10</b> Inorganic microfiber | 10 µm |
| <b>A16</b> Inorganic microfiber | 16 µm |
| <b>A25</b> Inorganic microfiber | 25 µm |
| <b>M25</b> Wire mesh            | 25 µm |

| Element Δp       | S | E | b | C | T | D |
|------------------|---|---|---|---|---|---|
| <b>N</b> 20 bar  |   | • | • |   |   |   |
| <b>R</b> 20 bar  |   |   |   |   | • |   |
| <b>H</b> 210 bar | • |   |   |   |   |   |
| <b>S</b> 210 bar |   |   |   |   |   | • |

| Execution   | 1 | 2 | 3 | 4 |
|---|---|---|---|---|
| <b>P01</b> MP Filtri standard                         | • | • | • | • |
| <b>P02</b> Maintenance from the bottom of the housing |   |   |   | • |
| <b>Pxx</b> Customized                                 |   |   |   |   |

### FILTER ELEMENT

Element series and size Configuration example: **HP065** | **3** | **M25** | **A** | **S** | **P01**

**HP065** | **HP135** | **HP320**

| Element length | HP065 | HP135 | HP320 |
|----------------|-------|-------|-------|
| 1              | •     | •     | •     |
| 2              | •     | •     | •     |
| 3              | •     | •     | •     |
| 4              |       |       | •     |

#### Filtration rating (filter media)

|                                 |       |
|---------------------------------|-------|
| <b>A03</b> Inorganic microfiber | 3 µm  |
| <b>A06</b> Inorganic microfiber | 6 µm  |
| <b>A10</b> Inorganic microfiber | 10 µm |
| <b>A16</b> Inorganic microfiber | 16 µm |
| <b>A25</b> Inorganic microfiber | 25 µm |
| <b>M25</b> Wire mesh            | 25 µm |

| Seals        |
|--------------|
| <b>A</b> NBR |
| <b>V</b> FPM |

| Element Δp       |
|------------------|
| <b>N</b> 20 bar  |
| <b>R</b> 20 bar  |
| <b>H</b> 210 bar |
| <b>S</b> 210 bar |



| Execution                     |
|-------------------------------|
| <b>P01</b> MP Filtri standard |
| <b>Pxx</b> Customized         |

### ACCESSORIES


| Differential indicators                                     | page    | Differential indicators                               | page |
|---|---------|---|------|
| <b>DEA</b> Electrical differential indicator                | 577     | <b>DLE</b> Electrical / visual differential indicator | 580  |
| <b>DEH</b> Hazardous area electronic differential indicator | 577-578 | <b>DTA</b> Electronic differential indicator          | 581  |
| <b>DEM</b> Electrical differential indicator                | 578-579 | <b>DVA</b> Visual differential indicator              | 581  |
| <b>DLA</b> Electrical / visual differential indicator       | 579-580 | <b>DVM</b> Visual differential indicator              | 581  |

| Additional features | page |
|---------------------|------|
| <b>T2</b> Plug      | 582  |

| FMP065        |           |
|---------------|-----------|
| Filter length | H [mm]    |
| 1             | 169       |
| 2             | 200       |
| 3             | 302       |
| Connections   | R         |
| G1-G2         | M8        |
| G3-G4-G5-G6   | 5/16" UNC |

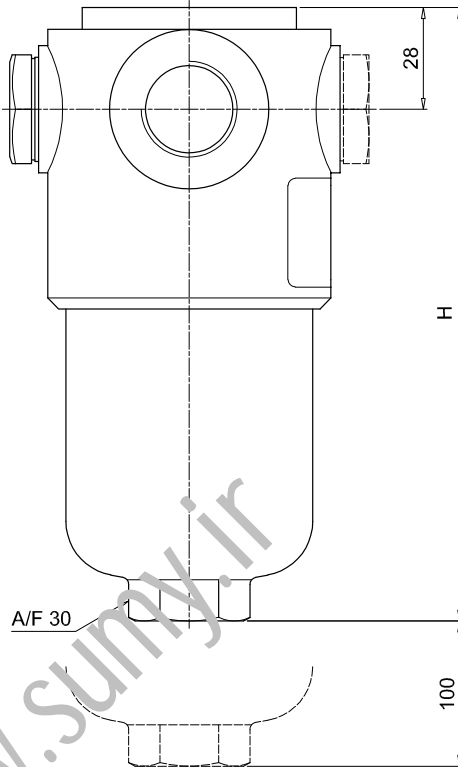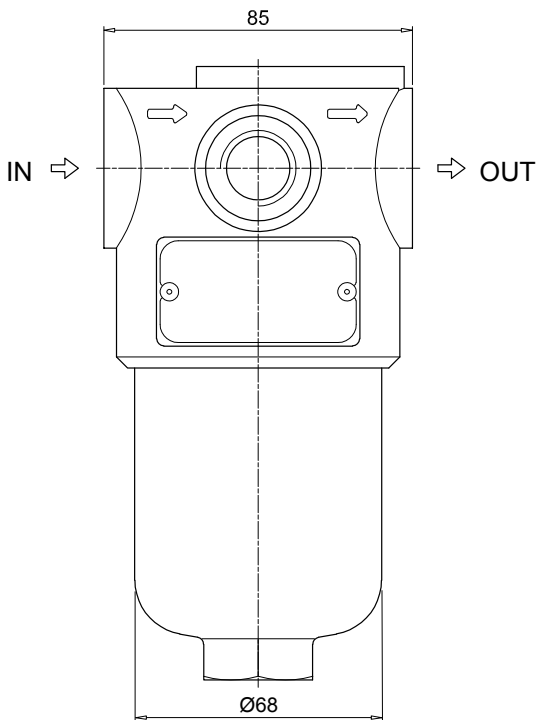


Recommended clearance space for maintenance

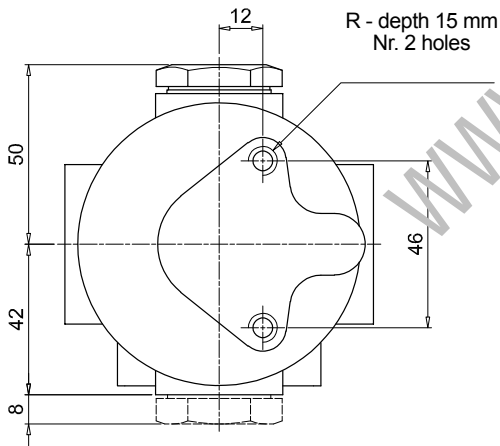

Valves S - B - T - D


Bypass plug

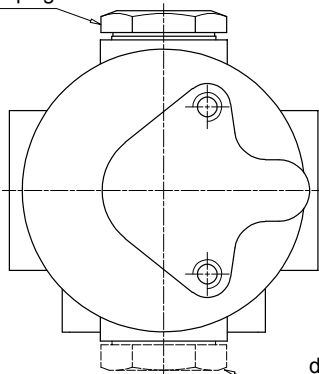

Connection for differential indicator  
T2 plug not included

Valves E - C



Connection for differential indicator  
T2 plug not included

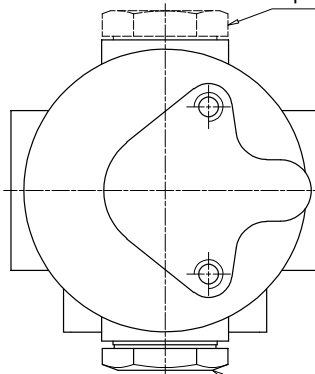


Bypass plug

# FMP FMP065 - FMP135 - FMP320


## Dimensions

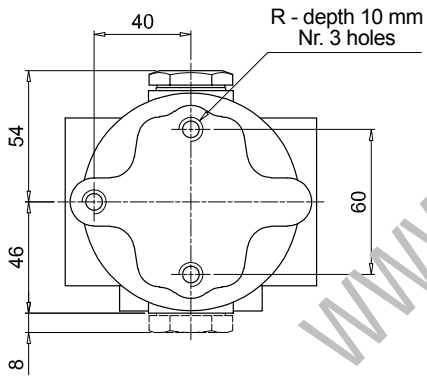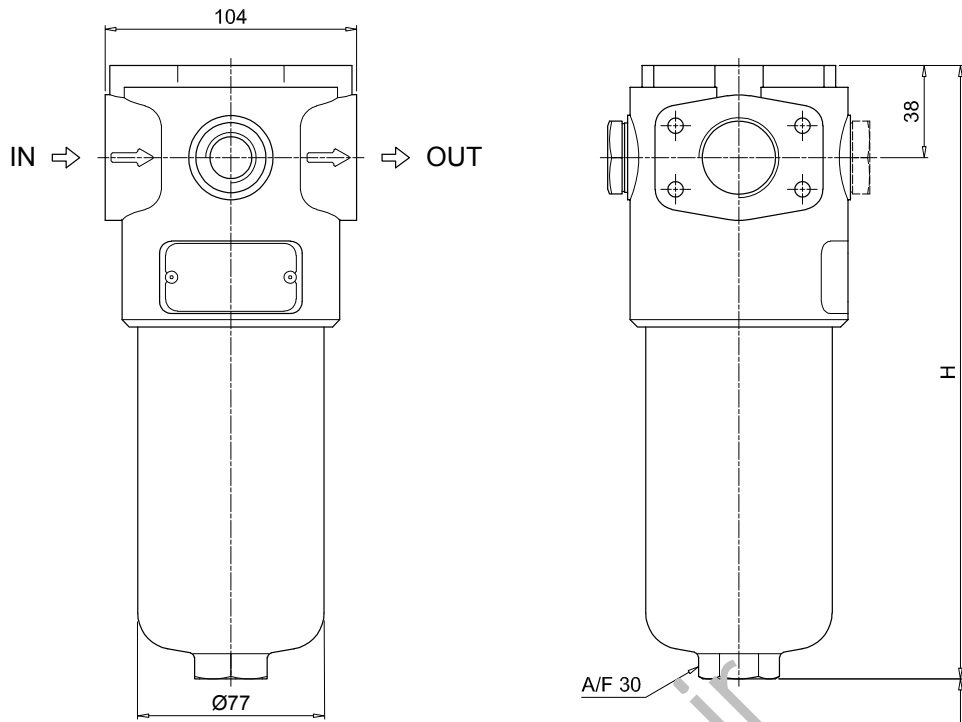

Valves S - B - T - D



Valves E - C

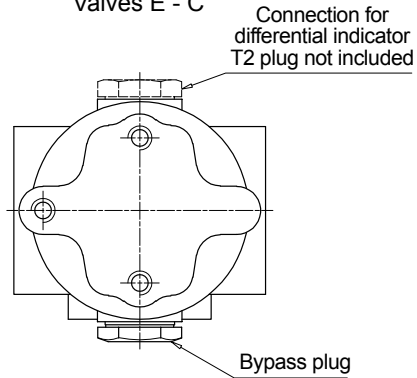


### FMP135


| Filter length | H [mm] |
|---------------|--------|
| 1             | 221    |
| 2             | 334    |
| 3             | 409    |

| Connections | R        |
|-------------|----------|
| G1-G2       | M10      |
| G3-G4-G5-G6 | 3/8" UNC |
| F1-F2       | M10      |
| F3-F4       | 3/8" UNC |




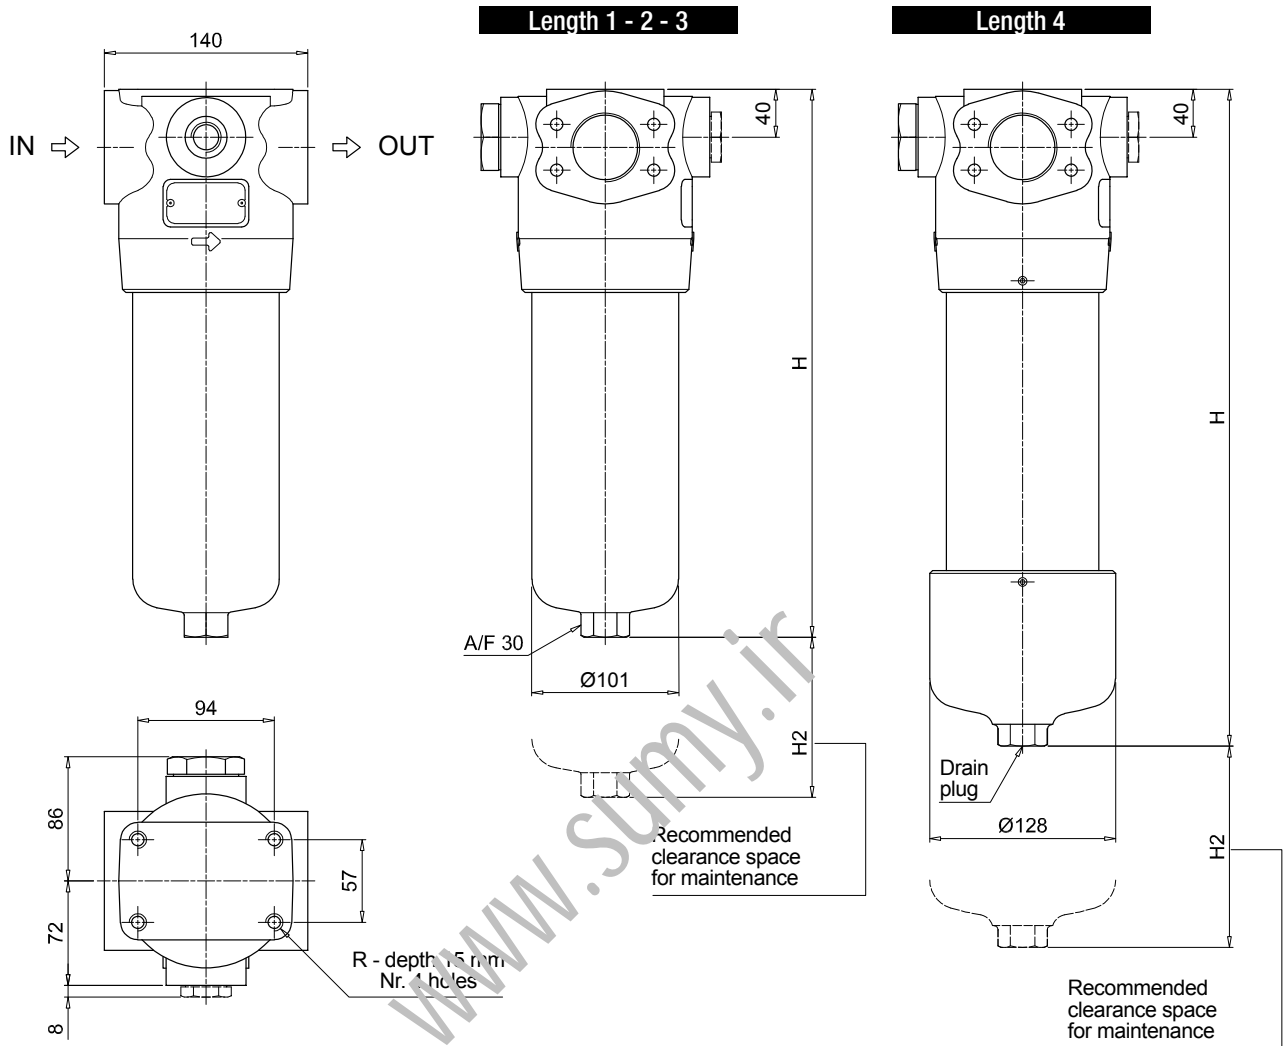

Valves S - B - T - D



Valves E - C

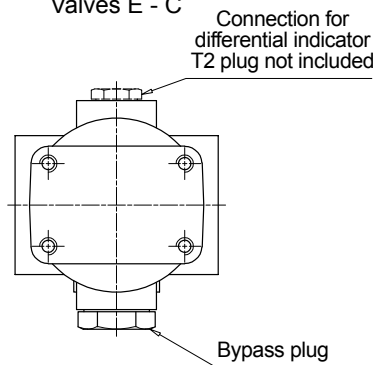

FMP320


| Filter length | H [mm] | H2 [mm]       |               |
|---------------|--------|---------------|---------------|
|               |        | Execution P01 | Execution P02 |
| 1             | 263    | 150           | -             |
| 2             | 386    | 150           | -             |
| 3             | 518    | 150           | -             |
| 4             | 671    | 150           | 550           |

| Connections | R        |
|-------------|----------|
| G1-G2       | M12      |
| G3-G4-G5-G6 | 1/2" UNC |
| F1-F2       | M12      |
| F3-F4       | 1/2" UNC |

# FMP SPARE PARTS

Order number for spare parts

FMP 065 - 135 - 320

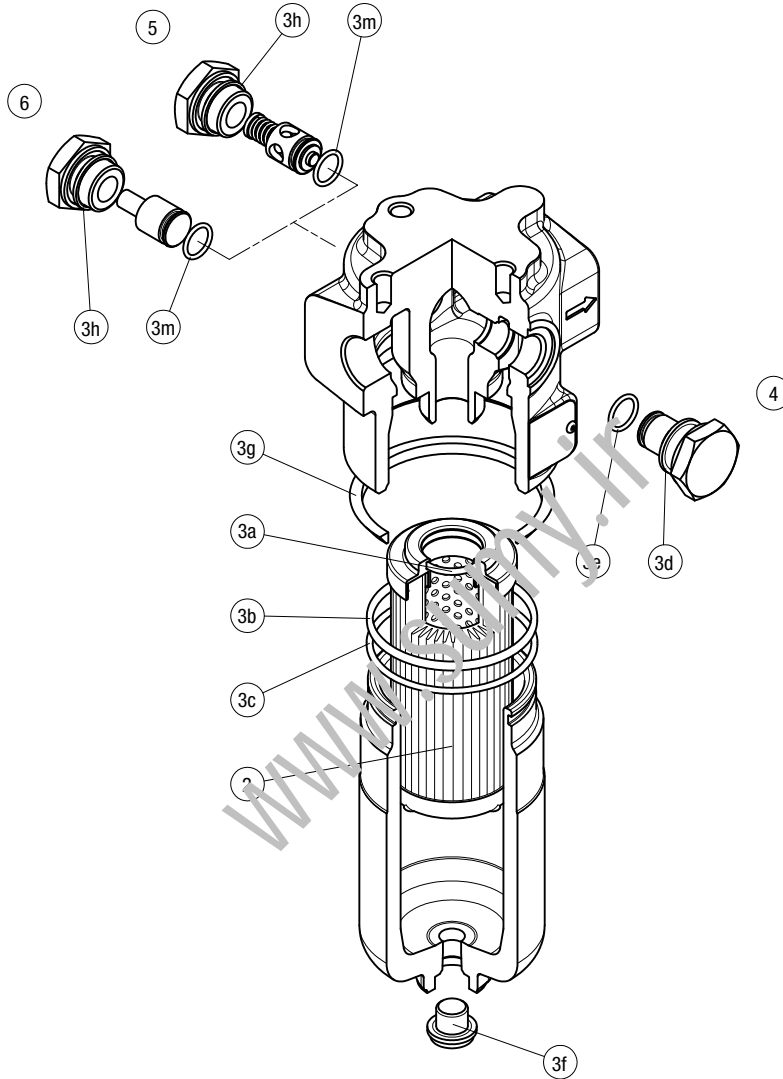

| Item:          | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          | Q.ty: 1 pc.               |     | Q.ty: 1 pc.     |          | Q.ty: 1 pc.         |          |
|----------------|-----------------|----------------------|----------|---------------------------|-----|-----------------|----------|---------------------|----------|
| Filter series  | Filter element  | Seal Kit code number |          | Indicator connection plug |     | Bypass assembly |          | Non-bypass assembly |          |
|                |                 | NBR                  | FPM      | NBR                       | FPM | NBR             | FPM      | NBR                 | FPM      |
| <b>FMP 065</b> | See order table | 02050267             | 02050278 |                           |     | 02001312        | 02001385 | 02001314            | 02001386 |
| <b>FMP 135</b> |                 | 02050293             | 02050294 | T2H                       | T2V | 02001312        | 02001385 | 02001314            | 02001386 |
| <b>FMP 320</b> |                 | 02050274             | 02050285 |                           |     | 02001396        | 02001397 | 02001398            | 02001399 |

[www.sumy.ir](http://www.sumy.ir)

[www.sumy.ir](http://www.sumy.ir)

# FHP series

Maximum working pressure up to 42 MPa (420 bar) - Flow rate up to 630 l/min



## Description

## Technical data

### High Pressure filters

#### In-line

**Maximum working pressure up to 42 MPa (420 bar)**

**Flow rate up to 630 l/min**

FHP is a range of versatile high pressure filter for protection of sensitive components in high pressure hydraulic systems in the industrial equipment.

They are directly connected to the lines of the system through the hydraulic fittings.

#### Available features:

- Female threaded connections up to 1 1/2" and flanged connections up to 2", for a maximum return flow rate of 630 l/min
- Fine filtration rating, to get a good cleanliness level into the system
- Bypass valve, to relieve excessive pressure drop across the filter media
- Check valve, to protect the system against reverse flow
- Reverse flow valve, to allow bidirectional flow through the filter housing. The back flow is not filtered. The filter requires the use of internal check valves to direct the flow through the element in one direction and around the element in the other
- Low collapse filter element "N", for use with filters provided with bypass valve
- High collapse filter element "H", for use with filters not provided with bypass valve
- Low collapse filter element with external support "R", for filter element protection against the back pressure caused by the check valve or the reverse flow in filters provided with the bypass valve
- High collapse filter element with external support "S", for filter element protection against the back pressure caused by the check valve or the reverse flow in filters not provided with the bypass valve
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

Delivery lines, in any high pressure industrial equipment or mobile machines

#### Filter housing materials

- Head: Phosphatized cast iron
- Housing: Phosphatized steel
- Bypass valve
  - AISI 316L: FHP 010 - 011
  - Brass: FHP 065 - 135
  - Brass / AISI 304: FHP 350
  - Steel: FHP 500
- Reverse Flow
  - Steel: FHP 350 - FHP 500

- Check valve: Steel

#### Pressure

- Test pressure: 63 MPa (630 bar)
- Burst pressure: 126 MPa (1260 bar)
- Pulse pressure fatigue test: 1 000 000 cycles with pressure from 0 to 42 MPa (420 bar)

#### Bypass valve

- Opening pressure 600 kPa (6 bar) ±10%
- Other opening pressures on request.

#### Element type

- Microfibre filter elements - series N: 20 bar
- Microfibre filter elements - series R: 20 bar (not available for FHP 010-011 and FHP 500)
- Microfibre filter elements - series H: 210 bar
- Microfibre filter elements - series S: 210 bar (only for FHP 500)
- Wire mesh filter elements - series N: 20 bar
- Fluid flow through the filter element from OUT to IN

#### Seals

- Standard NBR series A
- Optional FPM series V

#### Temperature

From -25 °C to +110 °C

#### Connections

FHP 010 - 065 - 135 - 350 - 500:

In-line Inlet/Outlet

FHP 011:

90° Inlet/Outlet

#### Note

FHP filters are provided for vertical mounting



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series        | Weights [kg] |       |       |       |       | Volumes [dm <sup>3</sup> ] |        |      |      |      |      |      |
|----------------------|--------------|-------|-------|-------|-------|----------------------------|--------|------|------|------|------|------|
|                      | Length       | 1     | 2     | 3     | 4     | 5                          | Length | 1    | 2    | 3    | 4    | 5    |
| <b>FHP 010 - 011</b> |              | 2.05  | 2.18  | 2.64  | 3.13  | -                          |        | 0.10 | 0.12 | 0.15 | 0.20 | -    |
| <b>FHP 065</b>       |              | 4.26  | 4.62  | 5.83  | -     | -                          |        | 0.25 | 0.30 | 0.50 | -    | -    |
| <b>FHP 135</b>       |              | 7.11  | 8.71  | 9.76  | -     | -                          |        | 0.43 | 0.76 | 0.97 | -    | -    |
| <b>FHP 350</b>       |              | 13.95 | 16.08 | 18.37 | 20.85 | -                          |        | 1.00 | 1.72 | 2.49 | 3.32 | -    |
| <b>FHP 500</b>       |              | 27.00 | 31.17 | 34.69 | 46.70 | 52.5                       |        | 1.71 | 2.43 | 3.04 | 5.18 | 6.51 |

| Filter series  | Length   | Filter element design - H Series |     |     |     |     | Filter element design - N Series |     |     |     |     |     |
|----------------|----------|----------------------------------|-----|-----|-----|-----|----------------------------------|-----|-----|-----|-----|-----|
|                |          | A03                              | A06 | A10 | A16 | A25 | A03                              | A06 | A10 | A16 | A25 | M25 |
| <b>FHP 010</b> | <b>1</b> | 3                                | 5   | 6   | 7   | 8   | 4                                | 6   | 8   | 9   | 10  | 37  |
|                | <b>2</b> | 5                                | 7   | 13  | 16  | 22  | 6                                | 8   | 16  | 19  | 24  | 40  |
|                | <b>3</b> | 10                               | 13  | 22  | 25  | 30  | 11                               | 14  | 23  | 26  | 31  | 41  |
|                | <b>4</b> | 12                               | 15  | 25  | 27  | 32  | 16                               | 19  | 27  | 30  | 33  | 41  |
| <b>FHP 011</b> | <b>1</b> | 3                                | 5   | 6   | 7   | 9   | 4                                | 6   | 8   | 9   | 11  | 47  |
|                | <b>2</b> | 5                                | 7   | 14  | 17  | 24  | 7                                | 9   | 17  | 21  | 28  | 52  |
|                | <b>3</b> | 11                               | 14  | 25  | 29  | 36  | 11                               | 14  | 26  | 30  | 37  | 53  |
|                | <b>4</b> | 12                               | 16  | 28  | 32  | 38  | 17                               | 21  | 32  | 36  | 40  | 54  |
| <b>FHP 065</b> | <b>1</b> | 24                               | 25  | 50  | 59  | 84  | 25                               | 33  | 56  | 63  | 90  | 142 |
|                | <b>2</b> | 33                               | 38  | 68  | 77  | 98  | 34                               | 52  | 72  | 79  | 106 | 143 |
|                | <b>3</b> | 61                               | 70  | 100 | 107 | 123 | 61                               | 73  | 101 | 108 | 125 | 147 |
| <b>FHP 135</b> | <b>1</b> | 49                               | 55  | 95  | 98  | 147 | 67                               | 72  | 115 | 122 | 159 | 184 |
|                | <b>2</b> | 89                               | 106 | 129 | 131 | 163 | 105                              | 111 | 140 | 142 | 192 | 209 |
|                | <b>3</b> | 120                              | 132 | 158 | 166 | 180 | 141                              | 143 | 176 | 179 | 193 | 211 |
| <b>FHP 350</b> | <b>1</b> | 108                              | 115 | 188 | 197 | 301 | 127                              | 140 | 234 | 282 | 343 | 451 |
|                | <b>2</b> | 196                              | 225 | 317 | 323 | 396 | 256                              | 278 | 394 | 415 | 465 | 480 |
|                | <b>3</b> | 266                              | 310 | 384 | 392 | 440 | 331                              | 370 | 450 | 466 | 475 | 490 |
|                | <b>4</b> | 308                              | 333 | 391 | 398 | 445 | 369                              | 393 | 456 | 474 | 495 | 503 |
| <b>FHP 500</b> | <b>1</b> | 144                              | 157 | 265 | 268 | 355 | 269                              | 305 | 390 | 406 | 444 | 612 |
|                | <b>2</b> | 232                              | 262 | 350 | 363 | 398 | 321                              | 357 | 433 | 441 | 484 | 619 |
|                | <b>3</b> | 293                              | 301 | 398 | 408 | 455 | 396                              | 416 | 497 | 499 | 537 | 622 |
|                | <b>4</b> | 336                              | 377 | 452 | 455 | 507 | 430                              | 475 | 516 | 524 | 545 | 626 |
|                | <b>5</b> | 420                              | 428 | 494 | 500 | 541 | 475                              | 493 | 535 | 545 | 569 | 627 |

### Maximum flow rate for a complete pressure filter with a pressure drop $\Delta p = 1.5$ bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure.

Please, contact our Sales Department for further additional information.






### Hydraulic symbols

| Filter series        | Style S | Style B | Style T | Style D | Style V | Style Z |
|----------------------|---------|---------|---------|---------|---------|---------|
| <b>FHP 010 - 011</b> | •       | •       |         |         | •       | •       |
| <b>FHP 065</b>       | •       | •       | •       |         |         |         |
| <b>FHP 135</b>       | •       | •       | •       |         |         |         |
| <b>FHP 350</b>       | •       | •       | •       | •       | •       | •       |
| <b>FHP 500</b>       | •       | •       | •       | •       | •       | •       |






# FHP GENERAL INFORMATION

## Pressure drop




### Filter housings $\Delta p$ pressure drop

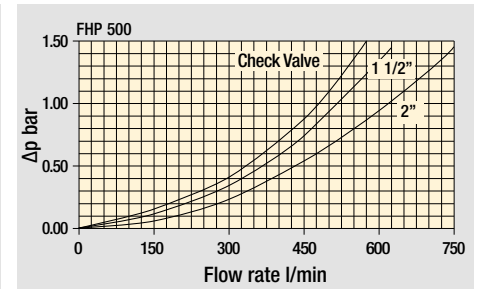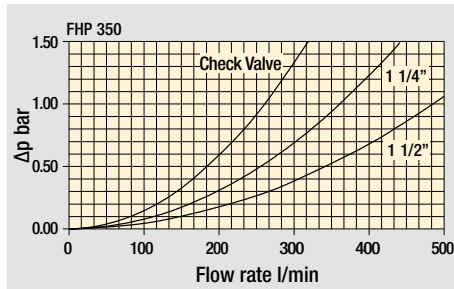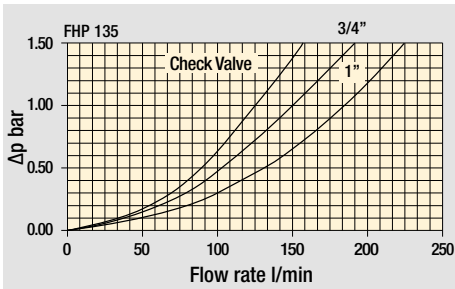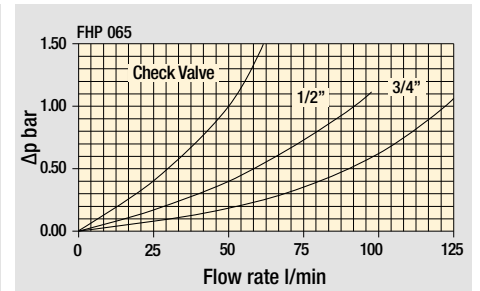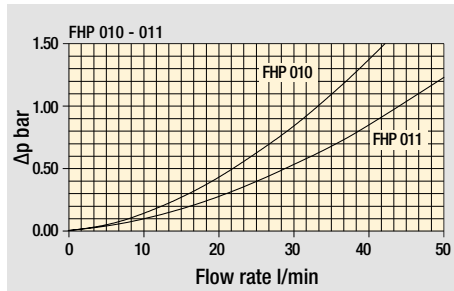

### Bypass valve pressure drop

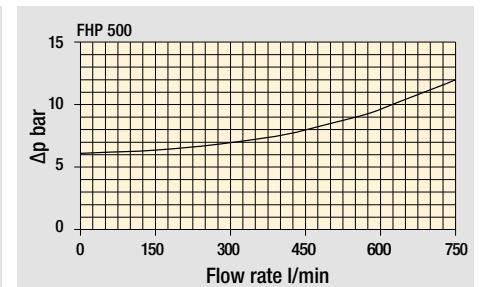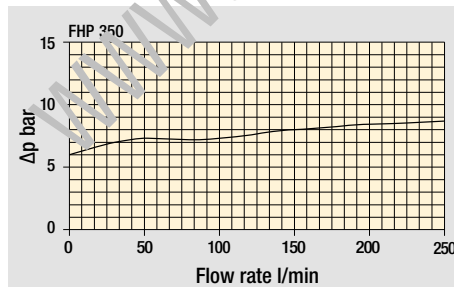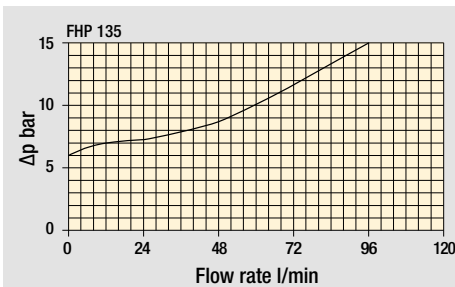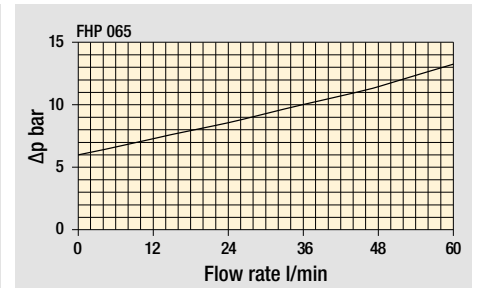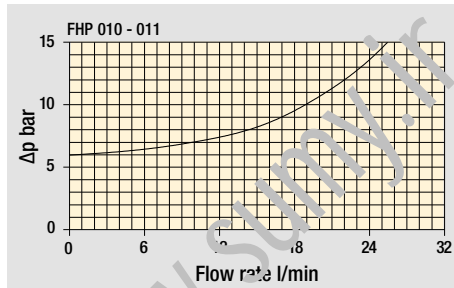

### Valves

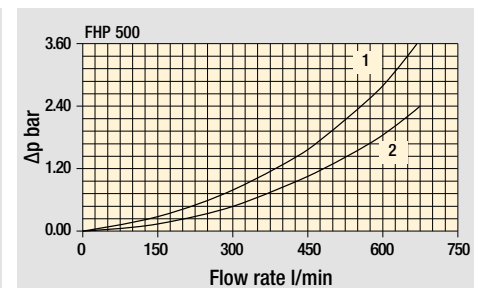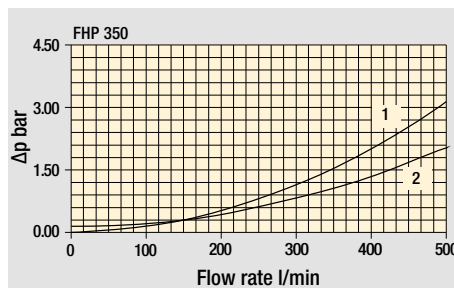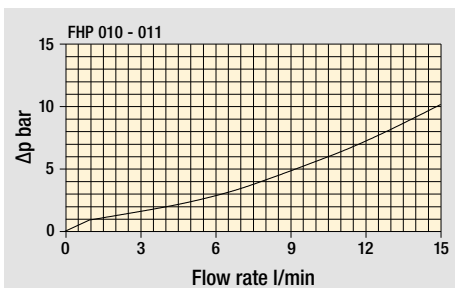

Filter housing with check valve

Pressure drop with reverse flow valve in  
1 - Filtering direction  
2 - Opposite direction

Pressure drop with reverse flow valve in  
1 - Opposite direction  
2 - Filtering direction

The curves are plotted using mineral oil with density of  $0.86 \text{ kg/dm}^3$  in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.



[www.sumy.ir](http://www.sumy.ir)

# FHP FHP010 - FHP011

## Designation & Ordering code

### COMPLETE FILTER

Configuration example: **FHP010** | **2** | **B** | **A** | **B** | **2** | **A03** | **N** | **P01**

**Series and size**  
**FHP010** | **FHP011**

**Length**  
**1** | **2** | **3** | **4**

**Valves**  
**S** Without bypass  
**B** With bypass 6 bar  
**V** With reverse flow, without bypass  
**Z** With reverse flow, with bypass 6 bar

**Seals**  
**A** NBR  
**V** FPM

**Connections**  
**A** G 1/4"  
**B** 1/4" NPT  
**C** SAE 5 - 1/2" - 20 UNF  
**D** G 3/8"  
**E** 3/8" NPT  
**F** SAE 6 - 9/16" - 18 UNF

**Connection for differential indicator**  
**1** Without  
**2** With connection

**Filtration rating (filter media)**

|                                       |                                       |
|---------------------------------------|---------------------------------------|
| <b>A03</b> Inorganic microfiber 3 µm  | <b>A16</b> Inorganic microfiber 16 µm |
| <b>A06</b> Inorganic microfiber 6 µm  | <b>A25</b> Inorganic microfiber 25 µm |
| <b>A10</b> Inorganic microfiber 10 µm | <b>M25</b> Wire mesh 25 µm            |

| Element Δp       | Valves |   |   |   | Execution                     |
|------------------|--------|---|---|---|-------------------------------|
|                  | S      | B | V | Z |                               |
| <b>N</b> 20 bar  |        | • |   | • | <b>P01</b> MP Filtri standard |
| <b>H</b> 210 bar | •      |   | • |   | <b>Pxx</b> Customized         |

### FILTER ELEMENT

Configuration example: **HP011** | **2** | **A03** | **A** | **N** | **P01**

**Element series and size**  
**HP011**

**Element length**  
**1** | **2** | **3** | **4**

**Filtration rating (filter media)**



|                                       |                                       |
|---------------------------------------|---------------------------------------|
| <b>A03</b> Inorganic microfiber 3 µm  | <b>A16</b> Inorganic microfiber 16 µm |
| <b>A06</b> Inorganic microfiber 6 µm  | <b>A25</b> Inorganic microfiber 25 µm |
| <b>A10</b> Inorganic microfiber 10 µm | <b>M25</b> Wire mesh 25 µm            |

**Seals**  
**A** NBR  
**V** FPM

| Element Δp       | Execution                     |     |
|------------------|-------------------------------|-----|
|                  | N                             | Pxx |
| <b>N</b> 20 bar  | <b>P01</b> MP Filtri standard |     |
| <b>H</b> 210 bar | <b>Pxx</b> Customized         |     |

### ACCESSORIES

| Differential indicators                                     | page    |   | page |
|---|---------|---|------|
| <b>DEA</b> Electrical differential indicator                | 577     | <b>DLE</b> Electrical / visual differential indicator | 580  |
| <b>DEH</b> Hazardous area electronic differential indicator | 577-578 | <b>DTA</b> Electronic differential indicator          | 581  |
| <b>DEM</b> Electrical differential indicator                | 578-579 | <b>DVA</b> Visual differential indicator              | 581  |
| <b>DLA</b> Electrical / visual differential indicator       | 579-580 | <b>DVM</b> Visual differential indicator              | 581  |
| <b>Additional features</b>                                  | page    |   |      |
| <b>T2</b> Plug  | 582     |   |      |

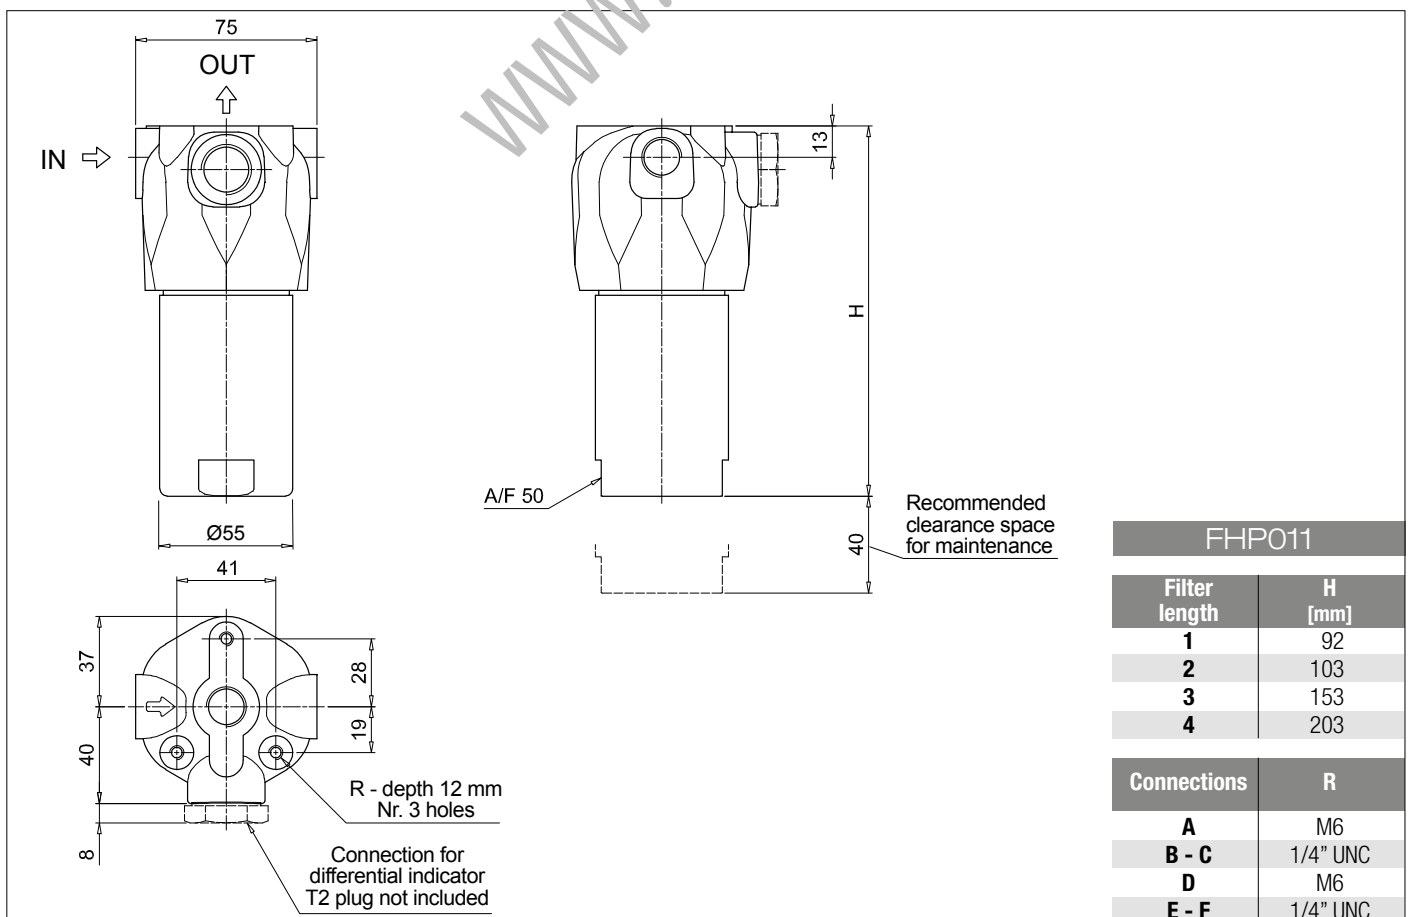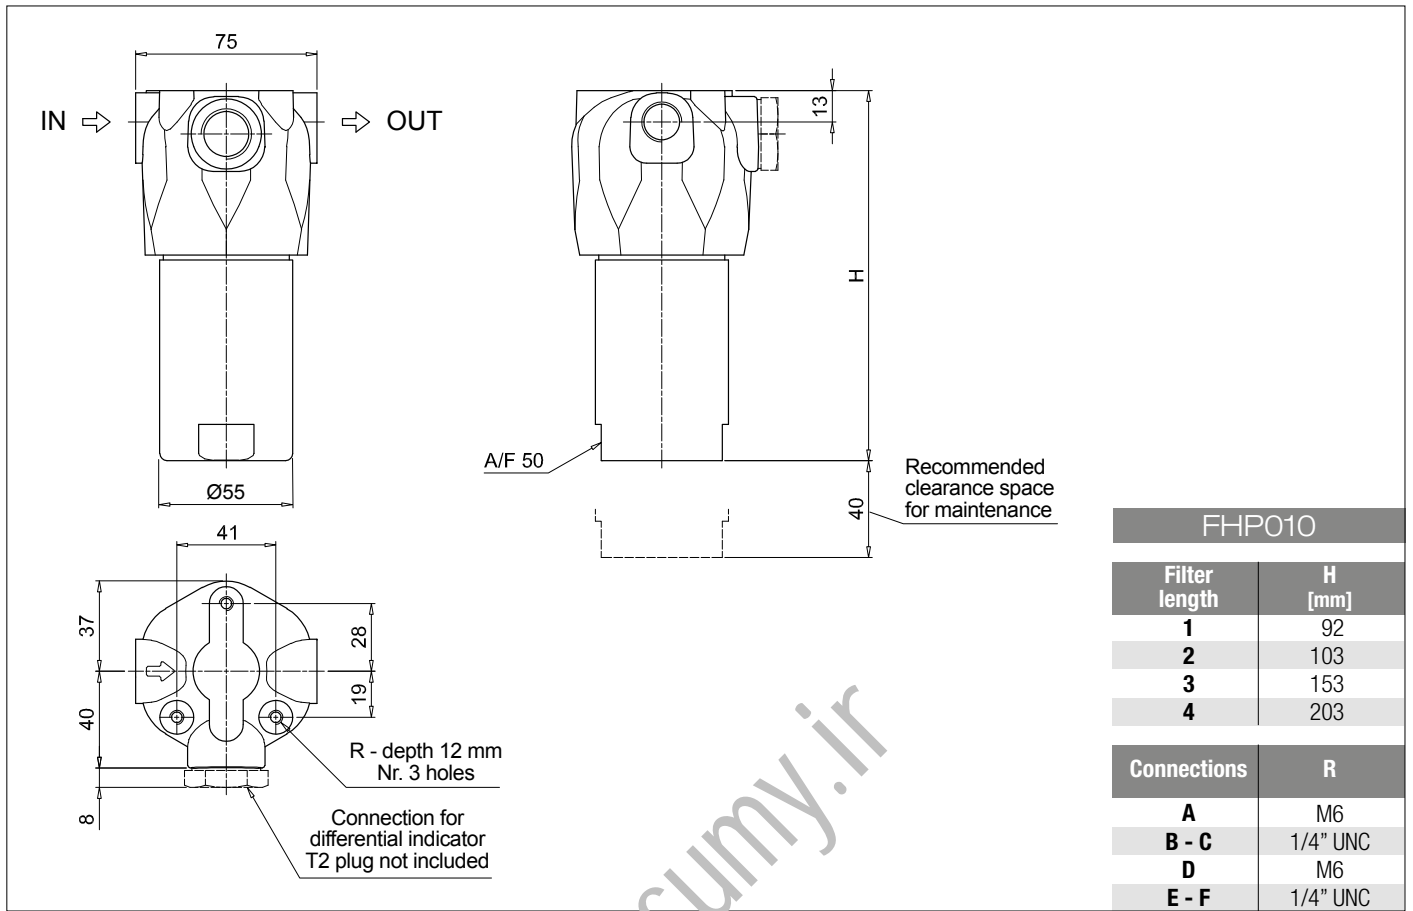

# FHP FHP065 - FHP135

## Designation & Ordering code

### COMPLETE FILTER

Series and size Configuration example: **FHP135** **2** **B** **A** **G3** **A06** **S** **P01**  
**FHP065** | **FHP135**

Length  
**1**  
**2**  
**3**

Valves  
**S** Without bypass  
**B** With bypass 6 bar  
**T** With check valve, without bypass

Seals  
**A** NBR  
**V** FPM

| Connections | FHP065                   | FHP135                   |
|-------------|--------------------------|--------------------------|
| <b>G1</b>   | G 1/2"                   | G 3/4"                   |
| <b>G2</b>   | G 3/4"                   | G 1"                     |
| <b>G3</b>   | 1/2" NPT                 | 3/4" NPT                 |
| <b>G4</b>   | 3/4" NPT                 | 1" NPT                   |
| <b>G5</b>   | SAE 8 - 3/4" - 16 UNF    | SAE 12 - 1 1/16" - 12 UN |
| <b>G6</b>   | SAE 12 - 1 1/16" - 12 UN | SAE 16 - 1 5/16" - 12 UN |
| <b>F1</b>   | -                        | 3/4" SAE 3000 psi/M      |
| <b>F2</b>   | -                        | 1" SAE 3000 psi/M        |
| <b>F3</b>   | -                        | 3/4" SAE 3000 psi/UNC    |
| <b>F4</b>   | -                        | 1" SAE 3000 psi/UNC      |
| <b>F5</b>   | -                        | 3/4" SAE 6000 psi/M      |
| <b>F6</b>   | -                        | 3/4" SAE 6000 psi/UNC    |

Filtration rating (filter media)

|            |                      |       |
|------------|----------------------|-------|
| <b>A03</b> | Inorganic microfiber | 3 µm  |
| <b>A06</b> | Inorganic microfiber | 6 µm  |
| <b>A10</b> | Inorganic microfiber | 10 µm |
| <b>A16</b> | Inorganic microfiber | 16 µm |
| <b>A25</b> | Inorganic microfiber | 25 µm |
| <b>M25</b> | Wire mesh            | 25 µm |

| Element Δp       | Valves |   |   |   |   |   |  |
|------------------|--------|---|---|---|---|---|--|
|                  | S      | B | T | D | V | Z |  |
| <b>N</b> 20 bar  |        | • |   |   |   |   |  |
| <b>R</b> 20 bar  |        |   |   | • |   | • |  |
| <b>H</b> 210 bar | •      |   |   |   |   |   |  |
| <b>S</b> 210 bar |        |   | • |   | • |   |  |

| Execution  |                    |
|------------|--------------------|
| <b>P01</b> | MP Filtri standard |
| <b>Pxx</b> | Customized         |

### FILTER ELEMENT

Element series and size Configuration example: **HP135** **2** **A06** **A** **S** **P01**  
**HP065** | **HP135**

Element length  
**1**  
**2**  
**3**

Filtration rating (filter media)

|            |                      |       |            |                      |       |
|------------|----------------------|-------|------------|----------------------|-------|
| <b>A03</b> | Inorganic microfiber | 3 µm  | <b>A16</b> | Inorganic microfiber | 16 µm |
| <b>A06</b> | Inorganic microfiber | 6 µm  | <b>A25</b> | Inorganic microfiber | 25 µm |
| <b>A10</b> | Inorganic microfiber | 10 µm | <b>M25</b> | Wire mesh            | 25 µm |

| Seals    |     |
|----------|-----|
| <b>A</b> | NBR |
| <b>V</b> | FPM |

| Element Δp |         |
|------------|---------|
| <b>N</b>   | 20 bar  |
| <b>R</b>   | 20 bar  |
| <b>H</b>   | 210 bar |
| <b>S</b>   | 210 bar |


| Execution  |                    |
|------------|--------------------|
| <b>P01</b> | MP Filtri standard |
| <b>Pxx</b> | Customized         |

### ACCESSORIES

| Differential indicators                                     | page    |
|---|---------|
| <b>DEA</b> Electrical differential indicator                | 577     |
| <b>DEH</b> Hazardous area electronic differential indicator | 577-578 |
| <b>DEM</b> Electrical differential indicator                | 578-579 |
| <b>DLA</b> Electrical / visual differential indicator       | 579-580 |

|   | page |
|---|------|
| <b>DLE</b> Electrical / visual differential indicator | 580  |
| <b>DTA</b> Electronic differential indicator          | 581  |
| <b>DVA</b> Visual differential indicator              | 581  |
| <b>DVM</b> Visual differential indicator              | 581  |

| Additional features | page |
|---------------------|------|
| <b>T2</b> Plug      | 582  |

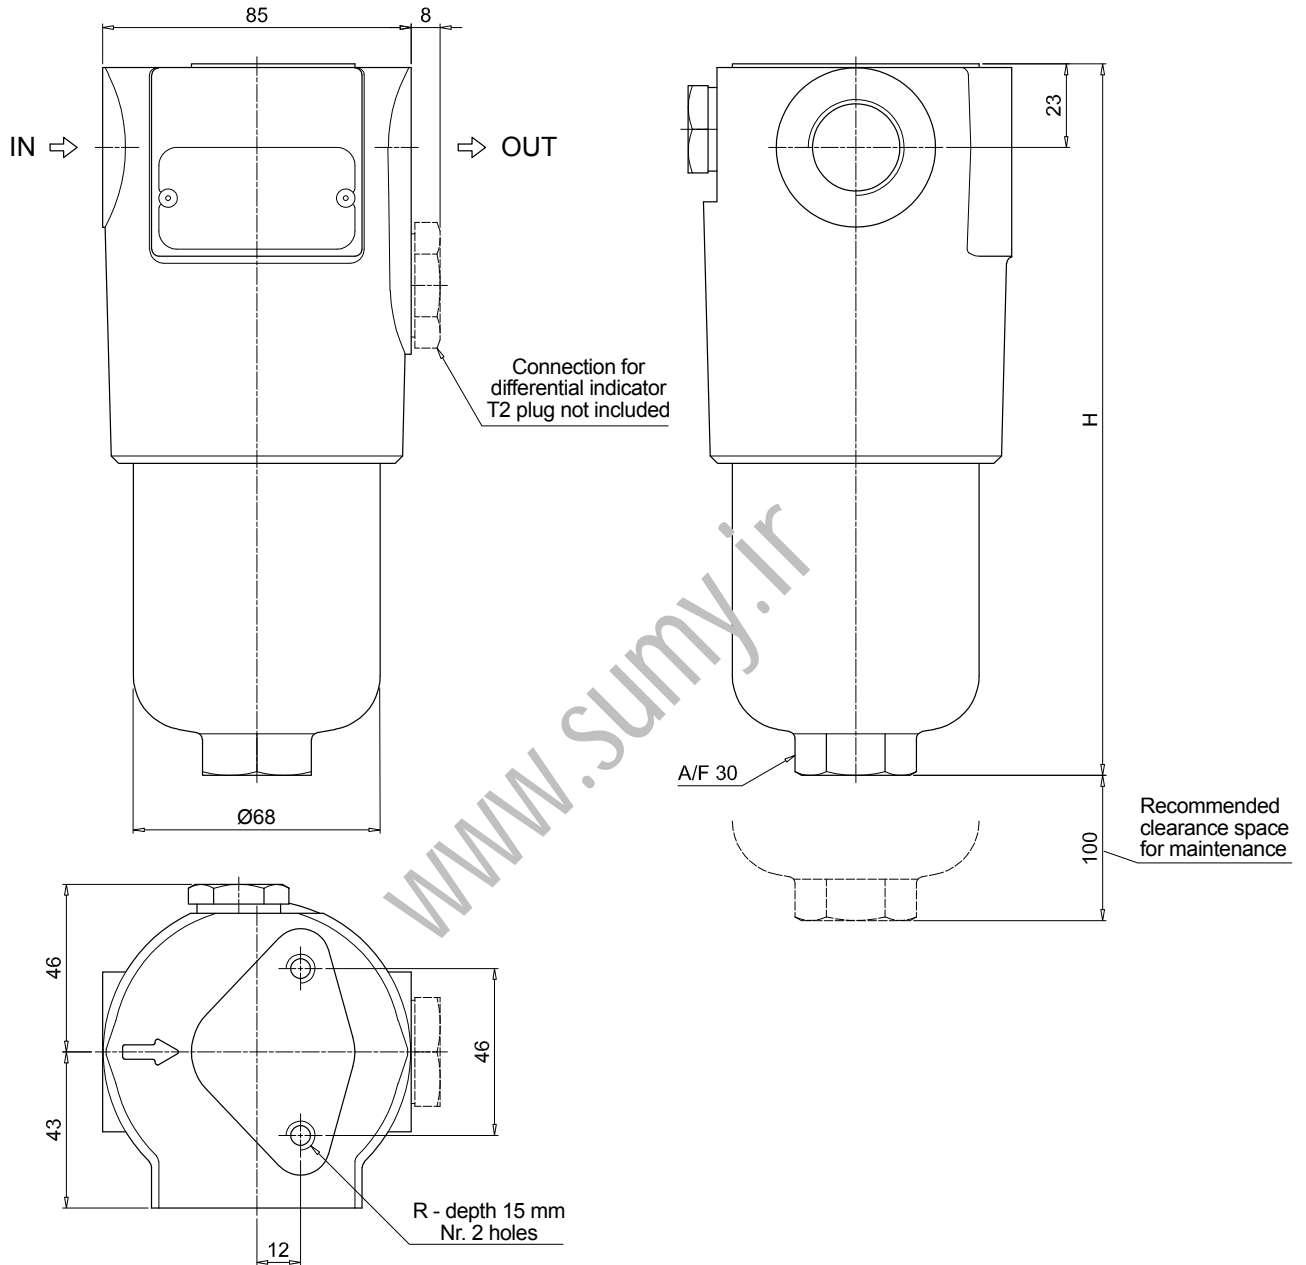

### FHP065


| Filter length | H [mm] |
|---------------|--------|
| 1             | 196    |
| 2             | 227    |
| 3             | 329    |

| Connections | R         |
|-------------|-----------|
| G1-G2       | M8        |
| G3-G4-G5-G6 | 5/16" UNC |

# FHP FHP065 - FHP135

## Dimensions

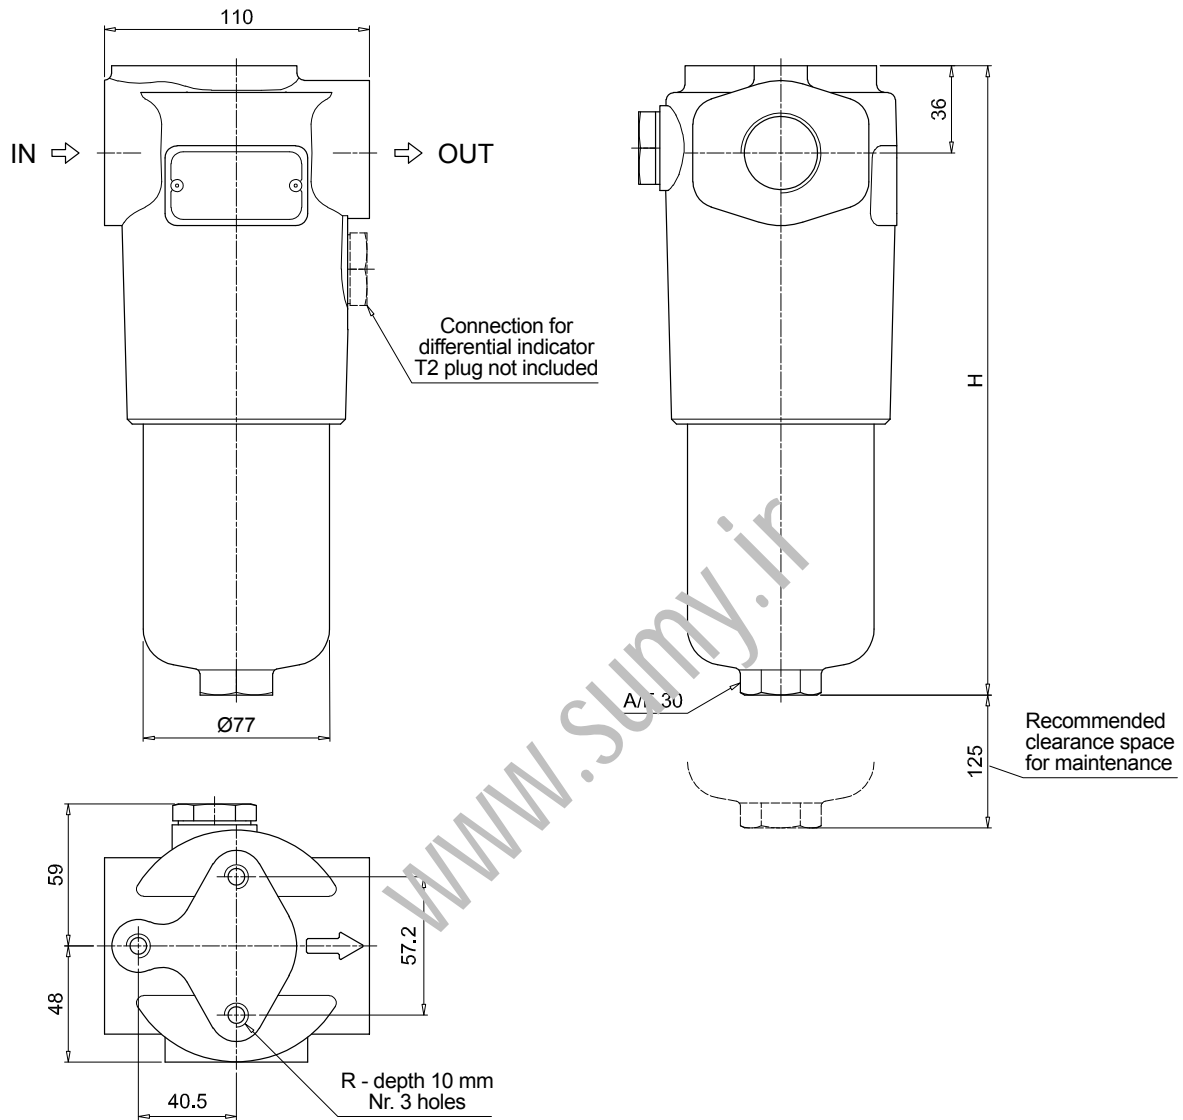

### FHP135

| Filter length | H [mm] |
|---------------|--------|
| 1             | 260    |
| 2             | 373    |
| 3             | 448    |

| Connections | R        |
|-------------|----------|
| G1-G2       | M10      |
| G3-G4-G5-G6 | 3/8" UNC |
| F1-F2       | M10      |
| F3-F4       | 3/8" UNC |
| F5          | M10      |
| F6          | 3/8" UNC |

[www.sumy.ir](http://www.sumy.ir)

## Designation & Ordering code

### COMPLETE FILTER

Series and size **FHP350** Configuration example: **FHP350** | **4** | **B** | **A** | **D** | **2** | **A06** | **N** | **P01**

**Length**  
1 | 2 | 3 | 4

**Valves**  
**S** Without bypass  
**B** With bypass 6 bar  
**T** With check valve, without bypass  
**D** With check valve, with bypass 6 bar  
**V** With reverse flow, without bypass  
**Z** With reverse flow, with bypass 6 bar

**Seals**  
**A** NBR  
**V** FPM

**Connections**  
**A** G 1 1/2"  
**B** 1 1/2" NPT  
**C** SAE 24 - 1 7/8" - 12 UN  
**D** 1 1/2" SAE 3000 psi/M + G 1 1/4"  
**E** 1 1/2" SAE 3000 psi/UNC + 1 1/4" NPT  
**F** 1 1/2" SAE 3000 psi/UNC + SAE 20 - 1 5/8" - 12 UN  
**G** 1 1/4" SAE 3000 psi/M  
**H** 1 1/4" SAE 3000 psi/UNC  
**I** 1 1/4" SAE 6000 psi/M  
**L** 1 1/4" SAE 6000 psi/UNC

**Connection for differential indicator**  
**2** With connection

**Filtration rating (filter media)**  
**A03** Inorganic microfiber 3 µm  
**A06** Inorganic microfiber 6 µm  
**A10** Inorganic microfiber 10 µm  
**A16** Inorganic microfiber 16 µm  
**A25** Inorganic microfiber 25 µm  
**M25** Wire mesh 25 µm

| Element Δp       | Valves |   |   |   |   |   |
|------------------|--------|---|---|---|---|---|
|                  | S      | B | T | D | V | Z |
| <b>N</b> 20 bar  |        | • |   |   |   |   |
| <b>R</b> 20 bar  |        |   |   | • |   | • |
| <b>H</b> 210 bar | •      |   |   |   |   |   |
| <b>S</b> 210 bar |        |   | • |   | • |   |

| Execution   | Filter length |   |   |   |
|---|---------------|---|---|---|
|   | 1             | 2 | 3 | 4 |
| <b>P01</b> MP Filtri standard                         | •             | • | • | • |
| <b>P02</b> Maintenance from the bottom of the housing |               |   |   | • |
| <b>Pxx</b> Customized                                 |               |   |   |   |

### FILTER ELEMENT

Element series and size **HP320** Configuration example: **HP320** | **4** | **A06** | **A** | **N** | **P01**

**Element length**  
1 | 2 | 3 | 4


**Filtration rating (filter media)**  
**A03** Inorganic microfiber 3 µm  
**A06** Inorganic microfiber 6 µm  
**A10** Inorganic microfiber 10 µm  
**A16** Inorganic microfiber 16 µm  
**A25** Inorganic microfiber 25 µm  
**M25** Wire mesh 25 µm

| Seals        | Element Δp       | Execution                     |
|--------------|------------------|-------------------------------|
| <b>A</b> NBR | <b>N</b> 20 bar  | <b>P01</b> MP Filtri standard |
| <b>V</b> FPM | <b>R</b> 20 bar  | <b>Pxx</b> Customized         |
|              | <b>H</b> 210 bar |                               |
|              | <b>S</b> 210 bar |                               |

### ACCESSORIES

| Differential indicators                                     | page    |   | page |
|---|---------|---|------|
| <b>DEA</b> Electrical differential indicator                | 577     | <b>DLE</b> Electrical / visual differential indicator | 580  |
| <b>DEH</b> Hazardous area electronic differential indicator | 577-578 | <b>DTA</b> Electronic differential indicator          | 581  |
| <b>DEM</b> Electrical differential indicator                | 578-579 | <b>DVA</b> Visual differential indicator              | 581  |
| <b>DLA</b> Electrical / visual differential indicator       | 579-580 | <b>DVM</b> Visual differential indicator              | 581  |
| Additional features   | page    |   |      |
| <b>T2</b> Plug  | 582     |   |      |



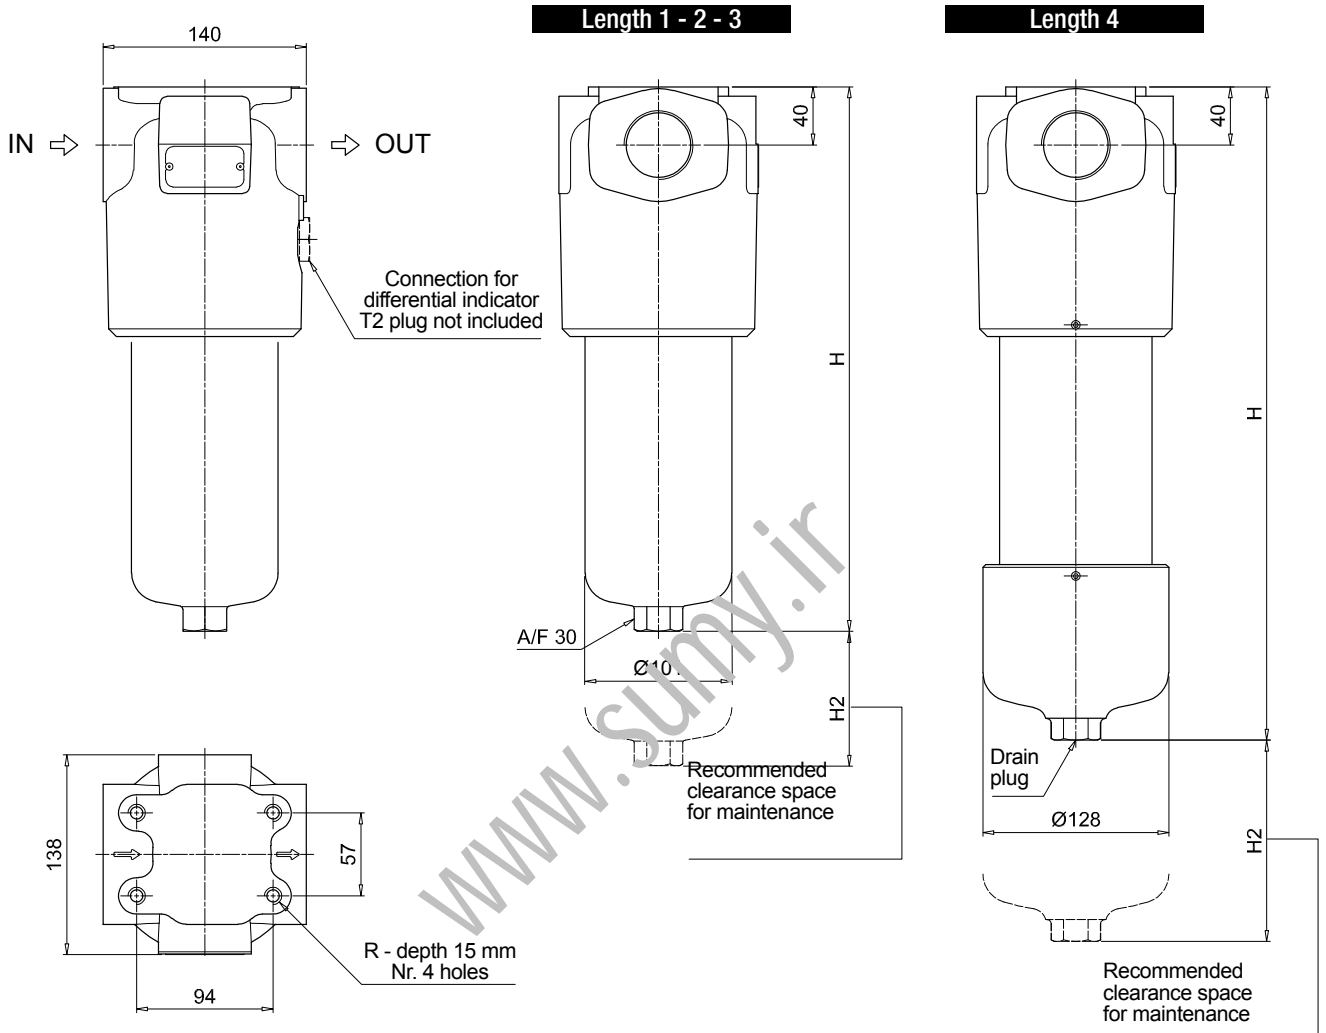

### FHP350

| Filter length | H [mm] | H2 [mm]       |               |
|---------------|--------|---------------|---------------|
|               |        | Execution P01 | Execution P02 |
| 1             | 295    | 150           | -             |
| 2             | 418    | 150           | -             |
| 3             | 550    | 150           | -             |
| 4             | 703    | 150           | 550           |

| Connections | R        |
|-------------|----------|
| A           | M12      |
| B - C       | 1/2" UNC |
| D           | M12      |
| E - F       | 1/2" UNC |
| G           | M12      |
| H           | 1/2" UNC |
| I           | M12      |
| L           | 1/2" UNC |

## Designation & Ordering code

### COMPLETE FILTER

Series and size **FHP500** Configuration example: **FHP500 4 V A F1 A06 S P01**

#### Length

1 | 2 | 3 | 4 | 5

#### Valves

- S** Without bypass
- B** With bypass 6 bar
- T** With check valve, without bypass
- D** With check valve, with bypass 6 bar
- V** With reverse flow, without bypass
- Z** With reverse flow, with bypass 6 bar

#### Seals

- A** NBR
- V** FPM

#### Connections

- F1** 1 1/2" SAE 3000 psi/M
- F2** 1 1/2" SAE 3000 psi/UNC
- F3** 2" SAE 3000 psi/M
- F4** 2" SAE 3000 psi/UNC + 1 1/2" NPT
- F5** 1 1/2" SAE 6000 psi/M
- F6** 1 1/2" SAE 6000 psi/UNC
- F7** 2" SAE 6000 psi/M + G 1 1/2"
- F8** 2" SAE 6000 psi/UNC + SAE 24 - 1 7/8" - 12 UN

#### Filtration rating (filter media)

- A03** Inorganic microfiber 3 µm
- A06** Inorganic microfiber 6 µm
- A10** Inorganic microfiber 10 µm
- A16** Inorganic microfiber 16 µm
- A25** Inorganic microfiber 25 µm
- M25** Wire mesh 25 µm

| Element Δp       | Valves |   |   |   |   |   |
|------------------|--------|---|---|---|---|---|
|                  | S      | B | T | D | V | Z |
| <b>N</b> 20 bar  |        | • |   |   |   |   |
| <b>R</b> 20 bar  |        |   |   |   |   | • |
| <b>S</b> 210 bar | •      |   | • |   | • |   |

| Execution   | Filter length |   |   |   |   |
|---|---------------|---|---|---|---|
|   | 1             | 2 | 3 | 4 | 5 |
| <b>P01</b> MP Filtri standard                         | •             | • | • | • | • |
| <b>P02</b> Maintenance from the bottom of the housing |               |   |   | • | • |
| <b>P03</b> Drain plug                                 | •             | • |   |   |   |
| <b>Pxx</b> Customized                                 | •             | • | • | • | • |

### FILTER ELEMENT

Element series and size **HP500** Configuration example: **HP500 4 A06 A S P01**

#### Element length

1 | 2 | 3 | 4 | 5

#### Filtration rating (filter media)

- A03** Inorganic microfiber 3 µm
- A06** Inorganic microfiber 6 µm
- A10** Inorganic microfiber 10 µm
- A16** Inorganic microfiber 16 µm
- A25** Inorganic microfiber 25 µm
- M25** Wire mesh 25 µm

| Seals    |     |
|----------|-----|
| <b>A</b> | NBR |
| <b>V</b> | FPM |


| Element Δp |         |
|------------|---------|
| <b>N</b>   | 20 bar  |
| <b>R</b>   | 20 bar  |
| <b>S</b>   | 210 bar |

| Execution  |                    |
|------------|--------------------|
| <b>P01</b> | MP Filtri standard |
| <b>Pxx</b> | Customized         |


### ACCESSORIES

| Accessories   | page    | Accessories   | page |
|---|---------|---|------|
| <b>DEA</b> Electrical differential indicator                | 577     | <b>DLE</b> Electrical / visual differential indicator | 580  |
| <b>DEH</b> Hazardous area electronic differential indicator | 577-578 | <b>DTA</b> Electronic differential indicator          | 581  |
| <b>DEM</b> Electrical differential indicator                | 578-579 | <b>DVA</b> Visual differential indicator              | 581  |
| <b>DLA</b> Electrical / visual differential indicator       | 579-580 | <b>DVM</b> Visual differential indicator              | 581  |


| Additional features | page |
|---------------------|------|
| <b>T2</b> Plug      | 582  |

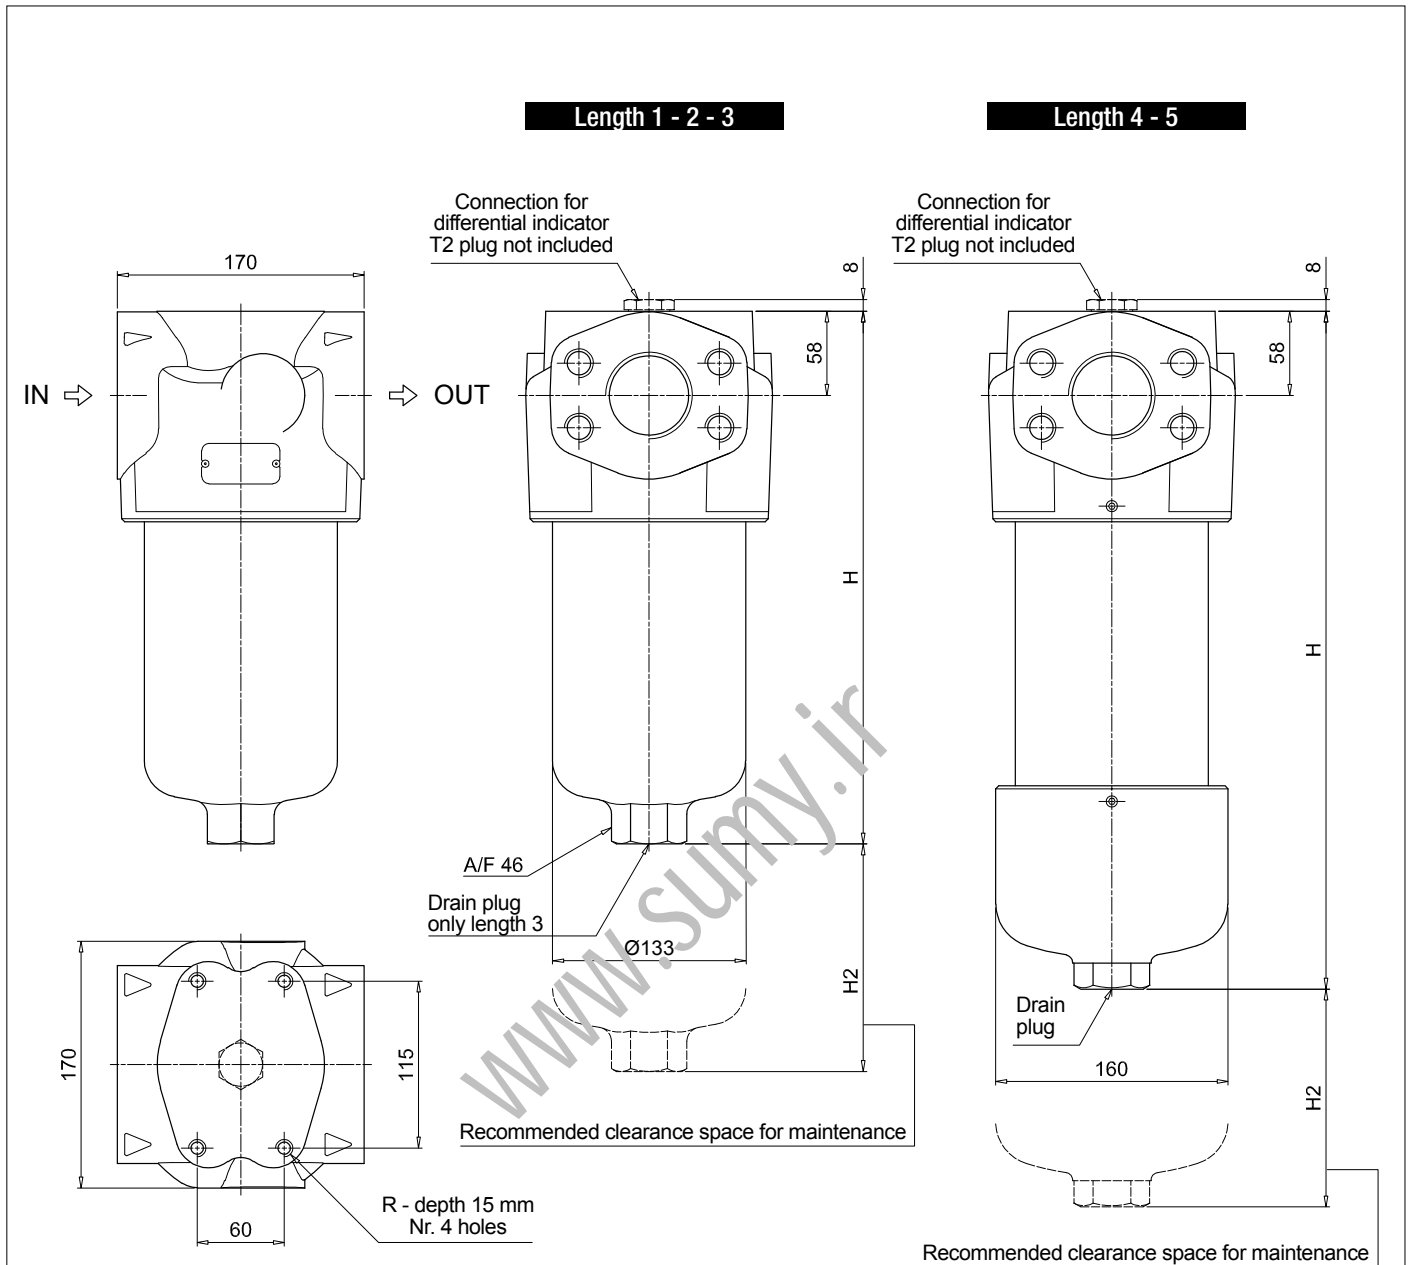

Valves S - B - T - D



Valves V - Z



FHP500


| Filter length | H [mm] | H2 [mm]       |     |
|---------------|--------|---------------|-----|
|               |        | Execution P01 | P02 |
| 1             | 330    | 150           | -   |
| 2             | 420    | 150           | -   |
| 3             | 496    | 150           | -   |
| 4             | 654    | 150           | 480 |
| 5             | 820    | 150           | 650 |

| Connections | R        |
|-------------|----------|
| F1          | M12      |
| F2          | 1/2" UNC |
| F3          | M12      |
| F4          | 1/2" UNC |
| F5          | M12      |
| F6          | 1/2" UNC |
| F7          | M12      |
| F8          | 1/2" UNC |

# FHP SPARE PARTS

Order number for spare parts

## FHP 010 - 011


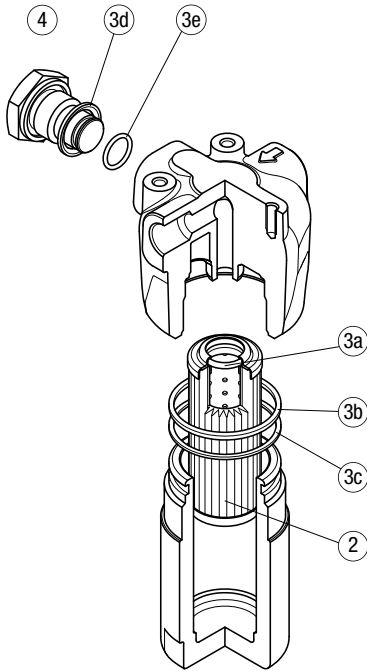


Q.ty:  
nr. 0 pcs. for version 1  
(without indicator port)  
  
nr. 1 pc. for version 2  
(with indicator port)

| Item:              | Q.ty: 1 pc.<br>2 | Q.ty: 1 pc.<br>3 (3a ÷ 3e) |          | Q.ty: 1 pc.<br>4          |     |
|--------------------|------------------|----------------------------|----------|---------------------------|-----|
| Filter series      | Filter element   | Seal Kit code number       |          | Indicator connection plug |     |
|                    |                  | NBR                        | FPM      | NBR                       | FPM |
| <b>FHP 010-011</b> | See order table  | 02050501                   | 02050492 | T2H                       | T2V |

## FHP 065


## FHP 135

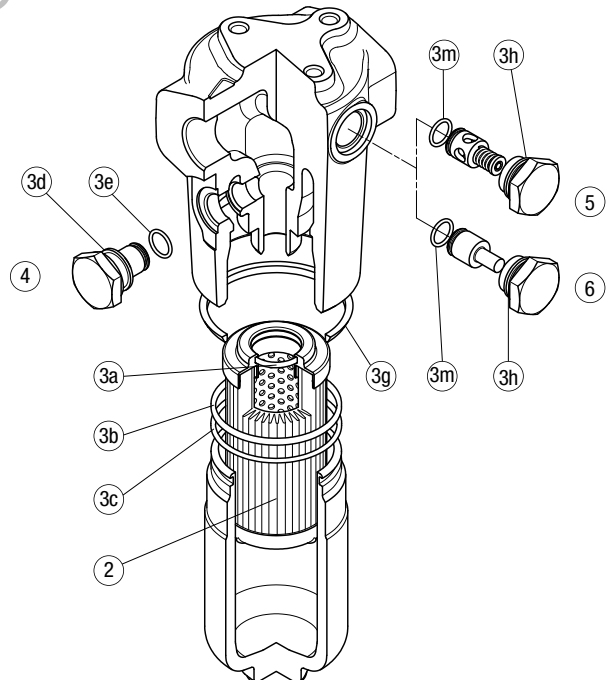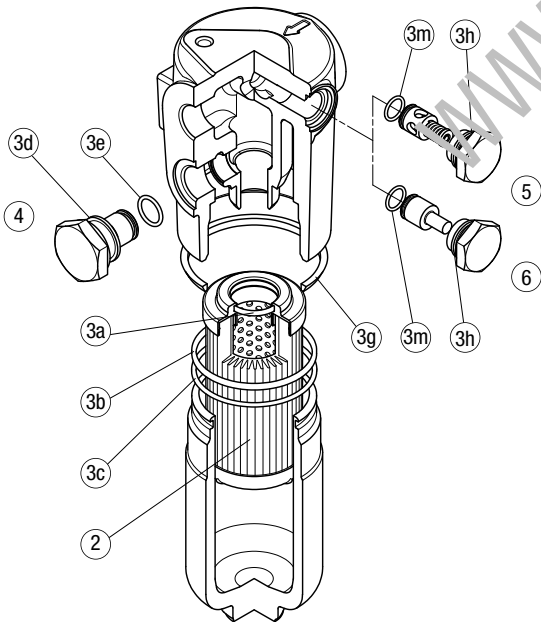

| Item:          | Q.ty: 1 pc.<br>2 | Q.ty: 1 pc.<br>3 (3a ÷ 3m) |          | Q.ty: 1 pc.<br>4          |     | Q.ty: 1 pc.<br>5 |          | Q.ty: 1 pc.<br>6    |          |
|----------------|------------------|----------------------------|----------|---------------------------|-----|------------------|----------|---------------------|----------|
| Filter series  | Filter element   | Seal Kit code number       |          | Indicator connection plug |     | Bypass assembly  |          | Non-bypass assembly |          |
|                |                  | NBR                        | FPM      | NBR                       | FPM | NBR              | FPM      | NBR                 | FPM      |
| <b>FHP 065</b> | See order table  | 02050265                   | 02050276 | T2H                       | T2V | 02001116         | 02001136 | 02001142            | 02001139 |
| <b>FHP 135</b> | See order table  | 02050269                   | 02050280 |                           |     | 02001117         | 02001137 | 02001143            | 02001392 |

FHP 350

FHP 500

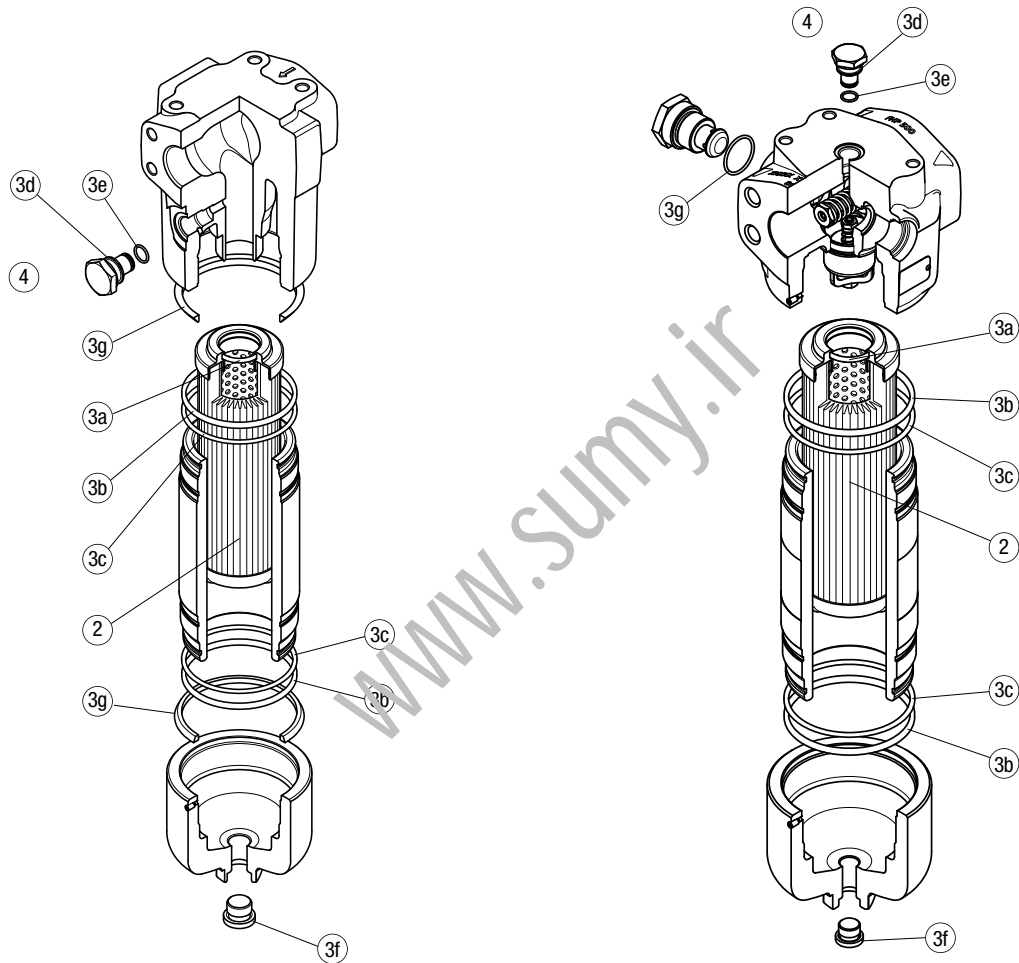

| Item:          | Q.ty: 1 pc.<br>2 | Q.ty: 1 pc. (3a ÷ 3g for FHP 350)<br>3 (3a ÷ 3f for FHP 500) |          | Q.ty: 1 pc.<br>4          |     |
|----------------|------------------|--|----------|---------------------------|-----|
| Filter series  | Filter element   | Seal Kit code number   |          | Indicator connection plug |     |
|                |                  | NBR  | FPM      | NBR                       | FPM |
| <b>FHP 350</b> | See order table  | 02050272   | 02050283 | T2H                       | T2V |
| <b>FHP 500</b> |                  | 02050330   | 02050331 |                           |     |

www.sumy.ir

# FMM series

Maximum working pressure up to 42 MPa (420 bar) - Flow rate up to 300 l/min



## Description

## Technical data

### High Pressure filters

#### In-line

**Maximum working pressure up to 42 MPa (420 bar)**

**Flow rate up to 300 l/min**

FMM is a range of versatile high pressure filter for protection of sensitive components in high pressure hydraulic systems in the mobile machines.

They are directly connected to the lines of the system through the hydraulic fittings.

#### Available features:

- Female threaded connections up to 1 1/4", for a maximum flow rate of 250 l/min
- Fine filtration rating, to get a good cleanliness level into the system
- Bypass valve, to relieve excessive pressure drop across the filter media
- Low collapse filter element "N", for use with filters provided with bypass valve
- Low collapse filter element with external support "R", for filter element protection against the back pressure caused by the check valve in filters provided with the bypass valve
- High collapse filter element with external support "S", for filter element protection against the back pressure caused by the check valve in filters not provided with the bypass valve
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

- Agricultural machines
- Mobile machines

#### Filter housing materials

- Head: Painted cast iron, black RAL 9005
- Housing: Phosphatized steel
- Bypass valve: Steel

#### Pressure

- Test pressure: 63 MPa (630 bar)
- Burst pressure: 126 MPa (1260 bar)
- Pulse pressure fatigue test: 1 000 000 cycles with pressure from 0 to 42 MPa (420 bar)

#### Bypass valve

- Opening pressure 600 kPa (6 bar) ±10%
- Other opening pressures on request.

#### Δp element type

- Microfiber filter elements - series N-R: 20 bar
- Microfiber filter elements - series S: 210 bar
- Wire mesh filter elements - series N: 20 bar
- Fluid flow through the filter element from OUT to IN

#### Seals

- Standard NBR series A
- Optional FPM series V

#### Temperature

From -25 °C to +110 °C

#### Connections

In-line Inlet/Outlet

#### Note

FMM filters are provided for vertical mounting



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series  | Weights [kg] |      |      |       |      | Volumes [dm <sup>3</sup> ] |        |      |      |      |      |      |
|----------------|--------------|------|------|-------|------|----------------------------|--------|------|------|------|------|------|
|                | Length       | 1    | 2    | 3     | 4    | 5                          | Length | 1    | 2    | 3    | 4    | 5    |
| <b>FMM 050</b> |              | 3.11 | 3.48 | 3.90  | 4.36 | 5.54                       |        | 0.34 | 0.48 | 0.63 | 0.81 | 1.23 |
| <b>FMM 150</b> |              | 7.50 | 9.50 | 10.90 | -    | -                          |        | 0.60 | 1.00 | 1.25 | -    | -    |



| Filter series  | Length   | Filter element design - N Series |     |     |     |     |     | Filter element design - S Series |     |     |     |     |
|----------------|----------|----------------------------------|-----|-----|-----|-----|-----|----------------------------------|-----|-----|-----|-----|
|                |          | A03                              | A06 | A10 | A16 | A25 | M25 | A03                              | A06 | A10 | A16 | A25 |
| <b>FMM 050</b> | <b>1</b> | 42                               | 43  | 79  | 82  | 106 | 147 | 29                               | 39  | 57  | 59  | 74  |
|                | <b>2</b> | 52                               | 57  | 85  | 96  | 121 | 149 | 45                               | 49  | 76  | 88  | 114 |
|                | <b>3</b> | 66                               | 69  | 97  | 106 | 130 | 150 | 58                               | 61  | 89  | 99  | 125 |
|                | <b>4</b> | 83                               | 89  | 113 | 115 | 134 | 152 | 74                               | 80  | 106 | 108 | 129 |
|                | <b>5</b> | 107                              | 110 | 130 | 134 | 141 | 154 | 93                               | 95  | 111 | 121 | 139 |
| <b>FMM 150</b> | <b>1</b> | 81                               | 88  | 156 | 163 | 179 | 295 |                                  |     |     |     |     |
|                | <b>2</b> | 142                              | 145 | 227 | 230 | 236 | 312 |                                  |     |     |     |     |
|                | <b>3</b> | 170                              | 180 | 242 | 245 | 263 | 315 |                                  |     |     |     |     |

### Maximum flow rate for a complete pressure filter with a pressure drop $\Delta p = 1.5$ bar.





The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).





You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.

### Hydraulic symbols


| Filter series  | Style S | Style B | Style T | Style D |
|----------------|---------|---------|---------|---------|
| <b>FMM 050</b> | •       | •       | •       | •       |
| <b>FMM 150</b> | •       | •       | •       | •       |

Pressure drop  
Filter housings  
 $\Delta p$  pressure drop

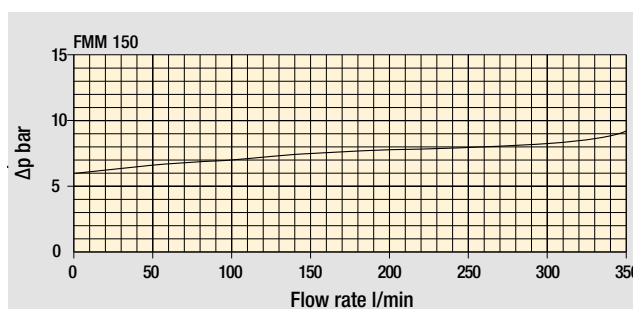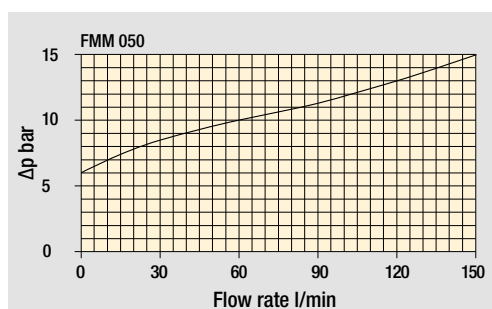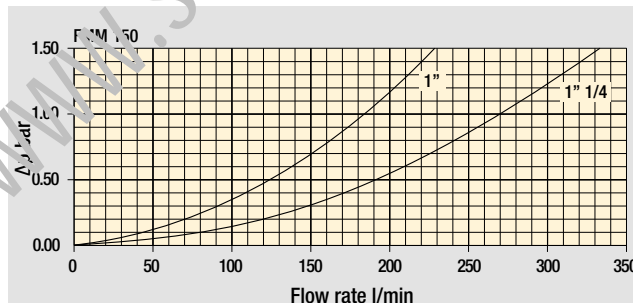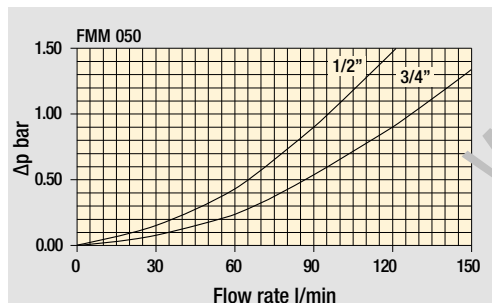

Bypass valve  
pressure drop

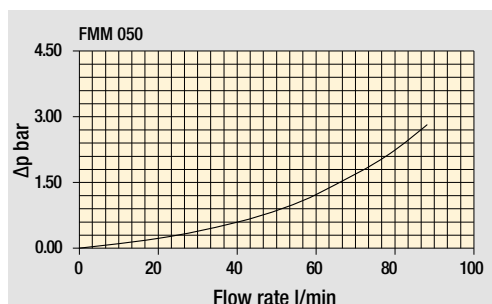

Filter housing  
with check valve

Valves

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

# FMM FMM050

## Designation & Ordering code

### COMPLETE FILTER

Series and size Configuration example: **FMM050** | **3** | **B** | **A** | **G** | **A10** | **N** | **P01**

#### FMM050

#### Length

1 | 2 | 3 | 4 | 5

#### Valves

- S** Without bypass
- B** With bypass 6 bar
- T** With check valve, without bypass
- D** With check valve, with bypass 6 bar

#### Seals

- A** NBR
- V** FPM

#### Connections

- A** M18x1.5 - ISO 6149
- B** M22x1.5 - ISO 6149
- C** G 1/2"
- D** G 3/4"
- E** 1/2" NPT
- F** 3/4" NPT
- G** SAE 8 - 3/4" - 16 UNF
- H** SAE 12 - 1 1/16" - 12 UN

#### Filtration rating (filter media)

- A03** Inorganic microfiber 3  $\mu$ m
- A06** Inorganic microfiber 6  $\mu$ m
- A10** Inorganic microfiber 10  $\mu$ m
- A16** Inorganic microfiber 16  $\mu$ m
- A25** Inorganic microfiber 25  $\mu$ m
- M25** Wire mesh 25  $\mu$ m

| Element $\Delta$ p | Valves |   |   |   |
|--------------------|--------|---|---|---|
|                    | S      | B | T | D |
| <b>N</b> 20 bar    |        | • |   |   |
| <b>R</b> 20 bar    |        |   |   | • |
| <b>S</b> 210 bar   | •      |   | • |   |

#### Execution

- P01** Upper connection for clogging indicator
- P02** Without connection for clogging indicator
- P03** Frontal connection for clogging indicator
- Pxx** Customized

### FILTER ELEMENT

Element series and size Configuration example: **HP050** | **3** | **A10** | **A** | **N** | **P01**

#### HP050

#### Element length

1 | 2 | 3 | 4 | 5

#### Filtration rating (filter media)

- A03** Inorganic microfiber 3  $\mu$ m
- A06** Inorganic microfiber 6  $\mu$ m
- A10** Inorganic microfiber 10  $\mu$ m
- A16** Inorganic microfiber 16  $\mu$ m
- A25** Inorganic microfiber 25  $\mu$ m
- M25** Wire mesh 25  $\mu$ m

#### Seals

- A** NBR
- V** FPM

#### Element $\Delta$ p

- N** 20 bar
- R** 20 bar
- S** 210 bar

#### Execution


- P01** MP Filtri standard
- Pxx** Customized

### ACCESSORIES


| Differential indicators                                     | page    |   | page |
|---|---------|---|------|
| <b>DEA</b> Electrical differential indicator                | 577     | <b>DLE</b> Electrical / visual differential indicator | 580  |
| <b>DEH</b> Hazardous area electronic differential indicator | 577-578 | <b>DTA</b> Electronic differential indicator          | 581  |
| <b>DEM</b> Electrical differential indicator                | 578-579 | <b>DVA</b> Visual differential indicator              | 581  |
| <b>DLA</b> Electrical / visual differential indicator       | 579-580 | <b>DVM</b> Visual differential indicator              | 581  |

#### Additional features

**T2** Plug 582

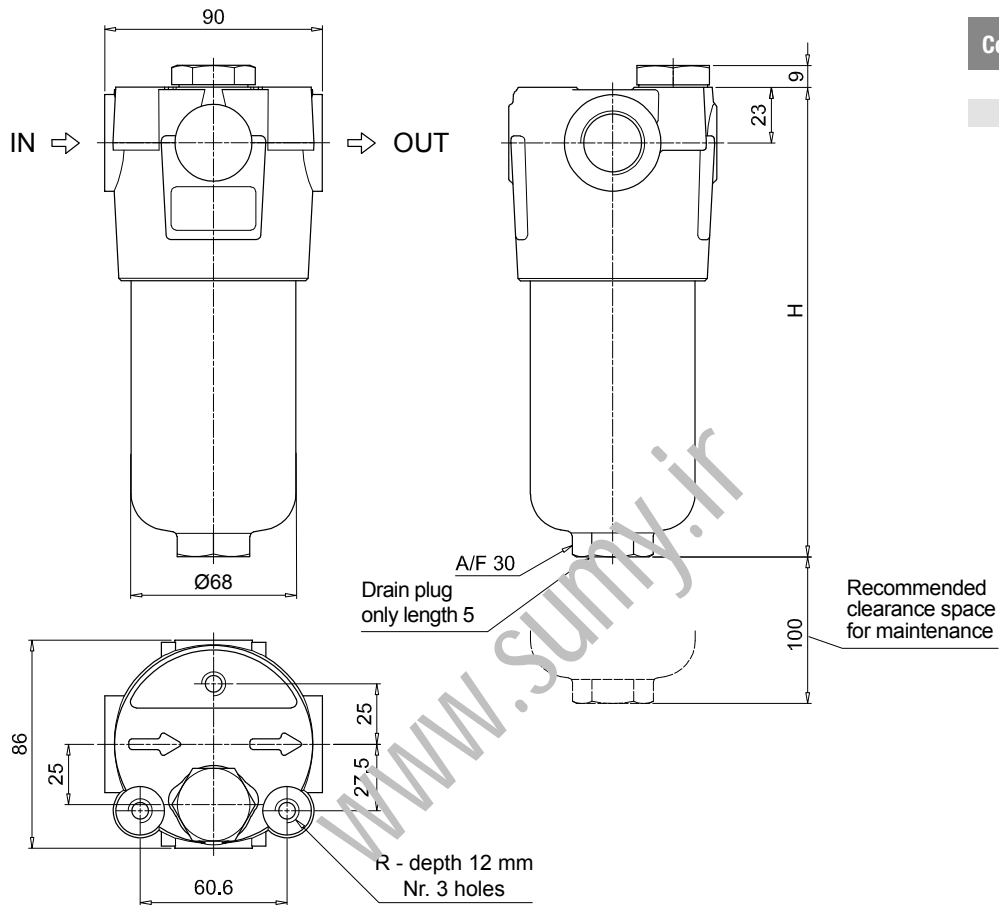

| FMM050        |          |
|---------------|----------|
| Filter length | H [mm]   |
| 1             | 158      |
| 2             | 195      |
| 3             | 237      |
| 4             | 285      |
| 5             | 407      |
| Connections   | R        |
| A-B-C-D       | M10      |
| E-F-G-H       | 3/8" UNC |

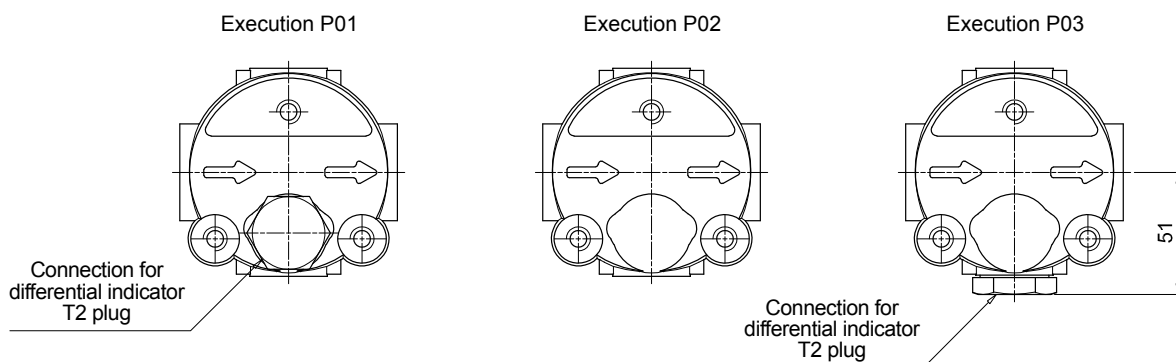

## Designation & Ordering code

### COMPLETE FILTER

Series and size **FMM150** Configuration example: **FMM150** | **2** | **B** | **A** | **D** | **2** | **M25** | **N** | **P01**

**Length**  
1 | 2 | 3

**Valves**  
**S** Without bypass  
**B** With bypass 6 bar

**Seals**  
**A** NBR  
**V** FPM

**Connections**  
**C** G 1"  
**D** G 1 1/4"  
**E** 1" NPT  
**F** 1 1/4" NPT  
**G** SAE 16 - 1 5/16" - 12 UN  
**H** SAE 20 - 1 5/8" - 12 UN

**Connection for differential indicator**  
**1** Without connection  
**2** Upper connection  
**3** Frontal connection

**Filtration rating (filter media)**

|                                       |                                       |
|---------------------------------------|---------------------------------------|
| <b>A03</b> Inorganic microfiber 3 µm  | <b>A16</b> Inorganic microfiber 16 µm |
| <b>A06</b> Inorganic microfiber 6 µm  | <b>A25</b> Inorganic microfiber 25 µm |
| <b>A10</b> Inorganic microfiber 10 µm | <b>M25</b> Wire mesh 25 µm            |

**Element Δp**  
**N** 20 bar

**Execution**  
**P01** MP Filtri standard  
**Pxx** Customized

### FILTER ELEMENT

Element series and size **HP150** Configuration example: **HP150** | **2** | **M25** | **A** | **N** | **P01**

**Element length**  
1 | 2 | 3

**Filtration rating (filter media)**

|                                       |                                       |
|---------------------------------------|---------------------------------------|
| <b>A03</b> Inorganic microfiber 3 µm  | <b>A16</b> Inorganic microfiber 16 µm |
| <b>A06</b> Inorganic microfiber 6 µm  | <b>A25</b> Inorganic microfiber 25 µm |
| <b>A10</b> Inorganic microfiber 10 µm | <b>M25</b> Wire mesh 25 µm            |




**Seals**  
**A** NBR  
**V** FPM

**Element Δp**  
**N** 20 bar


**Execution**  
**P01** MP Filtri standard  
**Pxx** Customized

### ACCESSORIES


| Differential indicators                                     | page    |   | page |
|---|---------|---|------|
| <b>DEA</b> Electrical differential indicator                | 577     | <b>DLE</b> Electrical / visual differential indicator | 580  |
| <b>DEH</b> Hazardous area electronic differential indicator | 577-578 | <b>DTA</b> Electronic differential indicator          | 581  |
| <b>DEM</b> Electrical differential indicator                | 578-579 | <b>DVA</b> Visual differential indicator              | 581  |
| <b>DLA</b> Electrical / visual differential indicator       | 579-580 | <b>DVM</b> Visual differential indicator              | 581  |
| <b>Additional features</b>                                  | page    |   |      |
| <b>T2</b> Plug  | 582     |   |      |

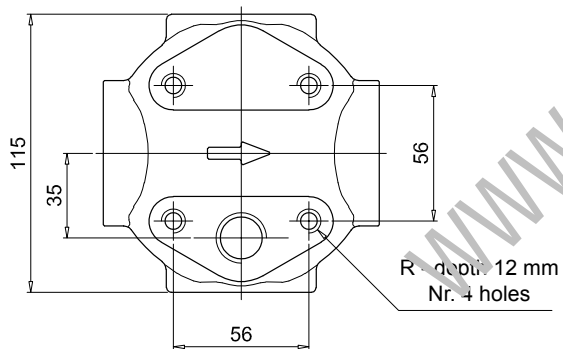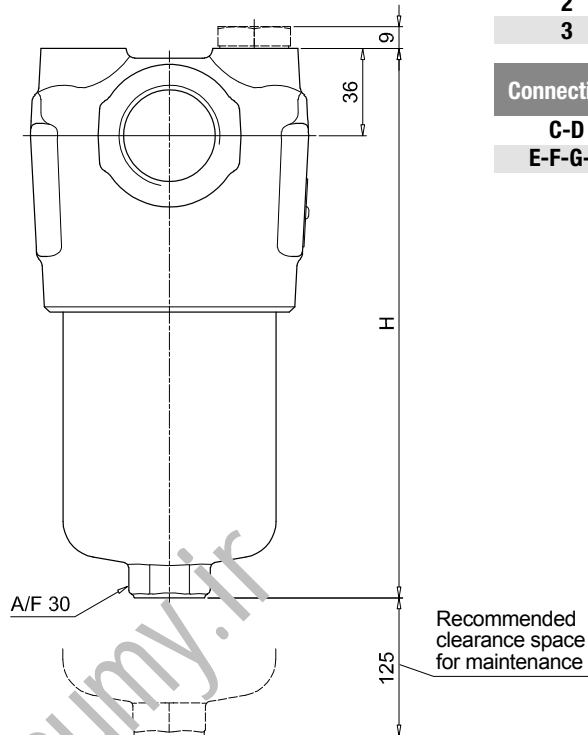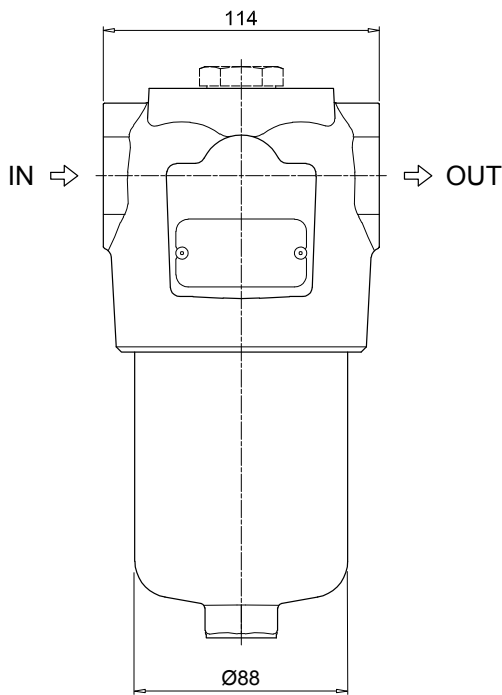

| FMM150        |          |
|---------------|----------|
| Filter length | H [mm]   |
| 1             | 230      |
| 2             | 340      |
| 3             | 415      |
| Connections   | R        |
| C-D           | M10      |
| E-F-G-H       | 3/8" UNC |




Version 1



Version 2

Connection for differential indicator  
T2 plug not included

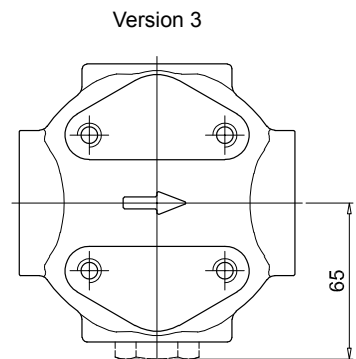


Version 3

Connection for differential indicator  
T2 plug not included

# FMM SPARE PARTS


Order number for spare parts

## FMM 050

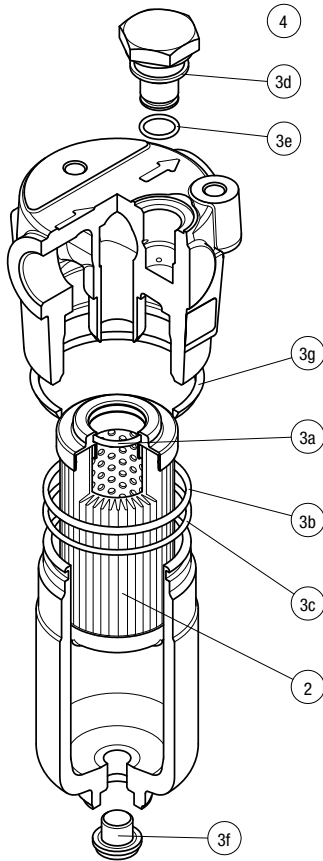

| Item:          | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          | Q.ty: 1 pc.               |     |
|----------------|-----------------|----------------------|----------|---------------------------|-----|
|                | <b>2</b>        | <b>3</b> (3a ÷ 3g)   |          | <b>4</b>                  |     |
| Filter series  | Filter element  | Seal Kit code number |          | Indicator connection plug |     |
|                |                 | NBR                  | FPM      | NBR                       | FPM |
| <b>FMM 050</b> | See order table | 02050314             | 02050315 | T2H                       | T2V |

## FMM 150

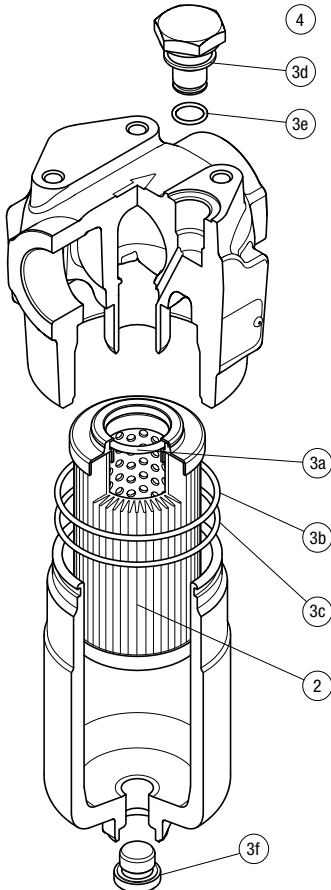

| Item:          | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          | Q.ty: 1 pc.               |     |
|----------------|-----------------|----------------------|----------|---------------------------|-----|
|                | <b>2</b>        | <b>3</b> (3a ÷ 3f)   |          | <b>4</b>                  |     |
| Filter series  | Filter element  | Seal Kit code number |          | Indicator connection plug |     |
|                |                 | NBR                  | FPM      | NBR                       | FPM |
| <b>FMM 150</b> | See order table | 02050731             | 02050732 | T2H                       | T2V |

[www.sumy.ir](http://www.sumy.ir)

www.sumy.ir



# FHA 051 series

Maximum working pressure up to 56 MPa (560 bar) - Flow rate up to 150 l/min



## Description

## Technical data

### High Pressure filters

#### In-line

**Maximum working pressure up to 56 MPa (560 bar)**

**Flow rate up to 150 l/min**

FHA is a range of high pressure filter for protection of sensitive components in high pressure hydraulic systems in the mobile machines. They are directly connected to the lines of the system through the hydraulic fittings.

#### Available features:

- Female threaded connections up to 3/4", for a maximum flow rate of 150 l/min
- Fine filtration rating, to get a good cleanliness level into the system
- Bypass valve, to relieve excessive pressure drop across the filter media
- Check valve, to protect the system against reverse flow
- Reverse flow valve, to allow bidirectional flow through the filter housing. The back flow is not filtered
- Low collapse filter element "N", for use with filters provided with bypass valve
- Low collapse filter element with external support "R", for filter element protection against the back pressure caused by the check valve or the reverse flow in filters provided with the bypass valve
- High collapse filter element with external support "S", for filter element protection against the back pressure caused by the check valve or the reverse flow in filters not provided with the bypass valve
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

Delivery lines, in any heavy duty industrial equipment or mobile machines

#### Filter housing materials

- Head: Steel (chemical heat treatment)
- Housing: Steel (chemical heat treatment)
- Bypass valve: Steel

#### Pressure

- Test pressure: 84 MPa (840 bar)
- Burst pressure: 168 MPa (1680 bar)
- Pulse pressure fatigue test: 1 00 000 cycles with pressure from 0 to 56 MPa (560 bar)

#### Bypass valve

- Opening pressure 600 kPa (6 bar) ±10%
- Other opening pressures on request.

#### Δp element type

- Microfibre filter elements - series N-R: 20 bar
- Microfibre filter elements - series S: 210 bar
- Wire mesh filter elements - series N: 20 bar
- Fluid flow through the filter element from OUT to IN

#### Seals

- Standard NBR series A
- Optional FPM series V

#### Temperature

from -25 °C to +110 °C

#### Connections

In-line Inlet/Outlet

#### Note

FHA filters are provided for vertical mounting



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series  | Weights [kg] |      |      |      |      | Volumes [dm <sup>3</sup> ] |        |      |      |      |      |      |
|----------------|--------------|------|------|------|------|----------------------------|--------|------|------|------|------|------|
|                | Length       | 1    | 2    | 3    | 4    | 5                          | Length | 1    | 2    | 3    | 4    | 5    |
| <b>FHA 051</b> |              | 3.28 | 3.65 | 4.06 | 4.54 | 5.74                       |        | 0.33 | 0.47 | 0.62 | 0.79 | 1.23 |

| Filter series | Length | Filter element design - N Series |     |     |     |     |     | Filter element design - R Series |     |     |     |     | Filter element design - S Series |     |     |     |     |
|---------------|--------|----------------------------------|-----|-----|-----|-----|-----|----------------------------------|-----|-----|-----|-----|----------------------------------|-----|-----|-----|-----|
|               |        | A03                              | A06 | A10 | A16 | A25 | M25 | A03                              | A06 | A10 | A16 | A25 | A03                              | A06 | A10 | A16 | A25 |
| FHA 051       | 1      | 42                               | 41  | 82  | 85  | 110 | 156 | 42                               | 41  | 82  | 85  | 110 | 30                               | 40  | 58  | 60  | 76  |
|               | 2      | 53                               | 58  | 87  | 100 | 127 | 158 | 53                               | 58  | 87  | 100 | 127 | 45                               | 50  | 78  | 91  | 120 |
|               | 3      | 68                               | 71  | 101 | 111 | 137 | 160 | 68                               | 71  | 101 | 111 | 137 | 59                               | 62  | 92  | 103 | 131 |
|               | 4      | 86                               | 92  | 118 | 121 | 142 | 162 | 86                               | 92  | 118 | 121 | 142 | 77                               | 83  | 110 | 113 | 137 |
|               | 5      | 112                              | 115 | 137 | 142 | 150 | 165 | 112                              | 115 | 137 | 142 | 150 | 96                               | 99  | 116 | 128 | 147 |

### Maximum flow rate for a complete pressure filter with a pressure drop $\Delta p = 1.5$ bar.


The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).


You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.

### Hydraulic symbols


| Filter series | Style S | Style B | Style T | Style D | Style V | Style Z |
|---------------|---------|---------|---------|---------|---------|---------|
| FHA 051       |         |         |         |         |         |         |

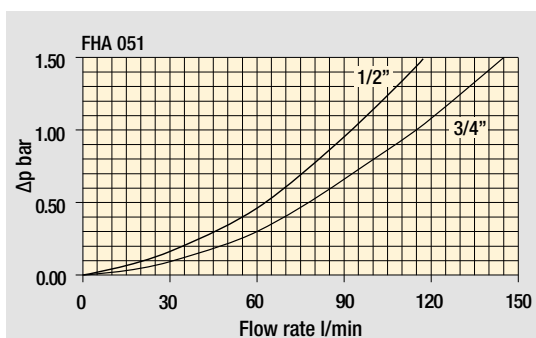

Filter housings  
 $\Delta p$  pressure drop

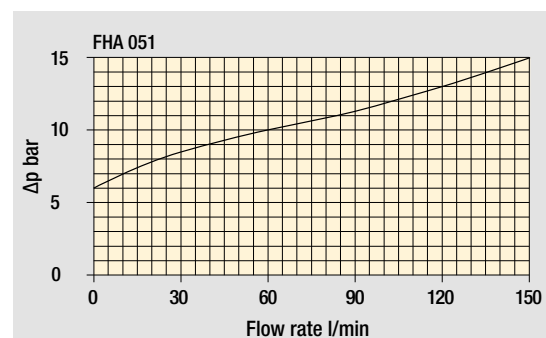

Pressure drop  
Bypass valve  
pressure drop

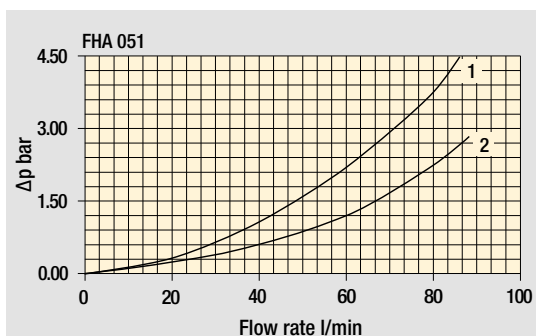

Pressure drop in reverse flow valves

- 1 - Reverse flow
- 2 - In filter direction

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

# FHA 051

## Designation & Ordering code

### COMPLETE FILTER

Series and size **FHA051** Configuration example: **FHA051** **3** **B** **A** **G** **A10** **N** **P01**

#### Series and size

#### Length

1 | 2 | 3 | 4 | 5

#### Valves

- S** Without bypass
- B** With bypass 6 bar
- T** With check valve, without bypass
- D** With check valve, with bypass 6 bar
- V** With reverse flow, without bypass
- Z** With reverse flow, with bypass 6 bar

#### Seals

- A** NBR
- V** FPM

#### Connections

- |                             |                                   |
|-----------------------------|-----------------------------------|
| <b>A</b> M18x1.5 - ISO 6149 | <b>E</b> 1/2" NPT                 |
| <b>B</b> M22x1.5 - ISO 6149 | <b>F</b> 3/4" NPT                 |
| <b>C</b> G 1/2"             | <b>G</b> SAE 8 - 3/4" - 16 UNF    |
| <b>D</b> G 3/4"             | <b>H</b> SAE 12 - 1 1/16" - 12 UN |

#### Filtration rating (filter media)

- A03** Inorganic microfiber 3 µm
- A06** Inorganic microfiber 6 µm
- A10** Inorganic microfiber 10 µm
- A16** Inorganic microfiber 16 µm
- A25** Inorganic microfiber 25 µm
- M25** Wire mesh 25 µm

| Element Δp       | Valves |   |   |   |   |   |  |
|------------------|--------|---|---|---|---|---|--|
|                  | S      | B | T | D | V | Z |  |
| <b>N</b> 20 bar  |        | • |   |   |   |   |  |
| <b>R</b> 20 bar  |        |   |   |   |   | • |  |
| <b>S</b> 210 bar | •      |   | • |   | • |   |  |

#### Execution

- P01** Upper connection for clogging indicator
- P02** Without connection for clogging indicator
- P03** Frontal connection for clogging indicator
- Pxx** Customized

### FILTER ELEMENT

Element series and size **HP050** Configuration example: **HP050** **3** **A10** **A** **N** **P01**

#### Element series and size

#### Element length

1 | 2 | 3 | 4 | 5

#### Filtration rating (filter media)

- A03** Inorganic microfiber 3 µm
- A06** Inorganic microfiber 6 µm
- A10** Inorganic microfiber 10 µm
- A16** Inorganic microfiber 16 µm
- A25** Inorganic microfiber 25 µm
- M25** Wire mesh 25 µm

#### Seals

- A** NBR
- V** FPM

#### Element Δp

- N** 20 bar
- R** 20 bar
- S** 210 bar

#### Execution


- P01** MP Filtri standard
- Pxx** Customized

### ACCESSORIES

| Differential indicators                                     | page    | Differential indicators                               | page |
|---|---------|---|------|
| <b>DEA</b> Electrical differential indicator                | 577     | <b>DLE</b> Electrical / visual differential indicator | 580  |
| <b>DEH</b> Hazardous area electronic differential indicator | 577-578 | <b>DTA</b> Electronic differential indicator          | 581  |
| <b>DEM</b> Electrical differential indicator                | 578-579 | <b>DVA</b> Visual differential indicator              | 581  |
| <b>DLA</b> Electrical / visual differential indicator       | 579-580 | <b>DVM</b> Visual differential indicator              | 581  |

#### Additional features


- T2** Plug 582

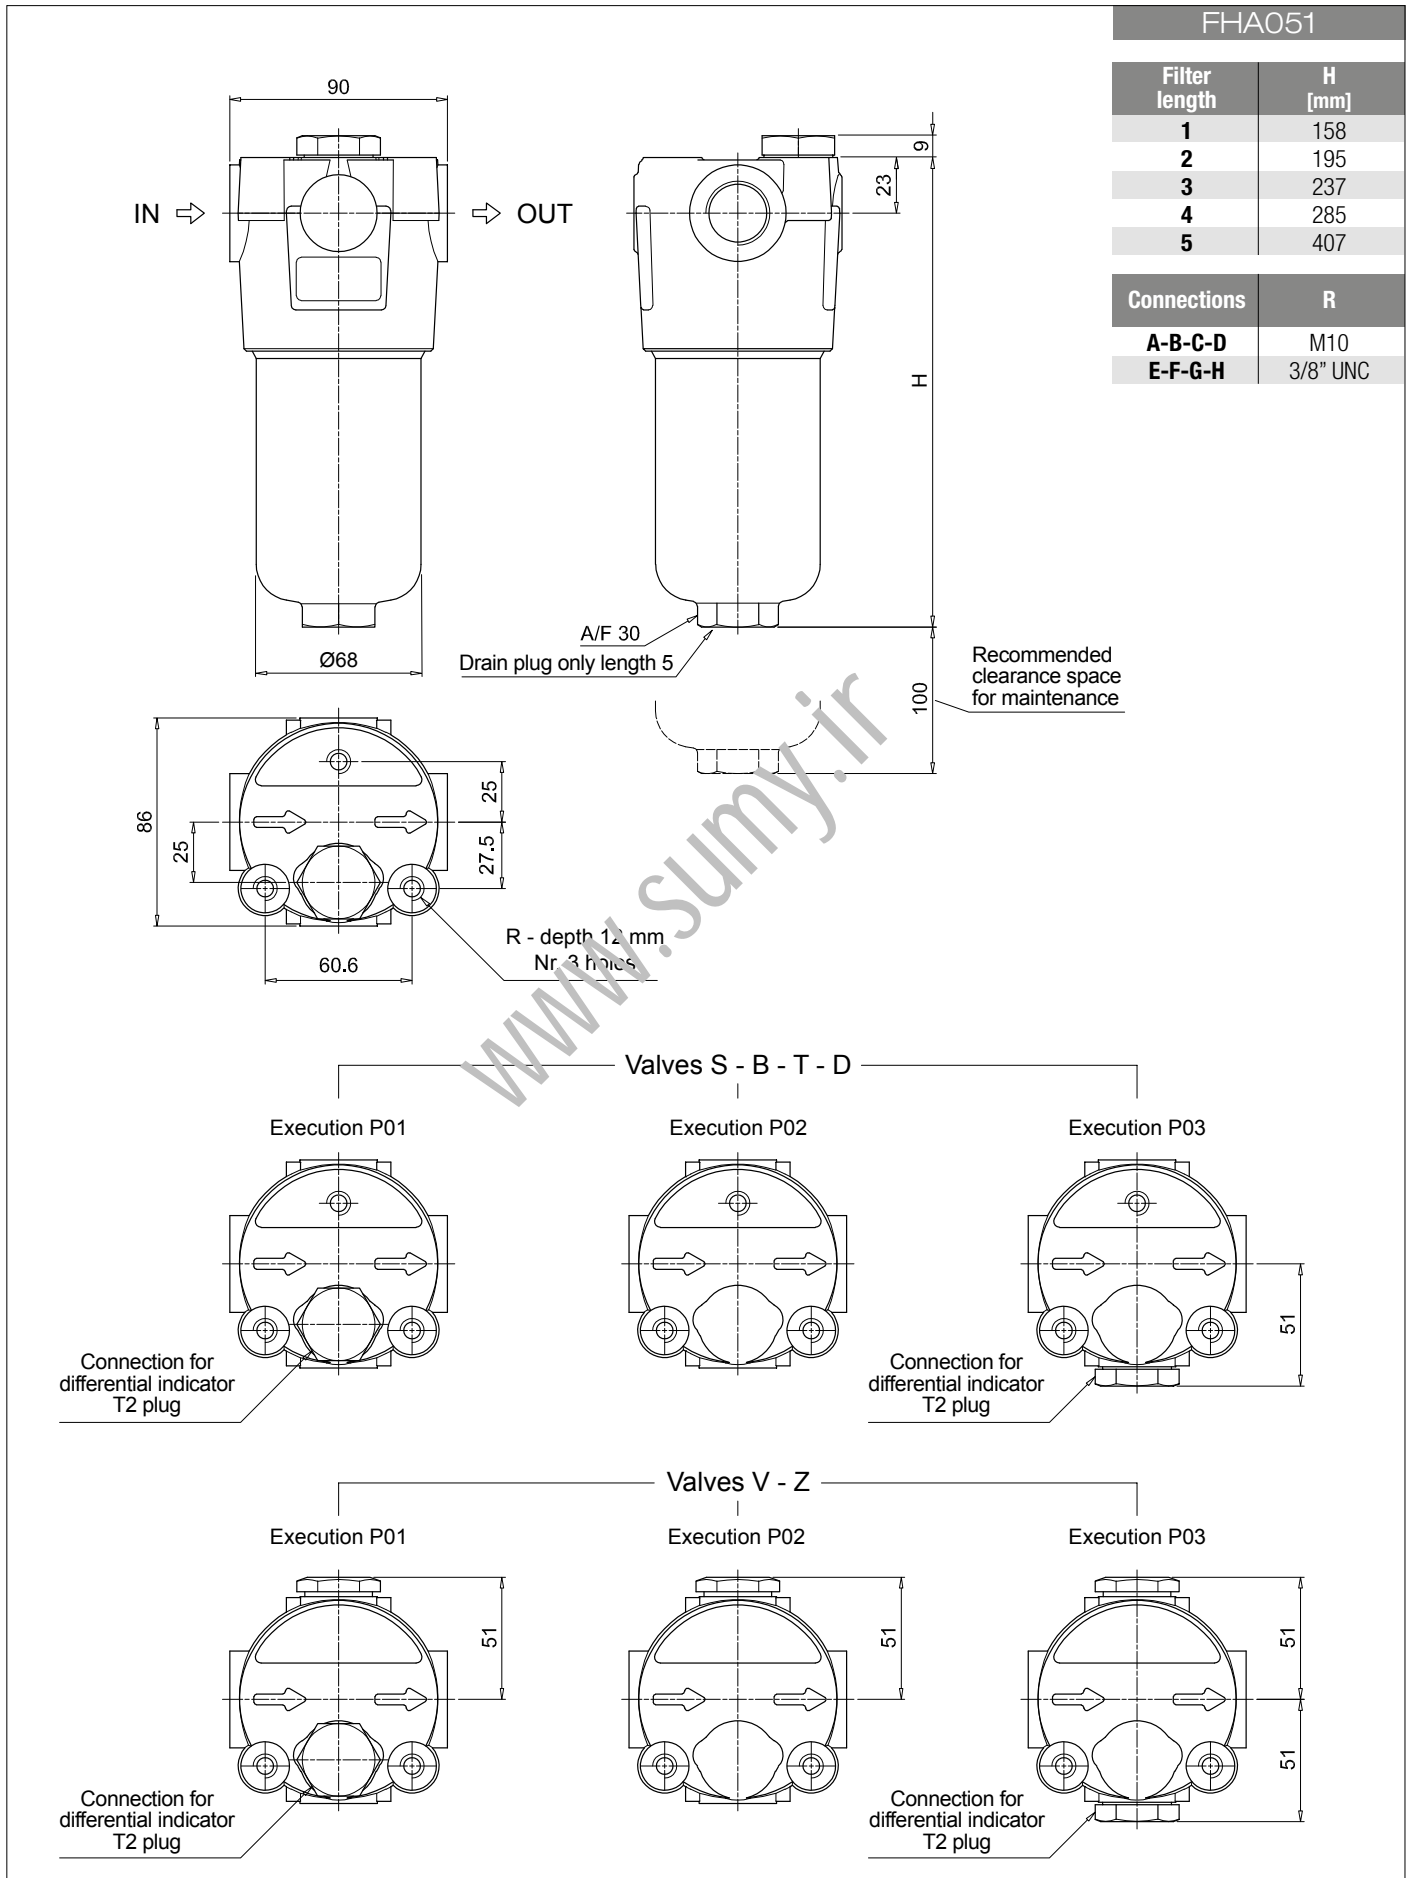

# FHA 051 SPARE PARTS

Order number for spare parts

FHA 051

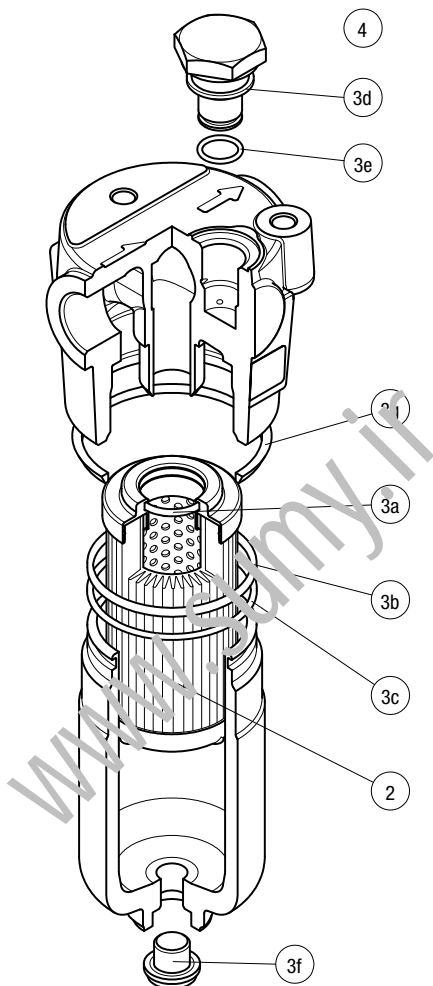

| Item:         | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          | Q.ty: 1 pc.               |     |
|---------------|-----------------|----------------------|----------|---------------------------|-----|
| Filter series | Filter element  | Seal Kit code number |          | Indicator connection plug |     |
| FHA 051       | See order table | NBR                  | FPM      | NBR                       | FPM |
|               | 2               | 3 (3a ÷ 3g)          |          | 4                         |     |
|               |                 | 02050288             | 02050305 | T2H                       | T2V |

[www.sumy.ir](http://www.sumy.ir)

[www.sumy.ir](http://www.sumy.ir)



# FHM series

Maximum working pressure up to 32 MPa (320 bar) - Flow rate up to 400 l/min



## Description

## Technical data

### High Pressure filters

#### Manifold

**Maximum working pressure up to 32 MPa (320 bar)**

**Flow rate up to 400 l/min**

FHM is a range of high pressure filter for protection of sensitive components in high pressure hydraulic systems in the mobile machines. They are directly connected to the top of the manifold, through the proper flanged interface.

#### Available features:

Available features:

- Manifold connections up to Ø30 mm, for a maximum flow rate of 400 l/min
- ISO 4401 CETOP 3 and CETOP 5 interface, for direct mounting on the CETOP valves
- Fine filtration rating, to get a good cleanliness level into the system
- Bypass valve, to relieve excessive pressure drop across the filter media
- Check valve, to protect the system against reverse flow
- Low collapse filter element "N", for use with filters provided with bypass valve
- High collapse filter element "H", for use with filters not provided with bypass valve
- High collapse filter element with external support "S", for filter element protection against the back pressure caused by the check valve in filters not provided with the bypass valve
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

Delivery lines, in any high pressure industrial equipment

#### Filter housing materials

- Head  
Phosphatized cast iron: FHM 006-007-010  
Phosphatized steel: FHM 050-065-135-320-500
- Housing: Phosphatized steel
- Bypass valve: Steel
- Check valve: Steel

#### Pressure

- Test pressure: 48 MPa (480 bar)
- Burst pressure: 96 MPa (960 bar)
- Pulse pressure fatigue test: 1 000 000 cycles with pressure from 0 to 32 MPa (320 bar)

#### Bypass valve

- Opening pressure 600 kPa (6 bar) ±10%
- Other opening pressures on request.

#### Δp element type

- Microfibre filter elements - series N: 20 bar (not available for FHM 006, FHM 007 and FHM 010)
- Microfibre filter elements - series H: 210 bar (not available for FHM 050 and FHM 500)
- Microfibre filter elements - series S: 210 bar (only for FHM 050 and FHM 500)
- Wire mesh filter elements - series N: 20 bar (not available for FHM 006)
- Wire mesh filter elements - series H: 210 bar (not available for FHM 050 and FHM 500)
- Fluid flow through the filter element from OUT to IN

#### Seals

- Standard NBR series A
- Optional FPM series V

#### Temperature

From -25 °C to +110 °C

#### Connections

Manifold mounting

#### Note

FHM filters are provided for vertical mounting



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series  | Weights [kg] |       |       |       |       | Volumes [dm <sup>3</sup> ] |        |      |      |      |      |      |
|----------------|--------------|-------|-------|-------|-------|----------------------------|--------|------|------|------|------|------|
|                | Length       | 1     | 2     | 3     | 4     | 5                          | Length | 1    | 2    | 3    | 4    | 5    |
| <b>FHM 006</b> |              | 2.17  | -     | -     | -     | -                          |        | 0.12 | -    | -    | -    | -    |
| <b>FHM 007</b> |              | -     | 4.74  | 5.95  | -     | -                          |        | -    | 0.30 | 0.50 | -    | -    |
| <b>FHM 010</b> |              | -     | 4.74  | 5.95  | -     | -                          |        | -    | 0.30 | 0.50 | -    | -    |
| <b>FHM 050</b> |              | 5.31  | 5.68  | 6.09  | 6.56  | 7.74                       |        | 0.29 | 0.38 | 0.48 | 0.60 | 0.89 |
| <b>FHM 065</b> |              | 5.47  | 5.83  | 7.04  | -     | -                          |        | 0.27 | 0.34 | 0.56 | -    | -    |
| <b>FHM 135</b> |              | 8.78  | 10.38 | 11.43 | -     | -                          |        | 0.49 | 0.82 | 1.03 | -    | -    |
| <b>FHM 320</b> |              | 19.80 | 21.93 | 24.22 | 26.70 | -                          |        | 1.04 | 1.76 | 2.53 | 3.36 | -    |
| <b>FHM 500</b> |              | 35.00 | 39.17 | 42.69 | 54.70 | 60.50                      |        | 1.63 | 2.35 | 2.96 | 5.11 | 6.44 |

| Filter series  | Length   | Filter element design - H Series |     |     |     |     |     |
|----------------|----------|----------------------------------|-----|-----|-----|-----|-----|
|                |          | A03                              | A06 | A10 | A16 | A25 | M25 |
| <b>FHM 006</b> | <b>1</b> | 9                                | 10  | 13  | 14  | 15  | 16  |
|                | <b>2</b> | 13                               | 13  | 15  | 16  | 16  | 16  |
| <b>FHM 007</b> | <b>3</b> | 15                               | 15  | 16  | 16  | 17  | 17  |
|                | <b>2</b> | 23                               | 25  | 32  | 34  | 37  | 38  |
| <b>FHM 010</b> | <b>3</b> | 31                               | 33  | 37  | 38  | 39  | 40  |

| Filter series  | Length   | Filter element design - N Series |     |     |     |     |     | Filter element design - S Series |     |     |     |     |
|----------------|----------|----------------------------------|-----|-----|-----|-----|-----|----------------------------------|-----|-----|-----|-----|
|                |          | A03                              | A06 | A10 | A16 | A25 | M25 | A03                              | A06 | A10 | A16 | A25 |
| <b>FHM 050</b> | <b>1</b> | 38                               | 37  | 65  | 67  | 81  | 101 | 28                               | 36  | 50  | 52  | 62  |
|                | <b>2</b> | 46                               | 50  | 69  | 75  | 89  | 102 | 41                               | 44  | 63  | 71  | 85  |
|                | <b>3</b> | 57                               | 59  | 76  | 81  | 93  | 103 | 51                               | 53  | 71  | 77  | 90  |
|                | <b>4</b> | 68                               | 71  | 84  | 86  | 95  | 103 | 62                               | 66  | 81  | 82  | 93  |
|                | <b>5</b> | 82                               | 83  | 93  | 95  | 98  | 105 | 73                               | 75  | 83  | 89  | 97  |

| Filter series  | Length   | Filter element design - N Series |     |     |     |     |     | Filter element design - H Series |     |     |     |     |
|----------------|----------|----------------------------------|-----|-----|-----|-----|-----|----------------------------------|-----|-----|-----|-----|
|                |          | A03                              | A06 | A10 | A16 | A25 | M25 | A03                              | A06 | A10 | A16 | A25 |
| <b>FHM 065</b> | <b>1</b> | 23                               | 30  | 48  | 53  | 71  | 102 | 22                               | 23  | 43  | 50  | 67  |
|                | <b>2</b> | 30                               | 45  | 59  | 64  | 81  | 103 | 30                               | 34  | 56  | 62  | 76  |
|                | <b>3</b> | 52                               | 60  | 78  | 82  | 92  | 105 | 51                               | 58  | 77  | 81  | 91  |
| <b>FHM 135</b> | <b>1</b> | 61                               | 65  | 99  | 104 | 131 | 149 | 46                               | 51  | 83  | 86  | 122 |
|                | <b>2</b> | 91                               | 96  | 118 | 119 | 155 | 167 | 79                               | 92  | 109 | 111 | 134 |
|                | <b>3</b> | 118                              | 119 | 144 | 146 | 156 | 162 | 103                              | 112 | 130 | 137 | 146 |
| <b>FHM 320</b> | <b>1</b> | 112                              | 121 | 187 | 217 | 252 | 312 | 97                               | 102 | 156 | 162 | 228 |
|                | <b>2</b> | 200                              | 214 | 281 | 293 | 320 | 328 | 161                              | 181 | 237 | 241 | 282 |
|                | <b>3</b> | 245                              | 267 | 312 | 320 | 325 | 333 | 207                              | 233 | 275 | 280 | 306 |
|                | <b>4</b> | 267                              | 281 | 315 | 325 | 336 | 341 | 232                              | 247 | 279 | 283 | 309 |

| Filter series  | Length   | Filter element design - N Series |     |     |     |     |     | Filter element design - S Series |     |     |     |     |
|----------------|----------|----------------------------------|-----|-----|-----|-----|-----|----------------------------------|-----|-----|-----|-----|
|                |          | A03                              | A06 | A10 | A16 | A25 | M25 | A03                              | A06 | A10 | A16 | A25 |
| <b>FHM 500</b> | <b>1</b> | 211                              | 232 | 281 | 299 | 309 | 394 | 126                              | 135 | 208 | 210 | 261 |
|                | <b>2</b> | 242                              | 262 | 303 | 308 | 330 | 397 | 187                              | 206 | 258 | 266 | 285 |
|                | <b>3</b> | 284                              | 294 | 330 | 338 | 357 | 399 | 226                              | 230 | 285 | 290 | 315 |
|                | <b>4</b> | 302                              | 325 | 346 | 350 | 361 | 401 | 251                              | 273 | 314 | 315 | 341 |
|                | <b>5</b> | 325                              | 334 | 356 | 361 | 373 | 401 | 296                              | 301 | 335 | 338 | 360 |

### Maximum flow rate for a complete pressure filter with a pressure drop $\Delta p = 1.5$ bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure.







Please, contact our Sales Department for further additional information.

### Hydraulic symbols




| Filter series  | Stile S | Stile S | Stile S | Stile B | Stile T | Stile D |
|----------------|---------|---------|---------|---------|---------|---------|
| <b>FHM 006</b> | •       |         |         |         |         |         |
| <b>FHM 007</b> | •       |         |         |         |         |         |
| <b>FHM 010</b> |         | •       |         |         |         |         |
| <b>FHM 050</b> |         |         | •       | •       | •       | •       |
| <b>FHM 065</b> |         |         | •       | •       | •       | •       |
| <b>FHM 135</b> |         |         | •       | •       | •       | •       |
| <b>FHM 320</b> |         |         | •       | •       | •       | •       |
| <b>FHM 500</b> |         |         | •       | •       | •       | •       |
|                |         |         |         |         |         |         |

## Pressure drop

Filter housings  $\Delta p$  pressure drop

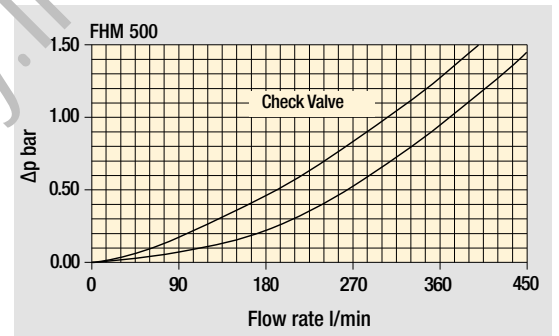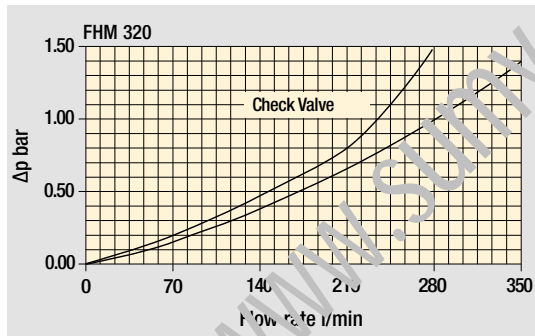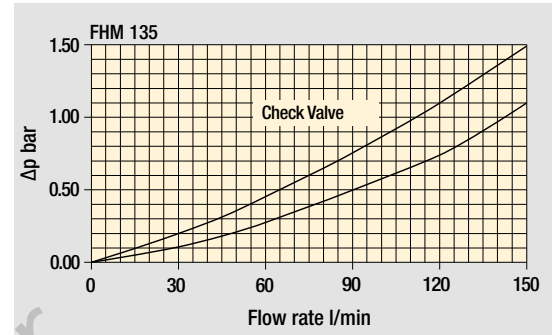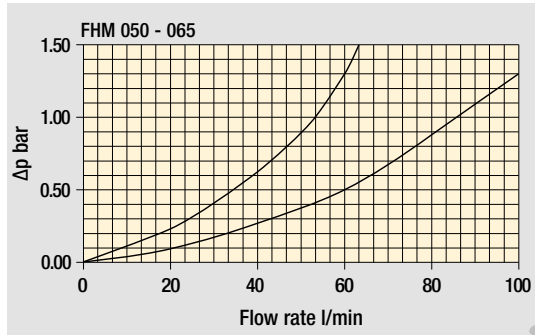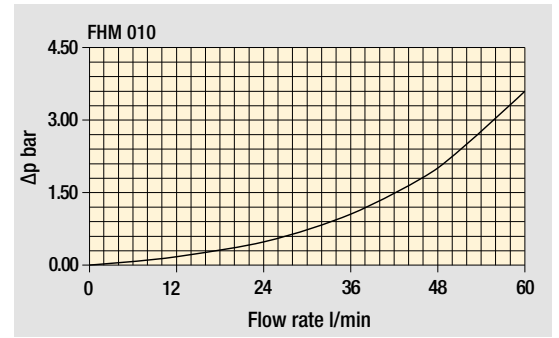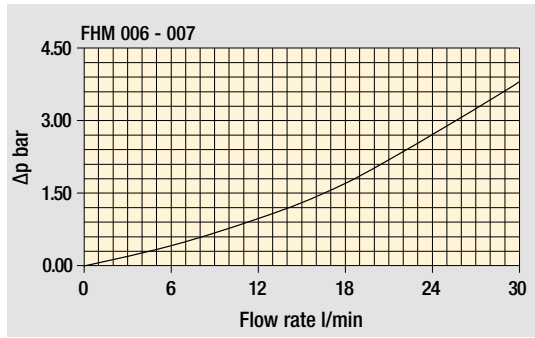

Bypass valve pressure drop

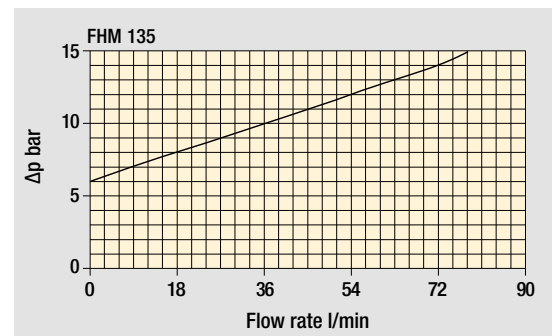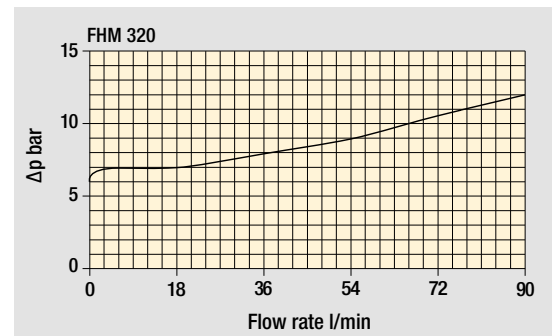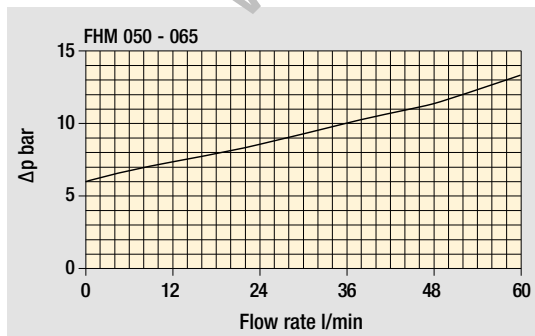

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

[www.sumy.ir](http://www.sumy.ir)

## Designation & Ordering code

### COMPLETE FILTER



|   |               |                                 |               |  |  |  |  |  |                   |                               |
|---|---------------|---------------------------------|---------------|--|--|--|--|--|-------------------|-------------------------------|
| <b>Series and size</b>                        |               |                                 |               | Configuration example: <b>FHM010</b>   <b>2</b>   <b>S</b>   <b>V</b>   <b>G1</b>   <b>A03</b>   <b>H</b>   <b>P01</b> |  |  |  |  |                   |                               |
| <b>FHM006</b>   <b>FHM007</b>   <b>FHM010</b> |               |                                 |               |  |  |  |  |  |                   |                               |
| <b>Length</b>                                 | <b>FHM006</b> | <b>FHM007</b>                   | <b>FHM010</b> |  |  |  |  |  |                   |                               |
| <b>1</b>                                      | •             |                                 |               |  |  |  |  |  |                   |                               |
| <b>2</b>                                      |               | •                               | •             |  |  |  |  |  |                   |                               |
| <b>3</b>                                      |               | •                               | •             |  |  |  |  |  |                   |                               |
| <b>Valves</b>                                 |               |                                 |               |  |  |  |  |  |                   |                               |
| <b>S</b> Without bypass                       |               |                                 |               |  |  |  |  |  |                   |                               |
| <b>Seals</b>                                  |               |                                 |               |  |  |  |  |  |                   |                               |
| <b>A</b> NBR                                  |               |                                 |               |  |  |  |  |  |                   |                               |
| <b>V</b> FPM                                  |               |                                 |               |  |  |  |  |  |                   |                               |
| <b>Connections</b>                            |               |                                 |               |  |  |  |  |  |                   |                               |
| <b>G1</b> Manifold side "A"                   |               |                                 |               |  |  |  |  |  |                   |                               |
| <b>G2</b> Manifold side "B"                   |               |                                 |               |  |  |  |  |  |                   |                               |
| <b>Filtration rating (filter media)</b>       |               |                                 |               |  |  |  |  |  |                   |                               |
| <b>A03</b> Inorganic microfiber               | 3 µm          | <b>A16</b> Inorganic microfiber | 16 µm         |  |  |  |  |  | <b>Element Δp</b> | <b>Execution</b>              |
| <b>A06</b> Inorganic microfiber               | 6 µm          | <b>A25</b> Inorganic microfiber | 25 µm         |  |  |  |  |  | <b>H</b> 210 bar  | <b>P01</b> MP Filtri standard |
| <b>A10</b> Inorganic microfiber               | 10 µm         | <b>M25</b> Wire mesh            | 25 µm         |  |  |  |  |  |                   | <b>Pxx</b> Customized         |

### FILTER ELEMENT

|   |               |                                 |               |  |  |  |  |  |              |                   |                               |
|---|---------------|---------------------------------|---------------|--|--|--|--|--|--------------|-------------------|-------------------------------|
| <b>Element series and size</b>          |               |                                 |               | Configuration example: <b>HP065</b>   <b>2</b>   <b>A03</b>   <b>A</b>   <b>H</b>   <b>P01</b> |  |  |  |  |              |                   |                               |
| <b>HP011</b>   <b>HP065</b>             |               |                                 |               |  |  |  |  |  |              |                   |                               |
| <b>Element length</b>                   | <b>FHM006</b> | <b>FHM007</b>                   | <b>FHM010</b> |  |  |  |  |  |              |                   |                               |
| <b>2</b>                                |               | •                               | •             |  |  |  |  |  |              |                   |                               |
| <b>3</b>                                | •             | •                               | •             |  |  |  |  |  |              |                   |                               |
| <b>Filtration rating (filter media)</b> |               |                                 |               |  |  |  |  |  |              |                   |                               |
| <b>A03</b> Inorganic microfiber         | 3 µm          | <b>A16</b> Inorganic microfiber | 16 µm         |  |  |  |  |  | <b>Seals</b> | <b>Element Δp</b> | <b>Execution</b>              |
| <b>A06</b> Inorganic microfiber         | 6 µm          | <b>A25</b> Inorganic microfiber | 25 µm         |  |  |  |  |  | <b>A</b> NBR | <b>H</b> 210 bar  | <b>P01</b> MP Filtri standard |
| <b>A10</b> Inorganic microfiber         | 10 µm         | <b>M25</b> Wire mesh            | 25 µm         |  |  |  |  |  | <b>V</b> FPM |                   | <b>Pxx</b> Customized         |



### ACCESSORIES

| <b>Differential indicators</b> |  | page    |            |  | page |
|--------------------------------|--|---------|------------|--|------|
| <b>DEA</b>                     | Electrical differential indicator                | 577     | <b>DLE</b> | Electrical / visual differential indicator | 580  |
| <b>DEH</b>                     | Hazardous area electronic differential indicator | 577-578 | <b>DTA</b> | Electronic differential indicator          | 581  |
| <b>DEM</b>                     | Electrical differential indicator                | 578-579 | <b>DVA</b> | Visual differential indicator              | 581  |
| <b>DLA</b>                     | Electrical / visual differential indicator       | 579-580 | <b>DVM</b> | Visual differential indicator              | 581  |
| <b>Additional features</b>     |  | page    |            |  |      |
| <b>T2</b>                      | Plug   | 582     |            |  |      |

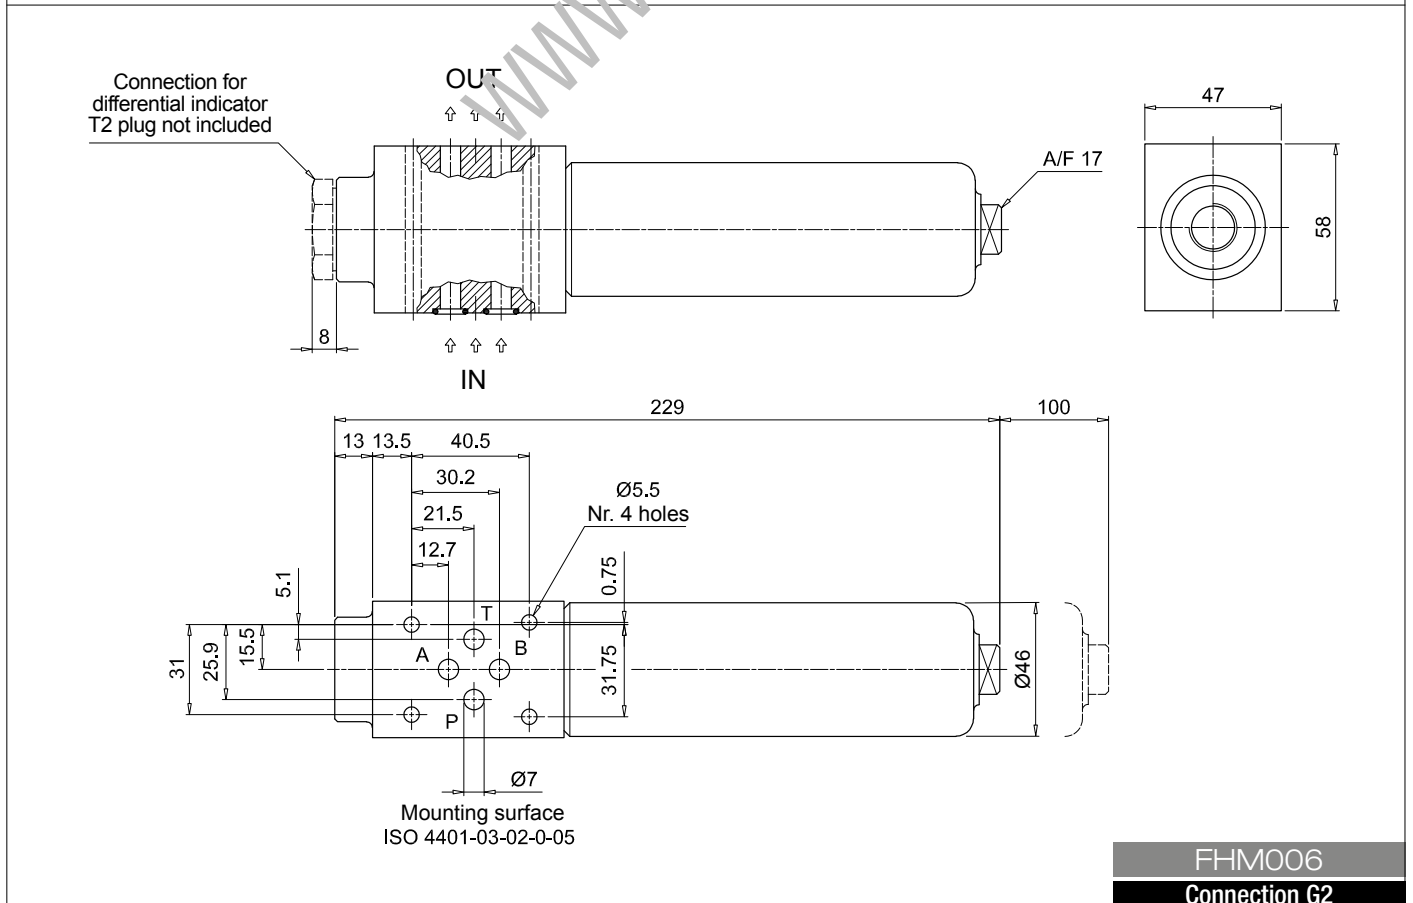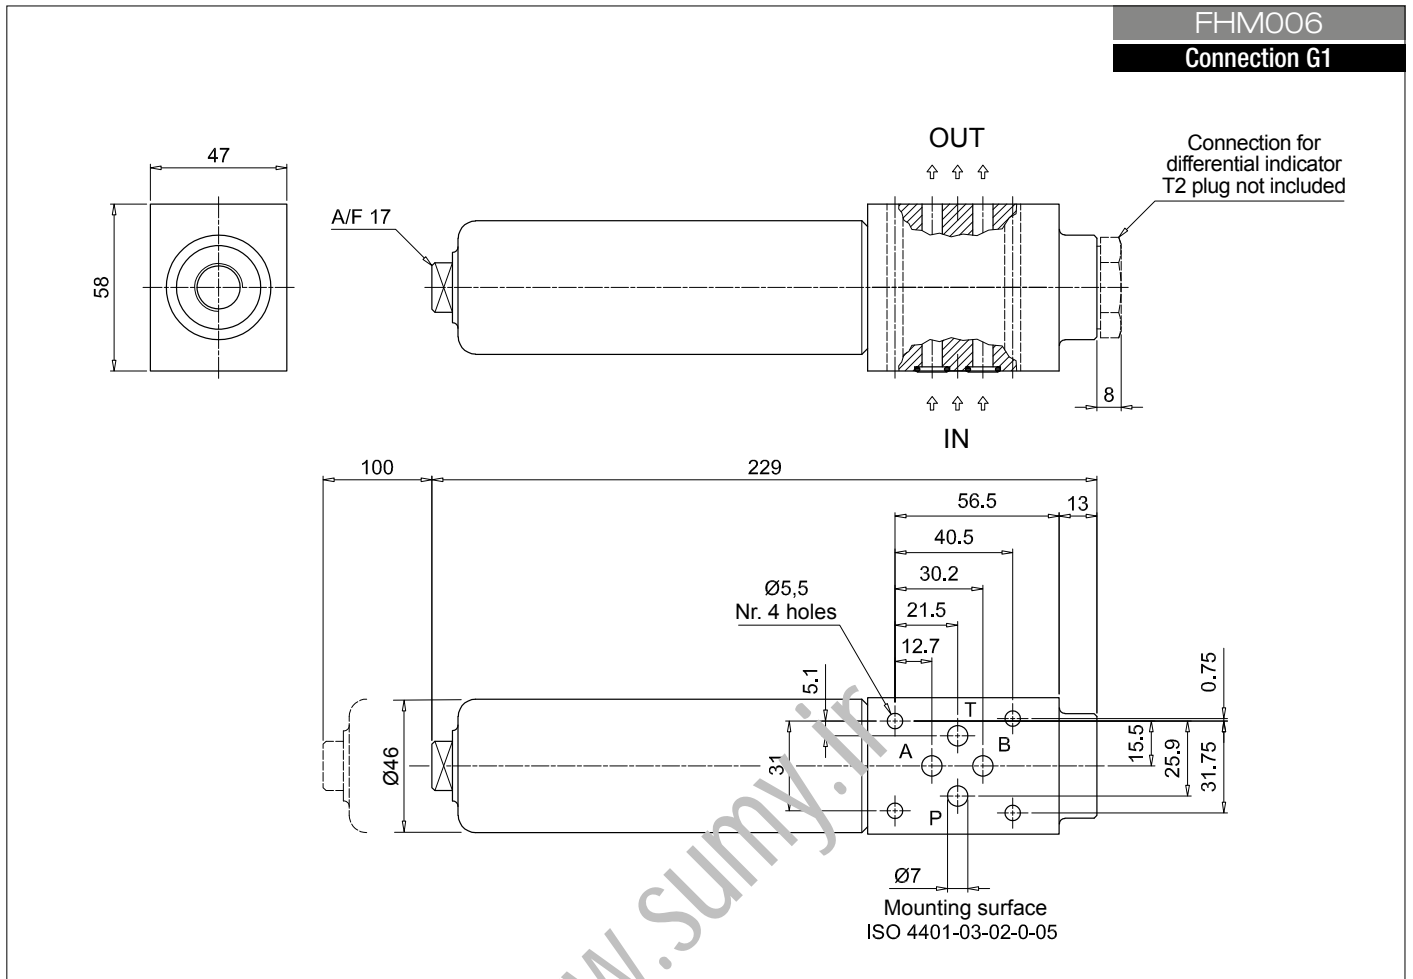





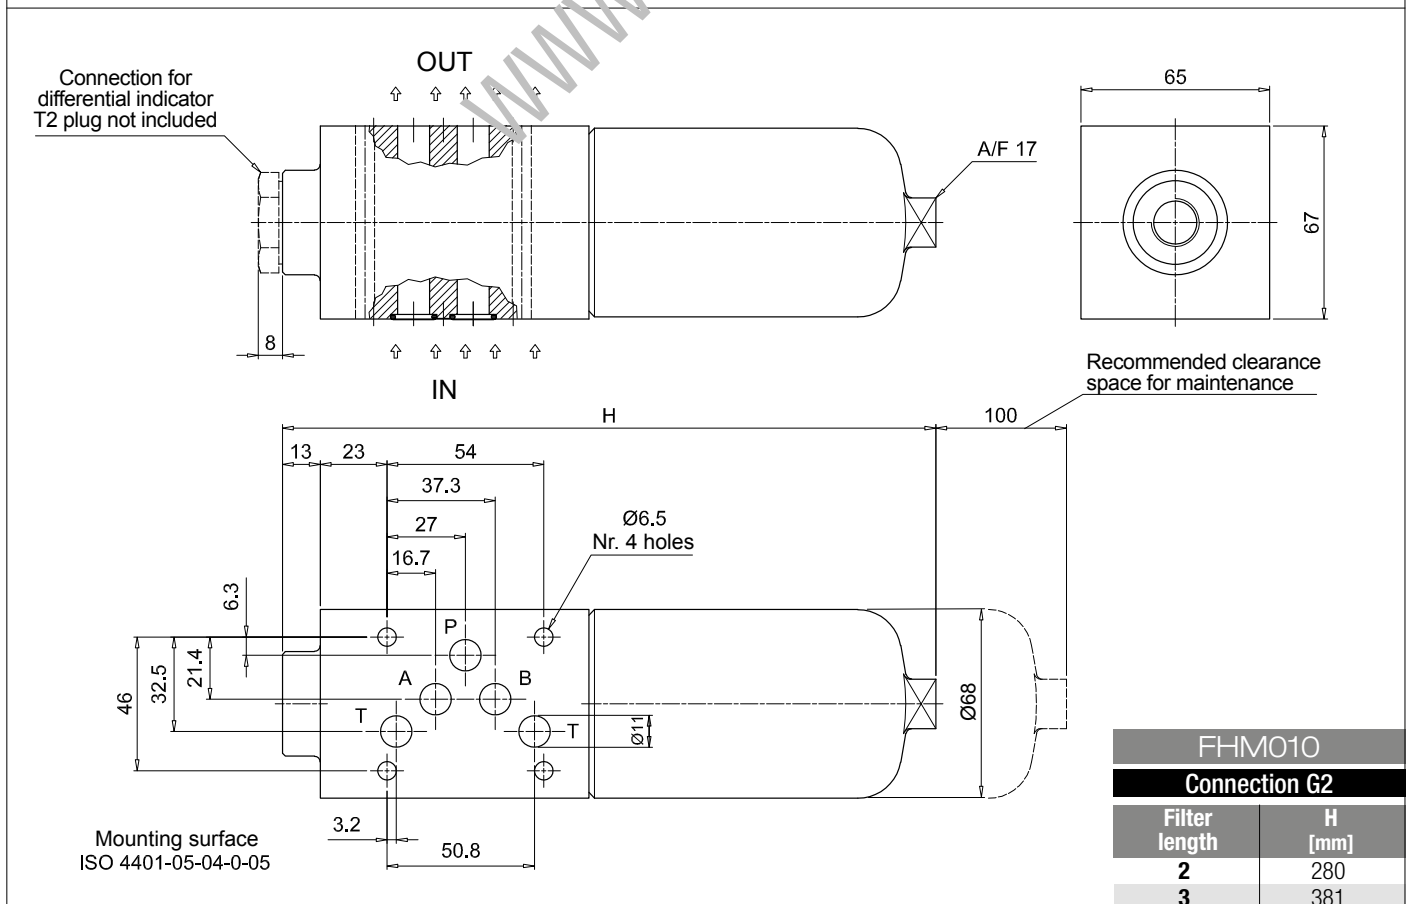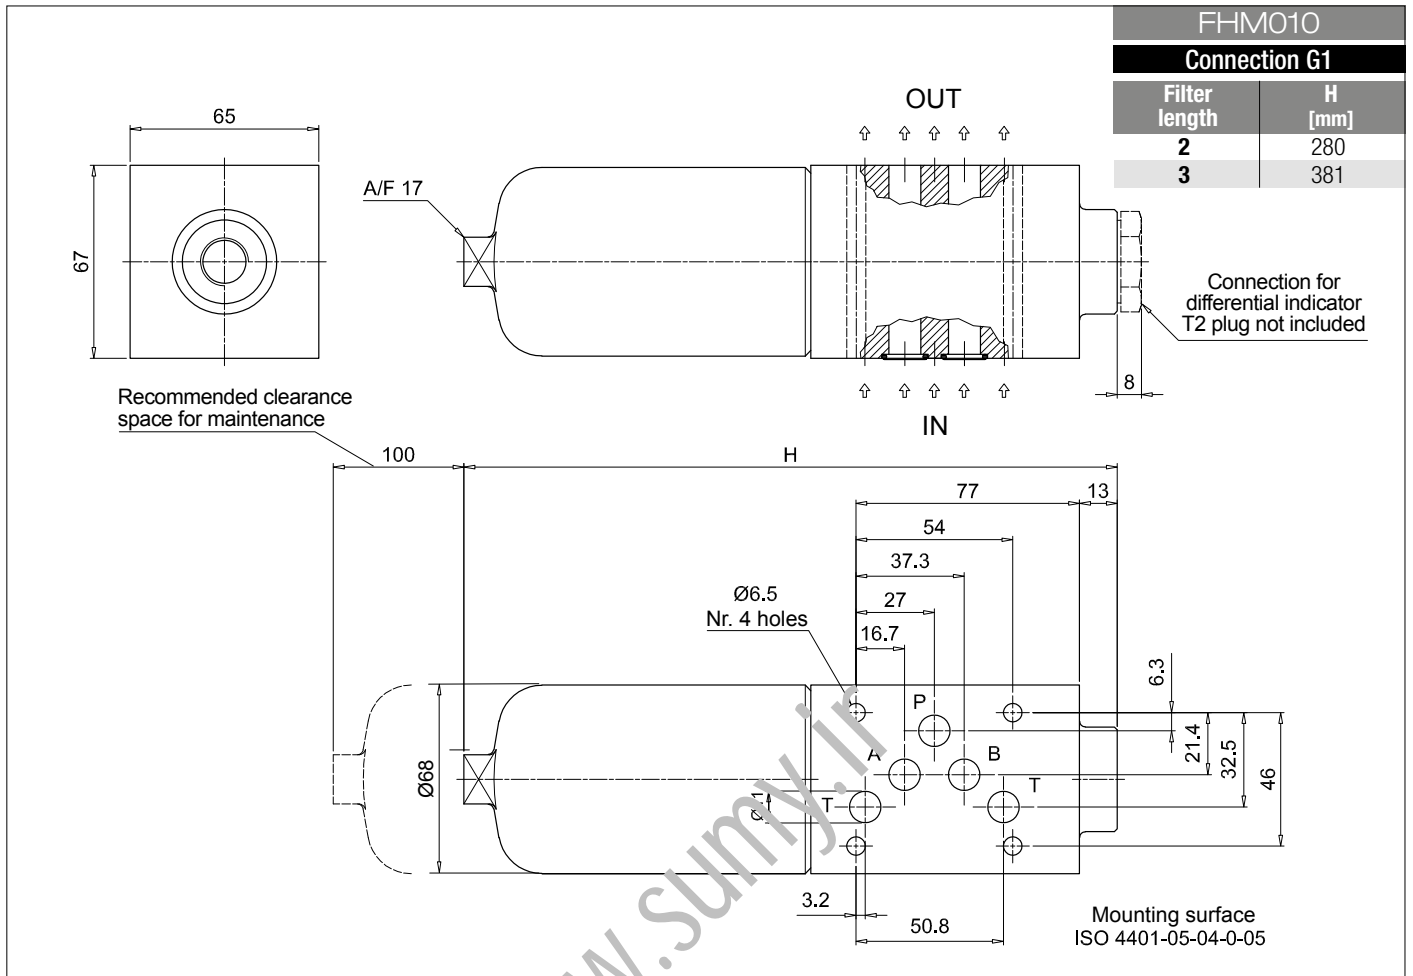

# FHM FHM050 - FHM065 - FHM135

## Designation & Ordering code

### COMPLETE FILTER

Series and size Configuration example: **FHM135** **3** **S** **A** **F1** **A10** **H** **P01**

**FHM050** | **FHM065** | **FHM135**

| Length | FHM050 | FHM065 | FHM135 |
|--------|--------|--------|--------|
| 1      | •      | •      | •      |
| 2      | •      | •      | •      |
| 3      | •      | •      | •      |
| 4      | •      |        |        |
| 5      | •      |        |        |

#### Valves

|          |                                     |
|----------|-------------------------------------|
| <b>S</b> | Without bypass                      |
| <b>B</b> | With bypass 6 bar                   |
| <b>T</b> | With check valve, without bypass    |
| <b>D</b> | With check valve, with bypass 6 bar |

#### Seals

|          |     |
|----------|-----|
| <b>A</b> | NBR |
| <b>V</b> | FPM |

#### Connections

|           |          |
|-----------|----------|
| <b>F1</b> | Manifold |
|-----------|----------|

#### Filtration rating (filter media)

|            |                      |       |            |                      |       |
|------------|----------------------|-------|------------|----------------------|-------|
| <b>A03</b> | Inorganic microfiber | 3 µm  | <b>A16</b> | Inorganic microfiber | 16 µm |
| <b>A06</b> | Inorganic microfiber | 6 µm  | <b>A25</b> | Inorganic microfiber | 25 µm |
| <b>A10</b> | Inorganic microfiber | 10 µm | <b>M25</b> | Wire mesh            | 25 µm |

| Element  | Valve   | FHM050 |   |   |   | FHM065-135 |   |   |   | Execution                     |
|----------|---------|--------|---|---|---|------------|---|---|---|-------------------------------|
|          |         | S      | B | T | D | S          | B | T | D |                               |
| <b>N</b> | 20 bar  | •      |   | • |   | •          |   | • |   | <b>P01</b> MP Filtri standard |
| <b>H</b> | 210 bar |        |   |   |   | •          |   | • |   | <b>Pxx</b> Customized         |
| <b>S</b> | 210 bar | •      |   | • |   |            |   |   |   |                               |

### FILTER ELEMENT

Element series and size Configuration example: **HP135** **3** **A10** **A** **H** **P01**

**HP050** | **HP065** | **HP135**

| Element length | HP050 | HP065 | HP135 |
|----------------|-------|-------|-------|
| 1              | •     | •     | •     |
| 2              | •     | •     | •     |
| 3              | •     | •     | •     |
| 4              | •     |       |       |
| 5              | •     |       |       |

#### Filtration rating (filter media)

|            |                      |       |            |                      |       |
|------------|----------------------|-------|------------|----------------------|-------|
| <b>A03</b> | Inorganic microfiber | 3 µm  | <b>A16</b> | Inorganic microfiber | 16 µm |
| <b>A06</b> | Inorganic microfiber | 6 µm  | <b>A25</b> | Inorganic microfiber | 25 µm |
| <b>A10</b> | Inorganic microfiber | 10 µm | <b>M25</b> | Wire mesh            | 25 µm |


| Seals        | Element Δp       | HP050 | HP065 | HP135 | Execution                     |
|--------------|------------------|-------|-------|-------|-------------------------------|
| <b>A</b> NBR | <b>N</b> 20 bar  | •     | •     | •     | <b>P01</b> MP Filtri standard |
| <b>V</b> FPM | <b>H</b> 210 bar |       | •     | •     | <b>Pxx</b> Customized         |
|              | <b>S</b> 210 bar | •     |       |       |                               |

### ACCESSORIES

| Differential indicators                                     | page    |   | page |
|---|---------|---|------|
| <b>DEA</b> Electrical differential indicator                | 577     | <b>DLE</b> Electrical / visual differential indicator | 580  |
| <b>DEH</b> Hazardous area electronic differential indicator | 577-578 | <b>DTA</b> Electronic differential indicator          | 581  |
| <b>DEM</b> Electrical differential indicator                | 578-579 | <b>DVA</b> Visual differential indicator              | 581  |
| <b>DLA</b> Electrical / visual differential indicator       | 579-580 | <b>DVM</b> Visual differential indicator              | 581  |


| Additional features | page |
|---------------------|------|
| <b>T2</b> Plug      | 582  |

| FHM050        |        | FHM065        |        |
|---------------|--------|---------------|--------|
| Filter length | H [mm] | Filter length | H [mm] |
| 1             | 154    | 1             | 162    |
| 2             | 191    | 2             | 193    |
| 3             | 233    | 3             | 295    |
| 4             | 281    |               |        |
| 5             | 403    |               |        |

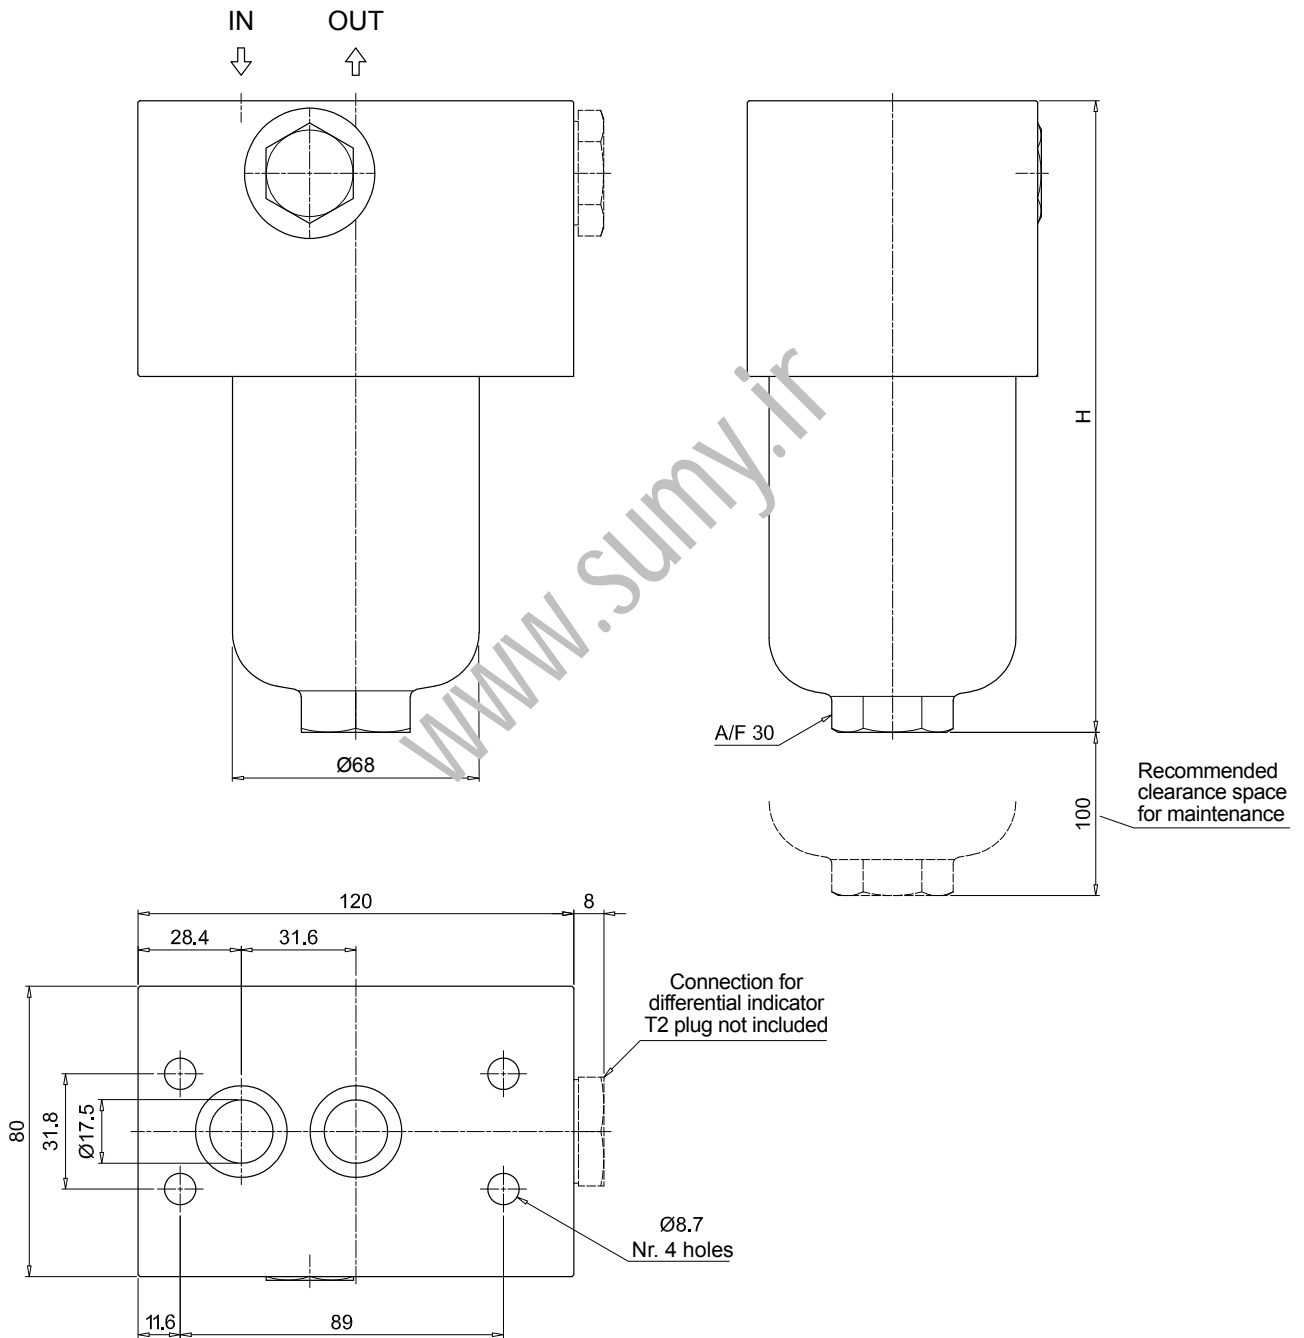

# FHM FHM050 - FHM065 - FHM135

## Dimensions

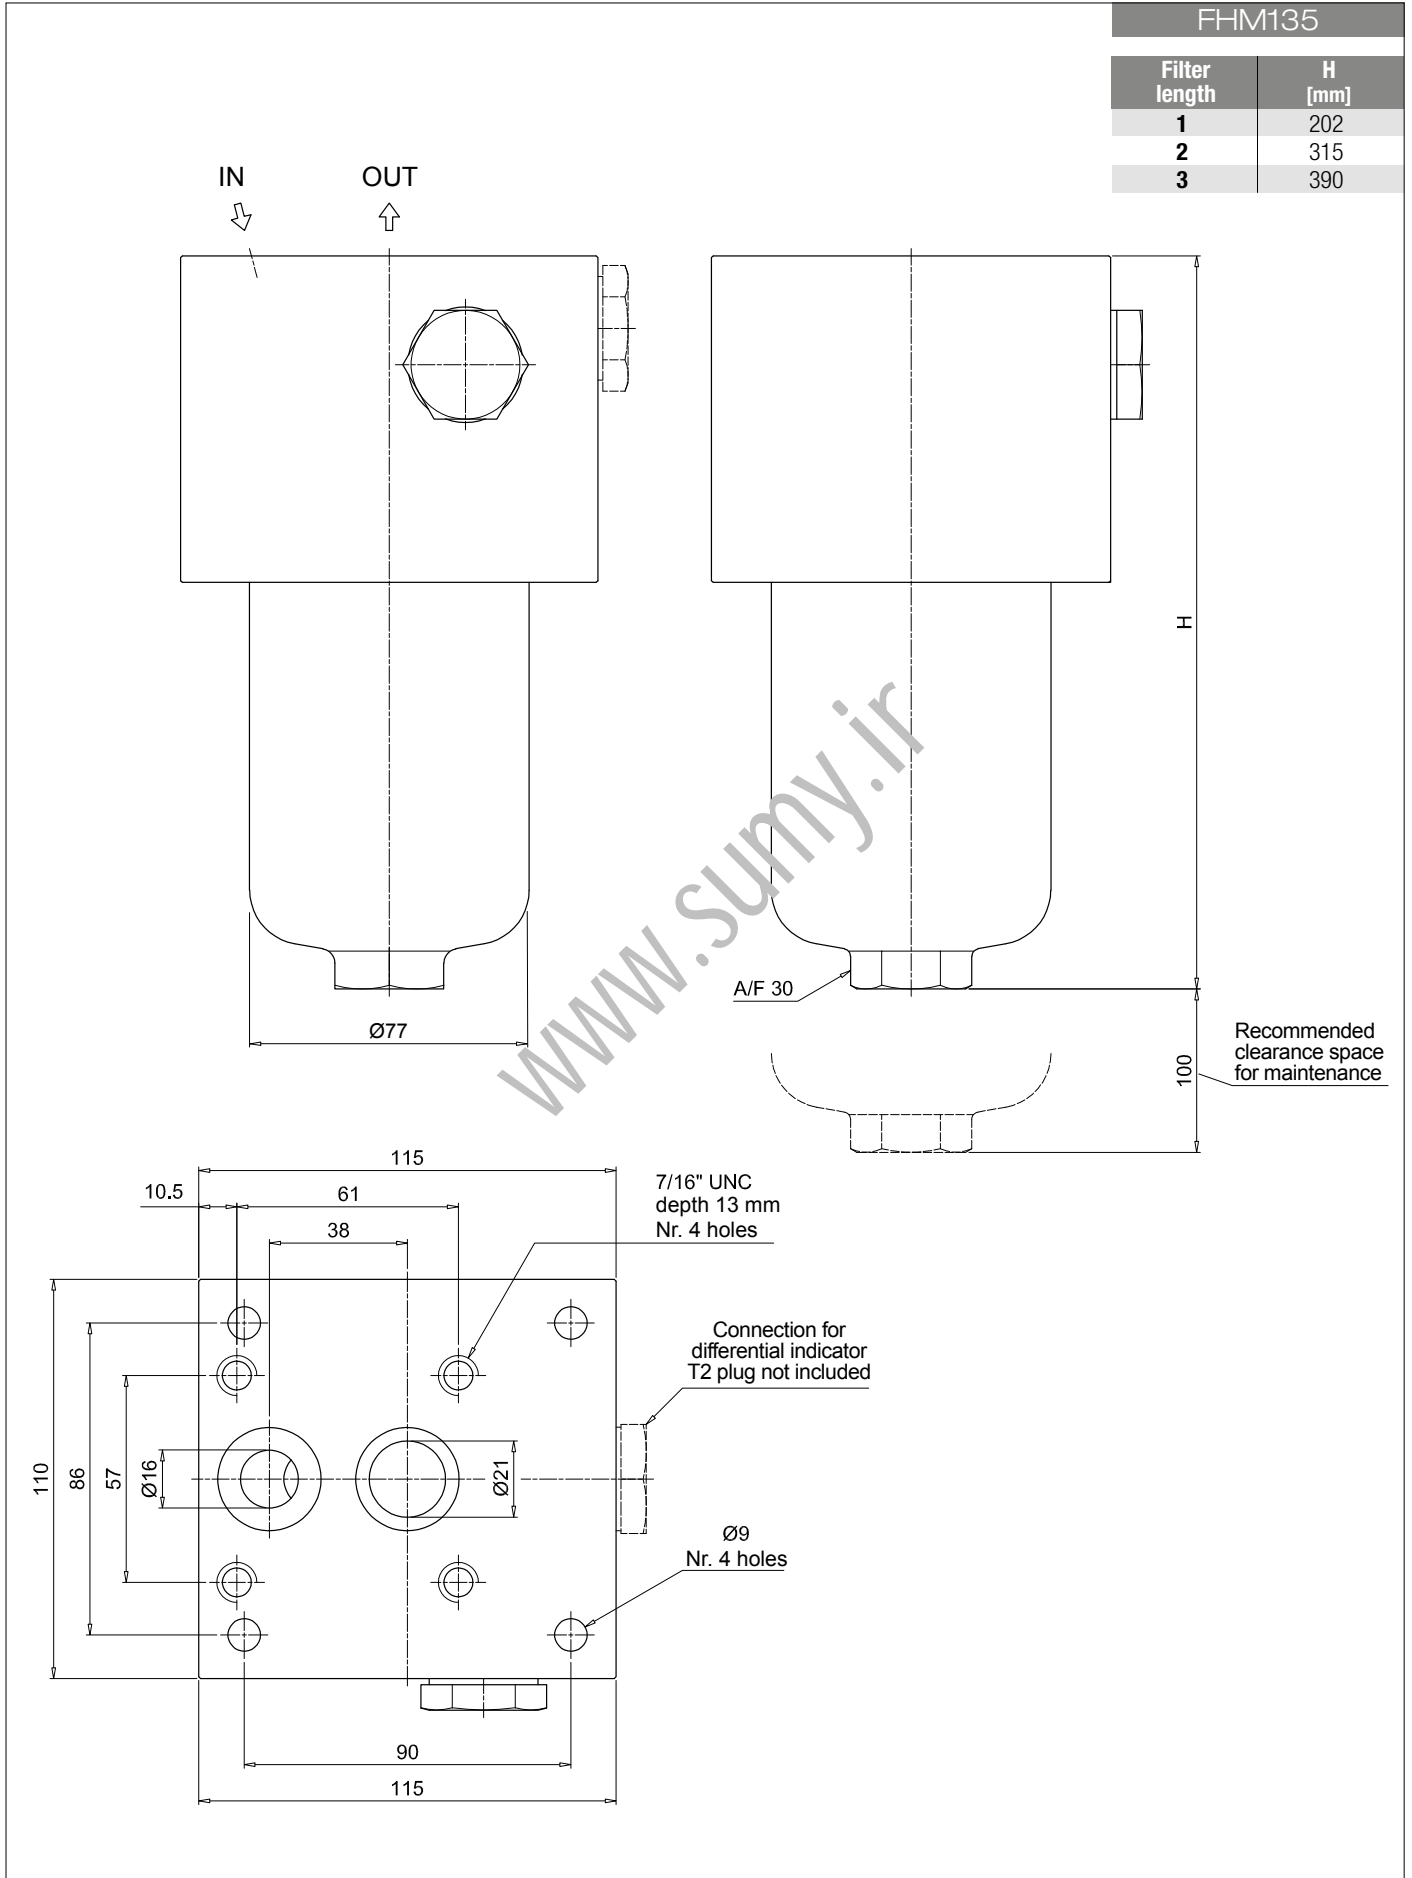

[www.sumy.ir](http://www.sumy.ir)

# FHM FHM320 - FHM500

## Designation & Ordering code

### COMPLETE FILTER

Series and size **FHM320 | FHM500** Configuration example: **FHM320** **4** **D** **A** **F1** **A06** **N** **P01**

| Length | FHM320 | FHM500 |
|--------|--------|--------|
| 1      | •      | •      |
| 2      | •      | •      |
| 3      | •      | •      |
| 4      | •      | •      |
| 5      |        | •      |

| Valves   |                                     |
|----------|-------------------------------------|
| <b>S</b> | Without bypass                      |
| <b>B</b> | With bypass 6 bar                   |
| <b>T</b> | With check valve, without bypass    |
| <b>D</b> | With check valve, with bypass 6 bar |

| Seals    |     |
|----------|-----|
| <b>A</b> | NBR |
| <b>V</b> | FPM |

| Connections |          |
|-------------|----------|
| <b>F1</b>   | Manifold |

| Filtration rating (filter media) |                      |                      |              |
|----------------------------------|----------------------|----------------------|--------------|
| <b>A03</b>                       | Inorganic microfiber | <b>3</b> µm          |              |
| <b>A06</b>                       | Inorganic microfiber | <b>6</b> µm          |              |
| <b>A10</b>                       | Inorganic microfiber | <b>10</b> µm         |              |
|                                  | <b>A16</b>           | Inorganic microfiber | <b>16</b> µm |
|                                  | <b>A25</b>           | Inorganic microfiber | <b>25</b> µm |
|                                  | <b>M25</b>           | Wire mesh            | <b>25</b> µm |

| Element  | Δp      | Valves: |   |   |   |        |   |  |   | Execution | Filter length |   |   |   |   |   |
|----------|---------|---------|---|---|---|--------|---|--|---|-----------|---------------|---|---|---|---|---|
|          |         | FHM320  |   |   |   | FHM500 |   |  |   |           | 1             | 2 | 3 | 4 | 5 |   |
| <b>N</b> | 20 bar  |         | • |   | • |        | • |  | • |           |               | • | • | • | • | • |
| <b>H</b> | 210 bar | •       |   | • |   |        |   |  |   |           |               |   |   |   | • | • |
| <b>S</b> | 210 bar |         |   |   |   |        |   |  | • |           |               |   |   |   |   |   |
|          |         |         |   |   |   |        |   |  |   |           |               |   |   |   |   |   |

### FILTER ELEMENT

Element series and size **HP320 | HP500** Configuration example: **HP320** **4** **A06** **A** **N** **P01**

| Element length | HP320 | HP500 |
|----------------|-------|-------|
| 1              | •     | •     |
| 2              | •     | •     |
| 3              | •     | •     |
| 4              | •     | •     |
| 5              |       | •     |

| Filtration rating (filter media) |                      |                      |              |
|----------------------------------|----------------------|----------------------|--------------|
| <b>A03</b>                       | Inorganic microfiber | <b>3</b> µm          |              |
| <b>A06</b>                       | Inorganic microfiber | <b>6</b> µm          |              |
| <b>A10</b>                       | Inorganic microfiber | <b>10</b> µm         |              |
|                                  | <b>A16</b>           | Inorganic microfiber | <b>16</b> µm |
|                                  | <b>A25</b>           | Inorganic microfiber | <b>25</b> µm |
|                                  | <b>M25</b>           | Wire mesh            | <b>25</b> µm |

| Seals    | Element Δp | HP320   |       | HP500 |       | Execution                     |
|----------|------------|---------|-------|-------|-------|-------------------------------|
|          |            | HP320   | HP500 | HP320 | HP500 |                               |
| <b>A</b> | NBR        |         |       | •     | •     | <b>P01</b> MP Filtri standard |
| <b>V</b> | FPM        |         |       |       |       | <b>Pxx</b> Customized         |
|          | <b>N</b>   | 20 bar  | •     |       |       |                               |
|          | <b>H</b>   | 210 bar | •     |       |       |                               |
|          | <b>S</b>   | 210 bar |       | •     |       |                               |


### ACCESSORIES

| Differential indicators                                     | page    |   | page |
|---|---------|---|------|
| <b>DEA</b> Electrical differential indicator                | 577     | <b>DLE</b> Electrical / visual differential indicator | 580  |
| <b>DEH</b> Hazardous area electronic differential indicator | 577-578 | <b>DTA</b> Electronic differential indicator          | 581  |
| <b>DEM</b> Electrical differential indicator                | 578-579 | <b>DVA</b> Visual differential indicator              | 581  |
| <b>DLA</b> Electrical / visual differential indicator       | 579-580 | <b>DVM</b> Visual differential indicator              | 581  |


| Additional features | page |
|---------------------|------|
| <b>T2</b> Plug      | 582  |

### FHM320



| Filter length | H [mm] | H2 [mm]       |               |
|---------------|--------|---------------|---------------|
|               |        | Execution P01 | Execution P02 |
| 1             | 293    | 150           | -             |
| 2             | 416    | 150           | -             |
| 3             | 548    | 150           | -             |
| 4             | 702    | 150           | 550           |

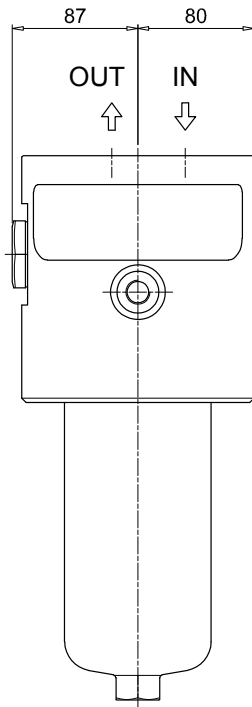

Length 1 - 2 - 3

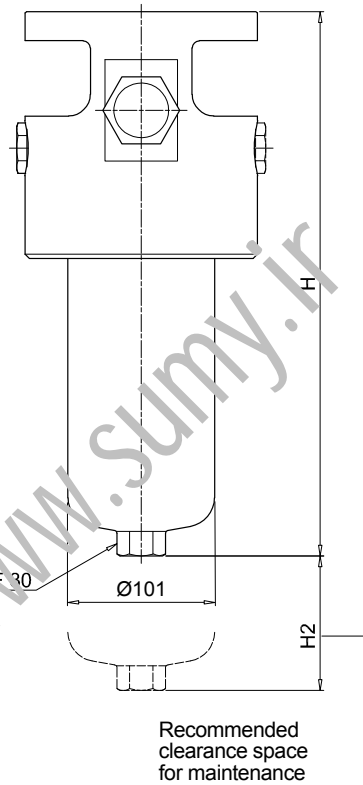

Length 4

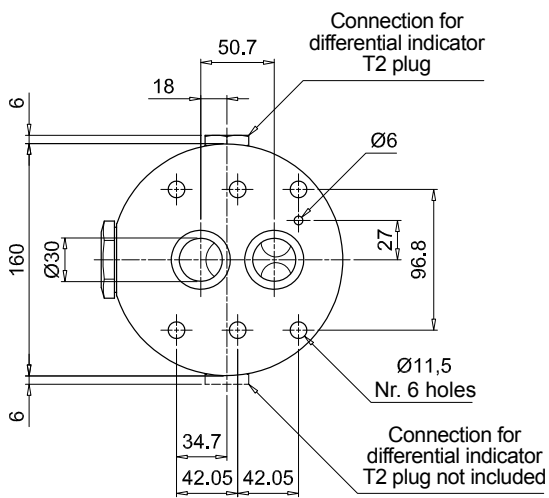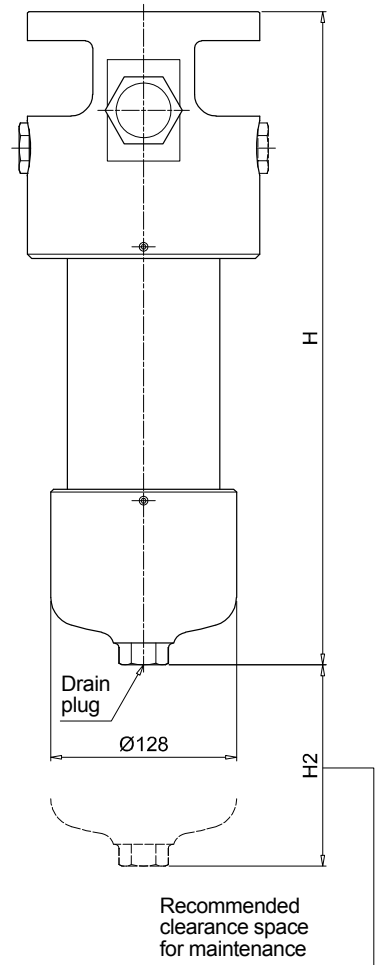


# FHM FHM320 - FHM500


## Dimensions

### FHM500



| Filter length | H [mm] | H2 [mm]       |               |
|---------------|--------|---------------|---------------|
|               |        | Execution P01 | Execution P02 |
| <b>1</b>      | 355    | 150           | -             |
| <b>2</b>      | 445    | 150           | -             |
| <b>3</b>      | 521    | 150           | -             |
| <b>4</b>      | 679    | 150           | 480           |
| <b>5</b>      | 845    | 150           | 650           |

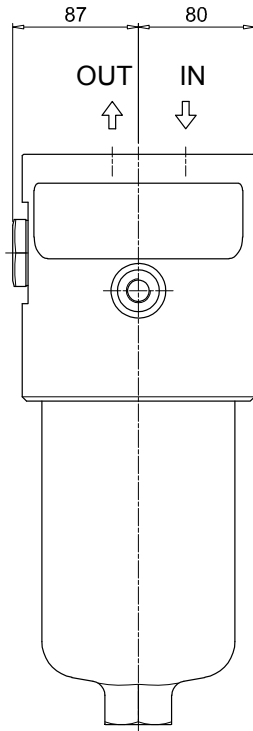

Length 1 - 2 - 3

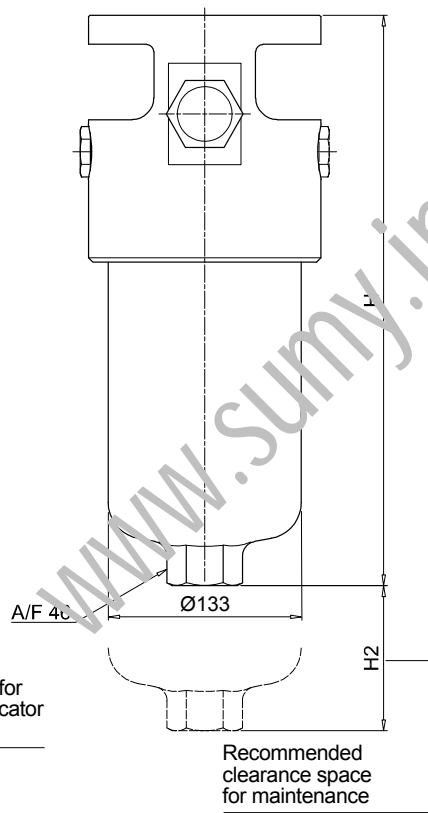


Length 4 - 5

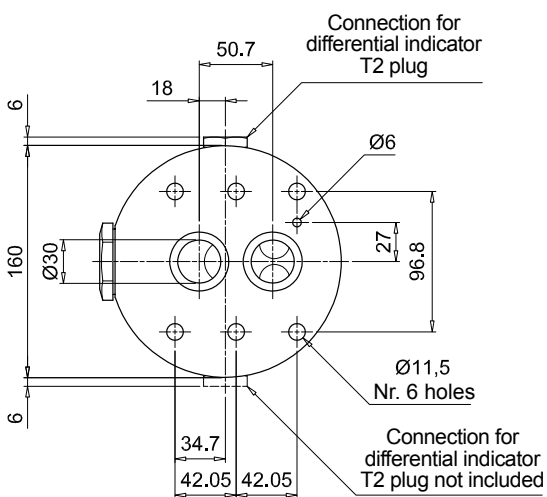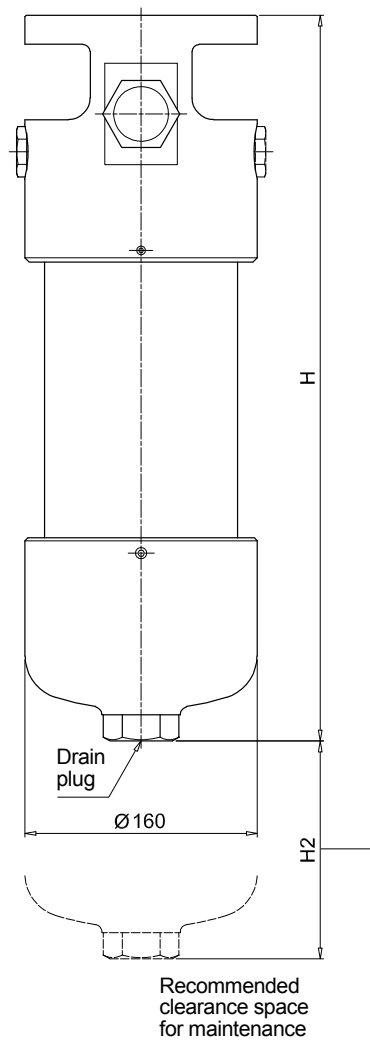




## FHM 006 - 007 - 010

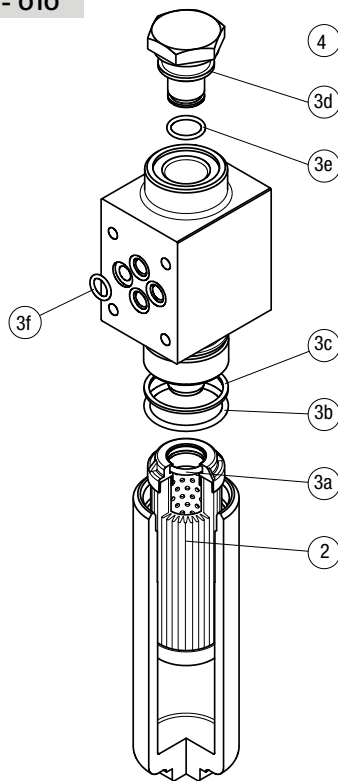

| Item:         | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          | Q.ty: 1 pc.               |     |
|---------------|-----------------|----------------------|----------|---------------------------|-----|
| Filter series | Filter element  | Seal Kit code number |          | Indicator connection plug |     |
|               |                 | NBR                  | FPM      | NBR                       | FPM |
| FHM 006       | See order table | 02050324             | 02050325 |                           |     |
| FHM 007       |                 | 02050600             | 02050601 | T2H                       | T2V |
| FHM 010       |                 | 02050320             | 02050321 |                           |     |

## FHM 050 - 065 - 135 - 320 - 500

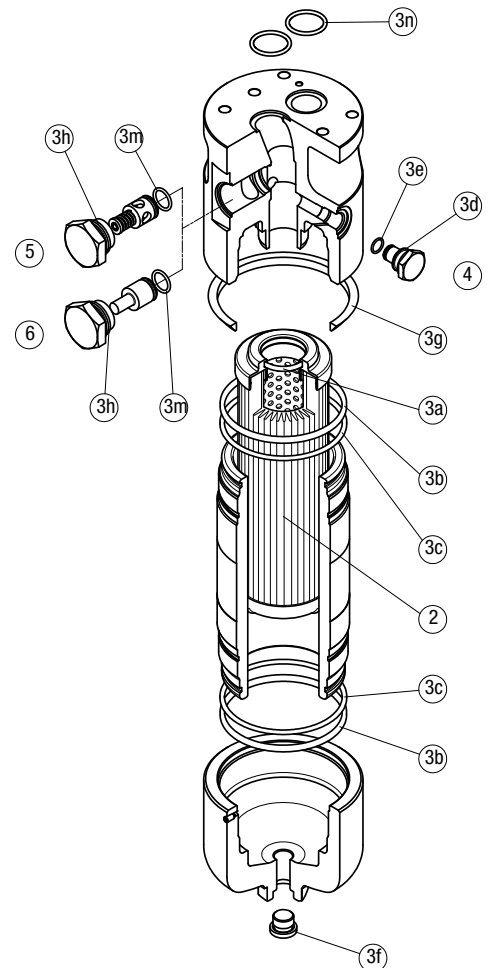

| Item:         | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          | Q.ty: 1 pc.               |     | Q.ty: 1 pc.     |          | Q.ty: 1 pc.         |          |
|---------------|-----------------|----------------------|----------|---------------------------|-----|-----------------|----------|---------------------|----------|
| Filter series | Filter element  | Seal Kit code number |          | Indicator connection plug |     | Bypass assembly |          | Non-bypass assembly |          |
|               |                 | NBR                  | FPM      | NBR                       | FPM | NBR             | FPM      | NBR                 | FPM      |
| FHM 050       | See order table | 02050410             | 02050411 |                           |     | 02001400        | 02001401 | 02001402            | 02001403 |
| FHM 065       |                 | 02050268             | 02050279 |                           |     | 02001400        | 02001401 | 02001402            | 02001403 |
| FHM 135       |                 | 02050271             | 02050282 | T2H                       | T2V | 02001404        | 02001405 | 02001406            | 02001407 |
| FHM 320       |                 | 02050275             | 02050286 |                           |     | 02001408        | 02001409 | 02001410            | 02001411 |
| FHM 500       |                 | 02050332             | 02050333 |                           |     | 02001408        | 02001409 | 02001410            | 02001411 |

www.sumy.ir

# FHB series

Maximum working pressure up to 32 MPa (320 bar) - Flow rate up to 485 l/min



### High Pressure filters

#### Manifold

**Maximum working pressure up to 32 MPa (320 bar)**

**Flow rate up to 485 l/min**

FHB is a range of high pressure filter for protection of sensitive components in high pressure hydraulic systems in the mobile machines. They are directly connected to the side of the manifold, through the proper flanged interface.

#### Available features:

- Manifold connections up to Ø30 mm, for a maximum flow rate of 485 l/min
- Fine filtration rating, to get a good cleanliness level into the system
- Bypass valve, to relieve excessive pressure drop across the filter media
- Check valve, to protect the system against reverse flow
- Low collapse filter element "N", for use with filters provided with bypass valve
- High collapse filter element "H", for use with filters not provided with bypass valve
- High collapse filter element with external support "S", for filter element protection against the back pressure caused by the check valve in filters not provided with the bypass valve
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

Delivery lines, in any high pressure industrial equipment or mobile machines

#### Filter housing materials

- Head: Phosphatized cast iron
- Housing: Phosphatized steel
- Bypass valve: Steel
- Check valve: Steel

#### Pressure

- Working pressure: 32 MPa (320 bar)
- Test pressure: 48 MPa (480 bar)
- Burst pressure: 96 MPa (960 bar)
- Pulse pressure fatigue test: 1 000 000 cycles with pressure from 0 to 32 MPa (320 bar)

#### Bypass valve

- Opening pressure 600 kPa (6 bar) ±10%
- Other opening pressures on request.

#### Δp element type

- Microfibre filter elements - series N: 20 bar
- Microfibre filter elements - series H: 210 bar (not available for FHB050)
- Microfibre filter elements - series S: 210 bar (only for FHB050)
- Wire mesh filter elements - series N: 20 bar
- Fluid flow through the filter element from OUT to IN

#### Seals

- Standard NBR series A
- Optional FPM series V

#### Temperature

From -25 °C to +110 °C

#### Connections

Manifold mounting

#### Note

FHB filters are provided for vertical mounting



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series  | Weights [kg] |       |       |       |       | Volumes [dm <sup>3</sup> ] |        |      |      |      |      |      |
|----------------|--------------|-------|-------|-------|-------|----------------------------|--------|------|------|------|------|------|
|                | Length       | 1     | 2     | 3     | 4     | 5                          | Length | 1    | 2    | 3    | 4    | 5    |
| <b>FHB 050</b> |              | 2.61  | 2.98  | 3.39  | 3.86  | 5.04                       |        | 0.21 | 0.30 | 0.40 | 0.52 | 0.81 |
| <b>FHB 065</b> |              | 3.33  | 3.69  | 4.90  | -     | -                          |        | 0.20 | 0.27 | 0.49 | -    | -    |
| <b>FHB 135</b> |              | 6.61  | 8.21  | 9.21  | -     | -                          |        | 0.40 | 0.73 | 0.94 | -    | -    |
| <b>FHB 320</b> |              | 12.95 | 15.08 | 17.37 | 26.77 | -                          |        | 0.91 | 1.63 | 2.40 | 3.59 | -    |

| Filter series  | Length   | Filter element design - N Series |     |     |     |     |     | Filter element design - S Series |     |     |     |     |
|----------------|----------|----------------------------------|-----|-----|-----|-----|-----|----------------------------------|-----|-----|-----|-----|
|                |          | A03                              | A06 | A10 | A16 | A25 | M25 | A03                              | A06 | A10 | A16 | A25 |
| <b>FHB 050</b> | <b>1</b> | 43                               | 42  | 79  | 81  | 101 | 131 | 30                               | 40  | 58  | 60  | 74  |
|                | <b>2</b> | 53                               | 58  | 84  | 93  | 112 | 132 | 46                               | 50  | 76  | 86  | 108 |
|                | <b>3</b> | 67                               | 70  | 94  | 101 | 119 | 133 | 59                               | 62  | 87  | 95  | 115 |
|                | <b>4</b> | 82                               | 87  | 106 | 108 | 122 | 134 | 74                               | 80  | 101 | 103 | 119 |
|                | <b>5</b> | 102                              | 104 | 119 | 122 | 127 | 136 | 90                               | 92  | 105 | 113 | 126 |

| Filter series  | Length   | Filter element design - N Series |     |     |     |     |     | Filter element design - H Series |     |     |     |     |
|----------------|----------|----------------------------------|-----|-----|-----|-----|-----|----------------------------------|-----|-----|-----|-----|
|                |          | A03                              | A06 | A10 | A16 | A25 | M25 | A03                              | A06 | A10 | A16 | A25 |
| <b>FHB 065</b> | <b>1</b> | 25                               | 33  | 55  | 62  | 87  | 133 | 23                               | 25  | 49  | 58  | 81  |
|                | <b>2</b> | 33                               | 51  | 70  | 76  | 101 | 134 | 33                               | 38  | 66  | 75  | 94  |
|                | <b>3</b> | 60                               | 71  | 97  | 103 | 118 | 138 | 60                               | 68  | 95  | 102 | 116 |
| <b>FHB 135</b> | <b>1</b> | 67                               | 72  | 120 | 129 | 177 | 212 | 49                               | 55  | 97  | 100 | 160 |
|                | <b>2</b> | 109                              | 116 | 152 | 154 | 224 | 250 | 90                               | 110 | 137 | 140 | 182 |
|                | <b>3</b> | 153                              | 155 | 201 | 205 | 226 | 253 | 126                              | 142 | 175 | 187 | 207 |
| <b>FHB 320</b> | <b>1</b> | 130                              | 143 | 238 | 286 | 343 | 442 | 110                              | 117 | 192 | 201 | 304 |
|                | <b>2</b> | 259                              | 281 | 391 | 409 | 454 | 468 | 200                              | 230 | 319 | 325 | 392 |
|                | <b>3</b> | 332                              | 368 | 441 | 455 | 463 | 476 | 269                              | 312 | 381 | 389 | 432 |
|                | <b>4</b> | 368                              | 390 | 446 | 462 | 481 | 488 | 311                              | 334 | 388 | 394 | 437 |

### Maximum flow rate for a complete pressure filter with a pressure drop $\Delta p = 1.5$ bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure.

Please, contact our Sales Department for further additional information.

### Hydraulic symbols




| Filter series  | Style S | Style B | Style T | Style D |
|----------------|---------|---------|---------|---------|
| <b>FHB 050</b> | •       | •       | •       | •       |
| <b>FHB 065</b> | •       | •       | •       | •       |
| <b>FHB 135</b> | •       | •       | •       | •       |
| <b>FHB 320</b> |         |         |         |         |




|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|--|--|--|--|

## Pressure drop

Filter housings  $\Delta p$  pressure drop

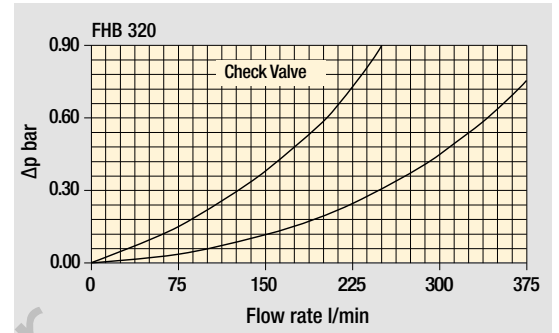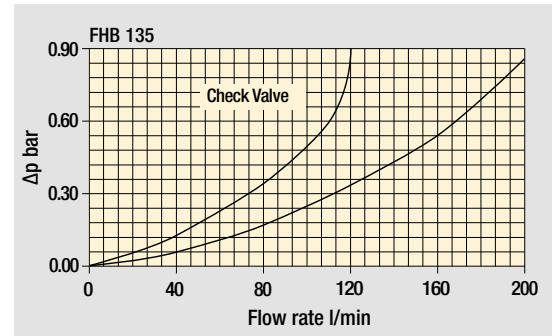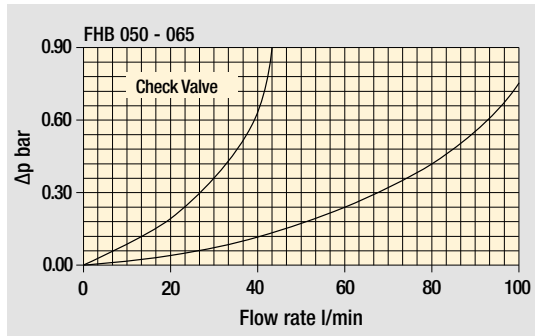

Bypass valve pressure drop

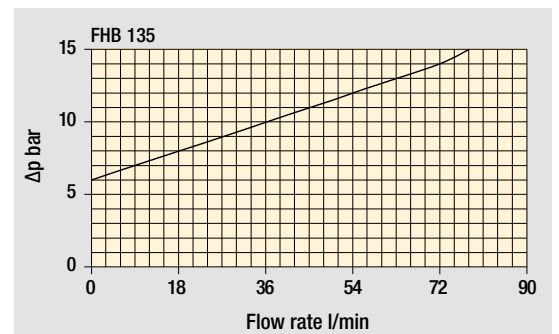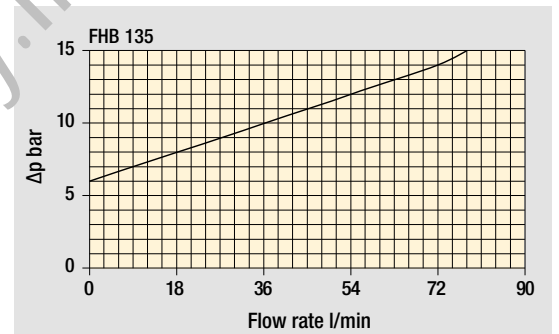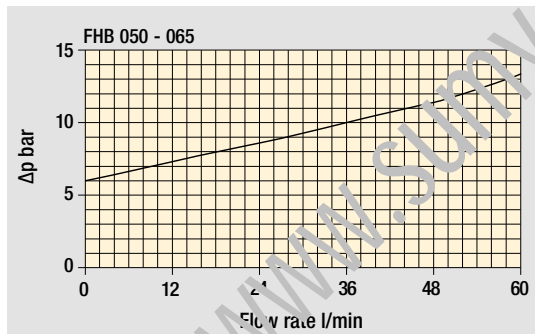

The curves are plotted using mineral oil with density of  $0.86 \text{ kg/dm}^3$  in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

[www.sumy.ir](http://www.sumy.ir)

## Designation & Ordering code

### COMPLETE FILTER

|   |  |  |  |  |  |  |  |  |  |
|---|--|--|--|--|--|--|--|--|--|
| <b>Series and size</b><br><b>FHB050</b>   | Configuration example: <b>FHB050</b>   <b>2</b>   <b>T</b>   <b>A</b>   <b>F1</b>   <b>A06</b>   <b>S</b>   <b>P01</b> |  |  |  |  |  |  |  |  |
| <b>Length</b><br><b>1</b>   <b>2</b>   <b>3</b>   <b>4</b>   <b>5</b>   |  |  |  |  |  |  |  |  |  |
| <b>Valves</b><br><b>S</b> Without bypass<br><b>B</b> With bypass 6 bar<br><b>T</b> With check valve, without bypass<br><b>D</b> With check valve, with bypass 6 bar |  |  |  |  |  |  |  |  |  |
| <b>Seals</b><br><b>A</b> NBR<br><b>V</b> FPM  |  |  |  |  |  |  |  |  |  |
| <b>Connections</b><br><b>F1</b> Manifold  |  |  |  |  |  |  |  |  |  |
| <b>Filtration rating (filter media)</b>   |  |  |  |  |  |  |  |  |  |
| <b>A03</b> Inorganic microfiber 3 µm  | <b>A16</b> Inorganic microfiber 16 µm  |  |  |  |  |  |  |  |  |
| <b>A06</b> Inorganic microfiber 6 µm  | <b>A25</b> Inorganic microfiber 25 µm  |  |  |  |  |  |  |  |  |
| <b>A10</b> Inorganic microfiber 10 µm   | <b>M25</b> Wire mesh 25 µm   |  |  |  |  |  |  |  |  |

| Element Δp       | Valves |   |   |   | Execution                     |
|------------------|--------|---|---|---|-------------------------------|
|                  | S      | B | T | D |                               |
| <b>N</b> 20 bar  |        | • |   | • | <b>P01</b> MP Filtri standard |
| <b>S</b> 210 bar | •      |   | • |   | <b>Pxx</b> Customized         |

### FILTER ELEMENT

|   |  |  |  |  |  |  |
|---|--|--|--|--|--|--|
| <b>Element series and size</b><br><b>HP050</b>                                | Configuration example: <b>HP050</b>   <b>2</b>   <b>A06</b>   <b>A</b>   <b>S</b>   <b>P01</b> |  |  |  |  |  |
| <b>Element length</b><br><b>1</b>   <b>2</b>   <b>3</b>   <b>4</b>   <b>5</b> |  |  |  |  |  |  |
| <b>Filtration rating (filter media)</b>                                       |  |  |  |  |  |  |
| <b>A03</b> Inorganic microfiber 3 µm  | <b>A16</b> Inorganic microfiber 16 µm  |  |  |  |  |  |
| <b>A06</b> Inorganic microfiber 6 µm  | <b>A25</b> Inorganic microfiber 25 µm  |  |  |  |  |  |
| <b>A10</b> Inorganic microfiber 10 µm   | <b>M25</b> Wire mesh 25 µm   |  |  |  |  |  |


| Seals        | Element Δp       | Execution                     |
|--------------|------------------|-------------------------------|
| <b>A</b> NBR | <b>N</b> 20 bar  | <b>P01</b> MP Filtri standard |
| <b>V</b> FPM | <b>S</b> 210 bar | <b>Pxx</b> Customized         |

### ACCESSORIES

| Differential indicators                                     | page    |   | page |
|---|---------|---|------|
| <b>DEA</b> Electrical differential indicator                | 577     | <b>DLE</b> Electrical / visual differential indicator | 580  |
| <b>DEH</b> Hazardous area electronic differential indicator | 577-578 | <b>DTA</b> Electronic differential indicator          | 581  |
| <b>DEM</b> Electrical differential indicator                | 578-579 | <b>DVA</b> Visual differential indicator              | 581  |
| <b>DLA</b> Electrical / visual differential indicator       | 579-580 | <b>DVM</b> Visual differential indicator              | 581  |
| <b>Additional features</b>                                  | page    |   |      |
| <b>T2</b> Plug  | 582     |   |      |



| FHB050        |        |
|---------------|--------|
| Filter length | H [mm] |
| 1             | 185    |
| 2             | 222    |
| 3             | 264    |
| 4             | 312    |
| 5             | 434    |

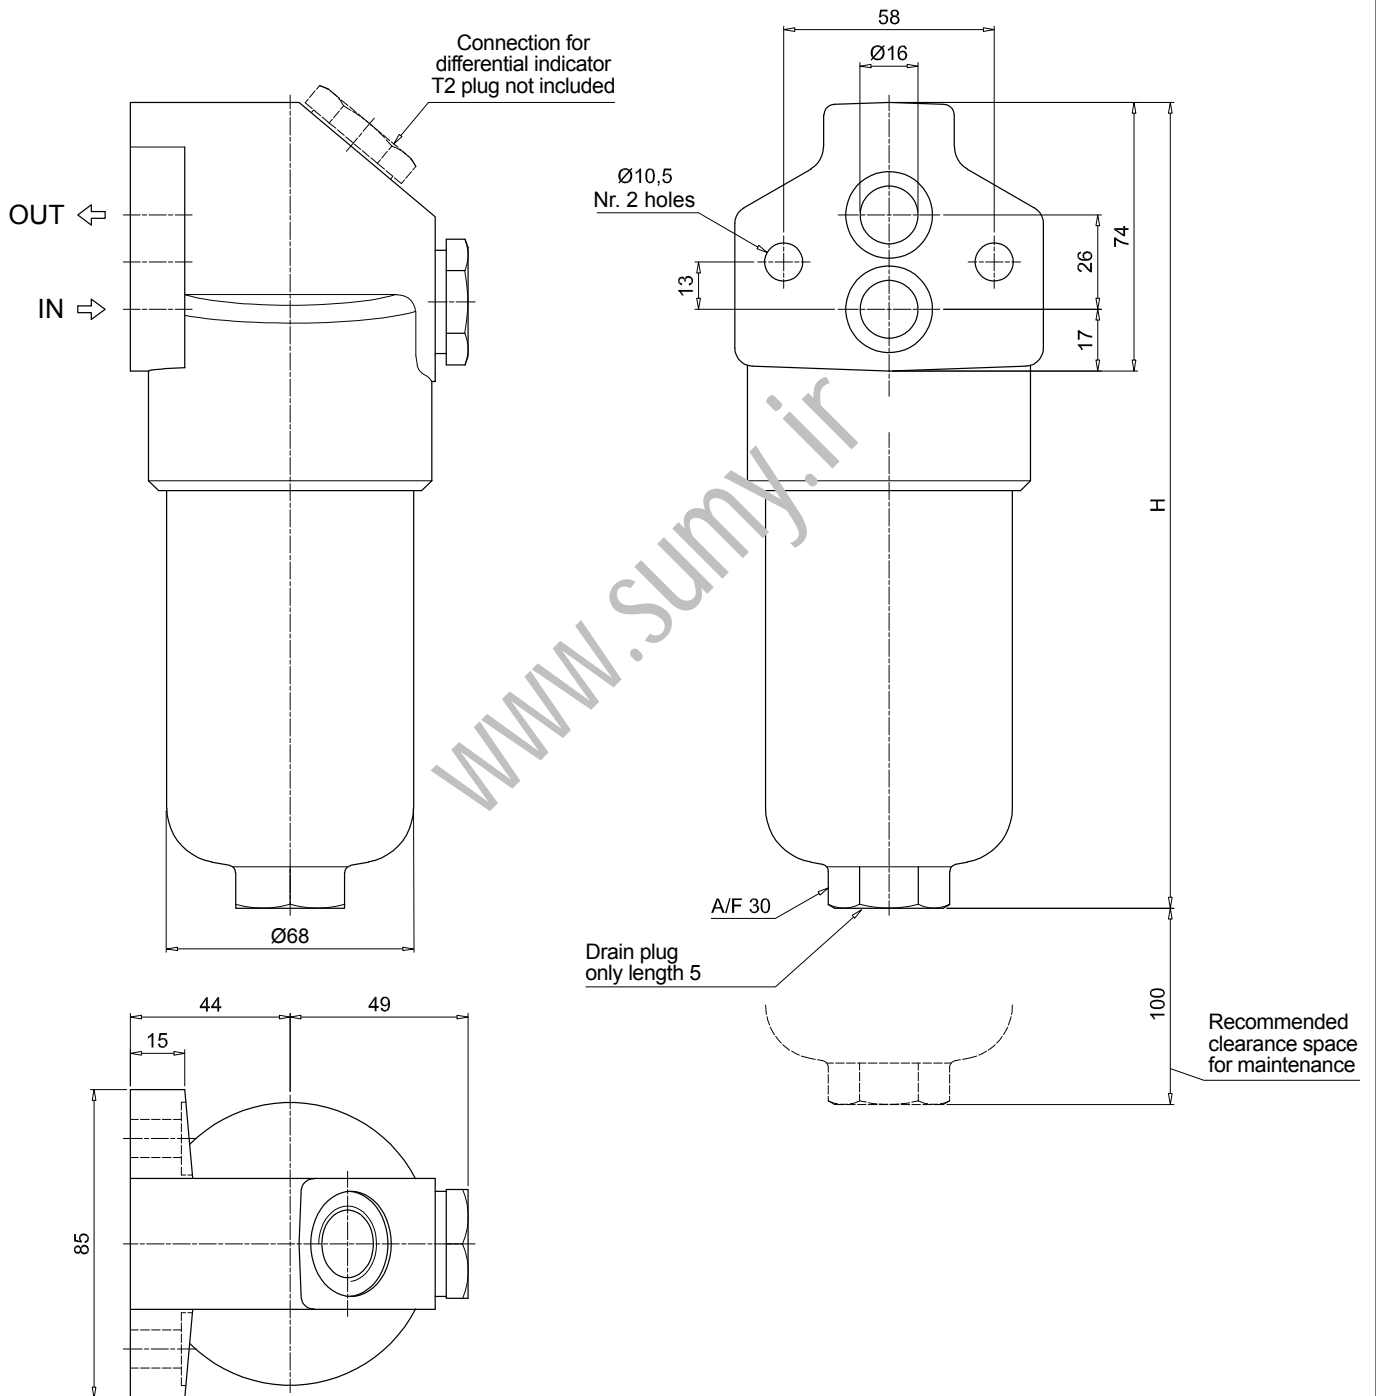

# FHB FHB065 - FHB135 - FHB320

## Designation & Ordering code

### COMPLETE FILTER

|   |                                     |               |               |  |  |  |  |  |  |  |  |
|---|-------------------------------------|---------------|---------------|--|--|--|--|--|--|--|--|
| <b>Series and size</b>                        |                                     |               |               | Configuration example: <b>FHB320</b>   <b>4</b>   <b>S</b>   <b>A</b>   <b>F1</b>   <b>A06</b>   <b>H</b>   <b>P01</b> |  |  |  |  |  |  |  |
| <b>FHB065</b>   <b>FHB135</b>   <b>FHB320</b> |                                     |               |               |  |  |  |  |  |  |  |  |
| <b>Length</b>                                 | <b>FHB065</b>                       | <b>FHB135</b> | <b>FHB320</b> |  |  |  |  |  |  |  |  |
| <b>1</b>                                      | •                                   | •             | •             |  |  |  |  |  |  |  |  |
| <b>2</b>                                      | •                                   | •             | •             |  |  |  |  |  |  |  |  |
| <b>3</b>                                      | •                                   | •             | •             |  |  |  |  |  |  |  |  |
| <b>4</b>                                      |                                     |               | •             |  |  |  |  |  |  |  |  |
| <b>Valves</b>                                 |                                     |               |               |  |  |  |  |  |  |  |  |
| <b>S</b>                                      | Without bypass                      |               |               |  |  |  |  |  |  |  |  |
| <b>B</b>                                      | With bypass 6 bar                   |               |               |  |  |  |  |  |  |  |  |
| <b>T</b>                                      | With check valve, without bypass    |               |               |  |  |  |  |  |  |  |  |
| <b>D</b>                                      | With check valve, with bypass 6 bar |               |               |  |  |  |  |  |  |  |  |
| <b>Seals</b>                                  |                                     |               |               |  |  |  |  |  |  |  |  |
| <b>A</b>                                      | NBR                                 |               |               |  |  |  |  |  |  |  |  |
| <b>V</b>                                      | FPM                                 |               |               |  |  |  |  |  |  |  |  |
| <b>Connections</b>                            |                                     |               |               |  |  |  |  |  |  |  |  |
| <b>F1</b>                                     | Manifold                            |               |               |  |  |  |  |  |  |  |  |
| <b>Filtration rating (filter media)</b>       |                                     |               |               |  |  |  |  |  |  |  |  |
| <b>A03</b>                                    | Inorganic microfiber 3 µm           |               | <b>A16</b>    | Inorganic microfiber 16 µm   |  |  |  |  |  |  |  |
| <b>A06</b>                                    | Inorganic microfiber 6 µm           |               | <b>A25</b>    | Inorganic microfiber 25 µm   |  |  |  |  |  |  |  |
| <b>A10</b>                                    | Inorganic microfiber 10 µm          |               | <b>M25</b>    | Wire mesh 25 µm  |  |  |  |  |  |  |  |

|   |         |               |   |          |   |                  |   |          |   |          |   |          |   |
|---|---------|---------------|---|----------|---|------------------|---|----------|---|----------|---|----------|---|
| <b>Element Δp</b>                                     |         | <b>Values</b> |   |          |   | <b>Execution</b> |   |          |   |          |   |          |   |
| <b>N</b>  | 20 bar  | <b>S</b>      | • | <b>3</b> | • | <b>1</b>         | • | <b>2</b> | • | <b>3</b> | • | <b>4</b> | • |
| <b>H</b>  | 210 bar | <b>S</b>      | • | <b>3</b> | • | <b>1</b>         |   | <b>2</b> |   | <b>3</b> |   | <b>4</b> | • |
| <b>P01</b> MP Filtri standard                         |         |               |   |          |   |                  |   |          |   |          |   |          |   |
| <b>P02</b> Maintenance from the bottom of the housing |         |               |   |          |   |                  |   |          |   |          |   |          |   |
| <b>Pxx</b> Customized                                 |         |               |   |          |   |                  |   |          |   |          |   |          |   |

### FILTER ELEMENT

|  |                            |              |              |  |  |  |  |  |  |  |  |
|--|----------------------------|--------------|--------------|--|--|--|--|--|--|--|--|
| <b>Element series and size</b>             |                            |              |              | Configuration example: <b>HP320</b>   <b>4</b>   <b>A06</b>   <b>A</b>   <b>H</b>   <b>P01</b> |  |  |  |  |  |  |  |
| <b>HP065</b>   <b>HP135</b>   <b>HP320</b> |                            |              |              |  |  |  |  |  |  |  |  |
| <b>Element length</b>                      | <b>HP065</b>               | <b>HP135</b> | <b>HP320</b> |  |  |  |  |  |  |  |  |
| <b>1</b>                                   | •                          | •            | •            |  |  |  |  |  |  |  |  |
| <b>2</b>                                   | •                          | •            | •            |  |  |  |  |  |  |  |  |
| <b>3</b>                                   | •                          | •            | •            |  |  |  |  |  |  |  |  |
| <b>4</b>                                   |                            |              | •            |  |  |  |  |  |  |  |  |
| <b>Filtration rating (filter media)</b>    |                            |              |              |  |  |  |  |  |  |  |  |
| <b>A03</b>                                 | Inorganic microfiber 3 µm  |              | <b>A16</b>   | Inorganic microfiber 16 µm   |  |  |  |  |  |  |  |
| <b>A06</b>                                 | Inorganic microfiber 6 µm  |              | <b>A25</b>   | Inorganic microfiber 25 µm   |  |  |  |  |  |  |  |
| <b>A10</b>                                 | Inorganic microfiber 10 µm |              | <b>M25</b>   | Wire mesh 25 µm  |  |  |  |  |  |  |  |

|              |     |                   |         |                  |                    |
|--------------|-----|-------------------|---------|------------------|--------------------|
| <b>Seals</b> |     | <b>Element Δp</b> |         | <b>Execution</b> |                    |
| <b>A</b>     | NBR | <b>N</b>          | 20 bar  | <b>P01</b>       | MP Filtri standard |
| <b>V</b>     | FPM | <b>H</b>          | 210 bar | <b>Pxx</b>       | Customized         |


### ACCESSORIES

|                                |  |         |            |  |      |
|--------------------------------|--|---------|------------|--|------|
| <b>Differential indicators</b> |  | page    |            |  | page |
| <b>DEA</b>                     | Electrical differential indicator                | 577     | <b>DLE</b> | Electrical / visual differential indicator | 580  |
| <b>DEH</b>                     | Hazardous area electronic differential indicator | 577-578 | <b>DTA</b> | Electronic differential indicator          | 581  |
| <b>DEM</b>                     | Electrical differential indicator                | 578-579 | <b>DVA</b> | Visual differential indicator              | 581  |
| <b>DLA</b>                     | Electrical / visual differential indicator       | 579-580 | <b>DVM</b> | Visual differential indicator              | 581  |

|                            |      |      |
|----------------------------|------|------|
| <b>Additional features</b> |      | page |
| <b>T2</b>                  | Plug | 582  |

### FHB065

| Filter length | H [mm] |
|---------------|--------|
| <b>1</b>      | 194    |
| <b>2</b>      | 225    |
| <b>3</b>      | 327    |

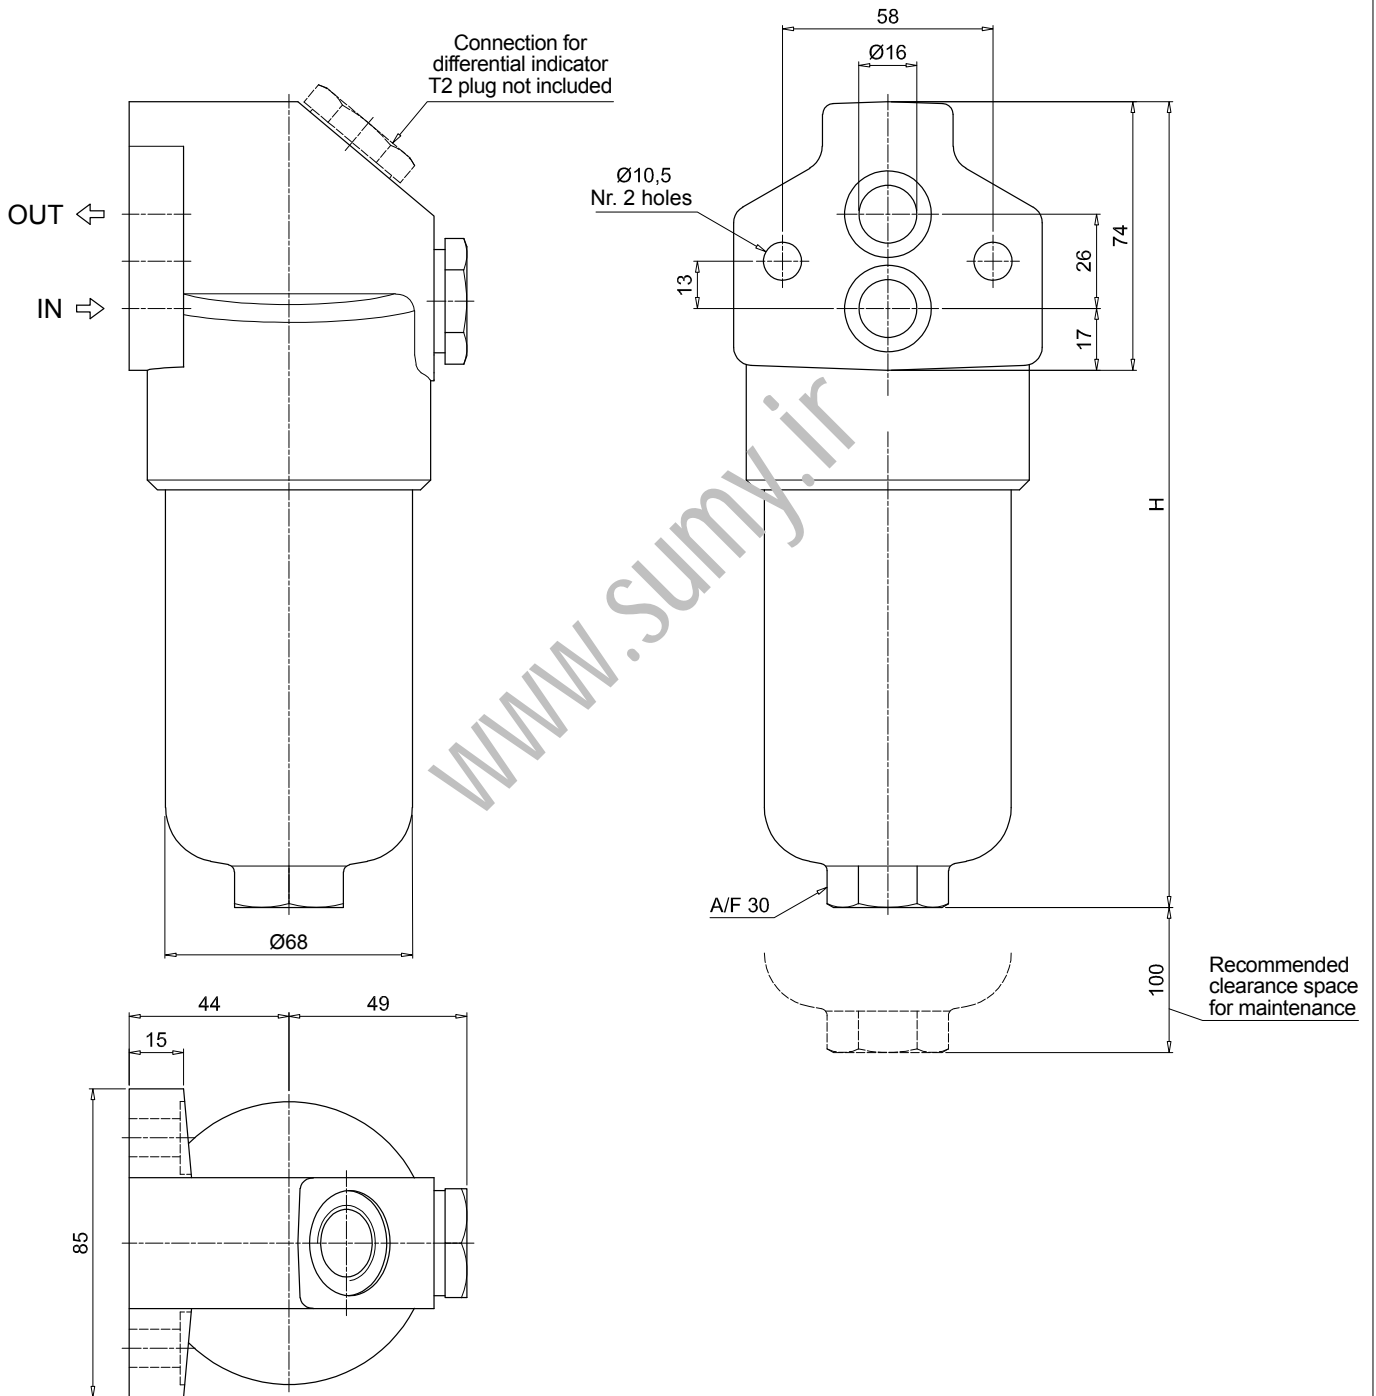


# FHB FHB065 - FHB135 - FHB320

## Dimensions


FHB135

| Filter length | H [mm] |
|---------------|--------|
| 1             | 268    |
| 2             | 381    |
| 3             | 456    |

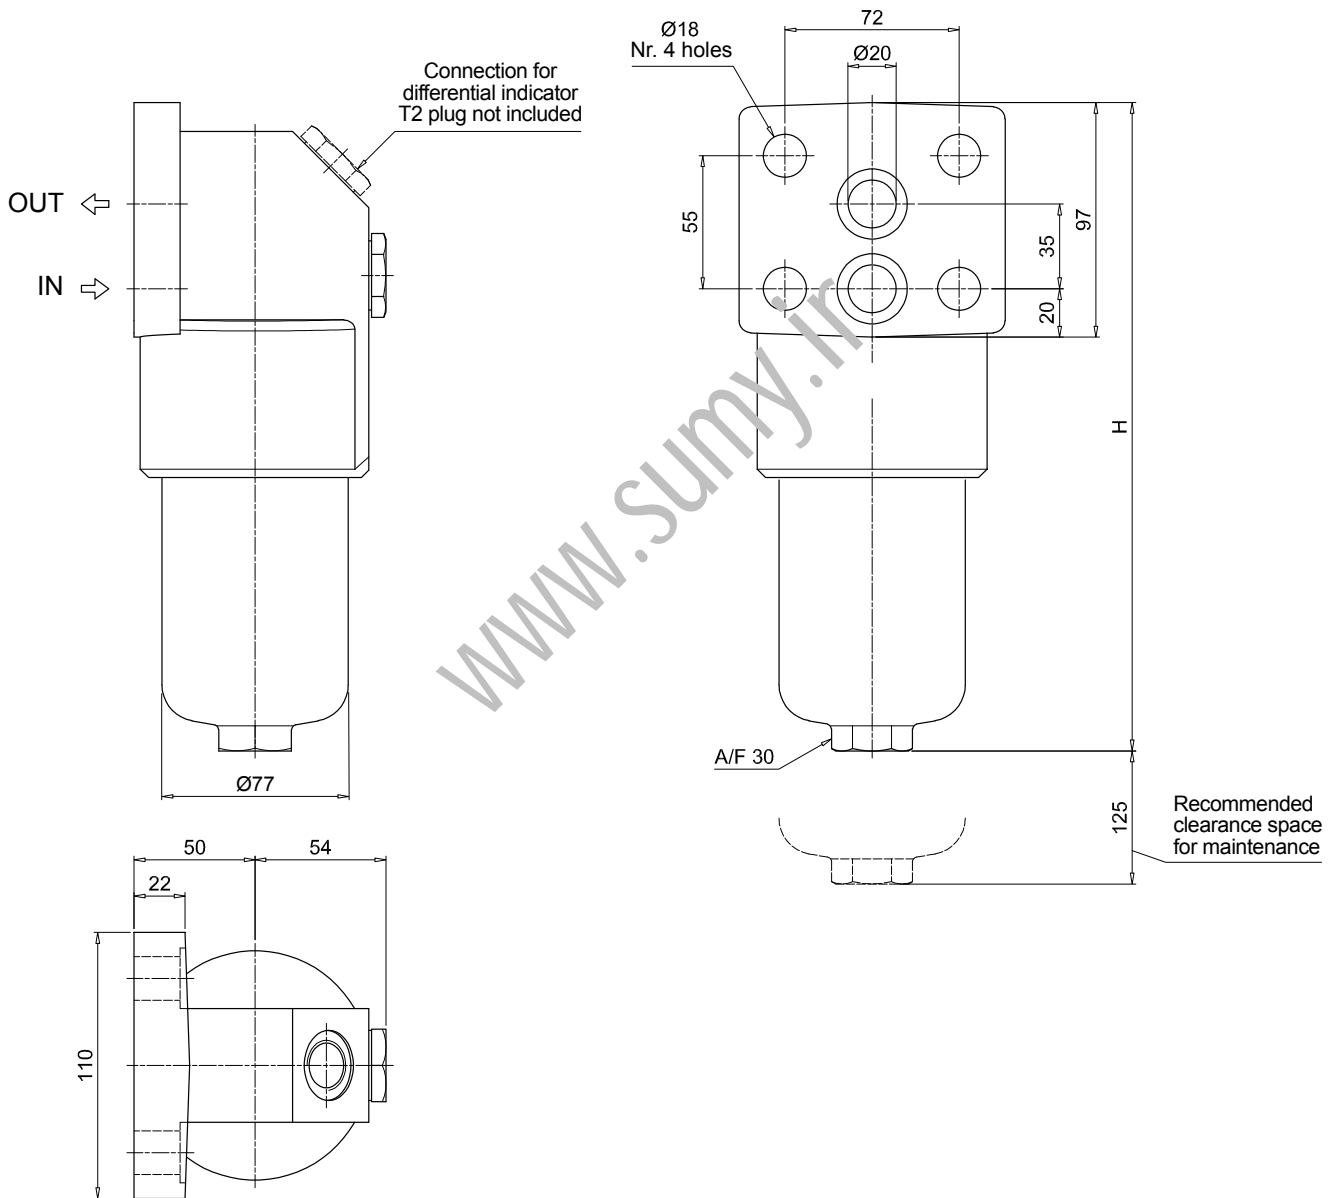

### FHB320


| Filter length | H [mm] | H2 [mm]       |               |
|---------------|--------|---------------|---------------|
|               |        | Execution P01 | Execution P02 |
| 1             | 301    | 150           | -             |
| 2             | 424    | 150           | -             |
| 3             | 556    | 150           | -             |
| 4             | 709    | 150           | 550           |

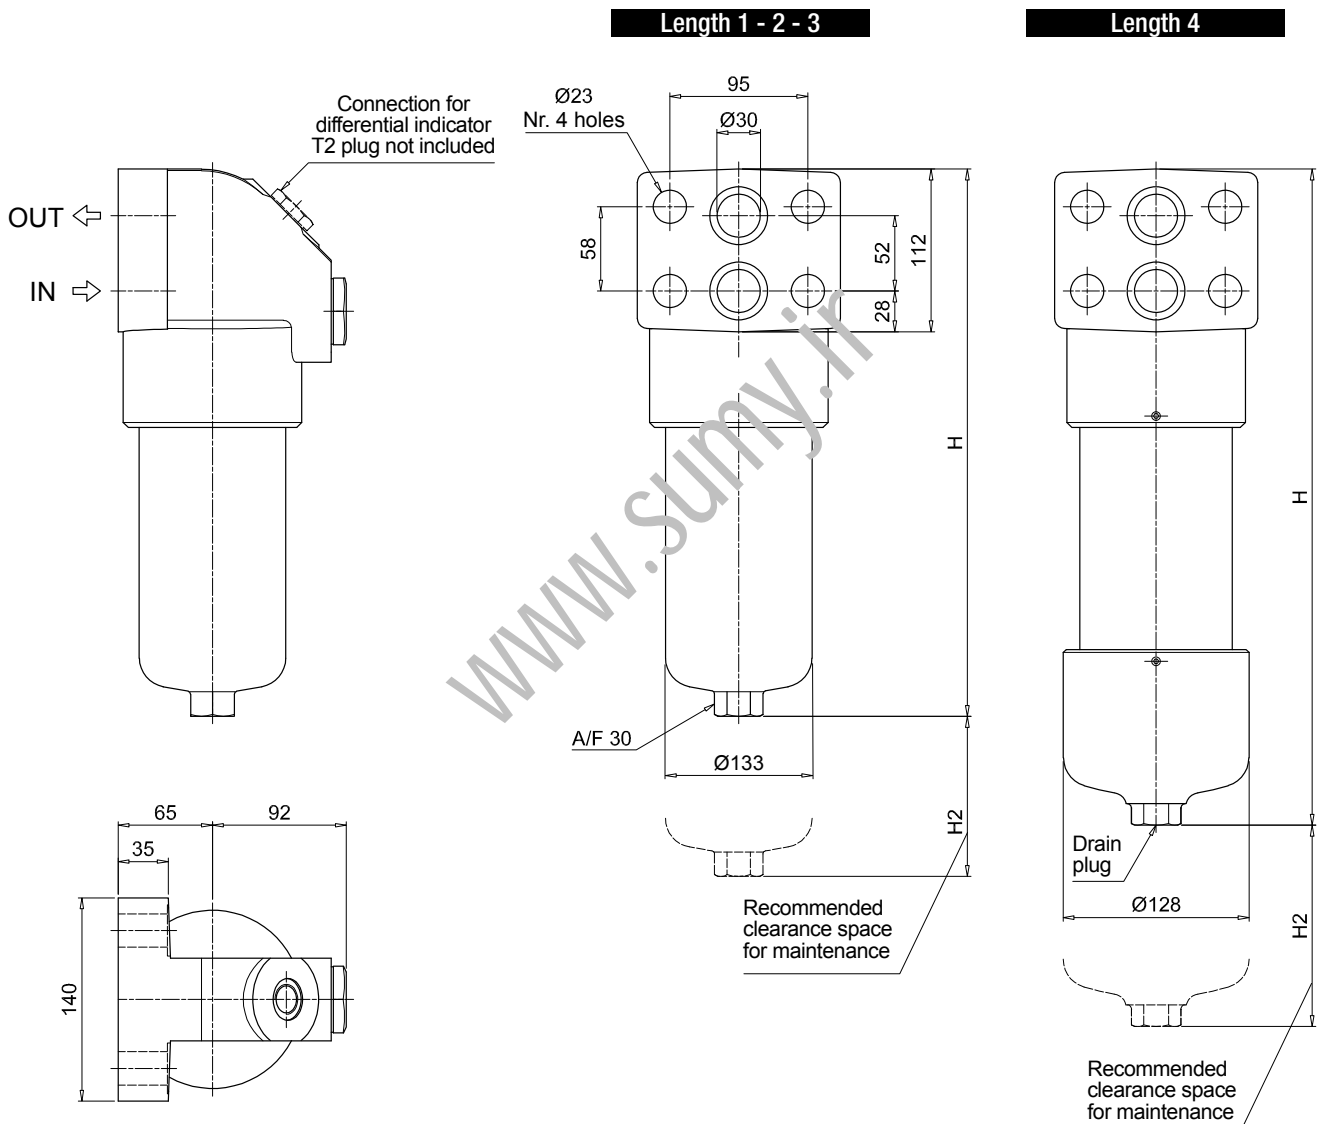

# FHB SPARE PARTS

Order number for spare parts

FHB 050 - 065 - 135 - 320

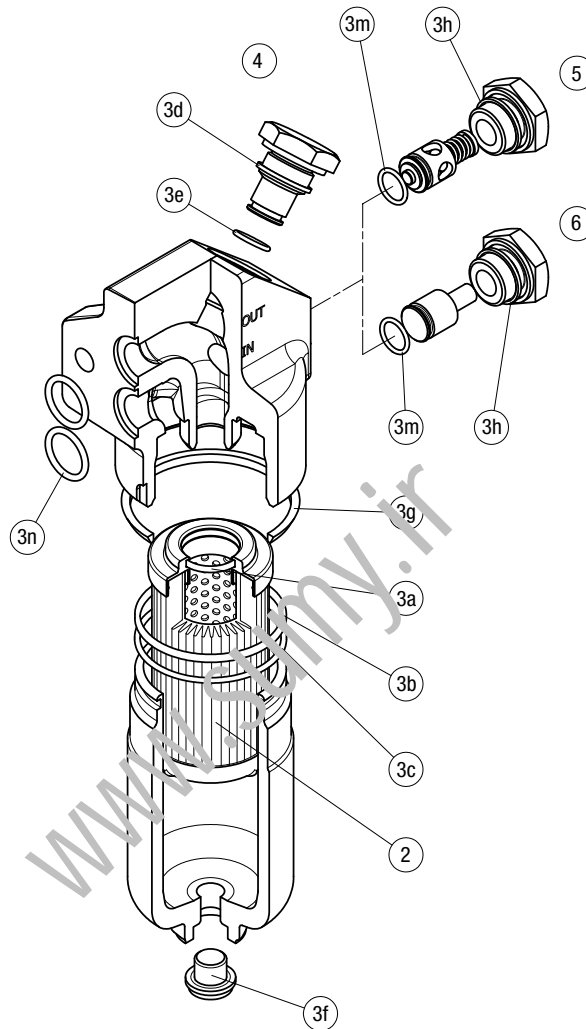

| Item:          | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          | Q.ty: 1 pc.               |     | Q.ty: 1 pc.     |          | Q.ty: 1 pc.         |          |
|----------------|-----------------|----------------------|----------|---------------------------|-----|-----------------|----------|---------------------|----------|
| Filter series  | Filter element  | Seal Kit code number |          | Indicator connection plug |     | Bypass assembly |          | Non-bypass assembly |          |
|                |                 | NBR                  | FPM      | NBR                       | FPM | NBR             | FPM      | NBR                 | FPM      |
| <b>FHB 050</b> | See order table | 02050412             | 02050413 | T2H                       | T2V | 02001312        | 02001385 | 02001314            | 02001386 |
| <b>FHB 065</b> |                 | 02050266             | 02050277 |                           |     | 02001312        | 02001385 | 02001314            | 02001386 |
| <b>FHB 135</b> |                 | 02050270             | 02050281 |                           |     | 02001312        | 02001385 | 02001314            | 02001386 |
| <b>FHB 320</b> |                 | 02050273             | 02050284 |                           |     | 02001381        | 02001382 | 02001383            | 02001384 |

[www.sumy.ir](http://www.sumy.ir)

[www.sumy.ir](http://www.sumy.ir)



# FHF 325 series

Maximum working pressure up to 35 MPa (350 bar) - Flow rate up to 550 l/min

Filter housing according to SAE J2066 for HF4 filter elements



# FHF 325 GENERAL INFORMATION

## Filter housing according to SAE J2066 for HF4 filter elements

### Description

#### High Pressure filters

#### Manifold

**Maximum working pressure up to 35 MPa (350 bar)**

**Flow rate up to 550 l/min**

FHF is a range of high pressure filter for protection of sensitive components in high pressure hydraulic systems in the mobile machines. They are directly connected to the lines of the system through the hydraulic fittings or the proper flanged interface.

#### Available features:

- 1 1/2" female threaded connections, 1 1/2" flanged connections and manifold connections up to 1 1/2", for a maximum flow rate of 550 l/min
- Base-mounting design, for ease of the replacement of the filter element
- Filter element designed in accordance with SAE J2066 HF4 regulation
- Fine filtration rating, to get a good cleanliness level into the system
- Bypass valve, to relieve excessive pressure drop across the filter media
- Low collapse filter element "N", for use with filters provided with bypass valve
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

Delivery lines, in any high pressure industrial equipment

### Technical data

#### Filter housing materials

- Head: Phosphatized cast iron
- Housing: Phosphatized steel
- Cover: Cast iron (chemical heat treatment)
- Bypass valve: Brass - Steel

#### Pressure

- Working pressure: 35 MPa (350 bar)
- Test pressure: 52.5 MPa (525 bar)
- Burst pressure: 105 MPa (1050 bar)
- Pulse pressure fatigue test: 1 000 000 cycles with pressure from 0 to 35 MPa (350 bar)

#### Bypass valve

- Opening pressure 600 kPa (6 bar)  $\pm 10\%$
- Other opening pressures on request.

#### $\Delta p$ element type

- Microfibre filter elements - series N: 20 bar
- Wire mesh filter elements - series N: 20 bar
- Fluid flow through the filter element from OUT to IN

#### Seals

- Standard NBR series A
- Optional FPM series V

#### Temperature

From -25 °C to +110 °C

#### Connections

- FHF 325: In-line threaded connection
- FHF 325: In-line flanged connection
- FHF 325: Manifold mounting

#### Note

FHF filters are provided for vertical mounting



### Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series  | Weights [kg] |       |       |       | Volumes [dm <sup>3</sup> ] |      |      |      |
|----------------|--------------|-------|-------|-------|----------------------------|------|------|------|
|                | Length       | 1     | 2     | 3     | Length                     | 1    | 2    | 3    |
| <b>FHF 325</b> |              | 23.90 | 32.68 | 41.47 |                            | 3.50 | 5.80 | 8.11 |

# GENERAL INFORMATION FHF 325

Filter housing according to SAE J2066 for HF4 filter elements

FILTER ASSEMBLY SIZING  
Flow rates [l/min]

| Filter series | Length | Filter element design - N Series |     |     |     |     |     |
|---------------|--------|----------------------------------|-----|-----|-----|-----|-----|
|               |        | A03                              | A06 | A10 | A16 | A25 | M25 |
| FHF 325       | 1      | 302                              | 339 | 348 | 419 | 500 | 556 |
|               | 2      | 401                              | 424 | 434 | 457 | 505 | 557 |
|               | 3      | 416                              | 451 | 460 | 469 | 510 | 559 |

## Maximum flow rate for a complete pressure filter with a pressure drop $\Delta p = 1.5$ bar.




The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.

Hydraulic symbols

| Filter series | Style S | Style B |
|---------------|---------|---------|
| FHF 325       | •       | •       |

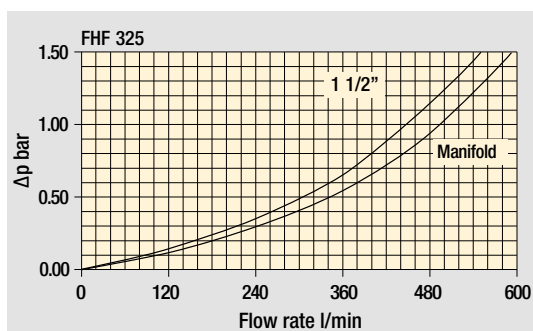

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

Pressure drop  
Filter housings  $\Delta p$  pressure drop

# FHF 325

## Designation & Ordering code

### COMPLETE FILTER

|  |                                       |          |          |          |          |          |            |          |            |
|--|---------------------------------------|----------|----------|----------|----------|----------|------------|----------|------------|
| <b>Series and size</b><br><b>FHF325</b>  | Configuration example: <b>FHF325</b>  | <b>2</b> | <b>S</b> | <b>A</b> | <b>H</b> | <b>7</b> | <b>A10</b> | <b>N</b> | <b>P01</b> |
| <b>Length</b><br><b>1   2   3</b>  |                                       |          |          |          |          |          |            |          |            |
| <b>Valves</b><br><b>S</b> Without bypass<br><b>B</b> With bypass 6 bar   |                                       |          |          |          |          |          |            |          |            |
| <b>Seals</b><br><b>A</b> NBR<br><b>V</b> FPM   |                                       |          |          |          |          |          |            |          |            |
| <b>Connections</b><br><b>A</b> G 1 1/2"<br><b>B</b> 1 1/2" NPT<br><b>C</b> SAE 24 - 1 7/8" - 12 UN<br><b>G</b> 1 1/2" SAE 6000 psi/M<br><b>H</b> 1 1/2" SAE 6000 psi/UNC<br><b>M</b> Manifold ø1.38"<br><b>N</b> Manifold ø1.50" |                                       |          |          |          |          |          |            |          |            |
| <b>Connection for differential indicator</b><br><b>7</b> With two connections plugged on both sides  |                                       |          |          |          |          |          |            |          |            |
| <b>Filtration rating (filter media)</b>  |                                       |          |          |          |          |          |            |          |            |
| <b>A03</b> Inorganic microfiber 3 µm   | <b>A16</b> Inorganic microfiber 16 µm |          |          |          |          |          |            |          |            |
| <b>A06</b> Inorganic microfiber 6 µm   | <b>A25</b> Inorganic microfiber 25 µm |          |          |          |          |          |            |          |            |
| <b>A10</b> Inorganic microfiber 10 µm  | <b>M25</b> Wire mesh 25 µm            |          |          |          |          |          |            |          |            |

|                                      |  |
|--------------------------------------|--|
| <b>Element Δp</b><br><b>N</b> 20 bar | <b>Execution</b><br><b>P01</b> MP Filtri standard<br><b>Pxx</b> Customized |
|--------------------------------------|--|

### FILTER ELEMENT





|  |                                       |          |            |          |          |            |
|--|---------------------------------------|----------|------------|----------|----------|------------|
| <b>Element series and size</b><br><b>HF325</b> | Configuration example: <b>HF325</b>   | <b>2</b> | <b>A10</b> | <b>A</b> | <b>N</b> | <b>P01</b> |
| <b>Element length</b><br><b>1   2   3</b>      |                                       |          |            |          |          |            |
| <b>Filtration rating (filter media)</b>        |                                       |          |            |          |          |            |
| <b>A03</b> Inorganic microfiber 3 µm           | <b>A16</b> Inorganic microfiber 16 µm |          |            |          |          |            |
| <b>A06</b> Inorganic microfiber 6 µm           | <b>A25</b> Inorganic microfiber 25 µm |          |            |          |          |            |
| <b>A10</b> Inorganic microfiber 10 µm          | <b>M25</b> Wire mesh 25 µm            |          |            |          |          |            |

|  |                                      |  |
|--|--------------------------------------|--|
| <b>Seals</b><br><b>A</b> NBR<br><b>V</b> FPM | <b>Element Δp</b><br><b>N</b> 20 bar | <b>Execution</b><br><b>P01</b> MP Filtri standard<br><b>Pxx</b> Customized |
|--|--------------------------------------|--|

### ACCESSORIES

| Differential indicators                                     | page    |   | page |
|---|---------|---|------|
| <b>DEA</b> Electrical differential indicator                | 577     | <b>DLE</b> Electrical / visual differential indicator | 580  |
| <b>DEH</b> Hazardous area electronic differential indicator | 577-578 | <b>DTA</b> Electronic differential indicator          | 581  |
| <b>DEM</b> Electrical differential indicator                | 578-579 | <b>DVA</b> Visual differential indicator              | 581  |
| <b>DLA</b> Electrical / visual differential indicator       | 579-580 | <b>DVM</b> Visual differential indicator              | 581  |
| <b>Additional features</b>                                  | page    |   |      |
| <b>T2</b> Plug  | 582     |   |      |

| FHF325               |        |         |
|----------------------|--------|---------|
| Connection A - B - C |        |         |
| Filter length        | H [mm] | H2 [mm] |
| 1                    | 452    | 250     |
| 2                    | 690    | 485     |
| 3                    | 928    | 725     |

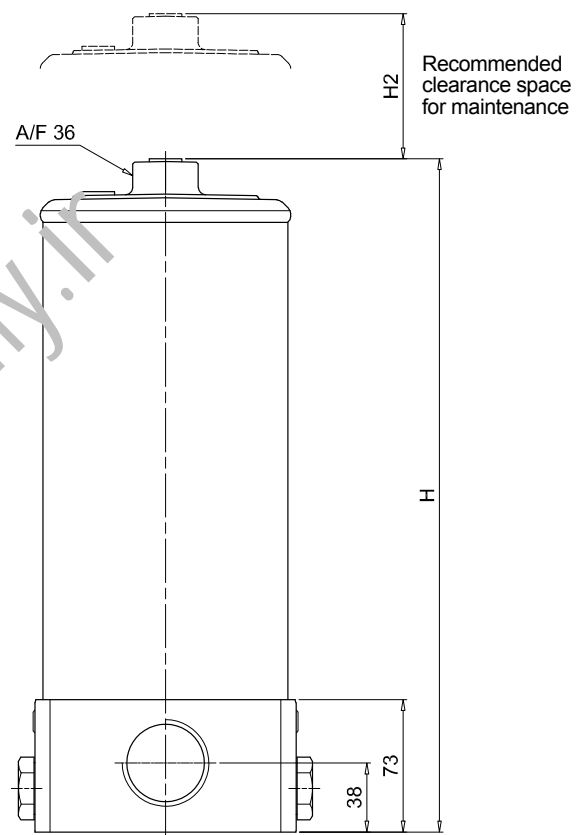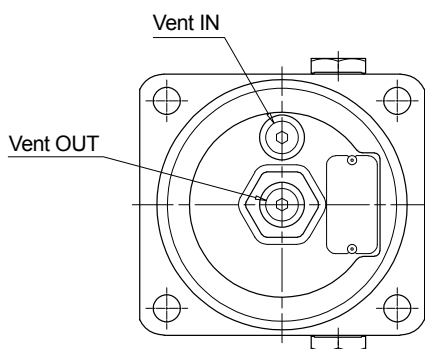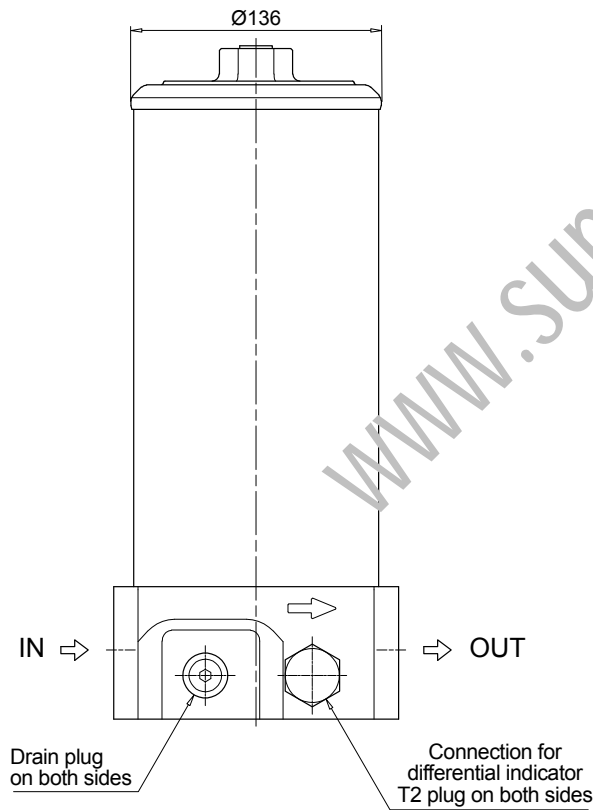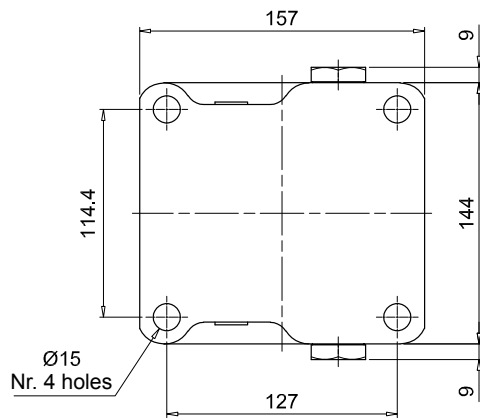




# FHF 325

## Dimensions





FHF325

Connection G - H

| Filter length | H [mm] | H2 [mm] |
|---------------|--------|---------|
| <b>1</b>      | 463    | 250     |
| <b>2</b>      | 701    | 485     |
| <b>3</b>      | 939    | 725     |

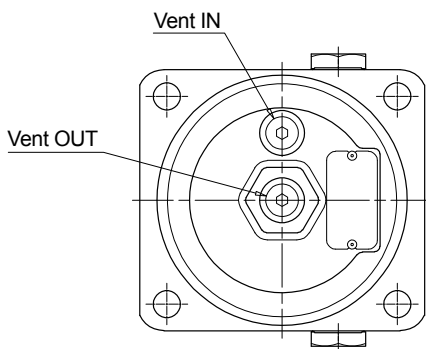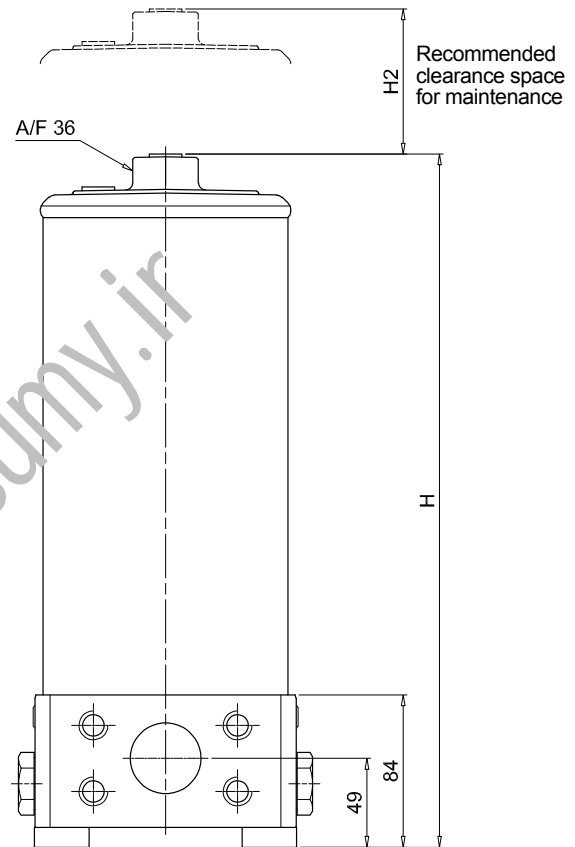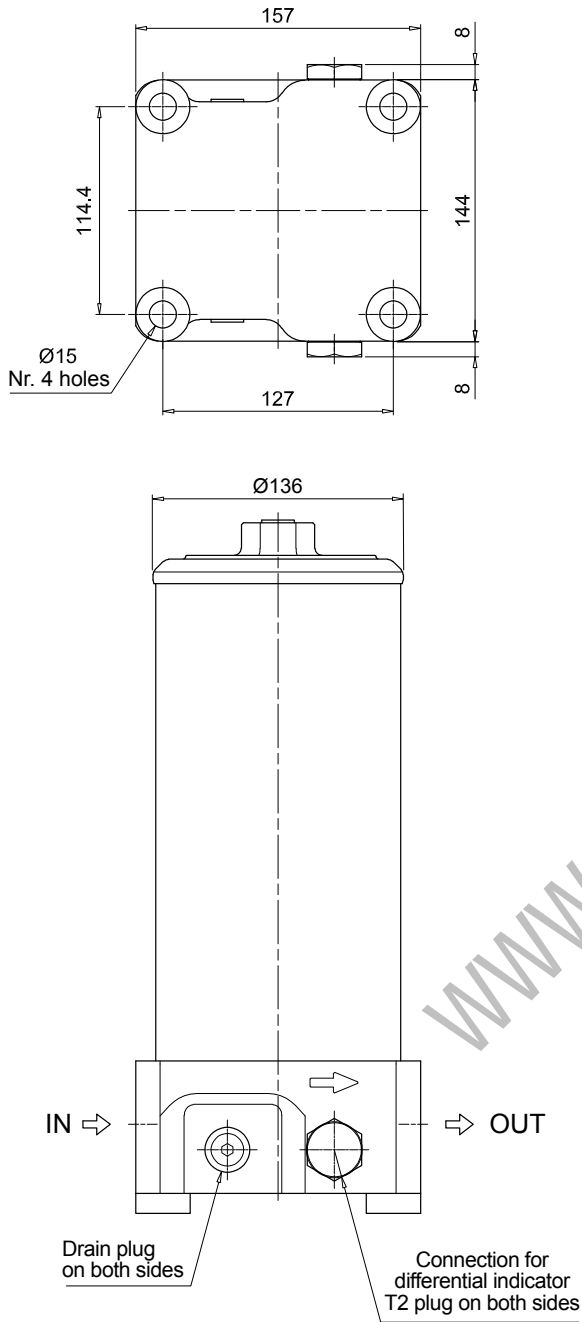

| FHF325           |        |         |
|------------------|--------|---------|
| Connection M - N |        |         |
| Filter length    | H [mm] | H2 [mm] |
| 1                | 452    | 250     |
| 2                | 690    | 485     |
| 3                | 928    | 725     |

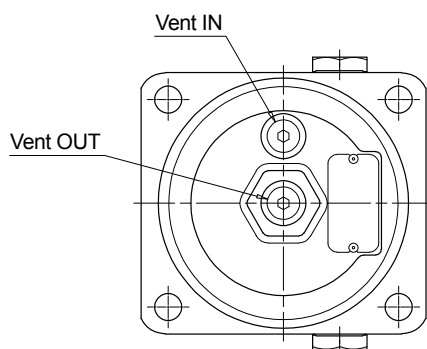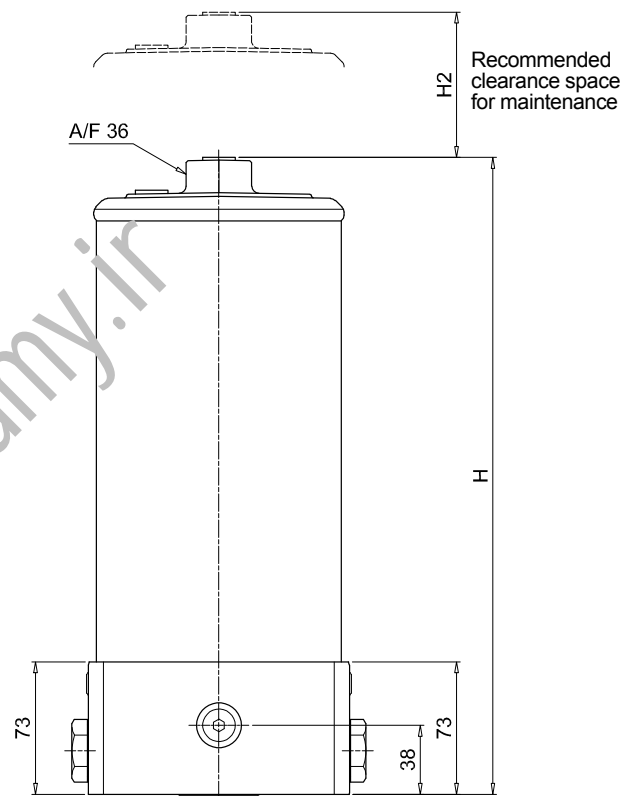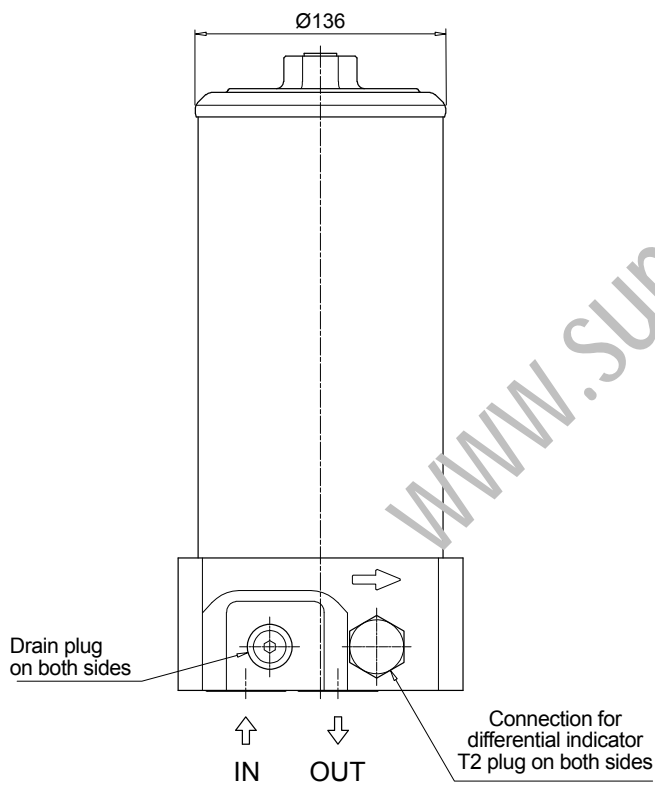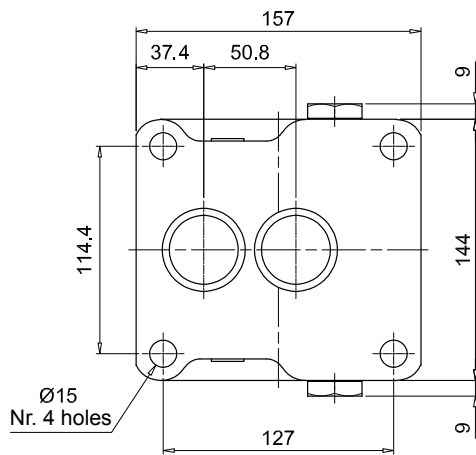

# FHF 325 SPARE PARTS

Filter housing according to SAE J2066 for HF4 filter elements

Order number for spare parts

**FHF 325**  
**Connections**  
**A - B - C - G - H**

| Item:                              | Q.ty: 1 pc.     | Q.ty: 1 pc.          | Q.ty: 2 pc.               |     |     |
|------------------------------------|-----------------|----------------------|---------------------------|-----|-----|
| Filter series                      | Filter element  | Seal Kit code number | Indicator connection plug |     |     |
|                                    |                 | NBR                  | FPM                       | NBR | FPM |
| <b>FHF 325</b><br><b>A-B-C-G-H</b> | See order table | 02050588             | 02050589                  | T2H | T2V |

**FHF 325**  
**Connections**  
**M - N**

| Item:                        | Q.ty: 1 pc.     | Q.ty: 1 pc.          | Q.ty: 2 pc.               |     |     |
|------------------------------|-----------------|----------------------|---------------------------|-----|-----|
| Filter series                | Filter element  | Seal Kit code number | Indicator connection plug |     |     |
|                              |                 | NBR                  | FPM                       | NBR | FPM |
| <b>FHF 325</b><br><b>M-N</b> | See order table | 02050590             | 02050591                  | T2H | T2V |



[www.sumy.ir](http://www.sumy.ir)

www.sumy.ir

# FHD series

Maximum working pressure up to 35 MPa (350 bar) - Flow rate up to 250 l/min



### High Pressure filters

#### Duplex

**Maximum working pressure up to 35 MPa (350 bar)**

**Flow rate up to 250 l/min**

FHD is a range of high pressure duplex filter with integrated changeover function to allow the filter element replacement without the system shut-down.

They are directly connected to the lines of the system through the hydraulic fittings.

#### Available features:

- Female threaded connections up to 1 1/4" and flanged connections up to 1 1/2", for a maximum flow rate of 345 l/min
- Fine filtration rating, to get a good cleanliness level into the system
- Balancing valve, available for FHD051, FHD326 and FHD333, to equalize the housing pressure before the switch.
- Bypass valve, to relieve excessive pressure drop across the filter media
- Vent ports, to avoid air trapped into the filter going into the system
- Drain ports, to remove the fluid from the housing prior the maintenance work
- Low collapse filter element "N", for use with filters provided with bypass valve
- High collapse filter element "H", for use with filters not provided with bypass valve
- Low collapse filter element with external support "R", for filter element protection against the back pressure caused by the check valve or the reverse flow in filters provided with the bypass valve
- High collapse filter element with external support "S", for filter element protection against the back pressure caused by the check valve or the reverse flow in filters not provided with the bypass valve
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

- System where shut-down causes high costs
- System where shut-down causes safety issues

#### Filter housing materials

- Head: Phosphatized cast iron
- Housing: Phosphatized steel
- Bypass valve: Steel

#### Pressure

- Test pressure: 52.5 MPa (525 bar)
- Burst pressure: 105 MPa (1050 bar)
- Pulse pressure fatigue test: 1 000 000 cycles with pressure from 0 to 35 MPa (350 bar)

#### Bypass valve

- Opening pressure 600 kPa (6 bar) ±10%
- Other opening pressures on request.

#### Δp element type

- Microfibre filter elements - series N: 20 bar
- Microfibre filter elements - series R: 20 bar (not available for FHD 021)
- Microfibre filter elements - series H: 210 bar (only for FHD 021)
- Microfibre filter elements - series S: 210 bar (not available for FHD 021)
- Wire mesh filter elements - series N: 20 bar
- Fluid flow through the filter element from OUT to IN

#### Seals

- Standard NBR series A
- Optional FPM series V

#### Temperature


From -25 °C to +110 °C

#### Connections

In-line Inlet/Outlet 90°

#### Note

FHD filters are provided for vertical mounting



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series  | Weights [kg] |      |      |      |      |      | Volumes [dm <sup>3</sup> ] |      |      |      |      |      |
|----------------|--------------|------|------|------|------|------|----------------------------|------|------|------|------|------|
|                | Length       | 1    | 2    | 3    | 4    | 5    | Length                     | 1    | 2    | 3    | 4    | 5    |
| <b>FHD 021</b> | -            | -    | 8.0  | 9.0  | 9.9  | -    | -                          | -    | 0.06 | 0.12 | 0.22 | -    |
| <b>FHD 051</b> | -            | -    | 16.9 | 17.5 | 18.5 | 19.8 | -                          | -    | 0.31 | 0.41 | 0.53 | 0.83 |
| <b>FHD 326</b> | -            | 43.0 | 50.0 | 54.0 | -    | -    | -                          | 0.88 | 1.60 | 2.37 | -    | -    |
| <b>FHD 333</b> | -            | -    | 74.0 | 79.0 | 98.0 | -    | -                          | -    | 1.75 | 2.52 | 3.35 | -    |

| Filter series  | Length   | Filter element design - H Series |     |     |     |     |     |
|----------------|----------|----------------------------------|-----|-----|-----|-----|-----|
|                |          | A03                              | A06 | A10 | A16 | A25 | M25 |
| <b>FHD 021</b> | <b>2</b> | 6                                | 8   | 14  | 16  | 19  | 26  |
|                | <b>3</b> | 10                               | 12  | 18  | 20  | 22  | 27  |
|                | <b>4</b> | 13                               | 16  | 21  | 22  | 24  | 27  |

| Filter series  | Length   | Filter element design - R Series |     |     |     |     |     | N Series | Filter element design - S Series |     |     |     |     |
|----------------|----------|----------------------------------|-----|-----|-----|-----|-----|----------|----------------------------------|-----|-----|-----|-----|
|                |          | A03                              | A06 | A10 | A16 | A25 | M25 |          | A03                              | A06 | A10 | A16 | A25 |
| <b>FHD 051</b> | <b>2</b> | 39                               | 41  | 51  | 54  | 59  | 64  |          | 35                               | 37  | 48  | 51  | 58  |
|                | <b>3</b> | 45                               | 46  | 54  | 56  | 61  | 65  |          | 41                               | 43  | 52  | 54  | 60  |
|                | <b>4</b> | 50                               | 52  | 58  | 58  | 62  | 65  |          | 47                               | 49  | 56  | 56  | 61  |
|                | <b>5</b> | 56                               | 57  | 61  | 62  | 63  | 65  |          | 53                               | 53  | 57  | 59  | 63  |
| <b>FHD 326</b> | <b>1</b> | 93                               | 99  | 131 | 142 | 154 | 171 |          | 83                               | 87  | 117 | 120 | 146 |
|                | <b>2</b> | 136                              | 141 | 163 | 166 | 173 | 176 |          | 119                              | 128 | 149 | 151 | 163 |
|                | <b>3</b> | 152                              | 159 | 171 | 174 | 175 | 177 |          | 139                              | 148 | 161 | 163 | 170 |
| <b>FHD 333</b> | <b>2</b> | 175                              | 184 | 224 | 230 | 245 | 249 |          | 147                              | 162 | 199 | 201 | 225 |
|                | <b>3</b> | 204                              | 217 | 241 | 245 | 247 | 252 |          | 179                              | 196 | 221 | 224 | 238 |
|                | <b>4</b> | 216                              | 224 | 242 | 247 | 253 | 255 |          | 196                              | 204 | 223 | 225 | 239 |

### Maximum flow rate for a complete pressure filter with a pressure drop $\Delta p = 1.5$ bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.





### Hydraulic symbols

| Filter series  | Style S | Style B | Style B |
|----------------|---------|---------|---------|
| <b>FHD 021</b> | •       |         |         |
| <b>FHD 051</b> | •       | •       |         |
| <b>FHD 326</b> | •       |         | •       |
| <b>FHD 333</b> | •       |         | •       |



# FHD GENERAL INFORMATION

## Pressure drop

Filter housings  $\Delta p$  pressure drop

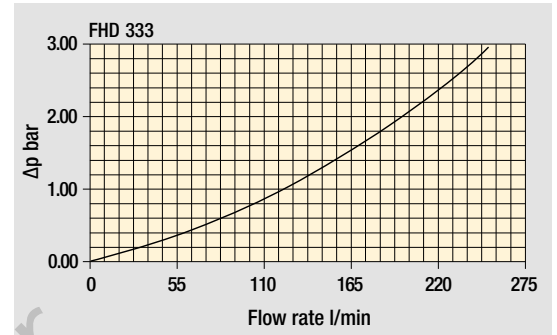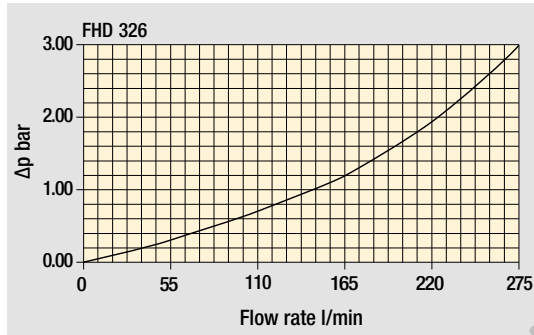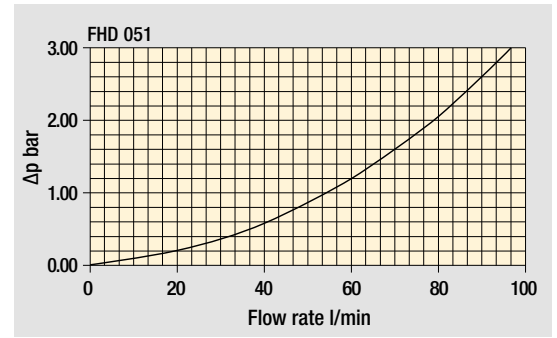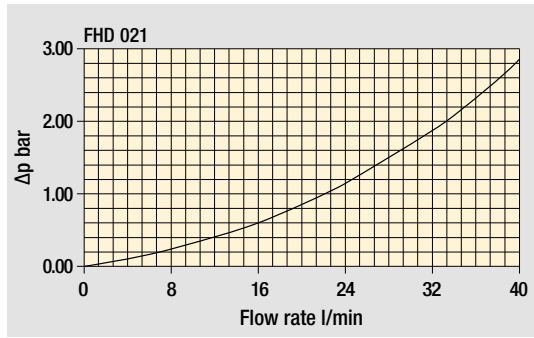

Bypass valve pressure drop

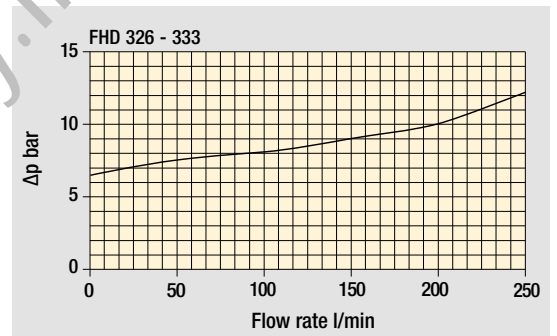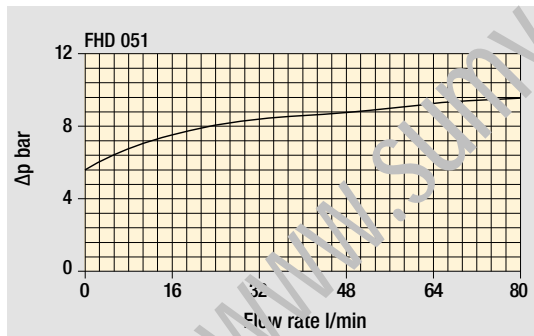

The curves are plotted using mineral oil with density of  $0.86 \text{ kg/dm}^3$  in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

[www.sumy.ir](http://www.sumy.ir)

## Designation & Ordering code

### COMPLETE FILTER

|   |  |  |  |  |  |  |  |  |  |
|---|--|--|--|--|--|--|--|--|--|
| <b>Series and size</b><br><b>FHD021</b>   | Configuration example: <b>FHD021</b>   <b>4</b>   <b>S</b>   <b>A</b>   <b>G1</b>   <b>A06</b>   <b>H</b>   <b>P01</b> |  |  |  |  |  |  |  |  |
| <b>Length</b><br><b>2</b>   <b>3</b>   <b>4</b>   |  |  |  |  |  |  |  |  |  |
| <b>Valves</b><br><b>S</b> Without bypass  |  |  |  |  |  |  |  |  |  |
| <b>Seals</b><br><b>A</b> NBR<br><b>V</b> FPM  |  |  |  |  |  |  |  |  |  |
| <b>Connections</b><br><b>G1</b> G 1/2"<br><b>G2</b> 1/2" NPT<br><b>G3</b> SAE 8 - 3/4" - 16 UNF |  |  |  |  |  |  |  |  |  |
| <b>Filtration rating (filter media)</b>   |  |  |  |  |  |  |  |  |  |
| <b>A03</b> Inorganic microfiber 3 µm  | <b>A16</b> Inorganic microfiber 16 µm  |  |  |  |  |  |  |  |  |
| <b>A06</b> Inorganic microfiber 6 µm  | <b>A25</b> Inorganic microfiber 25 µm  |  |  |  |  |  |  |  |  |
| <b>A10</b> Inorganic microfiber 10 µm   | <b>M25</b> Wire mesh 25 µm   |  |  |  |  |  |  |  |  |

| Element Δp       | Filtration rating |     | Execution                     |
|------------------|-------------------|-----|-------------------------------|
|                  | Axx               | M25 |                               |
| <b>N</b> 20 bar  |                   | •   | <b>P01</b> MP Filtri standard |
| <b>H</b> 210 bar | •                 |     | <b>Pxx</b> Customized         |

### FILTER ELEMENT

|   |  |  |  |  |  |  |
|---|--|--|--|--|--|--|
| <b>Element series and size</b><br><b>HP011</b>          | Configuration example: <b>HP011</b>   <b>4</b>   <b>A06</b>   <b>A</b>   <b>H</b>   <b>P01</b> |  |  |  |  |  |
| <b>Element length</b><br><b>2</b>   <b>3</b>   <b>4</b> |  |  |  |  |  |  |
| <b>Filtration rating (filter media)</b>                 |  |  |  |  |  |  |
| <b>A03</b> Inorganic microfiber 3 µm                    | <b>A16</b> Inorganic microfiber 16 µm  |  |  |  |  |  |
| <b>A06</b> Inorganic microfiber 6 µm                    | <b>A25</b> Inorganic microfiber 25 µm  |  |  |  |  |  |
| <b>A10</b> Inorganic microfiber 10 µm                   | <b>M25</b> Wire mesh 25 µm   |  |  |  |  |  |


| Seals        | Element Δp       | Filtration rating |     | Execution                     |
|--------------|------------------|-------------------|-----|-------------------------------|
|              |                  | Axx               | M25 |                               |
| <b>A</b> NBR | <b>N</b> 20 bar  |                   | •   | <b>P01</b> MP Filtri standard |
| <b>V</b> FPM | <b>H</b> 210 bar | •                 | •   | <b>Pxx</b> Customized         |

### ACCESSORIES

| Differential indicators                                     | page    |   | page |
|---|---------|---|------|
| <b>DEA</b> Electrical differential indicator                | 577     | <b>DLE</b> Electrical / visual differential indicator | 580  |
| <b>DEH</b> Hazardous area electronic differential indicator | 577-578 | <b>DTA</b> Electronic differential indicator          | 581  |
| <b>DEM</b> Electrical differential indicator                | 578-579 | <b>DVA</b> Visual differential indicator              | 581  |
| <b>DLA</b> Electrical / visual differential indicator       | 579-580 | <b>DVM</b> Visual differential indicator              | 581  |
| <b>Additional features</b>                                  |         |   |      |
| <b>T2</b> Plug  | 582     |   |      |



| FHDO21        |          |
|---------------|----------|
| Filter length | H [mm]   |
| 2             | 172      |
| 3             | 222      |
| 4             | 272      |
| Connections   | R        |
| G1            | M6       |
| G2 - G3       | 1/4" UNC |

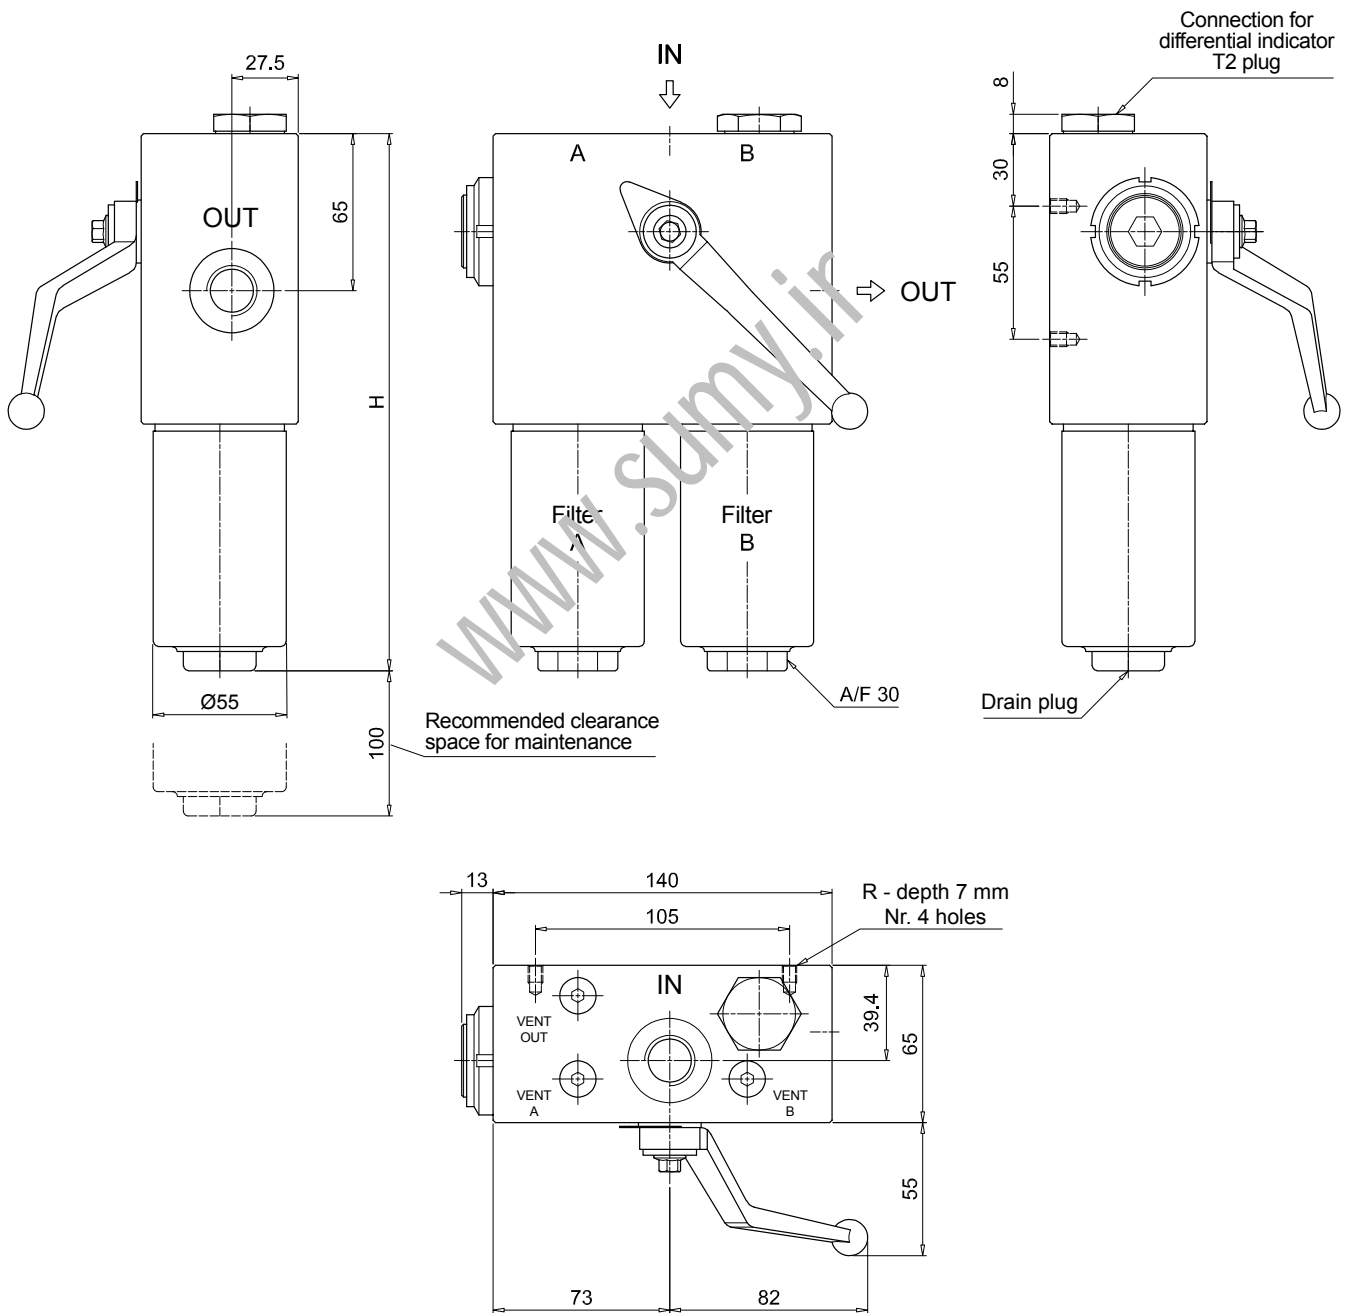

# FHD FHD051 - FHD326 - FHD333

## Designation & Ordering code

### COMPLETE FILTER

Series and size Configuration example: **FHD326** | **3** | **S** | **A** | **G1** | **M25** | **N** | **P01**

**FHD051** | **FHD326** | **FHD333**

| Length | FHD051 | FHD326 | FHD333 |
|--------|--------|--------|--------|
| 1      |        | •      |        |
| 2      | •      | •      | •      |
| 3      | •      | •      | •      |
| 4      | •      |        | •      |
| 5      | •      |        |        |

#### Valves

- S** Without bypass  
**B** With bypass 6 bar

#### Seals

- A** NBR  
**V** FPM

| Connections | FHD051                   | FHD326                  | FHD333                  |
|-------------|--------------------------|-------------------------|-------------------------|
| <b>G1</b>   | G 3/4"                   | G 1 1/4"                | -                       |
| <b>G2</b>   | 3/4" NPT                 | -                       | -                       |
| <b>G3</b>   | G 1/2"                   | 1 1/4" NPT              | -                       |
| <b>G4</b>   | 1/2" NPT                 | SAE 20 - 1 5/8" - 12 UN | -                       |
| <b>G5</b>   | SAE 8 - 3/4" - 16 UNF    | -                       | -                       |
| <b>G6</b>   | SAE 12 - 1 1/16" - 12 UN | -                       | -                       |
| <b>F1</b>   | -                        | -                       | 1 1/2" SAE 6000 psi/M   |
| <b>F2</b>   | -                        | -                       | 1 1/2" SAE 6000 psi/UNC |

#### Filtration rating (filter media)

|            |                      |       |
|------------|----------------------|-------|
| <b>A03</b> | Inorganic microfiber | 3 µm  |
| <b>A06</b> | Inorganic microfiber | 6 µm  |
| <b>A10</b> | Inorganic microfiber | 10 µm |
| <b>A16</b> | Inorganic microfiber | 16 µm |
| <b>A25</b> | Inorganic microfiber | 25 µm |
| <b>M25</b> | Wire mesh            | 25 µm |

| Element Δp       | Filtration rating |     | Execution                     |
|------------------|-------------------|-----|-------------------------------|
|                  | Axx               | M25 |                               |
| <b>N</b> 20 bar  |                   | •   | <b>P01</b> MP Filtri standard |
| <b>R</b> 20 bar  | •                 | •   | <b>Pxx</b> Customized         |
| <b>S</b> 210 bar | •                 | •   |                               |

### FILTER ELEMENT

Element series and size Configuration example: **HP320** | **3** | **M25** | **A** | **N** | **P01**

**HP050** | **HP320**

| Element length | HP050 | HP320 |
|----------------|-------|-------|
| 1              |       | •     |
| 2              | •     | •     |
| 3              | •     | •     |
| 4              | •     | •     |
| 5              | •     |       |

| Element length | HP050 | HP320 |
|----------------|-------|-------|
| 1              |       | •     |
| 2              | •     | •     |
| 3              | •     | •     |
| 4              | •     | •     |
| 5              | •     |       |

#### Filtration rating (filter media)

|            |                      |       |
|------------|----------------------|-------|
| <b>A03</b> | Inorganic microfiber | 3 µm  |
| <b>A06</b> | Inorganic microfiber | 6 µm  |
| <b>A10</b> | Inorganic microfiber | 10 µm |
| <b>A16</b> | Inorganic microfiber | 16 µm |
| <b>A25</b> | Inorganic microfiber | 25 µm |
| <b>M25</b> | Wire mesh            | 25 µm |



| Element Δp       | Filtration rating |     | Execution                     |
|------------------|-------------------|-----|-------------------------------|
|                  | Axx               | M25 |                               |
| <b>N</b> 20 bar  |                   | •   | <b>P01</b> MP Filtri standard |
| <b>R</b> 20 bar  | •                 | •   | <b>Pxx</b> Customized         |
| <b>S</b> 210 bar | •                 | •   |                               |

### ACCESSORIES

| Differential indicators                                     | page    | Differential indicators                               | page |
|---|---------|---|------|
| <b>DEA</b> Electrical differential indicator                | 577     | <b>DLE</b> Electrical / visual differential indicator | 580  |
| <b>DEH</b> Hazardous area electronic differential indicator | 577-578 | <b>DTA</b> Electronic differential indicator          | 581  |
| <b>DEM</b> Electrical differential indicator                | 578-579 | <b>DVA</b> Visual differential indicator              | 581  |
| <b>DLA</b> Electrical / visual differential indicator       | 579-580 | <b>DVM</b> Visual differential indicator              | 581  |

| Additional features | page |
|---------------------|------|
| <b>T2</b> Plug      | 582  |

| FHD051        |          |         |
|---------------|----------|---------|
| Filter length | H [mm]   |         |
| 2             | 253      |         |
| 3             | 295      |         |
| 4             | 343      |         |
| 5             | 465      |         |
| Connections   | R        |         |
| G1            | M6       |         |
| G2            | 1/4" UNC |         |
| G3            | M6       |         |
| G4-G5-G6      | 1/4" UNC |         |
| Valves        | L [mm]   | L1 [mm] |
| S             | 168      | 138     |
| B             | 182.5    | 152.5   |

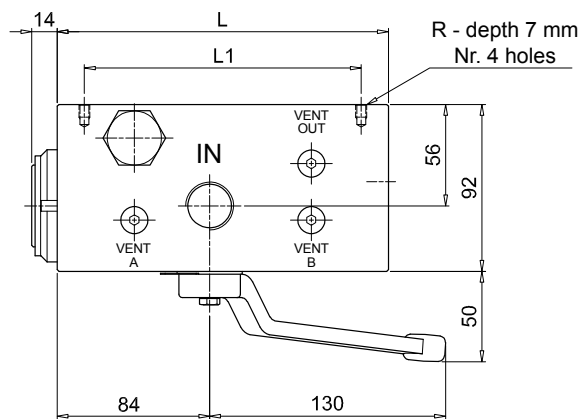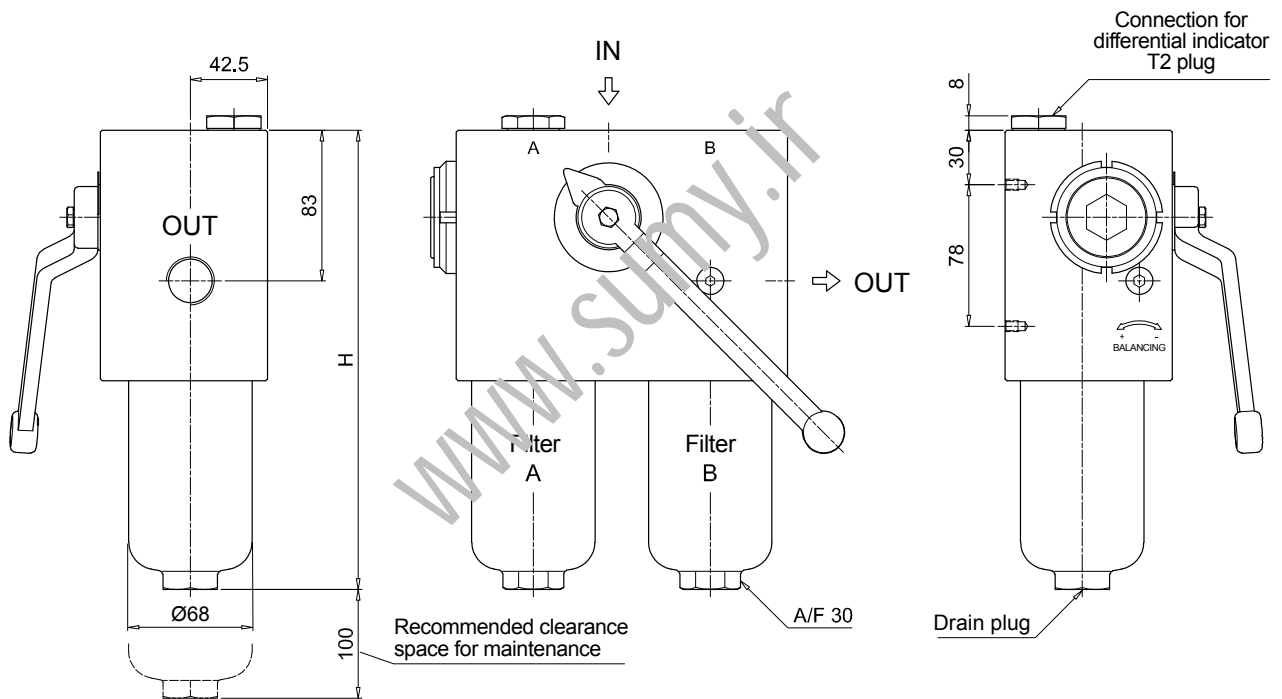

# FHD FHD051 - FHD326 - FHD333


## Dimensions

### FHD326


| Filter length | H [mm] |
|---------------|--------|
| <b>1</b>      | 309    |
| <b>2</b>      | 432    |
| <b>3</b>      | 564    |

| Connections    | R        |
|----------------|----------|
| <b>G1</b>      | M10      |
| <b>G2 - G3</b> | 3/8" UNC |

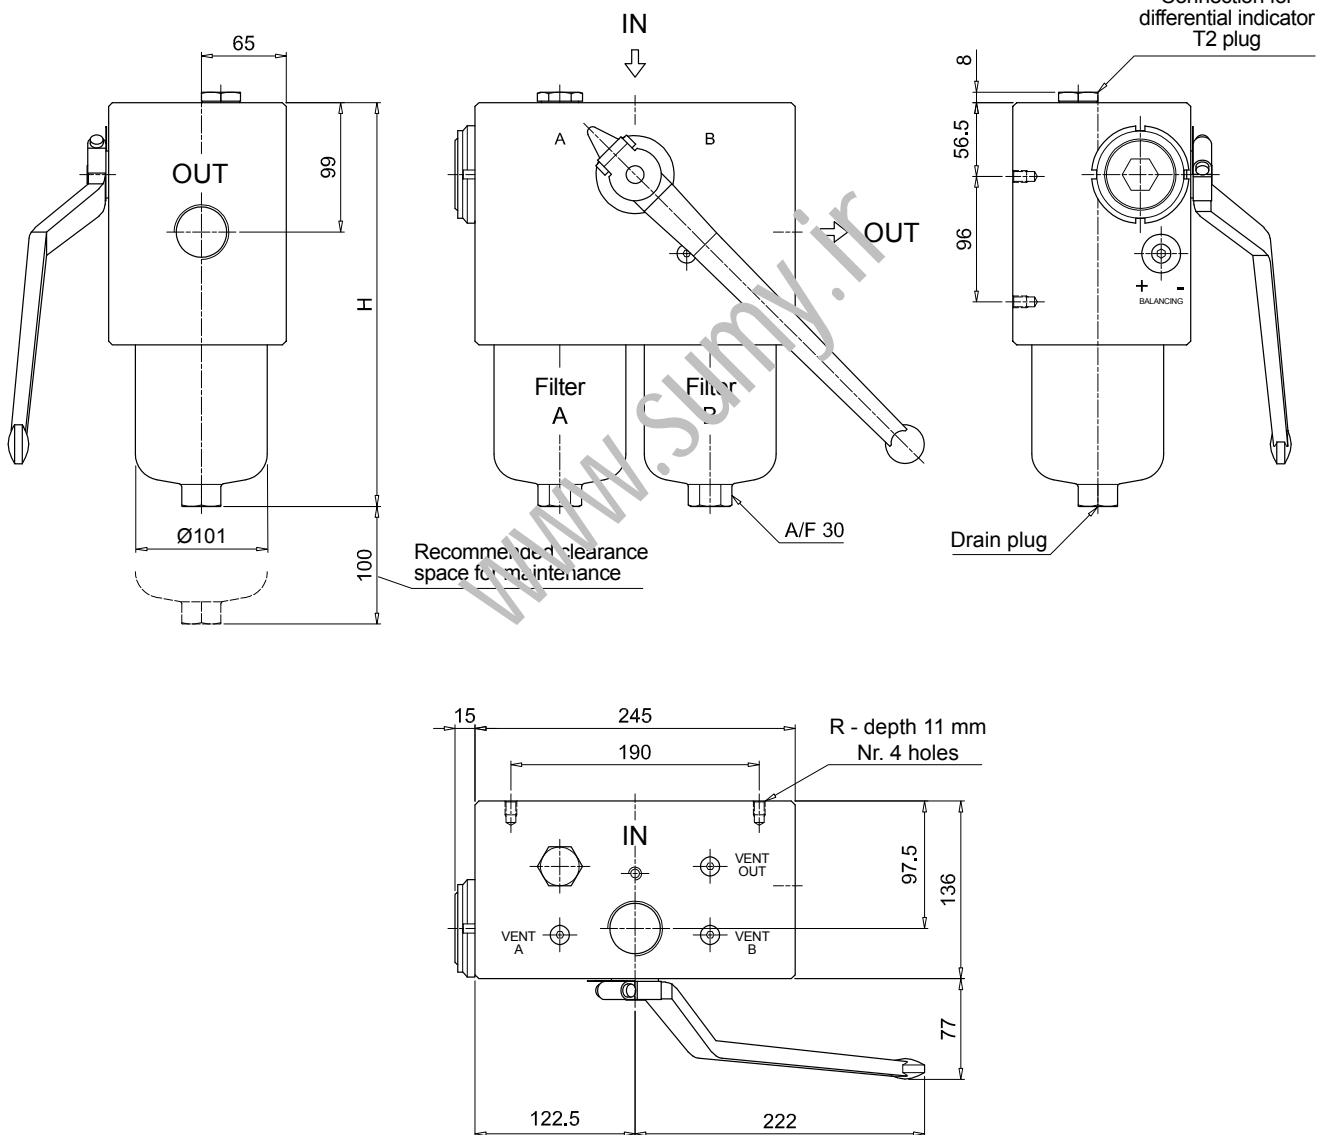



| FHD333        |          |
|---------------|----------|
| Length 2 - 3  |          |
| Filter length | H [mm]   |
| 2             | 479      |
| 3             | 612      |
| Connections   |          |
| F1            | R        |
| F1            | M10      |
| F2            | 3/8" UNC |

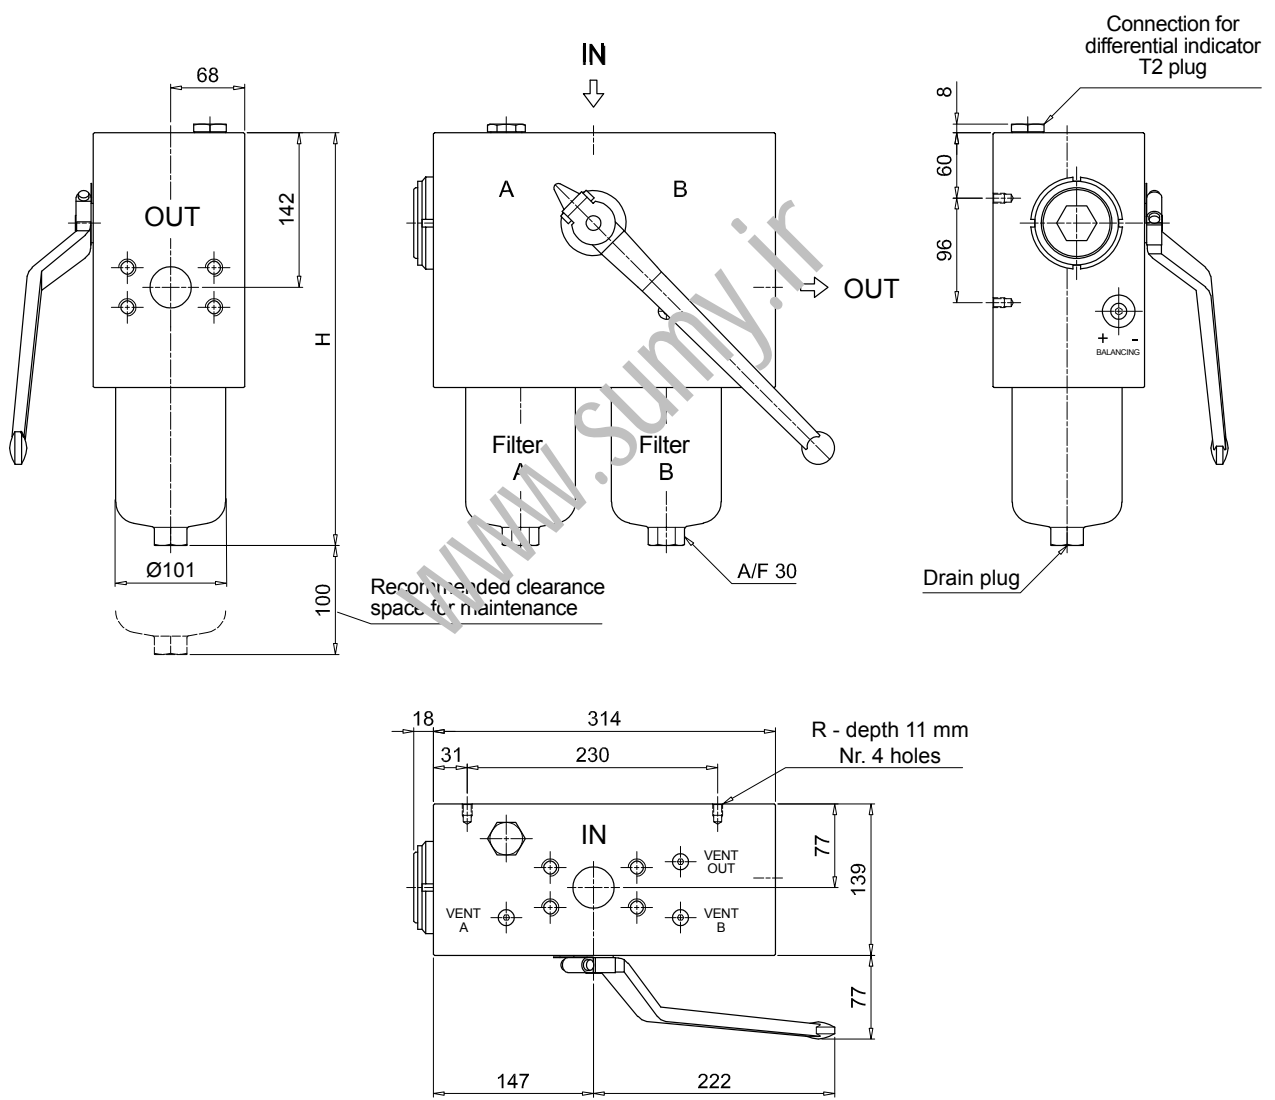


# FHD FHD051 - FHD326 - FHD333

## Dimensions

|             |          |
|-------------|----------|
| FHD333      |          |
| Length 4    |          |
| Connections | R        |
| F1          | M10      |
| F2          | 3/8" UNC |

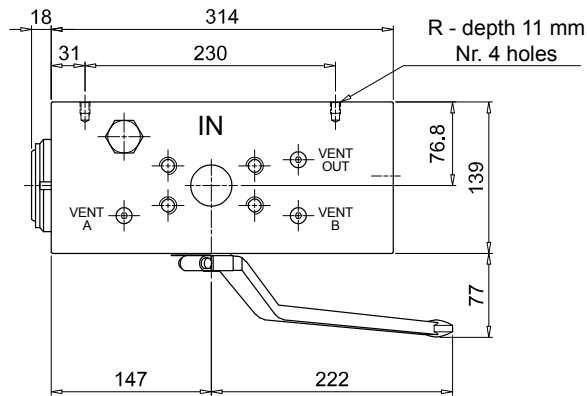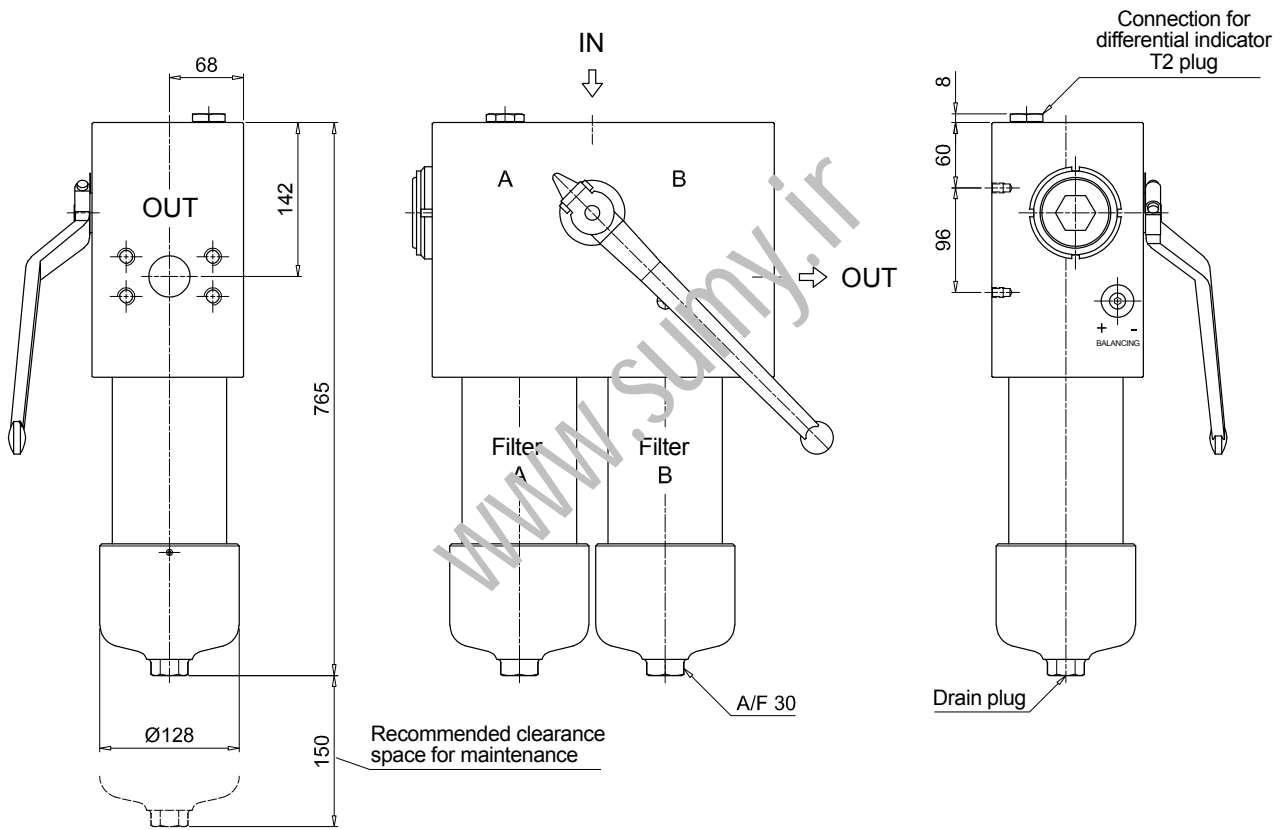

FHD 021 - 051 - 326 - 333

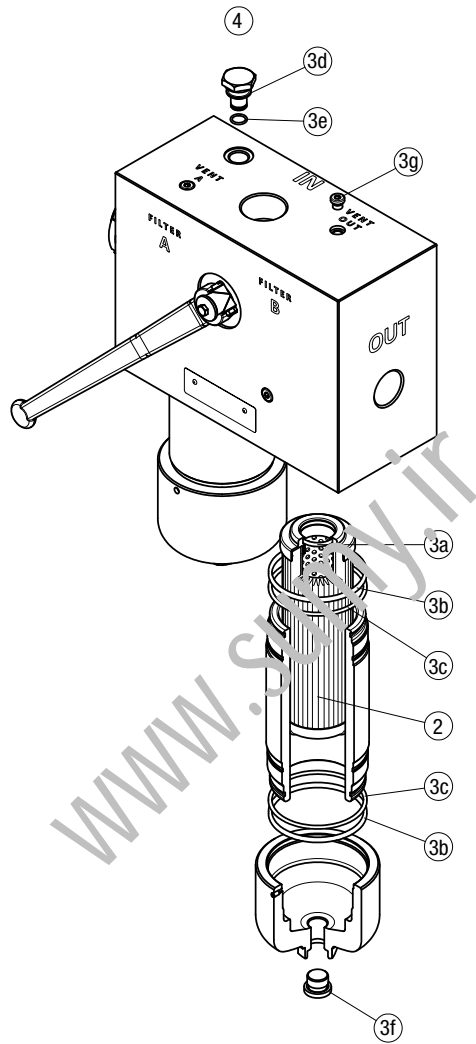

| Item:         | Q.ty: 1 pc.     |                      | Q.ty: 1 pc. |                           | Q.ty: 1 pc. |  |
|---------------|-----------------|----------------------|-------------|---------------------------|-------------|--|
| Filter series | Filter element  | Seal Kit code number |             | Indicator connection plug |             |  |
| FHD 021       | FHD 051         | NBR                  | FPM         | NBR                       | FPM         |  |
| FHD 021       | See order table | 02050511             | 02050512    | T2H                       | T2V         |  |
| FHD 051       |                 | 02050420             | 02050421    |                           |             |  |
| FHD 326-333   |                 | 02050377             | 02050378    |                           |             |  |

www.sumy.ir



# HPB series

## BOWL KIT

Maximum working pressure up to 42 MPa (420 bar) - Flow rate up to 300 l/min



### High Pressure Bowl Kit

**Maximum working pressure up to 42 MPa (420 bar)**  
**Flow rate up to 300 l/min**

HPB is a range of high pressure bowl kits for protection of sensitive components in high pressure hydraulic systems in the mobile machines. They are directly integrated in the control blocks.

#### Available features:

- Fine filtration rating, to get a good cleanliness level into the system
- Low collapse filter element "N", for use with blocks provided with bypass valve
- High collapse filter element with external support "S", for use with blocks not provided with the bypass valve

### Filter housing materials

- Housing: Phosphatized steel

### Pressure

- Test pressure: 63 MPa (630 bar)
- Burst pressure: 126 MPa (1260 bar)
- Pulse pressure fatigue test: 1 000 000 cycles with pressure from 0 to 42 MPa (420 bar)

### Δp element type

- Microfibre / Wire mesh filter elements - series N: 20 bar
- Microfibre / Wire mesh filter elements - series S: 210 bar
- Fluid flow through the filter element from OUT to IN

### Seals

- Standard NBR series A
- Optional FPM series V

### Temperature

From -25 °C to +110 °C

### Note

HPB filters are provided for vertical mounting



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series  | Weights [kg] |      |      |      |      | Volumes [dm <sup>3</sup> ] |        |      |      |      |      |      |
|----------------|--------------|------|------|------|------|----------------------------|--------|------|------|------|------|------|
|                | Length       | 1    | 2    | 3    | 4    | 5                          | Length | 1    | 2    | 3    | 4    | 5    |
| <b>HPB 050</b> |              | 1.10 | 1.50 | 1.90 | 2.40 | 3.50                       |        | 0.30 | 0.45 | 0.60 | 0.80 | 1.20 |
| <b>HPB 150</b> |              | 2.90 | 4.90 | 6.30 | -    | -                          |        | 0.45 | 0.85 | 1.10 | -    | -    |

| Filter series  | Length   | Filter element design - N Series |     |     |     |     |     | Filter element design - S Series |     |     |     |     |
|----------------|----------|----------------------------------|-----|-----|-----|-----|-----|----------------------------------|-----|-----|-----|-----|
|                |          | A03                              | A06 | A10 | A16 | A25 | M25 | A03                              | A06 | A10 | A16 | A25 |
| <b>HPB 050</b> | <b>1</b> | 42                               | 43  | 79  | 82  | 106 | 147 | 29                               | 39  | 57  | 59  | 74  |
|                | <b>2</b> | 52                               | 57  | 85  | 96  | 121 | 149 | 45                               | 49  | 76  | 88  | 114 |
|                | <b>3</b> | 66                               | 69  | 97  | 106 | 130 | 150 | 58                               | 61  | 89  | 99  | 125 |
|                | <b>4</b> | 83                               | 89  | 113 | 115 | 134 | 152 | 74                               | 80  | 106 | 108 | 129 |
|                | <b>5</b> | 107                              | 110 | 130 | 134 | 141 | 154 | 93                               | 95  | 111 | 121 | 139 |
| <b>HPB 150</b> | <b>1</b> | 81                               | 88  | 156 | 163 | 179 | 295 |                                  |     |     |     |     |
|                | <b>2</b> | 142                              | 145 | 227 | 230 | 236 | 312 |                                  |     |     |     |     |
|                | <b>3</b> | 170                              | 180 | 242 | 245 | 263 | 315 |                                  |     |     |     |     |

### Maximum flow rate for a complete pressure filter with a pressure drop $\Delta p = 1.5$ bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.


For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure.

Please, contact our Sales Department for further additional information.

| Filter series  | Style S |
|----------------|---------|
| <b>HPB 050</b> | •       |
| <b>HPB 150</b> | •       |

Hydraulic symbols



www.sumy.ir

## Designation & Ordering code

### COMPLETE FILTER

Series and size **HPB050** Configuration example: **HPB050** **3** **A** **A10** **N** **P01**

Length **1** | **2** | **3** | **4** | **5** |

Seals **A** NBR  
**V** FPM

| Filtration rating (filter media) |                      |       |
|----------------------------------|----------------------|-------|
| <b>A03</b>                       | Inorganic microfiber | 3 µm  |
| <b>A06</b>                       | Inorganic microfiber | 6 µm  |
| <b>A10</b>                       | Inorganic microfiber | 10 µm |
| <b>A16</b>                       | Inorganic microfiber | 16 µm |
| <b>A25</b>                       | Inorganic microfiber | 25 µm |
| <b>M25</b>                       | Wire mesh            | 25 µm |

| Element Δp |         |
|------------|---------|
| <b>N</b>   | 20 bar  |
| <b>S</b>   | 210 bar |

| Execution  |                    |
|------------|--------------------|
| <b>P01</b> | MP Filtri standard |
| <b>Pxx</b> | Customized         |

### FILTER ELEMENT

Element series and size **HP050** Configuration example: **HP050** **3** **A10** **A** **N** **P01**

Element length **1** | **2** | **3** | **4** | **5** |

Seals **A** NBR  
**V** FPM



| Filtration rating (filter media) |                      |       |
|----------------------------------|----------------------|-------|
| <b>A03</b>                       | Inorganic microfiber | 3 µm  |
| <b>A06</b>                       | Inorganic microfiber | 6 µm  |
| <b>A10</b>                       | Inorganic microfiber | 10 µm |
| <b>A16</b>                       | Inorganic microfiber | 16 µm |
| <b>A25</b>                       | Inorganic microfiber | 25 µm |
| <b>M25</b>                       | Wire mesh            | 25 µm |

| Seals    |     |
|----------|-----|
| <b>A</b> | NBR |
| <b>V</b> | FPM |

| Element Δp |         |
|------------|---------|
| <b>N</b>   | 20 bar  |
| <b>S</b>   | 210 bar |

| Execution  |                    |
|------------|--------------------|
| <b>P01</b> | MP Filtri standard |
| <b>Pxx</b> | Customized         |

| HPB050        |        |
|---------------|--------|
| Filter length | H [mm] |
| 1             | 107    |
| 2             | 144    |
| 3             | 186    |
| 4             | 234    |
| 5             | 356    |

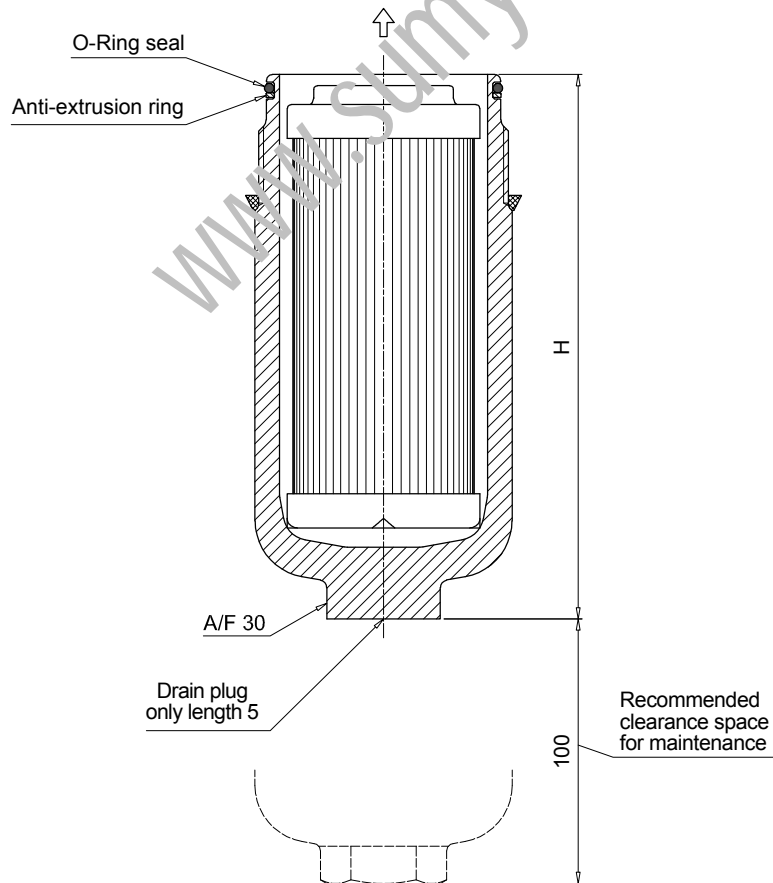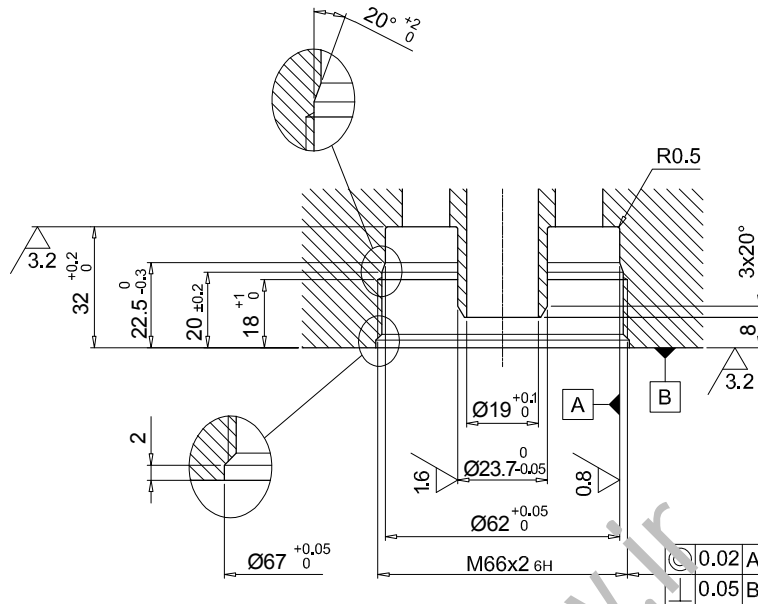

## Designation & Ordering code

### COMPLETE FILTER

Series and size **HPB150** Configuration example: **HPB150** | **3** | **A** | **A10** | **N** | **P01**

Length **1** | **2** | **3**

Seals **A** NBR  
**V** FPM

| Filtration rating (filter media) |                      |       |
|----------------------------------|----------------------|-------|
| <b>A03</b>                       | Inorganic microfiber | 3 µm  |
| <b>A06</b>                       | Inorganic microfiber | 6 µm  |
| <b>A10</b>                       | Inorganic microfiber | 10 µm |
| <b>A16</b>                       | Inorganic microfiber | 16 µm |
| <b>A25</b>                       | Inorganic microfiber | 25 µm |
| <b>M25</b>                       | Wire mesh            | 25 µm |

| Element Δp |        |
|------------|--------|
| <b>N</b>   | 20 bar |

| Execution  |                    |
|------------|--------------------|
| <b>P01</b> | MP Filtri standard |
| <b>Pxx</b> | Customized         |

### FILTER ELEMENT

Element series and size **HP150** Configuration example: **HP150** | **3** | **A10** | **A** | **N** | **P01**

Element length **1** | **2** | **3**

Seals **A** NBR  
**V** FPM



| Filtration rating (filter media) |                      |       |
|----------------------------------|----------------------|-------|
| <b>A03</b>                       | Inorganic microfiber | 3 µm  |
| <b>A06</b>                       | Inorganic microfiber | 6 µm  |
| <b>A10</b>                       | Inorganic microfiber | 10 µm |
| <b>A16</b>                       | Inorganic microfiber | 16 µm |
| <b>A25</b>                       | Inorganic microfiber | 25 µm |
| <b>M25</b>                       | Wire mesh            | 25 µm |

| Seals    |     |
|----------|-----|
| <b>A</b> | NBR |
| <b>V</b> | FPM |

| Element Δp |        |
|------------|--------|
| <b>N</b>   | 20 bar |

| Execution  |                    |
|------------|--------------------|
| <b>P01</b> | MP Filtri standard |
| <b>Pxx</b> | Customized         |


| HPB150        |        |
|---------------|--------|
| Filter length | H [mm] |
| 1             | 161    |
| 2             | 271    |
| 3             | 346    |

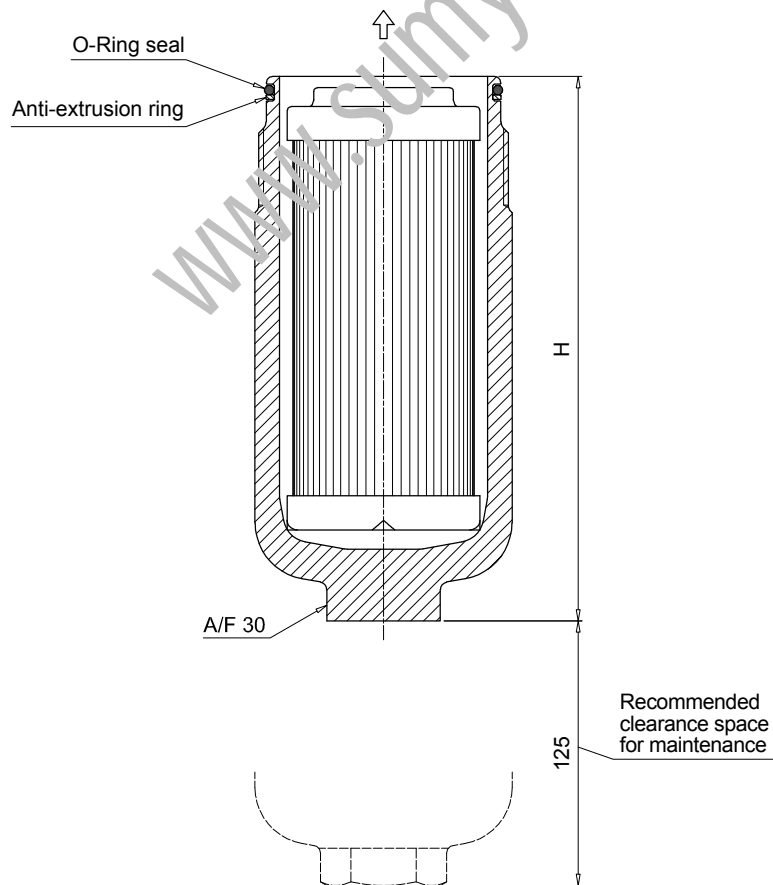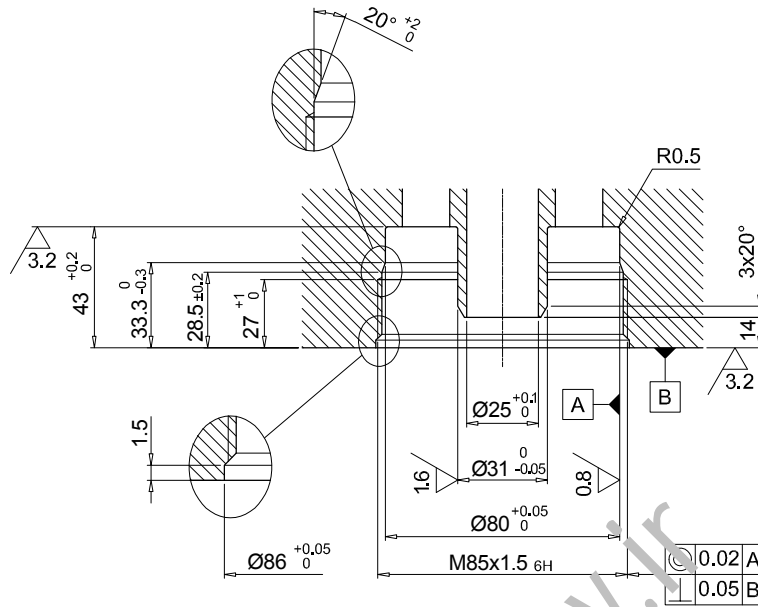

# HPB SPARE PARTS


Order number for spare parts

## HPB 050

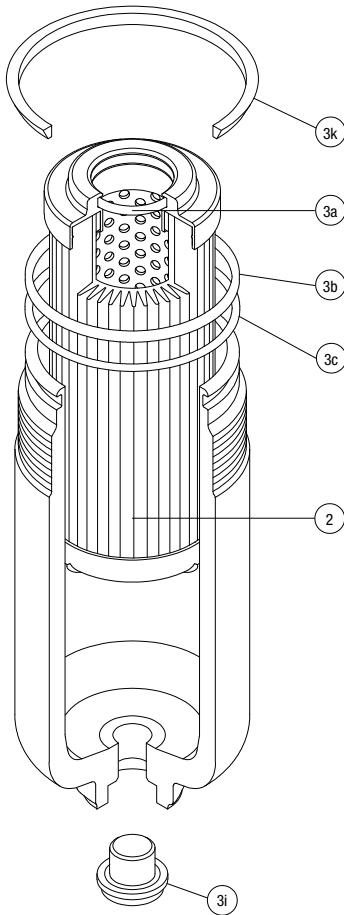

| Item:         | Q.ty: 1 pc.<br>2 | Q.ty: 1 pc.<br>3 (3a ÷ 3i) |          |
|---------------|------------------|----------------------------|----------|
| Filter series | Filter element   | Seal Kit code number       |          |
|               |                  | NBR                        | FPM      |
| HPB 050       | See order table  | 02050813                   | 02050823 |

## HPB 150

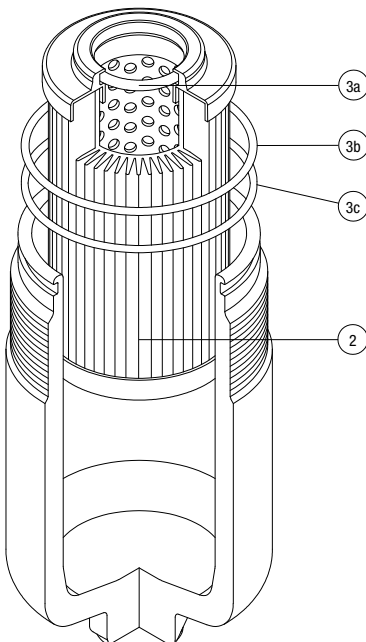

| Item:         | Q.ty: 1 pc.<br>2 | Q.ty: 1 pc.<br>3 (3a ÷ 3c) |          |
|---------------|------------------|----------------------------|----------|
| Filter series | Filter element   | Seal Kit code number       |          |
|               |                  | NBR                        | FPM      |
| HPB 150       | See order table  | 02050816                   | 02050826 |



www.sumy.ir

# Clogging indicators

## Differential indicators

### Introduction

Filter elements are efficient only if their Dirt Holding Capacity is fully exploited. This is achieved by using filter housings equipped with clogging indicators.

These devices trip when the clogging of the filter element causes an increase in pressure drop across the filter element.

The indicator is set to alarm before the element becomes fully clogged.

MP Filtri can supply indicators of the following designs:

- Vacuum switches and gauges
- Pressure switches and gauges
- Differential pressure indicators

These type of devices can be provided with a visual, electrical or both signals.

The electronic model (only available for differential type indicators) with warning signals (75% of clogging) and alarm (clogging).

### Suitable indicator types


#### DIFFERENTIAL INDICATORS

Differential indicators are used on the Pressure line to check the efficiency of the filter element.

They measure the pressure upstream and downstream of the filter element (differential pressure).

Standard items are produced with special connection G 1/2" size.

Also available in Stainless Steel models.

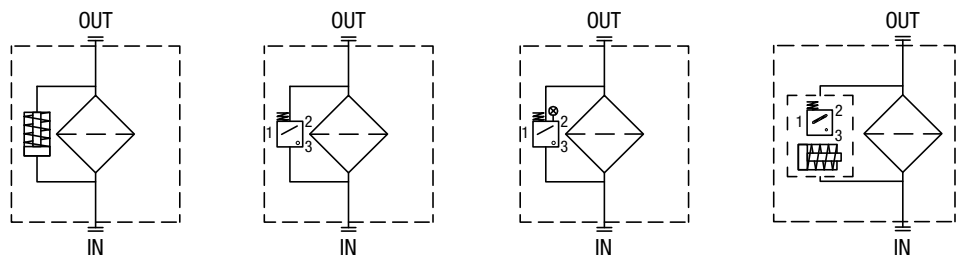

### Quick reference guide

| Filter series  | Visual indicator       | Electrical indicator         | Electrical / Visual indicator  | Electronic indicator | Hazardous area electronic indicator <span style="float: right; border: 1px solid black; padding: 2px;">NEW</span> |
|--|------------------------|------------------------------|--|----------------------|---|
| With bypass valve<br>FMP 039 - 065 - 135 - 320<br>FHP 010 - 011 - 065 - 135 - 350 - 500<br>FMM 050 - 150<br>FHA 051<br>FHM 006 - 007 - 010 - 050 - 065 - 135 - 320 - 500<br>FHB 050 - 135 - 320<br>FHF 325<br>FHD 021 - 051 - 326 - 333    | DVA50xP01<br>DVM50xP01 | DEA50xA50P01<br>DEM50xAxxP01 | DLA50xA51P01<br>DLA50xA52P01<br>DLA50xA71P01<br>DLE50xA50P01<br>DLE50xF50P01 | DTA50xF70P01         | DEH50xA48P01<br>DEH50xA49P01<br>DEH50xA70P01<br>DEH70xA48P01<br>DEH70xA49P01<br>DEH70xA70P01                      |
| Without bypass valve<br>FMP 039 - 065 - 135 - 320<br>FHP 010 - 011 - 065 - 135 - 350 - 500<br>FMM 050 - 150<br>FHA 051<br>FHM 006 - 007 - 010 - 050 - 065 - 135 - 320 - 500<br>FHB 050 - 135 - 320<br>FHF 325<br>FHD 021 - 051 - 326 - 333 | DVA70xP01<br>DVM70xP01 | DEA70xA50P01<br>DEM70xAxxP01 | DLA70xA51P01<br>DLA70xA52P01<br>DLA70xA71P01<br>DLE70xA50P01<br>DLE70xF50P01 | DTA70xF70P01         | DEH50xA48P01<br>DEH50xA49P01<br>DEH50xA70P01<br>DEH70xA48P01<br>DEH70xA49P01<br>DEH70xA70P01                      |

| DEA*50                                   |                    |
|--|--------------------|
| <b>Electrical Differential Indicator</b> |                    |
| Settings                                 | Ordering code      |
| 5.0 bar ±10%                             | DE A 50 x A 50 P01 |
| 7.0 bar ±10%                             | DE A 70 x A 50 P01 |
| 9.5 bar ±10%                             | DE A 95 x A 50 P01 |

**Hydraulic symbol**

**Electrical symbol**

**Materials**

- Body: Brass
- Base: Black Nylon
- Contacts: Silver
- Seal: HNBR - FPM

**Technical data**

- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -25 °C to +110 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids  
HFA, HFB, HFC according to ISO 2943
- Degree protection: IP66 according to EN 60529  
IP69K according to ISO 20653

**Electrical data**

- Electrical connection: EN 175301-803
- Resistive load: 0.2 A / 115 Vdc

| DEH*48  |                    |
|---|--------------------|
| <b>Hazardous Area Electronic Differential Indicator</b> |                    |
| Settings  | Ordering code      |
| 5.0 bar ±10%  | DE H 50 x A 48 P01 |
| 7.0 bar ±10%  | DE H 70 x A 48 P01 |

**Hydraulic symbol**

**Electrical symbol**

**Materials**

- Body: AISI 316L
- Contacts: Rhodium
- Seal: FPM - MFQ

**Technical data**

- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -60 °C to +125 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids  
HFA, HFB, HFC according to ISO 2943  
EX ia IIC T4/T6: Intrinsically safe
- Protection class: T4 (135 °C) and T6 (85 °C)
- Degree of protection: IP 66/67/68 according to EN 60529
- Connection type: Three-core cable, fitting M20x1.5
- Contact type: SPCO/SPDT (Hermetically sealed - Volt-free contacts)

**Electrical data**

- Resistive Load: 830 mA / 24 Vdc - 180 mA / 110 Vac
- Electrical Ratings:  
  - Ui = 30 Vdc
  - Ii = 250 mA
  - Pi = 1.3 W

- Certification / Approvals: ATEX, IECEx, EAC TR CU, INMETRO  
 - Certification included as standard

| DEH*49  |                    |
|---|--------------------|
| <b>Hazardous Area Electronic Differential Indicator</b> |                    |
| Settings  | Ordering code      |
| 5.0 bar ±10%  | DE H 50 x A 49 P01 |
| 7.0 bar ±10%  | DE H 70 x A 49 P01 |

**Hydraulic symbol**

**Electrical symbol**

**Materials**

- Body: AISI 316L
- Contacts: Rhodium
- Seal: FPM - MFQ

**Technical data**

- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -60 °C to +120 °C :  
ATEX, IECEx, EAC TR CU, INMETRO  
From -60 °C to +105 °C : UL/CSA
- Compatibility with fluids: Mineral oils, Synthetic fluids  
HFA, HFB, HFC according to ISO 2943
- Protection class: Ex d IIC T4/T6: Flameproof
- Temperature class: T4 (135 °C) and T6 (85 °C)
- Degree of protection: IP 66/67/68 according to EN 60529
- Connection type: Four-core cable, fitting 1/2" NPT
- Contact type: SPCO/SPDT (Hermetically sealed - Volt-free contacts)

**Electrical data**

- Resistive Load: 830 mA / 24 Vdc - 180 mA / 110 Vac
- Max voltage: 150 Vac/dc
- Power: 20 W

- Certification / Approvals: ATEX, IECEx, EAC TR CU, INMETRO, UL/CSA Class I Division 1 Groups A-D, UL/CSA Class II Division 1 Groups E-G  
 - Certification included as standard

# DIFFERENTIAL INDICATORS

## Dimensions

| DEH*70  |                    |
|---|--------------------|
| <b>Hazardous Area<br/>Electronic Differential Indicator</b> |                    |
| Settings  | Ordering code      |
| 5.0 bar $\pm 10\%$  | DE H 50 x A 70 P01 |
| 7.0 bar $\pm 10\%$  | DE H 70 x A 70 P01 |

A/F 25  
Max tightening torque: 50 N·m

**Hydraulic symbol**

**Electrical symbol**

**Materials**

- Body: AISI 316L with internal engineered resin switch
- Contacts: Rhodium
- Seal: FPM - MFQ

**Technical data**

- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -60 °C to +80 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids

- Protection class: EX ia IIC T6: Intrinsically safe

- Temperature class: T6 (85 °C)

- Degree of protection: IP 66/67 according to EN 60529

- Connection type: IEC 61076-2-101 D (M12)

- Contact type: SPCO/SPDT (Hermetically sealed - Volt-free contacts)

**Electrical data**

- Resistive Load: 830 mA / 24 Vdc - 180 mA / 110 Vdc
- Electrical Ratings: U<sub>i</sub> = 30 Vdc, I<sub>i</sub> = 250 mA, P<sub>i</sub> = 1.3 W

- Certification / Approvals: ATEX, IECEx, EAC TR CU, INMETRO

- Certification included as standard

| DEM*10                                   |                    |
|--|--------------------|
| <b>Electrical Differential Indicator</b> |                    |
| Settings                                 | Ordering code      |
| 5.0 bar $\pm 10\%$                       | DE M 50 x x 10 P01 |
| 7.0 bar $\pm 10\%$                       | DE M 70 x x 10 P01 |
| 9.5 bar $\pm 10\%$                       | DE M 95 x x 10 P01 |

A/F 28  
Max tightening torque: 65 N·m

flexible cable: 290 to "A"

**Hydraulic symbol**

**Electrical symbol**

**Materials**

- Body: Brass
- Base: Black Nylon
- Contacts: Silver
- Seal: HNBR - FPM

**Technical data**

- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -25 °C to +110 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids

- Degree protection: IP66 according to EN 60529

**Electrical data**

- Electrical connection: AMP Superseal series 1.5
- Resistive load: 0.2 A / 115 Vdc
- Switching type: Normally open contacts (NC on request)
- Thermal lockout: Normally open up to 30 °C (option "F")

| DEM*20                                   |                    |
|--|--------------------|
| <b>Electrical Differential Indicator</b> |                    |
| Settings                                 | Ordering code      |
| 5.0 bar $\pm 10\%$                       | DE M 50 x x 20 P01 |
| 7.0 bar $\pm 10\%$                       | DE M 70 x x 20 P01 |
| 9.5 bar $\pm 10\%$                       | DE M 95 x x 20 P01 |

A/F 28  
Max tightening torque: 65 N·m

flexible cable: 290 to "A"

**Hydraulic symbol**

**Electrical symbol**

**Materials**

- Body: Brass
- Base: Black Nylon
- Contacts: Silver
- Seal: HNBR - FPM

**Technical data**

- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -25 °C to +110 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids

- Degree protection: IP66 according to EN 60529

**Electrical data**


- Electrical connection: AMP Time junior
- Resistive load: 0.2 A / 115 Vdc
- Switching type: Normally open contacts (NC on request)
- Thermal lockout: Normally open up to 30 °C (option "F")



# DIFFERENTIAL INDICATORS


## Dimensions

| DLA*71  |                    |
|---|--------------------|
| <b>Electrical/Visual Differential Indicator</b> |                    |
| Settings  | Ordering code      |
| 5.0 bar $\pm$ 10%                               | DL A 50 x A 71 P01 |
| 7.0 bar $\pm$ 10%                               | DL A 70 x A 71 P01 |
| 9.5 bar $\pm$ 10%                               | DL A 95 x A 71 P01 |

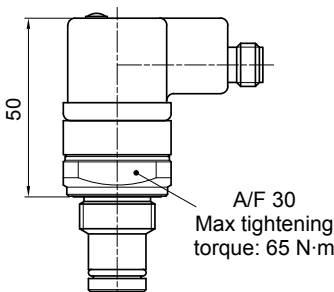


A/F 30  
Max tightening torque: 65 N·m

**Hydraulic symbol**



**Electrical symbol**



**Materials**

- Body: Brass
- Base: Black Nylon
- Contacts: Silver
- Seal: HNBR - FPM


**Technical data**

- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -25 °C to +110 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids  
HFA, HFB, HFC according to ISO 2943
- Degree protection: IP65 according to EN 60529  
IP69K according to ISO 20653

**Electrical data**


- Electrical connection: IEC 61076-2-101 D (M12)
- Lamps: 24 Vdc
- Resistive load: 0.4 A / 24 Vdc

| DLE*A50   |                    |
|---|--------------------|
| <b>Electrical/Visual Differential Indicator</b> |                    |
| Settings  | Ordering code      |
| 5.0 bar $\pm$ 10%                               | DL E 50 x A 50 P01 |
| 7.0 bar $\pm$ 10%                               | DL E 70 x A 50 P01 |
| 9.5 bar $\pm$ 10%                               | DL E 95 x A 50 P01 |

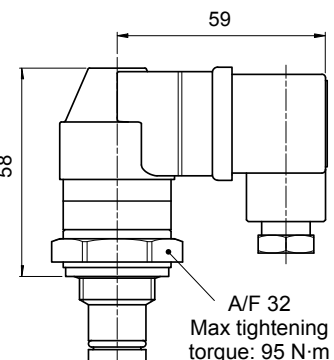


A/F 32  
Max tightening torque: 95 N·m

**Hydraulic symbol**



**Electrical symbol**



**Material:**

- Body: Brass
- Base: Black Nylon
- Contacts: Silver
- Seal: HNBR - FPM


**Technical data**

- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -25 °C to +110 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids  
HFA, HFB, HFC according to ISO 2943
- Degree protection: IP65 according to EN 60529

**Electrical data**


- Electrical connections: EN 175301-803
- Resistive load: 5 A / 250 Vac
- Available the connector with lamps

| DLE*F50   |                    |
|---|--------------------|
| <b>Electrical/Visual Differential Indicator</b> |                    |
| Settings  | Ordering code      |
| 5.0 bar $\pm$ 10%                               | DL E 50 x F 50 P01 |
| 7.0 bar $\pm$ 10%                               | DL E 70 x F 50 P01 |
| 9.5 bar $\pm$ 10%                               | DL E 95 x F 50 P01 |

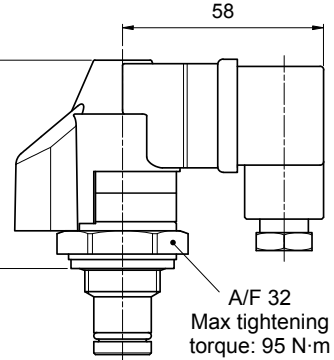


A/F 32  
Max tightening torque: 95 N·m

**Hydraulic symbol**



**Electrical symbol**



**Materials**

- Body: Brass
- Base: Black Nylon
- Contacts: Silver
- Seal: HNBR - FPM


**Technical data**

- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -25 °C to +110 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids  
HFA, HFB, HFC according to ISO 2943
- Degree protection: IP65 according to EN 60529

**Electrical data**


- Electrical connections: EN 175301-803
- Resistive load: 5 A / 250 Vac
- Thermal lockout setting: +30 °C

| DTA*70                                   |                    |
|--|--------------------|
| <b>Electronic Differential Indicator</b> |                    |
| Settings                                 | Ordering code      |
| 5.0 bar ±10%                             | DT A 50 x x 70 P01 |
| 7.0 bar ±10%                             | DT A 70 x x 70 P01 |
| 9.5 bar ±10%                             | DT A 95 x x 70 P01 |

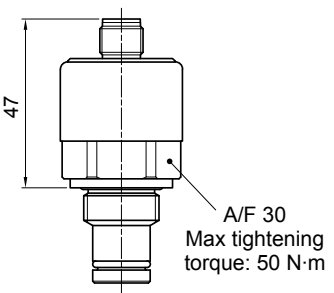

A/F 30  
Max tightening torque: 50 N·m

**Hydraulic symbol**



**Electrical symbol**

|   |   |   |                            |
|---|---|---|----------------------------|
| ① | ○ | ○ | +24 Vdc                    |
| ② | ○ | ○ | 4 ÷ 20 mA                  |
| ③ | ○ | ○ | 75% - N.O. Digital output  |
| ④ | ○ | ○ | 100% - N.O. Digital output |
| ⑤ | ○ | ○ | 0 Vdc                      |

**Materials**

- Body: Brass
- Internal parts: Brass - Nylon
- Contacts: Silver
- Seal: HNBR - FPM

**Technical data**


- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943
- Degree protection: IP67 according to EN 60529

**Electrical data**

- Electrical connection: IEC 61076-2-101 D (M12)
- Power supply: 24 Vdc
- Analogue output: From 4 to 20 mA
- Thermal lockout: 30 °C (all output signals stalled up to 30 °C)




| DVA                                  |               |
|--------------------------------------|---------------|
| <b>Visual Differential Indicator</b> |               |
| Settings                             | Ordering code |
| 5.0 bar ±10%                         | DV A 50 x P01 |
| 7.0 bar ±10%                         | DV A 70 x P01 |
| 9.5 bar ±10%                         | DV A 95 x P01 |

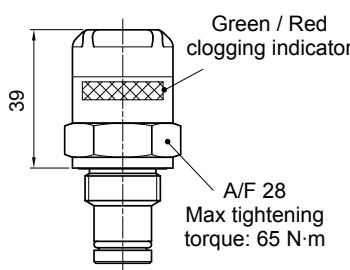

Green / Red clogging indicator

A/F 28  
Max tightening torque: 65 N·m

**Hydraulic symbol**




**Materials**

- Body: Brass
- Internal parts: Brass - Nylon
- Contacts: Silver
- Seal: HNBR - FPM

**Technical data**

- Reset: Automatic reset
- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -25 °C to +110 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943
- Degree protection: IP65 according to EN 60529


| DVM                                  |               |
|--------------------------------------|---------------|
| <b>Visual Differential Indicator</b> |               |
| Settings                             | Ordering code |
| 5.0 bar ±10%                         | DV M 50 x P01 |
| 7.0 bar ±10%                         | DV M 70 x P01 |
| 9.5 bar ±10%                         | DV M 95 x P01 |

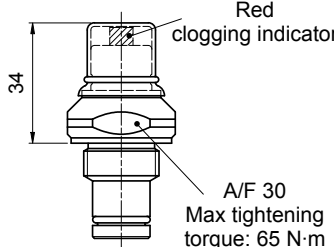

Red clogging indicator

A/F 30  
Max tightening torque: 65 N·m

**Hydraulic symbol**



**Materials**

- Body: Brass
- Internal parts: Brass - Nylon
- Contacts: Silver
- Seal: HNBR - FPM


**Technical data**

- Reset: Manual reset
- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -25 °C to +110 °C
- Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943
- Degree protection: IP65 according to EN 60529

# DIFFERENTIAL INDICATORS

## Dimensions

| T2             |               |
|----------------|---------------|
| Indicator plug |               |
| Seal           | Ordering code |
| HNBR           | T2 H          |
| FPM            | T2 V          |

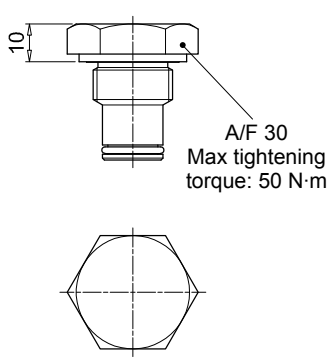A/F 30  
Max tightening  
torque: 50 N·m

10

**Materials**

- Body: Phosphatized steel
- Seal: HNBR / FPM

www.sumy.ir



### DESIGNATION & ORDERING CODE - DIFFERENTIAL INDICATORS

| Series  | Configuration example 1: |   |    |   |   |    |     |
|---|--------------------------|---|----|---|---|----|-----|
| <b>DE</b> Electrical or Electronic differential indicator | DE                       | M | 50 | H | F | 50 | P01 |
| <b>DL</b> Electrical / Visual differential indicator      | DE                       | H | 50 | F | A | 70 | P01 |
| <b>DT</b> Electronic differential indicator               | DL                       | E | 70 | V | A | 71 | P01 |
| <b>DV</b> Visual differential indicator                   | DT                       | A | 50 | H | F | 70 | P01 |
|   | DV                       | M | 95 | V |   |    | P01 |

| Type                                      | DE | DL | DT | DV                            |
|---|----|----|----|-------------------------------|
| <b>A</b> Standard type                    | •  | •  | •  | <b>A</b> With automatic reset |
| <b>M</b> With wired electrical connection | •  |    |    | <b>M</b> With manual reset    |
| <b>E</b> For high power supply            |    | •  |    |                               |
| <b>H</b> Hazardous area                   | •  |    |    |                               |

| Pressure setting  | DEA | DEH | DEM | DLA | DLE | DT | DV |
|-------------------|-----|-----|-----|-----|-----|----|----|
| <b>50</b> 5 bar   | •   | •   | •   | •   | •   | •  | •  |
| <b>70</b> 7 bar   | •   | •   | •   | •   | •   | •  | •  |
| <b>95</b> 9.5 bar | •   |     | •   | •   | •   | •  | •  |

| Seals         | DEA | DEH | DEM | DLA | DLE | DT | DV |
|---------------|-----|-----|-----|-----|-----|----|----|
| <b>F</b> MFQ  |     | •   |     |     |     |    |    |
| <b>H</b> HNBR | •   |     | •   | •   | •   | •  | •  |
| <b>V</b> FPM  | •   | •   | •   | •   | •   | •  | •  |

| Thermostat               | DEA | DEH | DEM | DLA | DLE | DT | DV |
|--------------------------|-----|-----|-----|-----|-----|----|----|
| <b>A</b> Without         | •   | •   | •   | •   | •   |    |    |
| <b>F</b> With thermostat |     |     | •   |     | •   | •  |    |

| Electrical connections   | DEA | DEH | DEM | DLA | DLE | DT | DV |
|--|-----|-----|-----|-----|-----|----|----|
| <b>10</b> Connection AMP Superseal series 1.5                              |     |     | •   |     |     |    |    |
| <b>20</b> Connection AMP Timer Junior                                      |     |     | •   |     |     |    |    |
| <b>30</b> Connection Deutsch DT-04-2-P                                     |     |     | •   |     |     |    |    |
| <b>35</b> Connection Deutsch DT-04-3-P                                     |     |     | •   |     |     |    |    |
| <b>48</b> Connection via three-core cable - fitting M20x1.5                |     | •   |     |     |     |    |    |
| <b>49</b> Connection via four-core cable - fitting 1/2" NPT                |     | •   |     |     |     |    |    |
| <b>50</b> Connection EN 175301-803   | •   |     |     |     | •   |    |    |
| <b>51</b> Connection EN 175301-803, transparent base with lamps 24 Vdc     |     |     |     | •   |     |    |    |
| <b>52</b> Connection EN 175301-803, transparent base with lamps 110 Vdc    |     |     |     | •   |     |    |    |
| <b>70</b> Connection IEC 61076-2-101 D (M12)                               |     | •   |     |     |     | •  |    |
| <b>71</b> Connection IEC 61076-2-101 D (M12), black base with lamps 24 Vdc |     |     |     | •   |     |    |    |

| Option                        |
|-------------------------------|
| <b>P01</b> MP Filtri standard |
| <b>Pxx</b> Customized         |

### DESIGNATION & ORDERING CODE - DIFFERENTIAL INDICATOR PLUG

| Series                   | Configuration example |   |
|--------------------------|-----------------------|---|
| <b>T2</b> Indicator plug | T2                    | H |

| Seals         |
|---------------|
| <b>H</b> HNBR |
| <b>V</b> FPM  |

**Stainless steel high pressure filters are used as process filters to protect individual valves or the entire hydraulic circuit from contamination as per ISO 4406.**

**6 versions are available with operating pressures ranging from 320 bar up to 1000 bar.**

**A range of products is available to resolve all filter mounting problems, in the following configurations:**

- **FZP In-line pressure filter with threaded mount**
- **FZH In-line pressure filter with threaded mount for higher pressure**
- **FZX In-line pressure filter with threaded mount up to 1000 bar**
- **FZB Manifold side mounting**
- **FZM Manifold top mounting**
- **FZD Duplex pressure filter for continuous operation requirements**

**FZ stainless steel filters are specifically designed for applications in the:**

- **Process engineering**
- **Water hydraulics**
- **Offshore technology**
- **Marine technology**
- **High pressure hydraulics**
- **Any application in harsh or aggressive environment**

## FILTER SIZING

For the proper corrective factor Y see chapter at page 25

# Stainless steel high pressure filters



|            |          |
|------------|----------|
| FZP        | page 587 |
| FZH        | 597      |
| FZX        | 607      |
| FZM        | 615      |
| FZB        | 623      |
| FZD        | 631      |
| INDICATORS | 641      |

[www.sumy.ir](http://www.sumy.ir)

# FZP series

Maximum working pressure up to 42 Mpa (420 bar) - Flow rate up to 160 l/min



## Description

## Technical data

### Stainless steel high pressure filters

#### In-line

**Maximum working pressure up to 42 Mpa (420 bar)**  
**Flow rate up to 160 l/min**

FZP is a range of stainless steel high pressure filter for protection of sensitive components in high pressure hydraulic systems placed in difficult environmental conditions.

They are directly connected to the lines of the system through the hydraulic fittings.

#### Available features:

- 1 1/4" female threaded connections, for a maximum flow rate of 160 l/min
- Fine filtration rating, to get a good cleanliness level into the system
- Bypass valve, to relieve excessive pressure drop across the filter media
- Low collapse filter element with external support "R", for filter element protection against the back pressure caused by the check valve or the reverse flow in filters provided with the bypass valve
- High collapse filter element with external support "S", for filter element protection against the back pressure caused by the check valve or the reverse flow in filters not provided with the bypass valve
- High collapse filter element "U", for use with aggressive fluids
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

- Off-shore equipment
- Water filtration systems
- Systems with strong or corrosive environmental conditions
- Systems with corrosive fluids

#### Filter housing materials

- Head: AISI 316L
- Housing: AISI 316L
- Bypass valve: AISI 316L

#### Seals

- Standard NBR series A (-25 °C to +110 °C)
- Optional FPM series V (-20 °C to +120 °C)
- Optional MFQ series F (-50 °C to +120 °C)

#### Bypass valve

Opening pressure 6 bar  $\pm$ 10%

#### Temperature

From -50 °C to +120 °C

#### Note

FZP filters are provided for vertical mounting

#### $\Delta p$ element type

Fluid flow through the filter element from OUT to IN

Microfibre filter elements - series R: 20 bar.

Element series "R":

- End cap: Nylon
- Core tube: Tinned Steel
- External/Internal support: Wire mesh Epox painted
- Media/Support/Pre-filter: Microfibre/Syntetic

Microfibre filter elements - series S: 210 bar.

Element series "S":

- End cap: Tinned Steel
- Core tube: Tinned Steel
- External support: Wire mesh Epox painted
- Internal support: Wire mesh Stainless Steel
- Media/Support/Pre-filter: Microfibre/Syntetic

Stainless Steel Microfibre filter elements series U: 210 bar.

Element series "U":

- End cap: Stainless Steel
- Core tube: Stainless Steel
- External support: Stainless Steel
- Internal support: Stainless Steel
- Media/Support/Pre-filter: Microfibre/Syntetic



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series  | Weights [kg] |     |      |      | Volumes [dm <sup>3</sup> ] |        |      |      |      |      |
|----------------|--------------|-----|------|------|----------------------------|--------|------|------|------|------|
|                | Length       | 1   | 2    | 3    | 4                          | Length | 1    | 2    | 3    | 4    |
| <b>FZP 039</b> | -            | -   | 4.5  | 5.1  | 5.6                        | -      | -    | 0.19 | 0.26 | 0.34 |
| <b>FZP 136</b> | 8.3          | 8.3 | 10.2 | 11.5 | -                          | 0.45   | 0.78 | 1.00 | -    | -    |

| Filter series  | Length   | Filter element design - R Series |     |     |     |     | Filter element design - S-U Series |     |     |     |     |
|----------------|----------|----------------------------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----|
|                |          | A03                              | A06 | A10 | A16 | A25 | A03                                | A06 | A10 | A16 | A25 |
| <b>FZP 039</b> | <b>2</b> | 19                               | 25  | 43  | 50  | 59  | 19                                 | 23  | 41  | 45  | 55  |
|                | <b>3</b> | 34                               | 37  | 53  | 62  | 74  | 31                                 | 34  | 48  | 52  | 66  |
|                | <b>4</b> | 42                               | 46  | 63  | 72  | 81  | 38                                 | 41  | 55  | 71  | 78  |
| <b>FZP 136</b> | <b>1</b> | 63                               | 67  | 102 | 108 | 136 | 47                                 | 53  | 87  | 89  | 127 |
|                | <b>2</b> | 95                               | 100 | 122 | 123 | 159 | 81                                 | 95  | 113 | 115 | 138 |
|                | <b>3</b> | 122                              | 124 | 148 | 150 | 160 | 106                                | 116 | 135 | 141 | 151 |

### Maximum flow rate for a complete stainless steel high pressure filter with a pressure drop $\Delta p = 1.5$ bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.


### Hydraulic symbols

| Filter series  | Style S | Style B | Style T | Style D | Style V | Style Z |
|----------------|---------|---------|---------|---------|---------|---------|
| <b>FZP 039</b> | •       | •       | •       | •       | •       | •       |
| <b>FZP 136</b> | •       | •       | •       | •       | •       | •       |

### Pressure drop

Filter housings  $\Delta p$  pressure drop

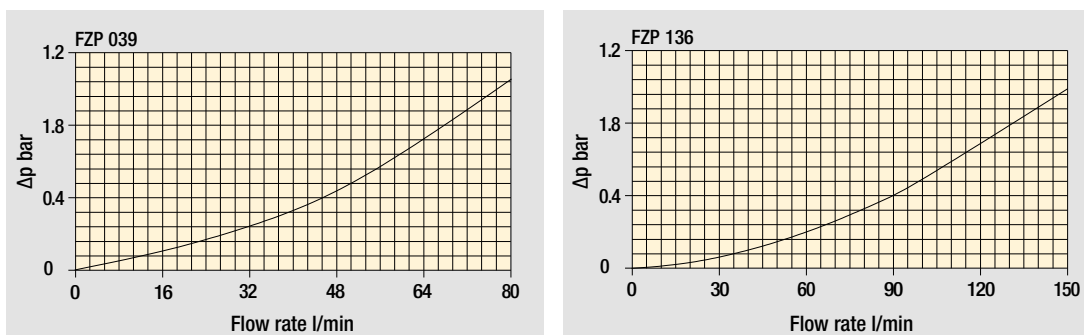

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

## Designation & Ordering code

### COMPLETE FILTER

|  |                               |   |   |   |   |   |     |   |     |
|--|-------------------------------|---|---|---|---|---|-----|---|-----|
| <b>Series and size</b>                         | Configuration example: FZP039 | 2 | B | F | B | 2 | A03 | U | P01 |
| <b>FZP039</b>                                  |                               |   |   |   |   |   |     |   |     |
| <b>Length</b>                                  |                               |   |   |   |   |   |     |   |     |
| 2   3   4                                      |                               |   |   |   |   |   |     |   |     |
| <b>Valves</b>                                  |                               |   |   |   |   |   |     |   |     |
| <b>S</b> Without bypass                        |                               |   |   |   |   |   |     |   |     |
| <b>B</b> With bypass 6 bar                     |                               |   |   |   |   |   |     |   |     |
| <b>T</b> With check valve, without bypass      |                               |   |   |   |   |   |     |   |     |
| <b>D</b> With check valve, with bypass 6 bar   |                               |   |   |   |   |   |     |   |     |
| <b>V</b> With reverse flow, without bypass     |                               |   |   |   |   |   |     |   |     |
| <b>Z</b> With reverse flow, with bypass 6 bar  |                               |   |   |   |   |   |     |   |     |
| <b>Seals</b>                                   |                               |   |   |   |   |   |     |   |     |
| <b>A</b> NBR                                   |                               |   |   |   |   |   |     |   |     |
| <b>V</b> FPM                                   |                               |   |   |   |   |   |     |   |     |
| <b>F</b> MFQ                                   |                               |   |   |   |   |   |     |   |     |
| <b>Connections</b>                             |                               |   |   |   |   |   |     |   |     |
| <b>A</b> G 1/2"                                |                               |   |   |   |   |   |     |   |     |
| <b>B</b> 1/2" NPT                              |                               |   |   |   |   |   |     |   |     |
| <b>C</b> SAE 8 - 3/4" - 16 UNF                 |                               |   |   |   |   |   |     |   |     |
| <b>Connections for differential indicators</b> |                               |   |   |   |   |   |     |   |     |
| <b>1</b> Without                               |                               |   |   |   |   |   |     |   |     |
| <b>2</b> With connection                       |                               |   |   |   |   |   |     |   |     |
| <b>Filtration rating (filter media)</b>        |                               |   |   |   |   |   |     |   |     |
| <b>A03</b> Inorganic microfiber 3 µm           |                               |   |   |   |   |   |     |   |     |
| <b>A06</b> Inorganic microfiber 6 µm           |                               |   |   |   |   |   |     |   |     |
| <b>A10</b> Inorganic microfiber 10 µm          |                               |   |   |   |   |   |     |   |     |
| <b>A16</b> Inorganic microfiber 16 µm          |                               |   |   |   |   |   |     |   |     |
| <b>A25</b> Inorganic microfiber 25 µm          |                               |   |   |   |   |   |     |   |     |

| Element Δp                                       | Valves |   |   |   |   |   | Execution                     |
|--|--------|---|---|---|---|---|-------------------------------|
|  | S      | B | T | D | V | Z |                               |
| <b>R</b> 20 bar                                  |        | • |   | • |   | • | <b>P01</b> MP Filtri standard |
| <b>S</b> 210 bar                                 | •      |   | • |   | • |   | <b>Pxx</b> Customized         |
| <b>U</b> 210 bar, stainless steel filter element | •      | • | • | • | • | • |                               |

### FILTER ELEMENT

|   |                              |   |     |   |   |     |
|---|------------------------------|---|-----|---|---|-----|
| <b>Element series and size</b>          | Configuration example: HP039 | 2 | A03 | F | U | P01 |
| <b>HP039</b>                            |                              |   |     |   |   |     |
| <b>Element length</b>                   |                              |   |     |   |   |     |
| 2   3   4                               |                              |   |     |   |   |     |
| <b>Filtration rating (filter media)</b> |                              |   |     |   |   |     |
| <b>A03</b> Inorganic microfiber 3 µm    |                              |   |     |   |   |     |
| <b>A06</b> Inorganic microfiber 6 µm    |                              |   |     |   |   |     |
| <b>A10</b> Inorganic microfiber 10 µm   |                              |   |     |   |   |     |
| <b>A16</b> Inorganic microfiber 16 µm   |                              |   |     |   |   |     |
| <b>A25</b> Inorganic microfiber 25 µm   |                              |   |     |   |   |     |


| Seals        | Element Δp                                       | Valves |   |   |   |   |   | Execution                     |
|--------------|--|--------|---|---|---|---|---|-------------------------------|
|              |  | S      | B | T | D | V | Z |                               |
| <b>A</b> NBR | <b>R</b> 20 bar                                  |        | • |   | • |   | • | <b>P01</b> MP Filtri standard |
| <b>V</b> FPM | <b>S</b> 210 bar                                 | •      |   | • |   | • |   | <b>Pxx</b> Customized         |
| <b>F</b> MFQ | <b>U</b> 210 bar, stainless steel filter element | •      | • | • | • | • | • |                               |

### ACCESSORIES

| Differential indicators                                     | page |  | page |
|---|------|--|------|
| <b>DEH</b> Hazardous area electronic differential indicator | 642  | <b>DVX</b> Visual differential indicator | 643  |
| <b>DEX</b> Electrical differential indicator                | 643  | <b>DVY</b> Visual differential indicator | 644  |
| <b>DLX</b> Electrical / visual differential indicator       | 643  |  |      |
| Additional features   | page |  |      |
| <b>X2</b> Plug  | 644  |  |      |



| FZP039        |          |
|---------------|----------|
| Filter length | H [mm]   |
| 2             | 179      |
| 3             | 222      |
| 4             | 266      |
| Connections   | R        |
| A             | M6       |
| B - C         | 1/4" UNC |

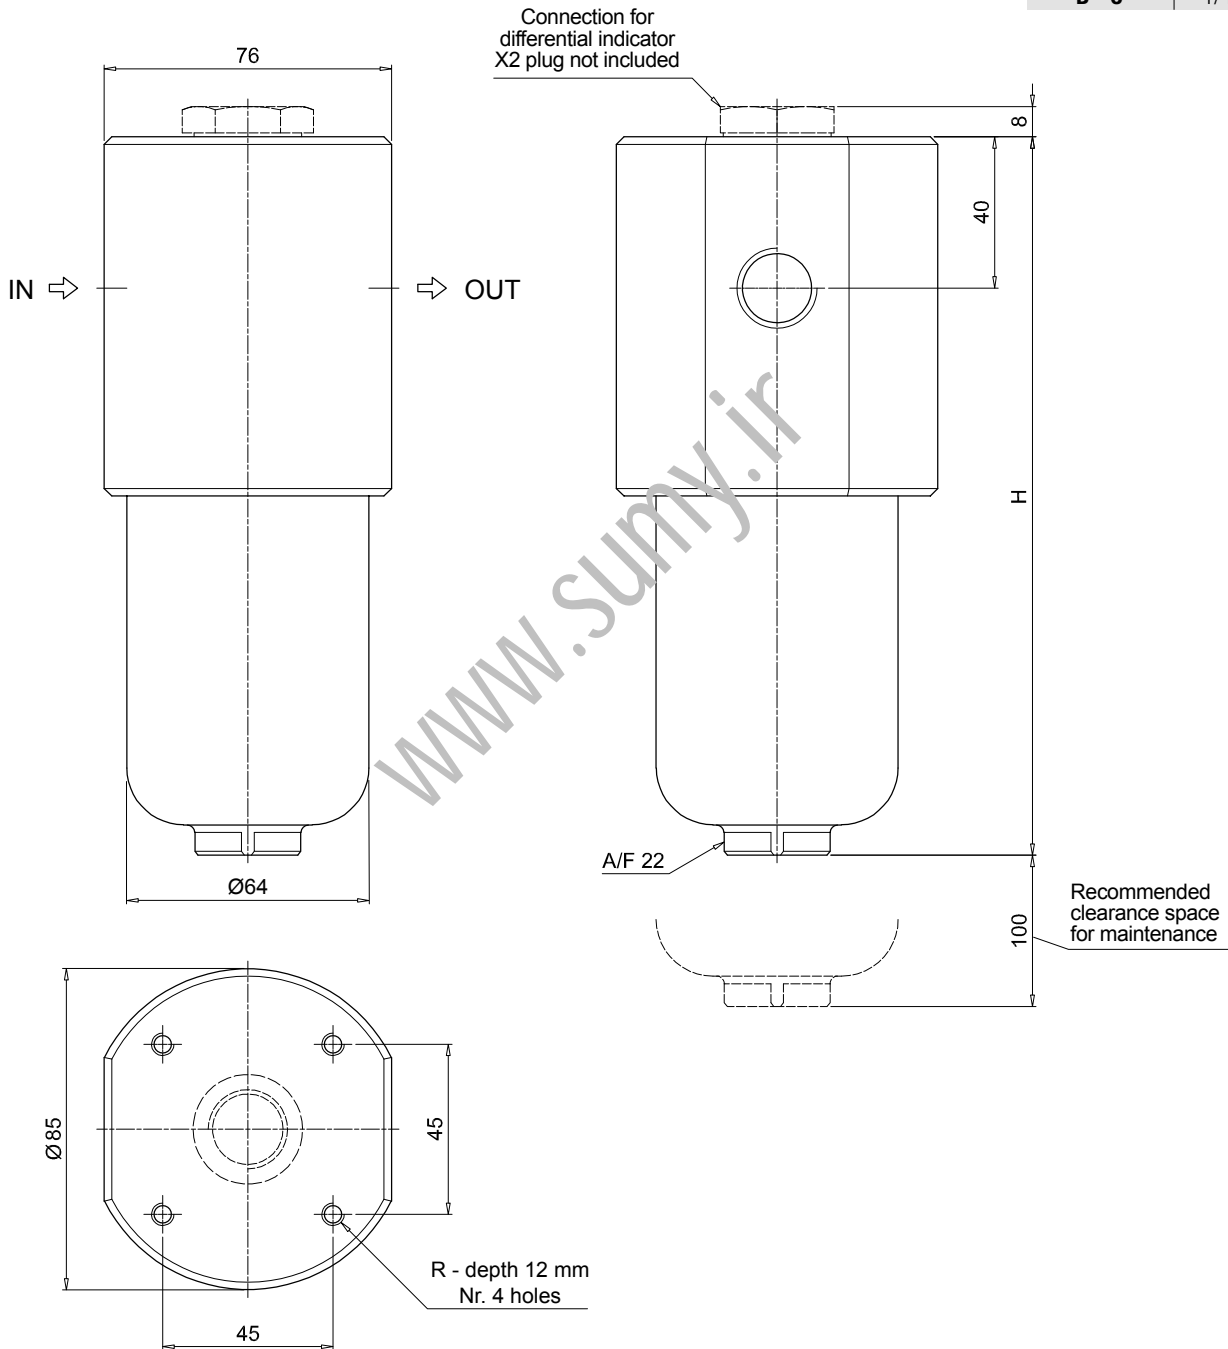

## Designation & Ordering code

### COMPLETE FILTER

Configuration example: **FZP136** | **1** | **B** | **A** | **B** | **6** | **A03** | **R** | **P01**

**Series and size**  
**FZP136**

**Length**  
**1** | **2** | **3**

**Valves**  
**S** Without bypass  
**B** With bypass 6 bar

**Seals**  
**A** NBR  
**V** FPM  
**F** MFQ

**Connections**  
**A** G 3/4"  
**B** 3/4" NPT  
**C** SAE 12 - 1 1/16" - 12 UN  
**D** G 1"  
**E** 1" NPT  
**F** SAE 16 - 1 5/16" - 12 UN  
**G** G 1 1/4"  
**H** 1 1/4" NPT  
**I** SAE 20 - 1 5/8" - 12 UN

**Connections for differential indicators**  
**1** Without  
**6** With two connections on both sides

**Filtration rating (filter media)**  
**A03** Inorganic microfiber 3 µm  
**A06** Inorganic microfiber 6 µm  
**A10** Inorganic microfiber 10 µm  
**A16** Inorganic microfiber 16 µm  
**A25** Inorganic microfiber 25 µm

| Element Δp                                       | Valves |   | Execution                     |
|--|--------|---|-------------------------------|
|  | S      | B |                               |
| <b>R</b> 20 bar                                  |        | • | <b>P01</b> MP Filtri standard |
| <b>S</b> 210 bar                                 | •      |   | <b>Pxx</b> Customized         |
| <b>U</b> 210 bar, stainless steel filter element | •      | • |                               |

### FILTER ELEMENT

Configuration example: **HP135** | **1** | **A03** | **A** | **R** | **P01**

**Element series and size**  
**HP135**

**Element length**  
**1** | **2** | **3**


**Filtration rating (filter media)**  
**A03** Inorganic microfiber 3 µm  
**A06** Inorganic microfiber 6 µm  
**A10** Inorganic microfiber 10 µm  
**A16** Inorganic microfiber 16 µm  
**A25** Inorganic microfiber 25 µm

| Seals        | Element Δp                                       | Valves |   | Execution                     |
|--------------|--|--------|---|-------------------------------|
|              |  | S      | B |                               |
| <b>A</b> NBR | <b>R</b> 20 bar                                  |        | • | <b>P01</b> MP Filtri standard |
| <b>V</b> FPM | <b>S</b> 210 bar                                 | •      |   | <b>Pxx</b> Customized         |
| <b>F</b> MFQ | <b>U</b> 210 bar, stainless steel filter element | •      | • |                               |

### ACCESSORIES

| Differential indicators                                     | page |  | page |
|---|------|--|------|
| <b>DEH</b> Hazardous area electronic differential indicator | 642  | <b>DVX</b> Visual differential indicator | 643  |
| <b>DEX</b> Electrical differential indicator                | 643  | <b>DVY</b> Visual differential indicator | 644  |
| <b>DLX</b> Electrical / visual differential indicator       | 643  |  |      |
| Additional features   | page |  |      |
| <b>X2</b> Plug  | 644  |  |      |

| FZP136        |          |
|---------------|----------|
| Filter length | H [mm]   |
| <b>1</b>      | 222      |
| <b>2</b>      | 335      |
| <b>3</b>      | 410      |
| Connections   | R        |
| <b>A</b>      | M10      |
| <b>B - C</b>  | 3/8" UNC |
| <b>D</b>      | M10      |
| <b>E - F</b>  | 3/8" UNC |
| <b>G</b>      | M10      |
| <b>H - I</b>  | 3/8" UNC |

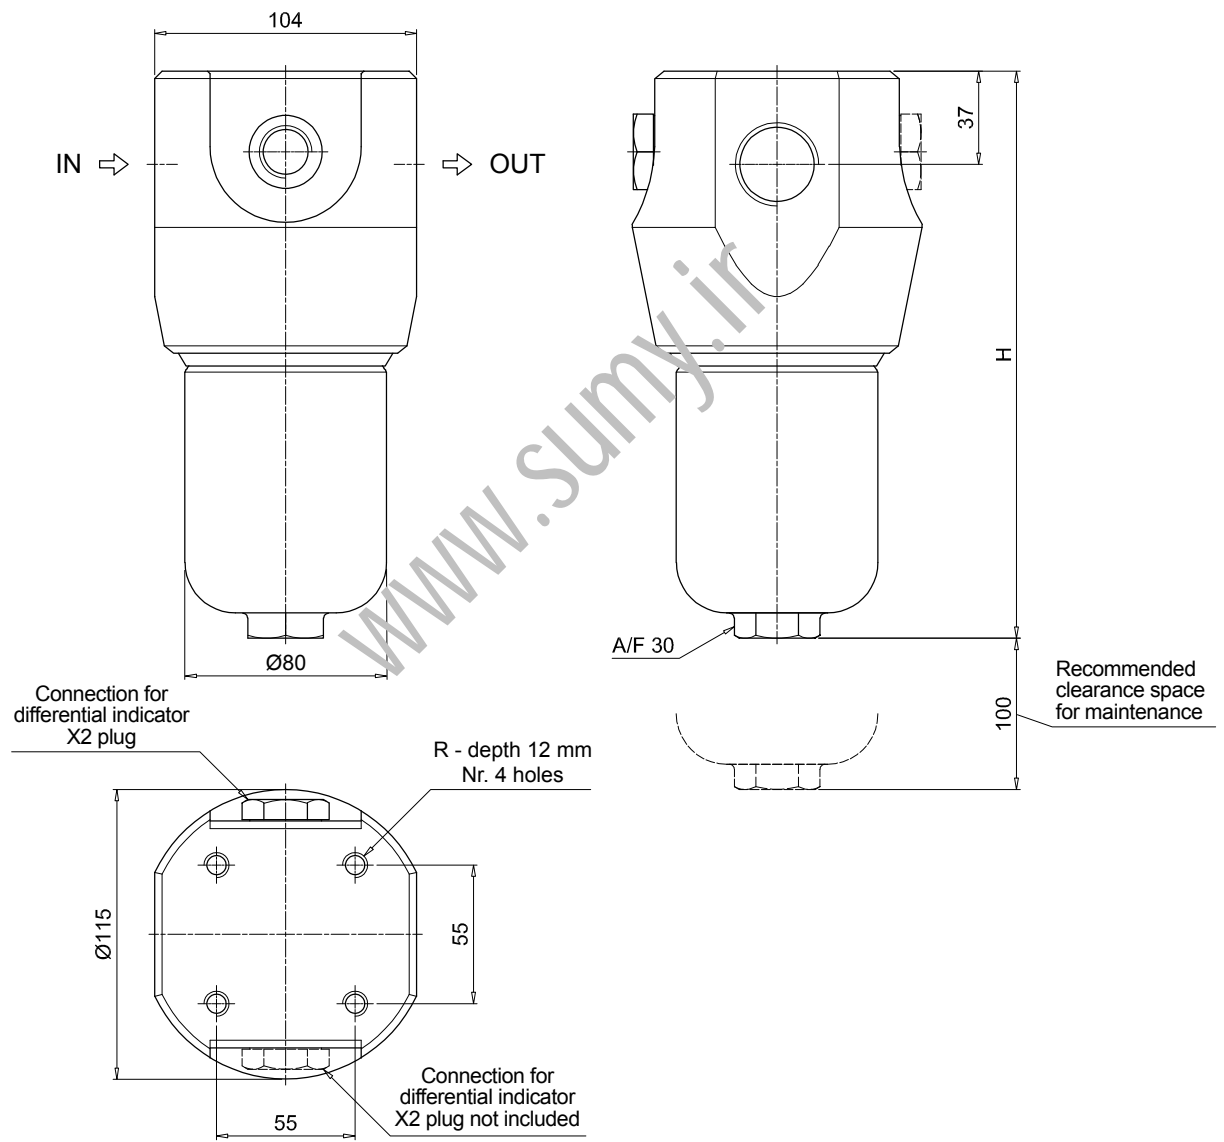


The position of the X2 plug is reversible

# FZP SPARE PARTS

Order number for spare parts

FZP 039

FZP 136

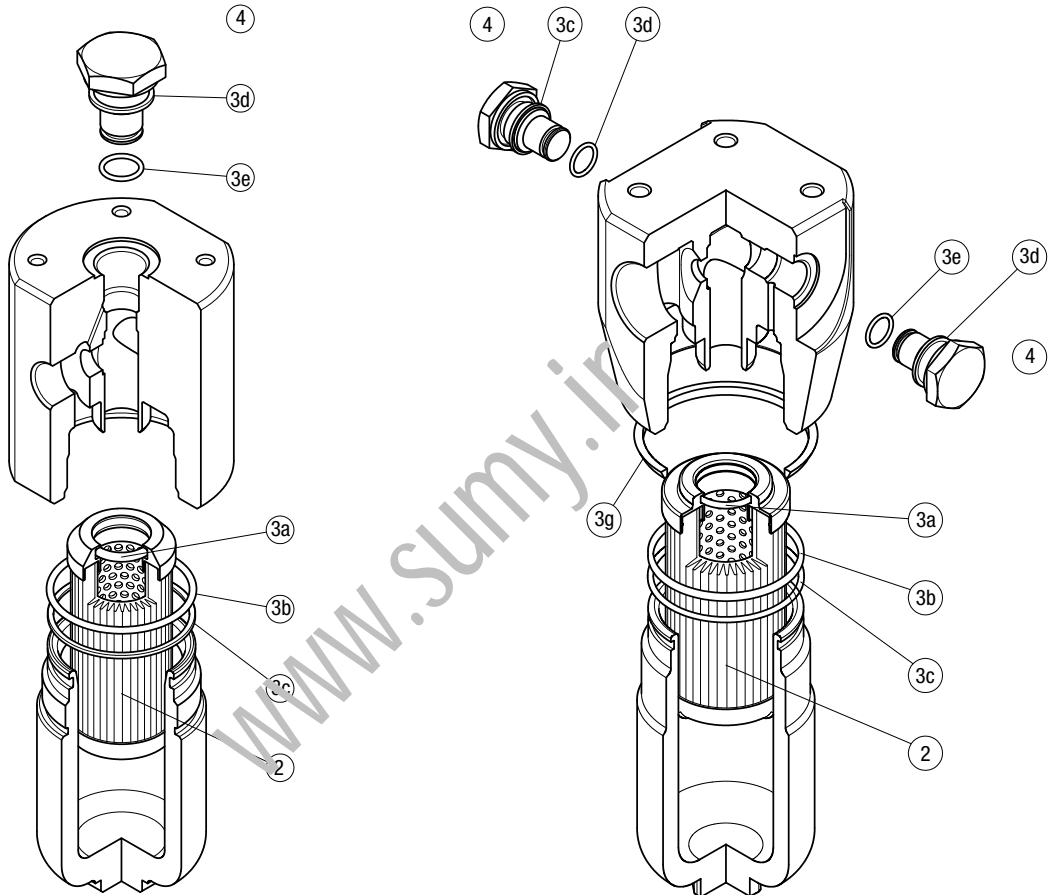

| Item:          | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          | Q.ty: 1 pc.               |     |
|----------------|-----------------|----------------------|----------|---------------------------|-----|
| Filter series  | Filter element  | Seal Kit code number |          | Indicator connection plug |     |
| FZP 039        | See order table | NBR                  | FPM      | NBR                       | FPM |
|                |                 | 02050299             | 02050300 | X2H                       | X2V |
| <b>FZP 136</b> |                 | 02050636             | 02050637 |                           |     |

[www.sumy.ir](http://www.sumy.ir)

[www.sumy.ir](http://www.sumy.ir)

# FZH series

Maximum working pressure up to 70 Mpa (700 bar) - Flow rate up to 80 l/min



## Description

## Technical data

### Stainless steel high pressure filters

#### In-line

**Maximum working pressure up to 80 Mpa (700 bar)**

**Flow rate up to 80 l/min**

FZH is a range of stainless steel high pressure filter for protection of sensitive components in high pressure hydraulic systems placed in difficult environmental conditions.

They are directly connected to the lines of the system through the hydraulic fittings.

#### Available features:

- 1/2" female threaded connections, for a maximum flow rate of 80 l/min
- Fine filtration rating, to get a good cleanliness level into the system
- Bypass valve, to relieve excessive pressure drop across the filter media
- Low collapse filter element "N", for use with filters provided with bypass valve
- High collapse filter element "H", for use with filters not provided with bypass valve
- Low collapse filter element with external support "R", for filter element protection against the back pressure caused by the check valve or the reverse flow in filters provided with the bypass valve
- High collapse filter element with external support "S", for filter element protection against the back pressure caused by the check valve or the reverse flow in filters not provided with the bypass valve
- High collapse filter element "U", for use with aggressive fluids
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

- Off-shore equipment
- Water filtration systems
- Systems with strong or corrosive environmental conditions
- Systems with corrosive fluids

#### Filter housing materials

- Head: AISI 316L
- Housing: AISI 316L
- Bypass valve: AISI 316L

#### Seals

- Standard NBR series A (-25 °C to +110 °C)
- Optional FPM series V (-20 °C to +120 °C)
- Optional MFQ series F (-50 °C to +120 °C)

#### Bypass valve

Opening pressure 6 bar  $\pm$ 10%

#### Temperature

From -50 °C to +120 °C

#### Note

FZH filters are provided for vertical mounting

#### $\Delta p$ element type

Fluid flow through the filter element from OUT to IN

Microfibre filter elements - series N-R: 20 bar.

Element series "N - R":

- End cap: Nylon
- Core tube: Tinned Steel
- External/Internal support: Wire mesh Epox painted
- Media/Support/Pre-filter: Microfibre/Syntetic

Microfibre filter elements - series H-S: 210 bar.

Element series "H - S":

- End cap: Tinned Steel
- Core tube: Tinned Steel
- External support: Wire mesh Epox painted
- Internal support: Wire mesh Stainless Steel
- Media/Support/Pre-filter: Microfibre/Syntetic

Stainless Steel Microfibre filter elements series U: 210 bar.

Element series "U":

- End cap: Stainless Steel
- Core tube: Stainless Steel
- External support: Stainless Steel
- Internal support: Stainless Steel
- Media/Support/Pre-filter: Microfibre/Syntetic



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series      | Weights [kg] |     |     |     |      | Volumes [dm <sup>3</sup> ] |      |      |      |      |
|--------------------|--------------|-----|-----|-----|------|----------------------------|------|------|------|------|
|                    | Length       | 1   | 2   | 3   | 4    | Length                     | 1    | 2    | 3    | 4    |
| <b>FZH 010-011</b> |              | 2.1 | 2.2 | 2.7 | 3.3  |                            | 0.10 | 0.12 | 0.15 | 0.20 |
| <b>FZH 039</b>     |              | -   | 7.8 | 8.9 | 10.1 |                            | -    | 0.19 | 0.26 | 0.34 |



| Filter series  | Length   | Filter element design - R Series |     |     |     |     | Filter element design - S-U Series |     |     |     |     |
|----------------|----------|----------------------------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----|
|                |          | A03                              | A06 | A10 | A16 | A25 | A03                                | A06 | A10 | A16 | A25 |
| <b>FZH 010</b> | <b>1</b> | 4                                | 6   | 8   | 9   | 11  | 4                                  | 5   | 6   | 7   | 9   |
|                | <b>2</b> | 7                                | 9   | 17  | 20  | 26  | 5                                  | 7   | 14  | 17  | 23  |
|                | <b>3</b> | 11                               | 14  | 25  | 27  | 32  | 11                                 | 14  | 24  | 27  | 32  |
|                | <b>4</b> | 17                               | 20  | 29  | 31  | 34  | 13                                 | 16  | 26  | 29  | 33  |
| <b>FZH 011</b> | <b>1</b> | 4                                | 6   | 8   | 9   | 11  | 3                                  | 5   | 6   | 7   | 9   |
|                | <b>2</b> | 7                                | 9   | 17  | 21  | 28  | 5                                  | 7   | 14  | 17  | 24  |
|                | <b>3</b> | 11                               | 14  | 26  | 30  | 37  | 11                                 | 14  | 25  | 29  | 36  |
|                | <b>4</b> | 17                               | 21  | 32  | 36  | 40  | 12                                 | 16  | 28  | 32  | 38  |
| <b>FZH 039</b> | <b>2</b> | 19                               | 25  | 43  | 50  | 59  | 19                                 | 23  | 41  | 45  | 55  |
|                | <b>3</b> | 34                               | 37  | 53  | 62  | 74  | 31                                 | 34  | 48  | 52  | 66  |
|                | <b>4</b> | 42                               | 46  | 63  | 72  | 81  | 38                                 | 41  | 55  | 71  | 78  |

### Maximum flow rate for a complete stainless steel high pressure filter with a pressure drop $\Delta p = 1.5$ bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).



You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.

### Hydraulic symbols

| Filter series      | Style S | Style B | Style T | Style D | Style V | Style Z |
|--------------------|---------|---------|---------|---------|---------|---------|
| <b>FZH 010-011</b> | •       | •       | •       | •       | •       | •       |
| <b>FZH 039</b>     | •       | •       | •       | •       | •       | •       |

### Pressure drop

Filter housings  $\Delta p$  pressure drop

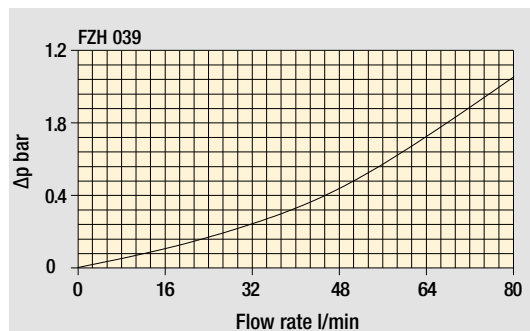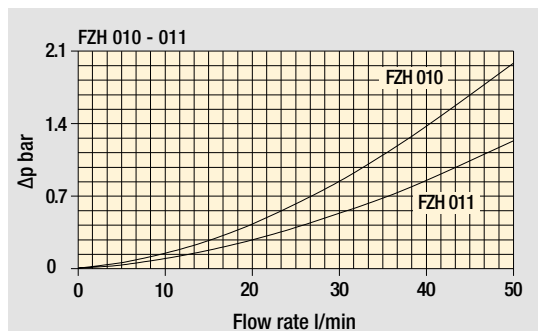

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

## Designation & Ordering code

### COMPLETE FILTER

Configuration example: **FZH010** | **2** | **B** | **F** | **B** | **2** | **A03** | **U** | **P01**

**Series and size**  
**FZH010** | **FZH011**

**Length**  
**1** | **2** | **3** | **4**

**Valves**  
**S** Without bypass  
**B** With bypass 6 bar  
**V** With reverse flow, without bypass  
**Z** With reverse flow, with bypass 6 bar

**Seals**  
**A** NBR  
**V** FPM  
**F** MFQ

**Connections**  
**A** G 1/4"  
**B** 1/4" NPT  
**C** SAE 5 - 1/2" - 20 UNF  
**D** G 3/8"  
**E** 3/8" NPT  
**F** SAE 6 - 9/16" - 18 UNF

**Connections for differential indicator**  
**1** Without  
**2** With connection on the top

**Filtration rating (filter media)**

|            |                      |       |
|------------|----------------------|-------|
| <b>A03</b> | Inorganic microfiber | 3 µm  |
| <b>A06</b> | Inorganic microfiber | 6 µm  |
| <b>A10</b> | Inorganic microfiber | 10 µm |
| <b>A16</b> | Inorganic microfiber | 16 µm |
| <b>A25</b> | Inorganic microfiber | 25 µm |

| Element Δp                                       | Valves |   |   |   |
|--|--------|---|---|---|
|  | S      | B | V | Z |
| <b>N</b> 20 bar                                  |        | • |   | • |
| <b>H</b> 210 bar                                 | •      |   | • |   |
| <b>U</b> 210 bar, stainless steel filter element | •      | • | • | • |

**Execution**  
**P01** MP Filtri standard  
**Pxx** Customized

### FILTER ELEMENT

Configuration example: **HP011** | **2** | **A03** | **F** | **U** | **P01**

**Element series and size**  
**HP011**

**Element length**  
**1** | **2** | **3** | **4**

**Filtration rating (filter media)**



|            |                      |       |
|------------|----------------------|-------|
| <b>A03</b> | Inorganic microfiber | 3 µm  |
| <b>A06</b> | Inorganic microfiber | 6 µm  |
| <b>A10</b> | Inorganic microfiber | 10 µm |
| <b>A16</b> | Inorganic microfiber | 16 µm |
| <b>A25</b> | Inorganic microfiber | 25 µm |

| Element Δp                                       | Valves |   |   |   |
|--|--------|---|---|---|
|  | S      | B | V | Z |
| <b>N</b> 20 bar                                  |        | • |   | • |
| <b>H</b> 210 bar                                 | •      |   | • |   |
| <b>U</b> 210 bar, stainless steel filter element | •      | • | • | • |

**Execution**  
**P01** MP Filtri standard  
**Pxx** Customized

### ACCESSORIES

| Differential indicators                                     | page |  | page |
|---|------|--|------|
| <b>DEH</b> Hazardous area electronic differential indicator | 642  | <b>DVX</b> Visual differential indicator | 643  |
| <b>DEX</b> Electrical differential indicator                | 643  | <b>DVY</b> Visual differential indicator | 644  |
| <b>DLX</b> Electrical / visual differential indicator       | 643  |  |      |
| Additional features   | page |  |      |
| <b>X2</b> Plug  | 644  |  |      |

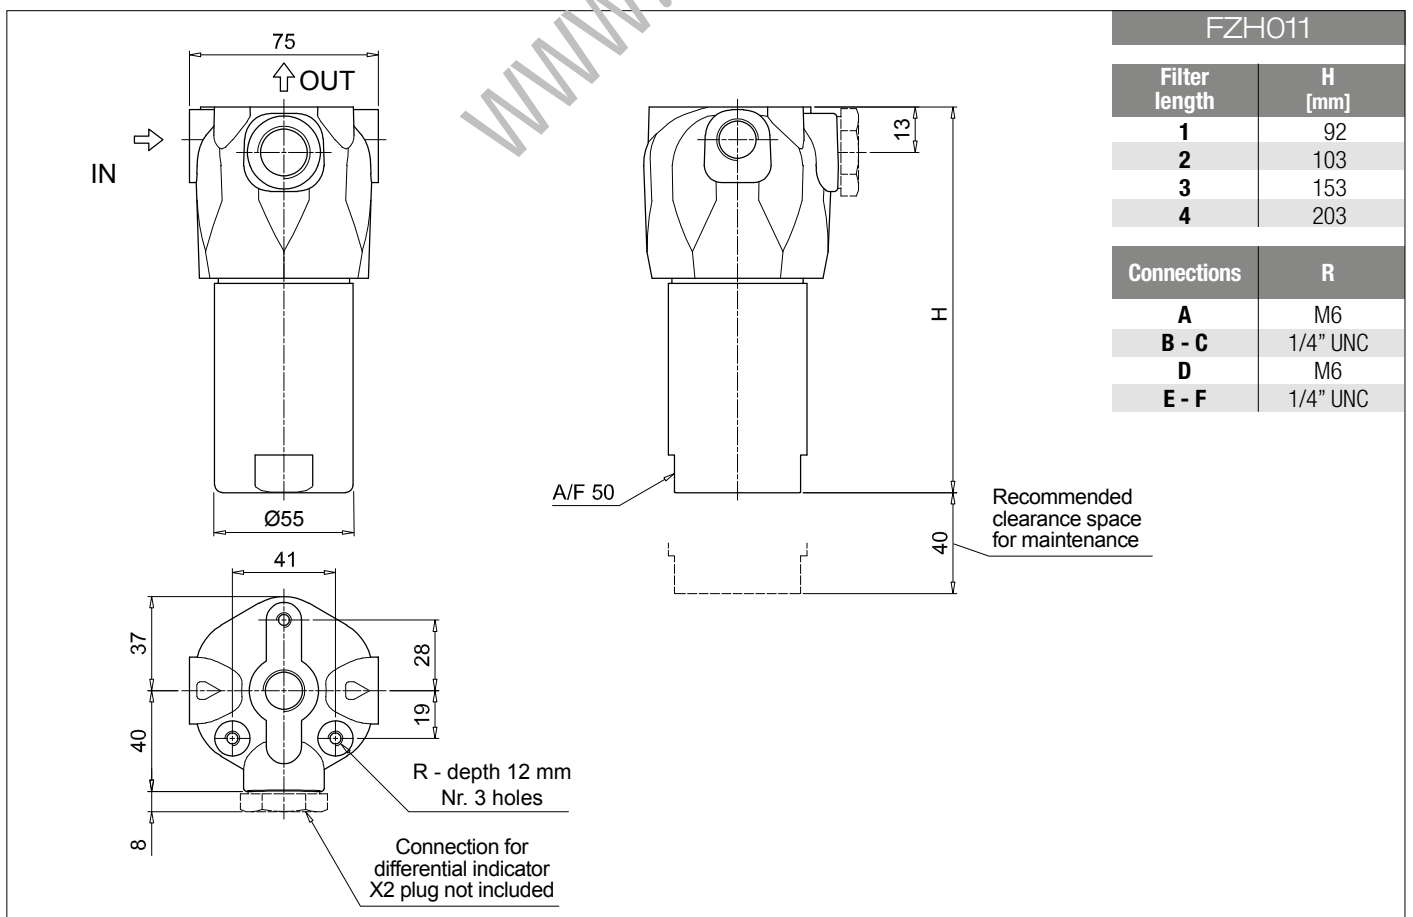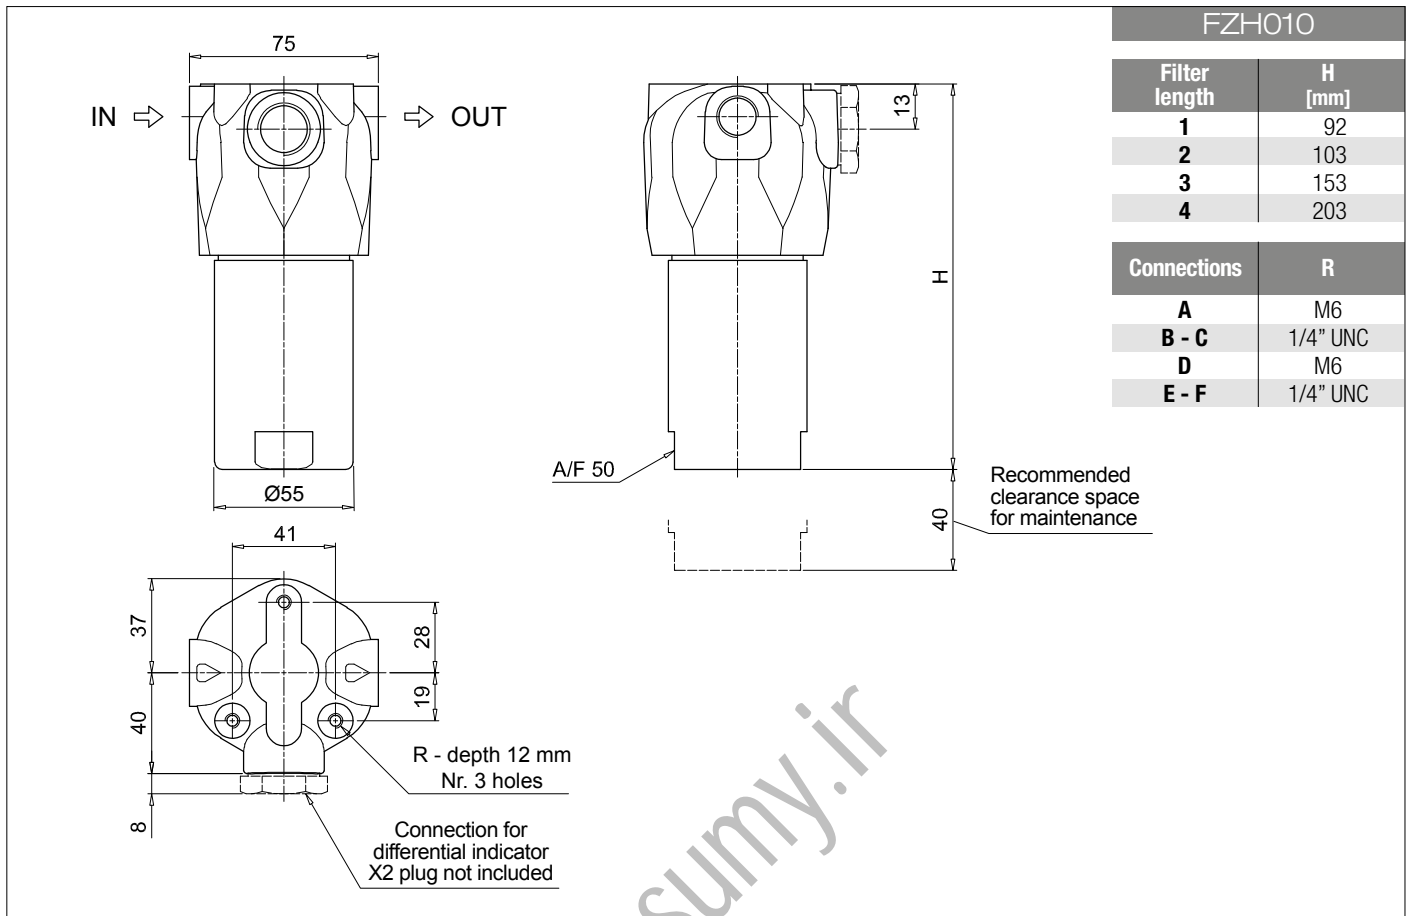

## Designation & Ordering code

### COMPLETE FILTER

Series and size **FZH039** Configuration example: **FZH039** **2** **T** **A** **A** **2** **A03** **S** **P01**

Length **2** | **3** | **4** |

Valves  
**S** Without bypass  
**B** With bypass 6 bar  
**T** With check valve, without bypass  
**D** With check valve, with bypass 6 bar  
**V** With reverse flow, without bypass  
**Z** With reverse flow, with bypass 6 bar

Seals  
**A** NBR  
**V** FPM  
**F** MFQ

Connections  
**A** G 1/2"  
**B** 1/2" NPT  
**C** SAE 8 - 3/4" - 16 UNF

Connections for differential indicator  
**1** Without  
**2** With connection on the top

| Filtration rating (filter media) |       |
|----------------------------------|-------|
| <b>A03</b> Inorganic microfiber  | 3 µm  |
| <b>A06</b> Inorganic microfiber  | 6 µm  |
| <b>A10</b> Inorganic microfiber  | 10 µm |
| <b>A16</b> Inorganic microfiber  | 16 µm |
| <b>A25</b> Inorganic microfiber  | 25 µm |

| Element Δp                                       | Valves |   |   |   |   |   |
|--|--------|---|---|---|---|---|
|  | S      | B | T | D | V | Z |
| <b>R</b> 20 bar                                  |        | • |   | • |   | • |
| <b>S</b> 210 bar                                 | •      |   | • |   | • |   |
| <b>U</b> 210 bar, stainless steel filter element | •      | • | • | • | • | • |

| Execution  |                    |
|------------|--------------------|
| <b>P01</b> | MP Filtri standard |
| <b>Pxx</b> | Customized         |

### FILTER ELEMENT

Element series and size **HP039** Configuration example: **HP039** **2** **A03** **A** **S** **P01**

Element length **2** | **3** | **4** |

| Filtration rating (filter media) |       |
|----------------------------------|-------|
| <b>A03</b> Inorganic microfiber  | 3 µm  |
| <b>A06</b> Inorganic microfiber  | 6 µm  |
| <b>A10</b> Inorganic microfiber  | 10 µm |
| <b>A16</b> Inorganic microfiber  | 16 µm |
| <b>A25</b> Inorganic microfiber  | 25 µm |


| Seals        | Element Δp                                       | Valves |   |   |   |   |   |
|--------------|--|--------|---|---|---|---|---|
|              |  | S      | B | T | D | V | Z |
| <b>A</b> NBR | <b>R</b> 20 bar                                  |        | • |   | • |   | • |
| <b>V</b> FPM | <b>S</b> 210 bar                                 | •      |   | • |   | • |   |
| <b>F</b> MFQ | <b>U</b> 210 bar, stainless steel filter element | •      | • | • | • | • | • |

| Execution  |                    |
|------------|--------------------|
| <b>P01</b> | MP Filtri standard |
| <b>Pxx</b> | Customized         |

### ACCESSORIES

| Differential indicators                                     | page |  | page |
|---|------|--|------|
| <b>DEH</b> Hazardous area electronic differential indicator | 642  | <b>DVX</b> Visual differential indicator | 643  |
| <b>DEX</b> Electrical differential indicator                | 643  | <b>DVY</b> Visual differential indicator | 644  |
| <b>DLX</b> Electrical / visual differential indicator       | 643  |  |      |
| Additional features   | page |  |      |
| <b>X2</b> Plug  | 644  |  |      |

| FZH039        |          |
|---------------|----------|
| Filter length | H [mm]   |
| 2             | 200      |
| 3             | 243      |
| 4             | 287      |
| Connections   | R        |
| A             | M10      |
| B - C         | 3/8" UNC |

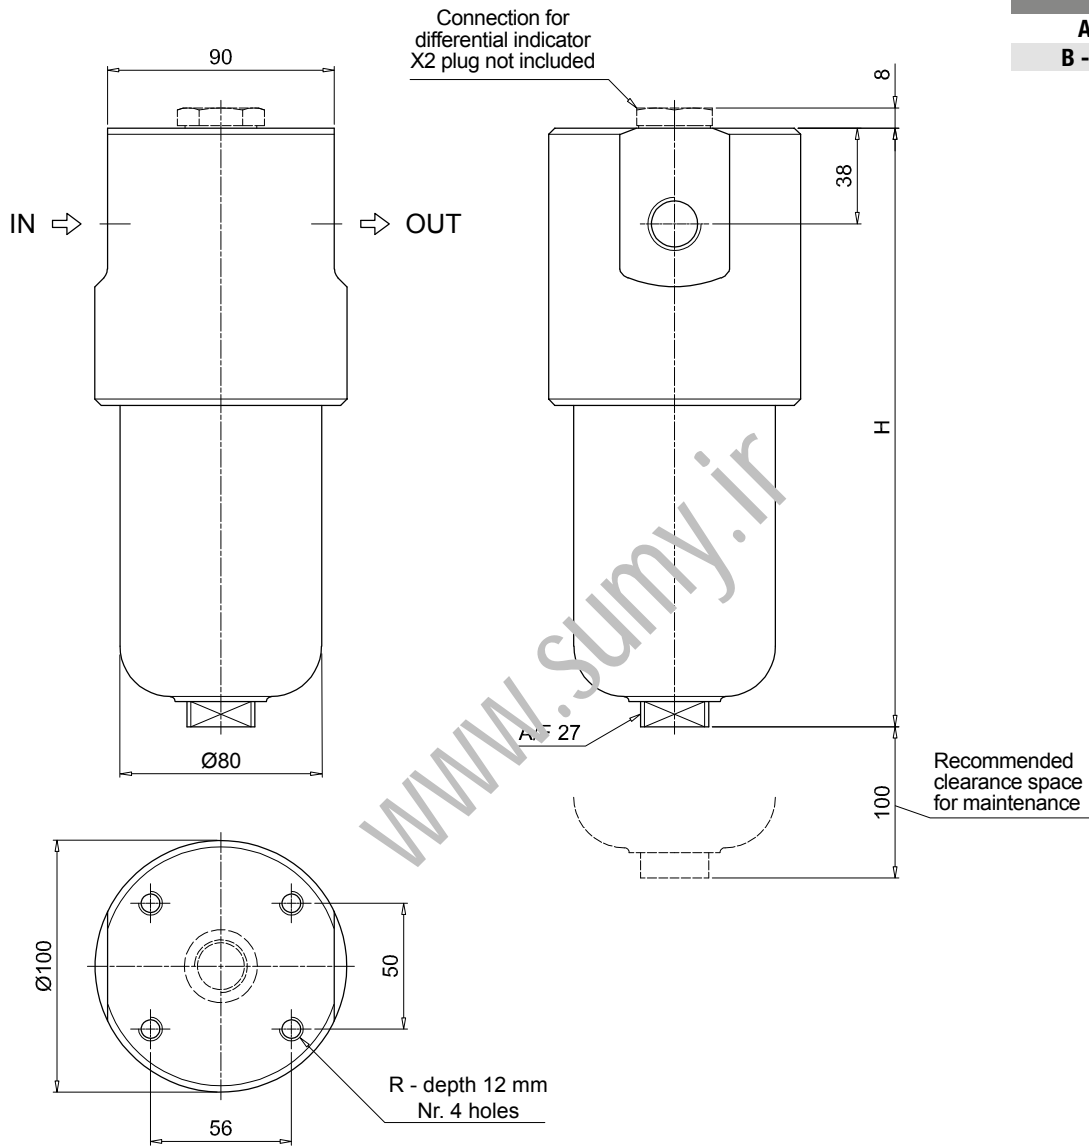


# FZH SPARE PARTS

Order number for spare parts

FZH 010 - 011

FZH 039

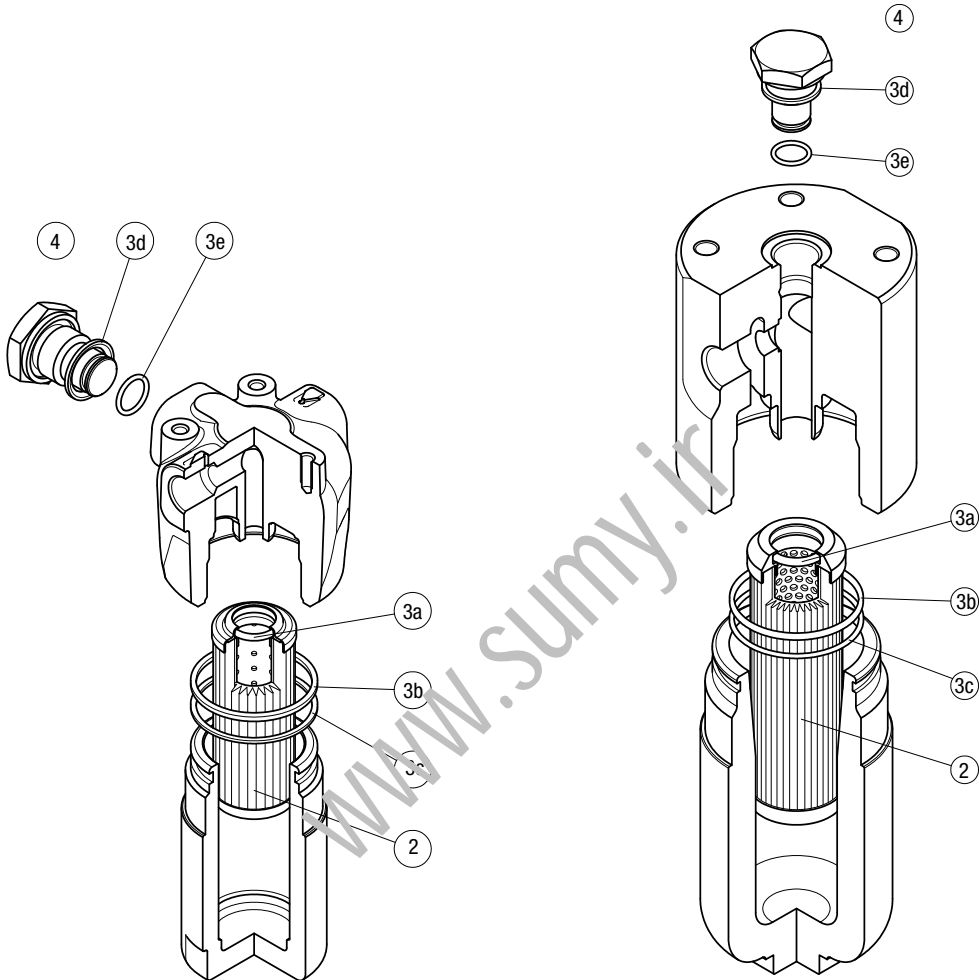

| Item:          | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          | Q.ty: 1 pc.               |     |
|----------------|-----------------|----------------------|----------|---------------------------|-----|
| Filter series  | Filter element  | Seal Kit code number |          | Indicator connection plug |     |
| FZH 010-011    | See order table | NBR                  | FPM      | NBR                       | FPM |
|                |                 | 02050501             | 02050492 | X2H                       | X2V |
| <b>FZH 039</b> |                 | 02050335             | 02050336 |                           |     |

[www.sumy.ir](http://www.sumy.ir)

[www.sumy.ir](http://www.sumy.ir)



# FZX series

Maximum working pressure up to 100 Mpa (1000 bar) - Flow rate up to 10 l/min



## Description

## Technical data

### Stainless steel high pressure filters

#### In-line

**Maximum working pressure up to 100 Mpa (1000 bar)**

**Flow rate up to 10 l/min**

FZX is a range of stainless steel high pressure filter for protection of sensitive components in high pressure hydraulic systems placed in difficult environmental conditions.

They are directly connected to the lines of the system through the hydraulic fittings.

#### Available features:

- 1/2" female threaded connections, for a maximum flow rate of 10 l/min
- Fine filtration rating, to get a good cleanliness level into the system
- High collapse filter element "H", for use with filters not provided with bypass valve
- High collapse filter element "U", for use with aggressive fluids
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

- Off-shore equipment
- Water filtration systems
- Systems with strong or corrosive environmental conditions
- Systems with corrosive fluids

#### Filter housing materials

- Head: AISI 316L
- Housing: AISI 316L
- Bypass valve: AISI 316L

#### Seals

- Standard NBR series A (-25 °C to +110 °C)
- Optional FPM series V (-20 °C to +120 °C)
- Optional MFQ series F (-50 °C to +120 °C)

#### Bypass valve

Opening pressure 6 bar  $\pm$ 10%

#### Temperature

From -50 °C to +120 °C

#### Note

FZX filters are provided for vertical mounting

#### $\Delta p$ element type

Fluid flow through the filter element from OUT to IN

Microfibre filter elements - series H: 210 bar.

Element series "H":

- End cap: Tinned Steel
- Core tube: Tinned Steel
- External support: Wire mesh Epoxy painted
- Internal support: Wire mesh Stainless Steel
- Media/Support/Pre-filter: Microfibre/Synthetic

Stainless Steel Microfibre filter elements series U: 210 bar.

Element series "U":

- End cap: Stainless Steel
- Core tube: Stainless Steel
- External support: Stainless Steel
- Internal support: Stainless Steel
- Media/Support/Pre-filter: Microfibre/Synthetic



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series  | Weights [kg] |   |     |   |   | Volumes [dm <sup>3</sup> ] |   |      |   |   |
|----------------|--------------|---|-----|---|---|----------------------------|---|------|---|---|
|                | Length       | 1 | 2   | 3 | 4 | Length                     | 1 | 2    | 3 | 4 |
| <b>FZX 011</b> | -            | - | 6.5 | - | - | -                          | - | 0.15 | - | - |

| Filter series  | Length   | Filter element design - H-U Series |      |      |      |      |
|----------------|----------|------------------------------------|------|------|------|------|
|                |          | A03                                | A06  | A10  | A16  | A25  |
| <b>FZX 011</b> | <b>3</b> | 1.57                               | 1.63 | 1.73 | 1.74 | 1.77 |

### Maximum flow rate for a complete stainless steel high pressure filter with a pressure drop $\Delta p = 1.5$ bar.


The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.

### Hydraulic symbols


| Filter series  | Style S |
|----------------|---------|
| <b>FZX 011</b> | •       |



www.sumy.ir

### Pressure drop

Filter housings  $\Delta p$  pressure drop

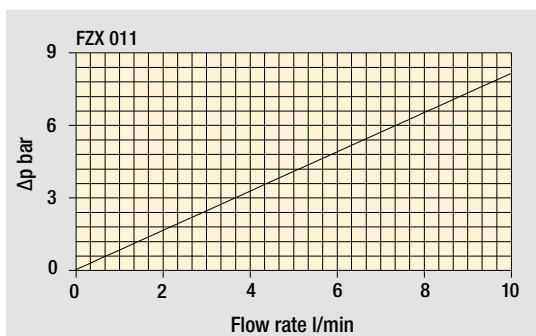

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

## Designation & Ordering code

### COMPLETE FILTER

Configuration example: **FZX011** **3** **S** **V** **B** **1** **A03** **U** **P01**

**Series and size**  
FZX011

**Length**  
3

**Valves**  
S Without bypass

**Seals**  
A NBR  
V FPM  
F MFQ

**Connections**  
700 bar  
A G 1/4"  
B 1/4" NPT  
G G 1/2"  
H 1/2" NPT"  
Autoclave 1000 bar  
M 9/16" - 18 UNF  
L 3/4" - 14 NPS

**Connection for differential indicators**  
1 Without

**Filtration rating (filter media)**  
A03 Inorganic microfiber 3 µm  
A06 Inorganic microfiber 6 µm  
A10 Inorganic microfiber 10 µm  
A16 Inorganic microfiber 16 µm  
A25 Inorganic microfiber 25 µm

| Element Δp                                | Execution              |
|---|------------------------|
| H 210 bar                                 | P01 MP Filtri standard |
| U 210 bar, stainless steel filter element | Pxx Customized         |

### FILTER ELEMENT



Configuration example: **HP011** **3** **A03** **V** **U** **P01**

**Element series and size**  
HP011

**Element length**  
3


**Filtration rating (filter media)**  
A03 Inorganic microfiber 3 µm  
A06 Inorganic microfiber 6 µm  
A10 Inorganic microfiber 10 µm  
A16 Inorganic microfiber 16 µm  
A25 Inorganic microfiber 25 µm

| Seals | Element Δp                                | Execution              |
|-------|---|------------------------|
| A NBR | H 210 bar                                 | P01 MP Filtri standard |
| V FPM | U 210 bar, stainless steel filter element | Pxx Customized         |
| F MFQ |   |                        |

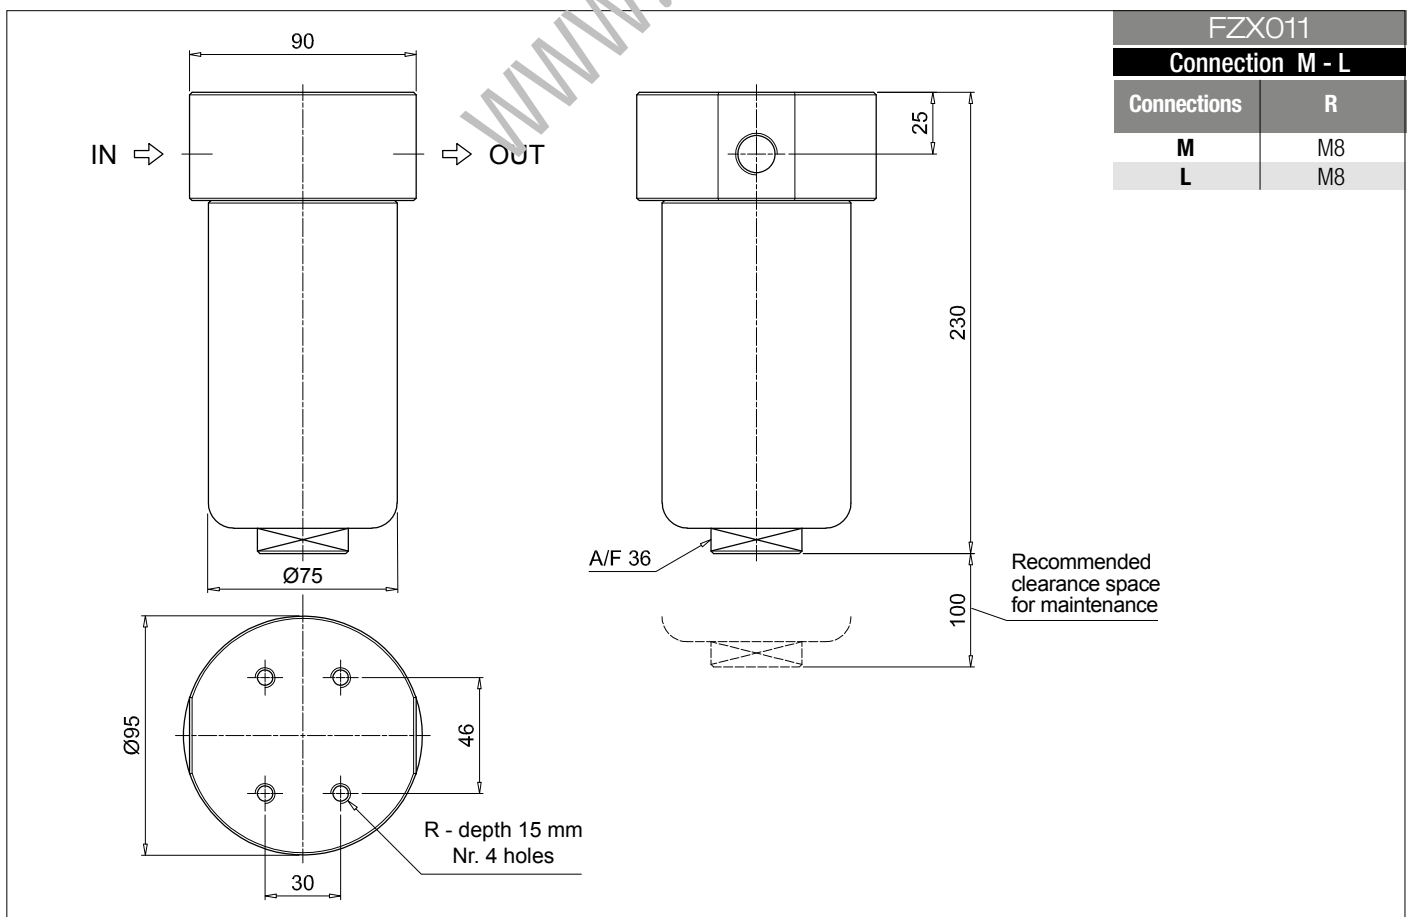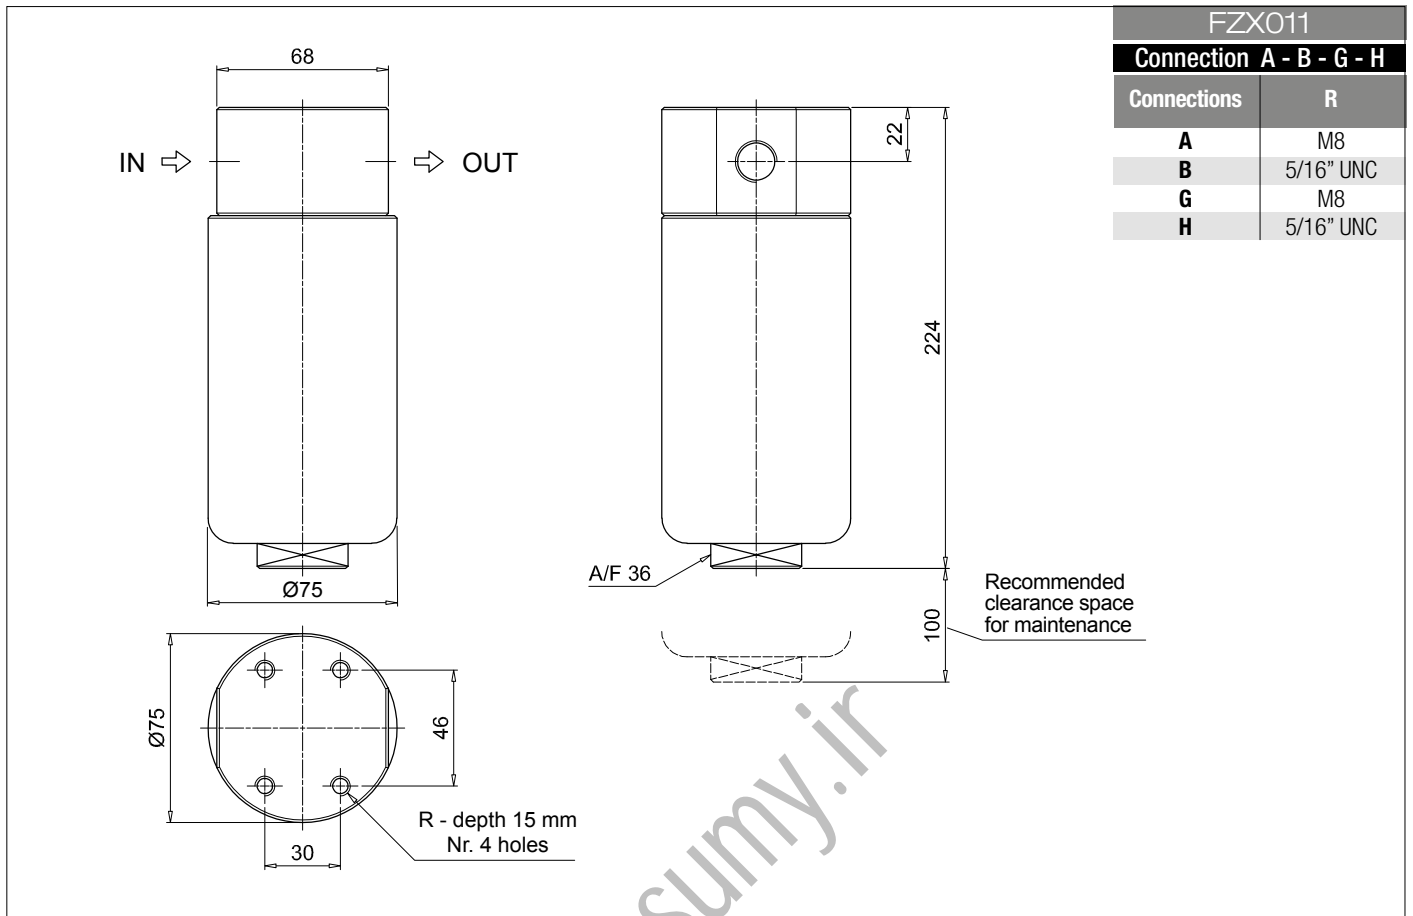

Order number for spare parts

FZX 011

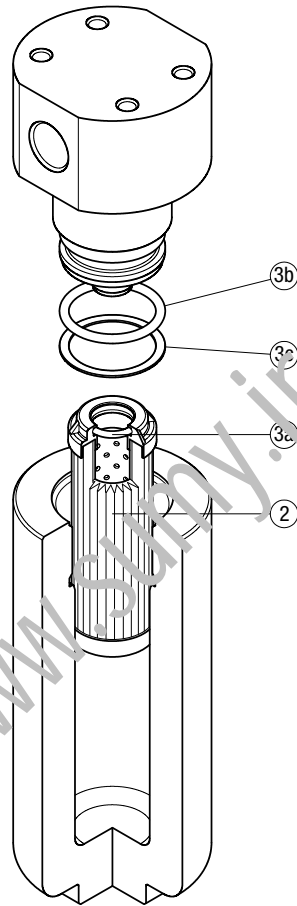

| Item:         | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          |
|---------------|-----------------|----------------------|----------|
| Filter series | Filter element  | Seal Kit code number |          |
| FZX 011       | See order table | NBR                  | FPM      |
|               | 2               | 02050643             | 02050644 |
|               |                 | 3 (3a + 3c)          |          |

[www.sumy.ir](http://www.sumy.ir)

[www.sumy.ir](http://www.sumy.ir)



# FZM series

Maximum working pressure up to 32 Mpa (320 bar) - Flow rate up to 70 l/min



## Description

## Technical data

### Stainless steel high pressure filters

#### Manifold

**Maximum working pressure up to 32 Mpa (320 bar)**  
**Flow rate up to 70 l/min**

FZM is a range of stainless steel high pressure filter for protection of sensitive components in high pressure hydraulic systems placed in difficult environmental conditions.

They are directly connected to the top of the manifold, through the proper flanged interface.

#### Available features:

- Manifold connections up to Ø15 mm, for a maximum flow rate of 70 l/min
- ISO 4401 CETOP 3 and CETOP 5 interface, for direct mounting on the CETOP valves.
- Fine filtration rating, to get a good cleanliness level into the system
- Bypass valve, to relieve excessive pressure drop across the filter media
- Low collapse filter element with external support "R", for filter element protection against the back pressure caused by the check valve or the reverse flow in filters provided with the bypass valve
- High collapse filter element with external support "S", for filter element protection against the back pressure caused by the check valve or the reverse flow in filters not provided with the bypass valve
- High collapse filter element "U", for use with aggressive fluids
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

- Off-shore equipment
- Water filtration systems
- Systems with strong or corrosive environmental conditions
- Systems with corrosive fluids

#### Filter housing materials

- Head: AISI 316L
- Housing: AISI 316L
- Bypass valve: AISI 316L

#### Seals

- Standard NBR series A (-25 °C to +110 °C)
- Optional FPM series V (-20 °C to +120 °C)
- Optional MFQ series F (-50 °C to +120 °C)

#### Bypass valve

Opening pressure 6 bar ±10%

#### Temperature

From -50 °C to +120 °C

#### Note

FZM filters are provided for vertical mounting

#### Δp element type

Fluid flow through the filter element from OUT to IN

Microfibre filter elements - series R: 20 bar.

Element series "R":

- End cap: Nylon
- Core tube: Tinned Steel
- External/Internal support: Wire mesh Epox painted
- Media/Support/Pre-filter: Microfibre/Syntetic

Microfibre filter elements - series S: 210 bar.

Element series "S":

- End cap: Tinned Steel
- Core tube: Tinned Steel
- External support: Wire mesh Epox painted
- Internal support: Wire mesh Stainless Steel
- Media/Support/Pre-filter: Microfibre/Syntetic

Stainless Steel Microfibre filter elements series U: 210 bar.

Element series "U":

- End cap: Stainless Steel
- Core tube: Stainless Steel
- External support: Stainless Steel
- Internal support: Stainless Steel
- Media/Support/Pre-filter: Microfibre/Syntetic



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series  | Weights [kg] |     |     |     |   | Volumes [dm <sup>3</sup> ] |      |      |      |   |
|----------------|--------------|-----|-----|-----|---|----------------------------|------|------|------|---|
|                | Length       | 1   | 2   | 3   | 4 | Length                     | 1    | 2    | 3    | 4 |
| <b>FZM 039</b> | -            | 5.0 | 5.6 | 6.1 |   | -                          | 0.19 | 0.26 | 0.34 |   |

| Filter series  | Length   | Filter element design - R Series |     |     |     |     | Filter element design - S-U Series |     |     |     |     |
|----------------|----------|----------------------------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----|
|                |          | A03                              | A06 | A10 | A16 | A25 | A03                                | A06 | A10 | A16 | A25 |
| <b>FZM 039</b> | <b>2</b> | 19                               | 25  | 41  | 47  | 54  | 19                                 | 23  | 39  | 43  | 51  |
|                | <b>3</b> | 33                               | 36  | 50  | 56  | 65  | 30                                 | 33  | 45  | 49  | 60  |
|                | <b>4</b> | 41                               | 44  | 58  | 64  | 70  | 37                                 | 39  | 51  | 63  | 68  |

### Maximum flow rate for a complete stainless steel high pressure filter with a return drop $\Delta p = 1.5$ bar.


The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure.


Please, contact our Sales Department for further additional information.

### Hydraulic symbols

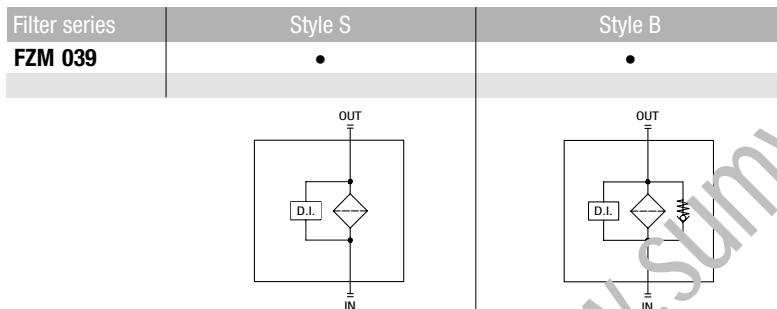

### Pressure drop

Filter housings  $\Delta p$  pressure drop

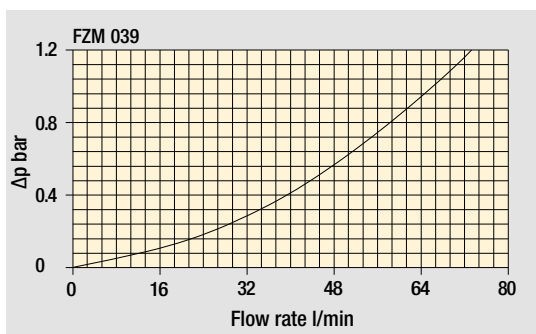

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

## Designation & Ordering code

### COMPLETE FILTER

|  |                               |           |   |   |   |   |     |   |     |
|--|-------------------------------|-----------|---|---|---|---|-----|---|-----|
| <b>Series and size</b><br>FZM039             | Configuration example: FZM039 | 2         | S | A | M | 1 | A10 | H | P01 |
| <b>Length</b>                                |                               | 2   3   4 |   |   |   |   |     |   |     |
| <b>Valves</b>                                |                               |           |   |   |   |   |     |   |     |
| <b>S</b>                                     | Without bypass                |           |   |   |   |   |     |   |     |
| <b>B</b>                                     | With bypass 6 bar             |           |   |   |   |   |     |   |     |
| <b>Seals</b>                                 |                               |           |   |   |   |   |     |   |     |
| <b>A</b>                                     | NBR                           |           |   |   |   |   |     |   |     |
| <b>V</b>                                     | FPM                           |           |   |   |   |   |     |   |     |
| <b>F</b>                                     | MFQ                           |           |   |   |   |   |     |   |     |
| <b>Connections</b>                           |                               |           |   |   |   |   |     |   |     |
| <b>M</b>                                     | Manifold                      |           |   |   |   |   |     |   |     |
| <b>Connection for differential indicator</b> |                               |           |   |   |   |   |     |   |     |
| <b>1</b>                                     | Without                       |           |   |   |   |   |     |   |     |
| <b>2</b>                                     | With connection               |           |   |   |   |   |     |   |     |
| <b>Filtration rating (filter media)</b>      |                               |           |   |   |   |   |     |   |     |
| <b>A03</b>                                   | Inorganic microfiber 3 µm     |           |   |   |   |   |     |   |     |
| <b>A06</b>                                   | Inorganic microfiber 6 µm     |           |   |   |   |   |     |   |     |
| <b>A10</b>                                   | Inorganic microfiber 10 µm    |           |   |   |   |   |     |   |     |
| <b>A16</b>                                   | Inorganic microfiber 16 µm    |           |   |   |   |   |     |   |     |
| <b>A25</b>                                   | Inorganic microfiber 25 µm    |           |   |   |   |   |     |   |     |

| Element Δp                                       | Valves |   |
|--|--------|---|
|  | S      | B |
| <b>R</b> 20 bar                                  |        | • |
| <b>S</b> 210 bar                                 | •      |   |
| <b>U</b> 210 bar, stainless steel filter element | •      | • |

| Execution                     |
|-------------------------------|
| <b>P01</b> MP Filtri standard |
| <b>Pxx</b> Customized         |

### FILTER ELEMENT

|   |                              |           |     |   |   |     |
|---|------------------------------|-----------|-----|---|---|-----|
| <b>Element series and size</b><br>HP039 | Configuration example: HP039 | 3         | A10 | A | S | P01 |
| <b>Element length</b>                   |                              | 2   3   4 |     |   |   |     |
| <b>Filtration rating (filter media)</b> |                              |           |     |   |   |     |
| <b>A03</b>                              | Inorganic microfiber 3 µm    |           |     |   |   |     |
| <b>A06</b>                              | Inorganic microfiber 6 µm    |           |     |   |   |     |
| <b>A10</b>                              | Inorganic microfiber 10 µm   |           |     |   |   |     |
| <b>A16</b>                              | Inorganic microfiber 16 µm   |           |     |   |   |     |
| <b>A25</b>                              | Inorganic microfiber 25 µm   |           |     |   |   |     |


| Seals        | Element Δp                                       |
|--------------|--|
| <b>A</b> NBR | <b>R</b> 20 bar                                  |
| <b>V</b> FPM | <b>S</b> 210 bar                                 |
| <b>F</b> MFQ | <b>U</b> 210 bar, stainless steel filter element |

| Execution                     |
|-------------------------------|
| <b>P01</b> MP Filtri standard |
| <b>Pxx</b> Customized         |

### ACCESSORIES

| Differential indicators                                     | page |  | page |
|---|------|--|------|
| <b>DEH</b> Hazardous area electronic differential indicator | 642  | <b>DVX</b> Visual differential indicator | 643  |
| <b>DEX</b> Electrical differential indicator                | 643  | <b>DVY</b> Visual differential indicator | 644  |
| <b>DLX</b> Electrical / visual differential indicator       | 643  |  |      |
| Additional features   | page |  |      |
| <b>X2</b> Plug  | 644  |  |      |


| FZM039        |        |
|---------------|--------|
| Filter length | H [mm] |
| 2             | 160    |
| 3             | 203    |
| 4             | 247    |

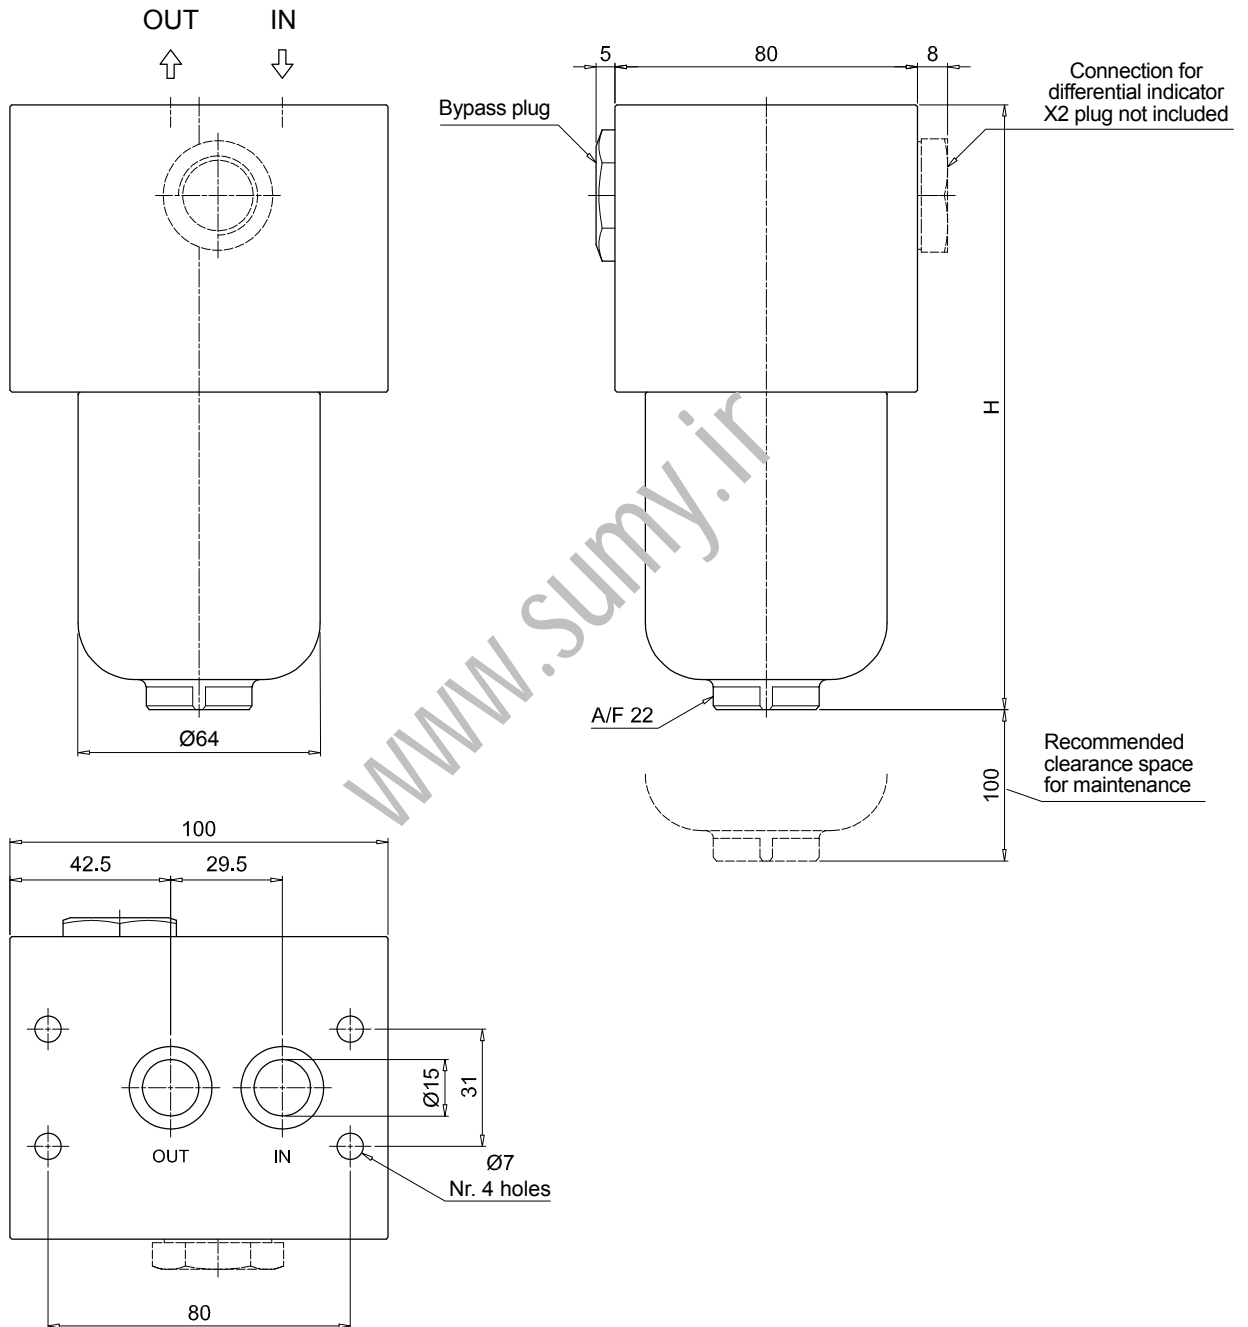

# FZM SPARE PARTS

Order number for spare parts

FZM 039

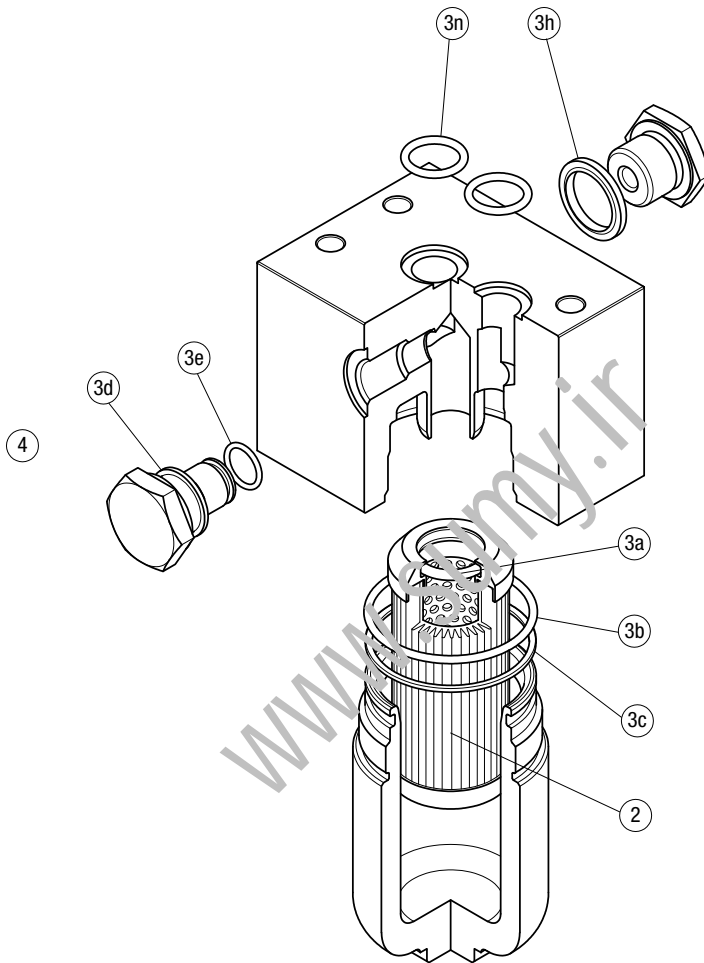

| Item:         | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          | Q.ty: 1 pc.               |     |
|---------------|-----------------|----------------------|----------|---------------------------|-----|
| Filter series | Filter element  | Seal Kit code number |          | Indicator connection plug |     |
| FZM 039       | See order table | NBR                  | FPM      | NBR                       | FPM |
|               | 2               | 3 (3a ÷ 3n)          |          | 4                         |     |
|               |                 | 02050651             | 02050652 | X2H                       | X2V |

[www.sumy.ir](http://www.sumy.ir)

[www.sumy.ir](http://www.sumy.ir)



# FZB series

Maximum working pressure up to 32 Mpa (320 bar) - Flow rate up to 70 l/min



## Description

## Technical data

### Stainless steel high pressure filters

#### Manifold

**Maximum working pressure up to 32 Mpa (320 bar)**  
**Flow rate up to 70 l/min**

FZB is a range of stainless steel high pressure filter for protection of sensitive components in high pressure hydraulic systems placed in difficult environmental conditions.

They are directly connected to the side of the manifold, through the proper flanged interface.

#### Available features:

- Manifold connections up to Ø16 mm, for a maximum flow rate of 70 l/min
- Fine filtration rating, to get a good cleanliness level into the system
- Bypass valve, to relieve excessive pressure drop across the filter media
- Low collapse filter element with external support "R", for filter element protection against the back pressure caused by the check valve or the reverse flow in filters provided with the bypass valve
- High collapse filter element with external support "S", for filter element protection against the back pressure caused by the check valve or the reverse flow in filters not provided with the bypass valve
- High collapse filter element "U", for use with aggressive fluids
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

- Off-shore equipment
- Water filtration systems
- Systems with strong or corrosive environmental conditions
- Systems with corrosive fluids

#### Filter housing materials

- Head: AISI 316L
- Housing: AISI 316L
- Bypass valve: AISI 316L

#### Seals

- Standard NBR series A (-25 °C to +110 °C)
- Optional FPM series V (-20 °C to +120 °C)
- Optional MFQ series F (-50 °C to +120 °C)

#### Bypass valve

Opening pressure 6 bar ±10%

#### Temperature

From -50 °C to +120 °C

#### Note

FZB filters are provided for vertical mounting

#### Δp element type

Fluid flow through the filter element from OUT to IN

Microfibre filter elements - series R: 20 bar.

Element series "R":

- End cap: Nylon
- Core tube: Tinned Steel
- External/Internal support: Wire mesh Epox painted
- Media/Support/Pre-filter: Microfibre/Syntetic

Microfibre filter elements - series S: 210 bar.

Element series "S":

- End cap: Tinned Steel
- Core tube: Tinned Steel
- External support: Wire mesh Epox painted
- Internal support: Wire mesh Stainless Steel
- Media/Support/Pre-filter: Microfibre/Syntetic

Stainless Steel Microfibre filter elements series U: 210 bar.

Element series "U":

- End cap: Stainless Steel
- Core tube: Stainless Steel
- External support: Stainless Steel
- Internal support: Stainless Steel
- Media/Support/Pre-filter: Microfibre/Syntetic



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series  | Weights [kg] |     |     |     |   | Volumes [dm <sup>3</sup> ] |      |      |   |   |
|----------------|--------------|-----|-----|-----|---|----------------------------|------|------|---|---|
|                | Length       | 1   | 2   | 3   | 4 | Length                     | 1    | 2    | 3 | 4 |
| <b>FZB 039</b> | -            | 4.6 | 5.2 | 5.7 | - | 0.19                       | 0.26 | 0.34 | - | - |

| Filter series  | Length   | Filter element design - R Series |     |     |     |     | Filter element design - S Series |     |     |     |     | Filter element design - U Series |     |     |     |     |
|----------------|----------|----------------------------------|-----|-----|-----|-----|----------------------------------|-----|-----|-----|-----|----------------------------------|-----|-----|-----|-----|
|                |          | A03                              | A06 | A10 | A16 | A25 | A03                              | A06 | A10 | A16 | A25 | A03                              | A06 | A10 | A16 | A25 |
| <b>FZB 039</b> | <b>2</b> | 18                               | 23  | 39  | 44  | 52  | 18                               | 22  | 37  | 40  | 48  | 18                               | 22  | 37  | 40  | 48  |
|                | <b>3</b> | 31                               | 33  | 47  | 54  | 65  | 28                               | 31  | 43  | 46  | 84  | 28                               | 31  | 43  | 46  | 84  |
|                | <b>4</b> | 38                               | 41  | 56  | 63  | 71  | 34                               | 36  | 48  | 62  | 68  | 34                               | 36  | 48  | 62  | 68  |

### Maximum flow rate for a complete stainless steel high pressure filter with a pressure drop $\Delta p = 1.5$ bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure.


Please, contact our Sales Department for further additional information.

### Hydraulic symbols

| Filter series  | Style S | Style B | Style T | Style D |
|----------------|---------|---------|---------|---------|
| <b>FZB 039</b> | •       | •       | •       | •       |
|                |         |         |         |         |

### Pressure drop

Filter housings  $\Delta p$  pressure drop

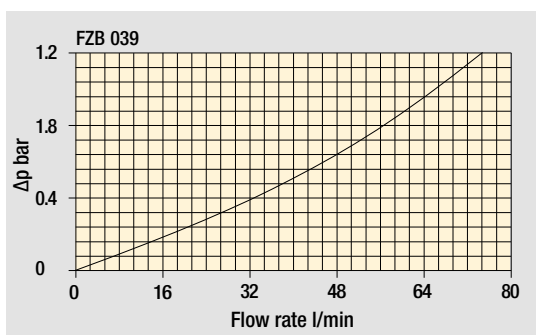

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

## Designation & Ordering code

### COMPLETE FILTER

Configuration example: **FZB039** | **2** | **T** | **A** | **F** | **2** | **A06** | **S** | **P01**

**Series and size**  
FZB039

**Length**  
2 | 3 | 4

**Valves**  
**S** Without bypass  
**B** With bypass 6 bar  
**T** With check valve, without bypass  
**D** With check valve, with bypass 6 bar

**Seals**  
**A** NBR  
**V** FPM  
**F** MFQ

**Connections**  
F Manifold

**Connections for differential indicator**  
**1** Without  
**2** With connection on the top

**Filtration rating (filter media)**  
**A03** Inorganic microfiber 3 µm  
**A06** Inorganic microfiber 6 µm  
**A10** Inorganic microfiber 10 µm  
**A16** Inorganic microfiber 16 µm  
**A25** Inorganic microfiber 25 µm

| Element Δp                                       | Valves |   |   |   | Execution                     |
|--|--------|---|---|---|-------------------------------|
|  | S      | B | T | D |                               |
| <b>R</b> 20 bar                                  |        | • |   | • | <b>P01</b> MP Filtri standard |
| <b>S</b> 210 bar                                 | •      |   | • |   | <b>Pxx</b> Customized         |
| <b>U</b> 210 bar, stainless steel filter element | •      | • | • | • |                               |

### FILTER ELEMENT

Configuration example: **HP039** | **2** | **A06** | **A** | **S** | **P01**

**Element series and size**  
HP039

**Element length**  
2 | 3 | 4


**Filtration rating (filter media)**  
**A03** Inorganic microfiber 3 µm  
**A06** Inorganic microfiber 6 µm  
**A10** Inorganic microfiber 10 µm  
**A16** Inorganic microfiber 16 µm  
**A25** Inorganic microfiber 25 µm

| Seals        | Element Δp                                       | Execution                     |
|--------------|--|-------------------------------|
| <b>A</b> NBR | <b>R</b> 20 bar                                  | <b>P01</b> MP Filtri standard |
| <b>V</b> FPM | <b>S</b> 210 bar                                 | <b>Pxx</b> Customized         |
| <b>F</b> MFQ | <b>U</b> 210 bar, stainless steel filter element |                               |

### ACCESSORIES

| Differential indicators                                     | page |  | page |
|---|------|--|------|
| <b>DEH</b> Hazardous area electronic differential indicator | 642  | <b>DVX</b> Visual differential indicator | 643  |
| <b>DEX</b> Electrical differential indicator                | 643  | <b>DVY</b> Visual differential indicator | 644  |
| <b>DLX</b> Electrical / visual differential indicator       | 643  |  |      |
| Additional features   | page |  |      |
| <b>X2</b> Plug  | 644  |  |      |


| FZB039        |        |
|---------------|--------|
| Filter length | H [mm] |
| 2             | 190    |
| 3             | 233    |
| 4             | 277    |

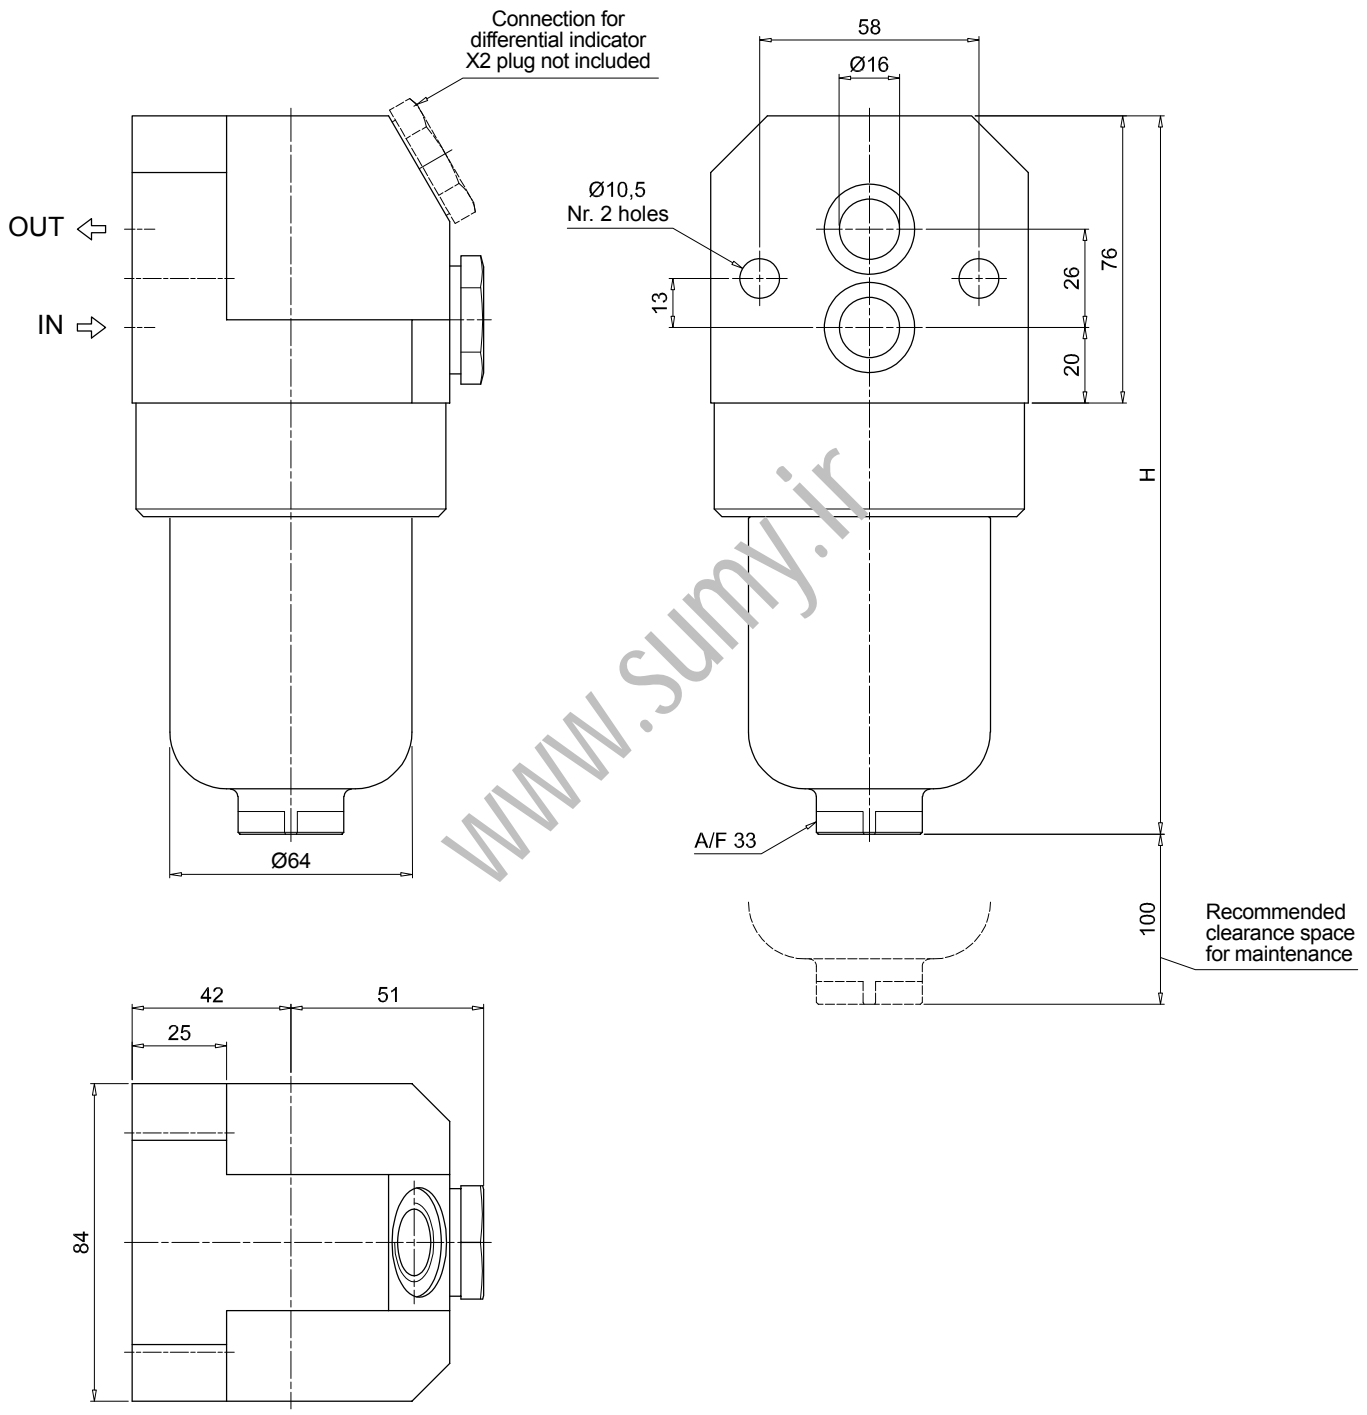

# FZB SPARE PARTS

Order number for spare parts

FZB 039

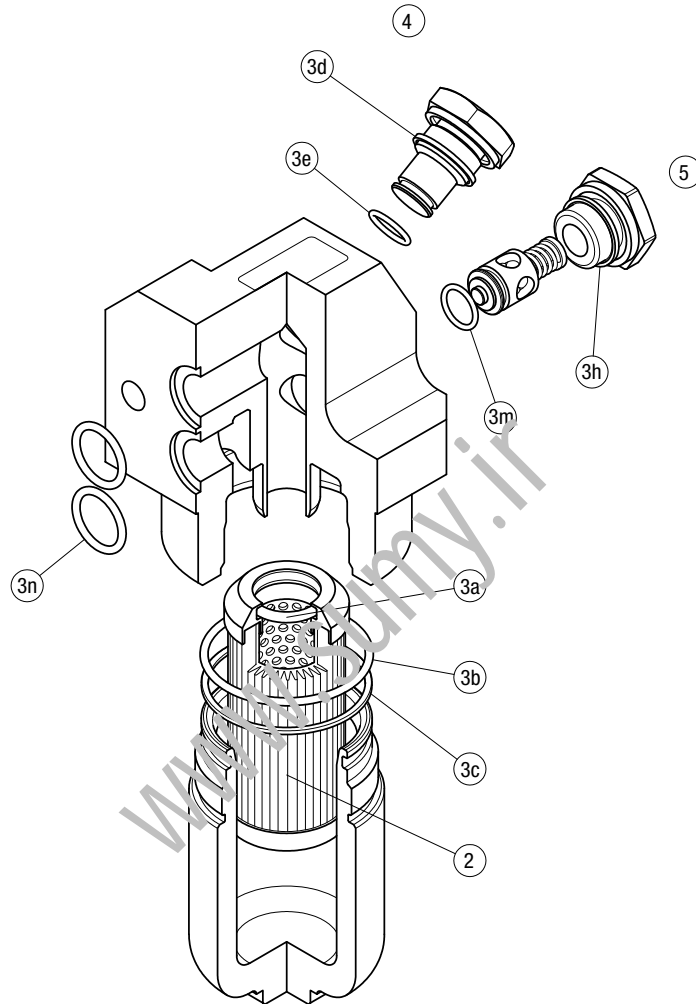

| Item:          | Q.ty: 1 pc.     |                      | Q.ty: 1 pc. |                           | Q.ty: 1 pc. |                        | Q.ty: 1 pc. |  |
|----------------|-----------------|----------------------|-------------|---------------------------|-------------|------------------------|-------------|--|
| Filter series  | Filter element  | Seal Kit code number |             | Indicator connection plug |             | Bypass assembly / plug |             |  |
|                |                 | NBR                  | FPM         | NBR                       | FPM         | NBR                    | FPM         |  |
| <b>FZB 039</b> | See order table | 02050647             | 02050648    | X2H                       | X2V         | 02001286               | 02001295    |  |

[www.sumy.ir](http://www.sumy.ir)

[www.sumy.ir](http://www.sumy.ir)



# FZD series

Maximum working pressure up to 35 Mpa (350 bar) - Flow rate up to 60 l/min



### Stainless steel high pressure filters

#### Duplex

**Maximum working pressure up to 35 Mpa (350 bar)**  
**Flow rate up to 60 l/min**

FZD is a range of stainless steel high pressure duplex filter with integrated changeover function to allow the filter element replacement without the system shut-down. They are directly connected to the lines of the system through the hydraulic fittings.

#### Available features:

- Female threaded connections up to 3/4", for a maximum flow rate of 60 l/min
- Fine filtration rating, to get a good cleanliness level into the system
- Balancing valve, available for FZD051, to equalize the housing pressure before the switch.
- Bypass valve, to relieve excessive pressure drop across the filter media
- Vent ports, to avoid air trapped into the filter going into the system
- Drain ports, to remove the fluid from the housing prior the maintenance work
- High collapse filter element "H", for use with filters not provided with bypass valve
- Low collapse filter element with external support "R", for filter element protection against the back pressure caused by the check valve or the reverse flow in filters provided with the bypass valve
- High collapse filter element with external support "S", for filter element protection against the back pressure caused by the check valve or the reverse flow in filters not provided with the bypass valve
- High collapse filter element "U", for use with aggressive fluids
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

- System where shut-down causes high costs
- System where shut-down causes safety issues

#### Filter housing materials

- Head: AISI 316L
- Housing: AISI 316L
- Bypass valve: AISI 316L

#### Seals

- Standard NBR series A (-25 °C to +110 °C)
- Optional FPM series V (-20 °C to +120 °C)
- Optional MFQ series F (-50 °C to +120 °C)

#### Bypass valve

Opening pressure 6 bar  $\pm$ 10%

#### Temperature

From -50 °C to +120 °C

#### Note

FZD filters are provided for vertical mounting

#### $\Delta p$ element type

Fluid flow through the filter element from OUT to IN

Microfibre filter elements - series R: 20 bar.

Element series "R":

- End cap: Nylon
- Core tube: Tinned Steel
- External/Internal support: Wire mesh Epox painted
- Media/Support/Pre-filter: Microfibre/Syntetic

Microfibre filter elements - series H-S: 210 bar.

Element series "H - S":

- End cap: Tinned Steel
- Core tube: Tinned Steel
- External support: Wire mesh Epox painted
- Internal support: Wire mesh Stainless Steel
- Media/Support/Pre-filter: Microfibre/Syntetic

Stainless Steel Microfibre filter elements series U: 210 bar.

Element series "U":

- End cap: Stainless Steel
- Core tube: Stainless Steel
- External support: Stainless Steel
- Internal support: Stainless Steel
- Media/Support/Pre-filter: Microfibre/Syntetic



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series  | Weights [kg] |   |      |      |      | Volumes [dm <sup>3</sup> ] |        |   |      |      |      |      |   |
|----------------|--------------|---|------|------|------|----------------------------|--------|---|------|------|------|------|---|
|                | Length       | 1 | 2    | 3    | 4    | 5                          | Length | 1 | 2    | 3    | 4    | 4    |   |
| <b>FZD 010</b> | -            | - | 7.9  | -    | -    | -                          | -      | - | 0.10 | -    | -    | -    | - |
| <b>FZD 021</b> | -            | - | 9.6  | 9.8  | 10.3 | -                          | -      | - | 0.06 | 0.12 | 0.22 | -    | - |
| <b>FZD 051</b> | -            | - | 17.4 | 18.0 | 19.0 | 20.3                       | -      | - | 0.31 | 0.41 | 0.53 | 0.83 | - |

| Filter series | Length | Filter element design - H Series |     |     |     |     | Filter element design - U Series |     |     |     |     |
|---------------|--------|----------------------------------|-----|-----|-----|-----|----------------------------------|-----|-----|-----|-----|
|               |        | A03                              | A06 | A10 | A16 | A25 | A03                              | A06 | A10 | A16 | A25 |
| FZD 010       | 2      | 4                                | 5   | 7   | 8   | 11  | 4                                | 5   | 7   | 8   | 11  |
|               | 3      | 5                                | 6   | 11  | 12  | 16  | 5                                | 6   | 11  | 12  | 16  |
| FZD 021       | 3      | 9                                | 11  | 16  | 18  | 20  | 9                                | 11  | 16  | 18  | 20  |
|               | 4      | 10                               | 12  | 17  | 19  | 21  | 10                               | 12  | 17  | 19  | 21  |

| Filter series | Length | Filter element design - R Series |     |     |     |     | Filter element design - S Series |     |     |     |     | Filter element design - U Series |     |     |     |     |
|---------------|--------|----------------------------------|-----|-----|-----|-----|----------------------------------|-----|-----|-----|-----|----------------------------------|-----|-----|-----|-----|
|               |        | A03                              | A06 | A10 | A16 | A25 | A03                              | A06 | A10 | A16 | A25 | A03                              | A06 | A10 | A16 | A25 |
| FZD 051       | 2      | 39                               | 41  | 51  | 54  | 59  | 35                               | 37  | 48  | 51  | 58  | 35                               | 37  | 48  | 51  | 58  |
|               | 3      | 45                               | 46  | 54  | 56  | 61  | 41                               | 43  | 52  | 54  | 60  | 41                               | 43  | 52  | 54  | 60  |
|               | 4      | 50                               | 52  | 58  | 58  | 62  | 47                               | 49  | 56  | 56  | 61  | 47                               | 49  | 56  | 56  | 61  |
|               | 5      | 56                               | 57  | 61  | 62  | 63  | 53                               | 53  | 57  | 59  | 63  | 53                               | 53  | 57  | 59  | 63  |
|               | 6      | 61                               | 62  | 66  | 67  | 71  | 59                               | 59  | 63  | 65  | 71  | 59                               | 59  | 63  | 65  | 71  |

### Maximum flow rate for a complete stainless steel high pressure filter with a pressure drop $\Delta p = 1.5$ bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.





For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure.

Please, contact our Sales Department for further additional information.

### Hydraulic symbols

| Filter series | Style S | Style B |
|---------------|---------|---------|
| FZD 010       | •       |         |
| FZD 021       | •       |         |
| FZD 051       | •       | •       |

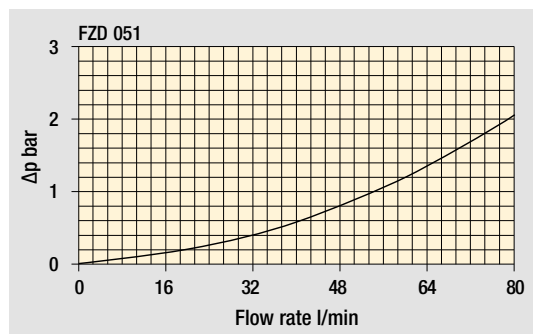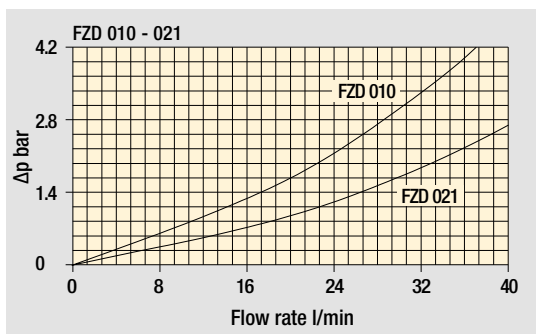

### Pressure drop Filter housings $\Delta p$ pressure drop

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

## Designation & Ordering code

### COMPLETE FILTER

|   |   |  |                       |       |  |  |  |  |  |  |  |
|---|---|--|-----------------------|-------|--|--|--|--|--|--|--|
| <b>Series and size</b>                  |   | Configuration example: <b>FZD021</b>   <b>4</b>   <b>S</b>   <b>A</b>   <b>G1</b>   <b>A06</b>   <b>H</b>   <b>P01</b> |                       |       |  |  |  |  |  |  |  |
| <b>FZD010</b>                           | <b>FZD021</b>                           |  |                       |       |  |  |  |  |  |  |  |
| <b>Length</b>                           |   | <b>FZD010</b>  | <b>FZD021</b>         |       |  |  |  |  |  |  |  |
| <b>2</b>                                |   | •  | •                     |       |  |  |  |  |  |  |  |
| <b>3</b>                                |   |  | •                     |       |  |  |  |  |  |  |  |
| <b>4</b>                                |   |  | •                     |       |  |  |  |  |  |  |  |
| <b>Valves</b>                           |   |  |                       |       |  |  |  |  |  |  |  |
| <b>S</b>                                | Without bypass                          |  |                       |       |  |  |  |  |  |  |  |
| <b>Seals</b>                            |   |  |                       |       |  |  |  |  |  |  |  |
| <b>A</b>                                | NBR                                     |  |                       |       |  |  |  |  |  |  |  |
| <b>V</b>                                | FPM                                     |  |                       |       |  |  |  |  |  |  |  |
| <b>Connections</b>                      |   | <b>FZD010</b>  | <b>FZD021</b>         |       |  |  |  |  |  |  |  |
| <b>G1</b>                               |   | G 3/8"   | G 1/2"                |       |  |  |  |  |  |  |  |
| <b>G2</b>                               |   | 3/8" NPT   | 1/2" NPT              |       |  |  |  |  |  |  |  |
| <b>G3</b>                               |   | -  | SAE 8 - 3/4" - 16 UNF |       |  |  |  |  |  |  |  |
| <b>Filtration rating (filter media)</b> |   |  |                       |       |  |  |  |  |  |  |  |
| <b>A03</b>                              | Inorganic microfiber                    |  |                       | 3 µm  |  |  |  |  |  |  |  |
| <b>A06</b>                              | Inorganic microfiber                    |  |                       | 6 µm  |  |  |  |  |  |  |  |
| <b>A10</b>                              | Inorganic microfiber                    |  |                       | 10 µm |  |  |  |  |  |  |  |
| <b>A16</b>                              | Inorganic microfiber                    |  |                       | 16 µm |  |  |  |  |  |  |  |
| <b>A25</b>                              | Inorganic microfiber                    |  |                       | 25 µm |  |  |  |  |  |  |  |
| <b>Element Δp</b>                       |   |  |                       |       |  |  |  |  |  |  |  |
| <b>H</b>                                | 210 bar                                 |  |                       |       |  |  |  |  |  |  |  |
| <b>U</b>                                | 210 bar, stainless steel filter element |  |                       |       |  |  |  |  |  |  |  |
| <b>Execution</b>                        |   |  |                       |       |  |  |  |  |  |  |  |
| <b>P01</b>                              | MP Filtri standard                      |  |                       |       |  |  |  |  |  |  |  |
| <b>Pxx</b>                              | Customized                              |  |                       |       |  |  |  |  |  |  |  |


### FILTER ELEMENT

|   |   |  |               |       |  |  |  |  |  |  |  |
|---|---|--|---------------|-------|--|--|--|--|--|--|--|
| <b>Element series and size</b>          |   | Configuration example: <b>HP011</b>   <b>4</b>   <b>A06</b>   <b>A</b>   <b>H</b>   <b>P01</b> |               |       |  |  |  |  |  |  |  |
| <b>HP010</b>                            | <b>HP011</b>                            | <b>FZD010</b>  | <b>FZD021</b> |       |  |  |  |  |  |  |  |
| <b>HP010</b>                            |   | •  |               |       |  |  |  |  |  |  |  |
| <b>HP011</b>                            |   |  | •             |       |  |  |  |  |  |  |  |
| <b>Element length</b>                   |   | <b>HP010</b>   | <b>HP011</b>  |       |  |  |  |  |  |  |  |
| <b>2</b>                                |   | •  | •             |       |  |  |  |  |  |  |  |
| <b>3</b>                                |   |  | •             |       |  |  |  |  |  |  |  |
| <b>4</b>                                |   |  | •             |       |  |  |  |  |  |  |  |
| <b>Filtration rating (filter media)</b> |   |  |               |       |  |  |  |  |  |  |  |
| <b>A03</b>                              | Inorganic microfiber                    |  |               | 3 µm  |  |  |  |  |  |  |  |
| <b>A06</b>                              | Inorganic microfiber                    |  |               | 6 µm  |  |  |  |  |  |  |  |
| <b>A10</b>                              | Inorganic microfiber                    |  |               | 10 µm |  |  |  |  |  |  |  |
| <b>A16</b>                              | Inorganic microfiber                    |  |               | 16 µm |  |  |  |  |  |  |  |
| <b>A25</b>                              | Inorganic microfiber                    |  |               | 25 µm |  |  |  |  |  |  |  |
| <b>Seals</b>                            |   |  |               |       |  |  |  |  |  |  |  |
| <b>A</b>                                | NBR                                     |  |               |       |  |  |  |  |  |  |  |
| <b>V</b>                                | FPM                                     |  |               |       |  |  |  |  |  |  |  |
| <b>Element Δp</b>                       |   |  |               |       |  |  |  |  |  |  |  |
| <b>H</b>                                | 210 bar                                 |  |               |       |  |  |  |  |  |  |  |
| <b>U</b>                                | 210 bar, stainless steel filter element |  |               |       |  |  |  |  |  |  |  |
| <b>Execution</b>                        |   |  |               |       |  |  |  |  |  |  |  |
| <b>P01</b>                              | MP Filtri standard                      |  |               |       |  |  |  |  |  |  |  |
| <b>Pxx</b>                              | Customized                              |  |               |       |  |  |  |  |  |  |  |

### ACCESSORIES

|                                |  |      |            |                               |     |
|--------------------------------|--|------|------------|-------------------------------|-----|
| <b>Differential indicators</b> |  | page |            | page                          |     |
| <b>DEH</b>                     | Hazardous area electronic differential indicator | 642  | <b>DVX</b> | Visual differential indicator | 643 |
| <b>DEX</b>                     | Electrical differential indicator                | 643  | <b>DVY</b> | Visual differential indicator | 644 |
| <b>DLX</b>                     | Electrical / visual differential indicator       | 643  |            |                               |     |
| <b>Additional features</b>     |  | page |            |                               |     |
| <b>X2</b>                      | Plug   | 644  |            |                               |     |

FZD010

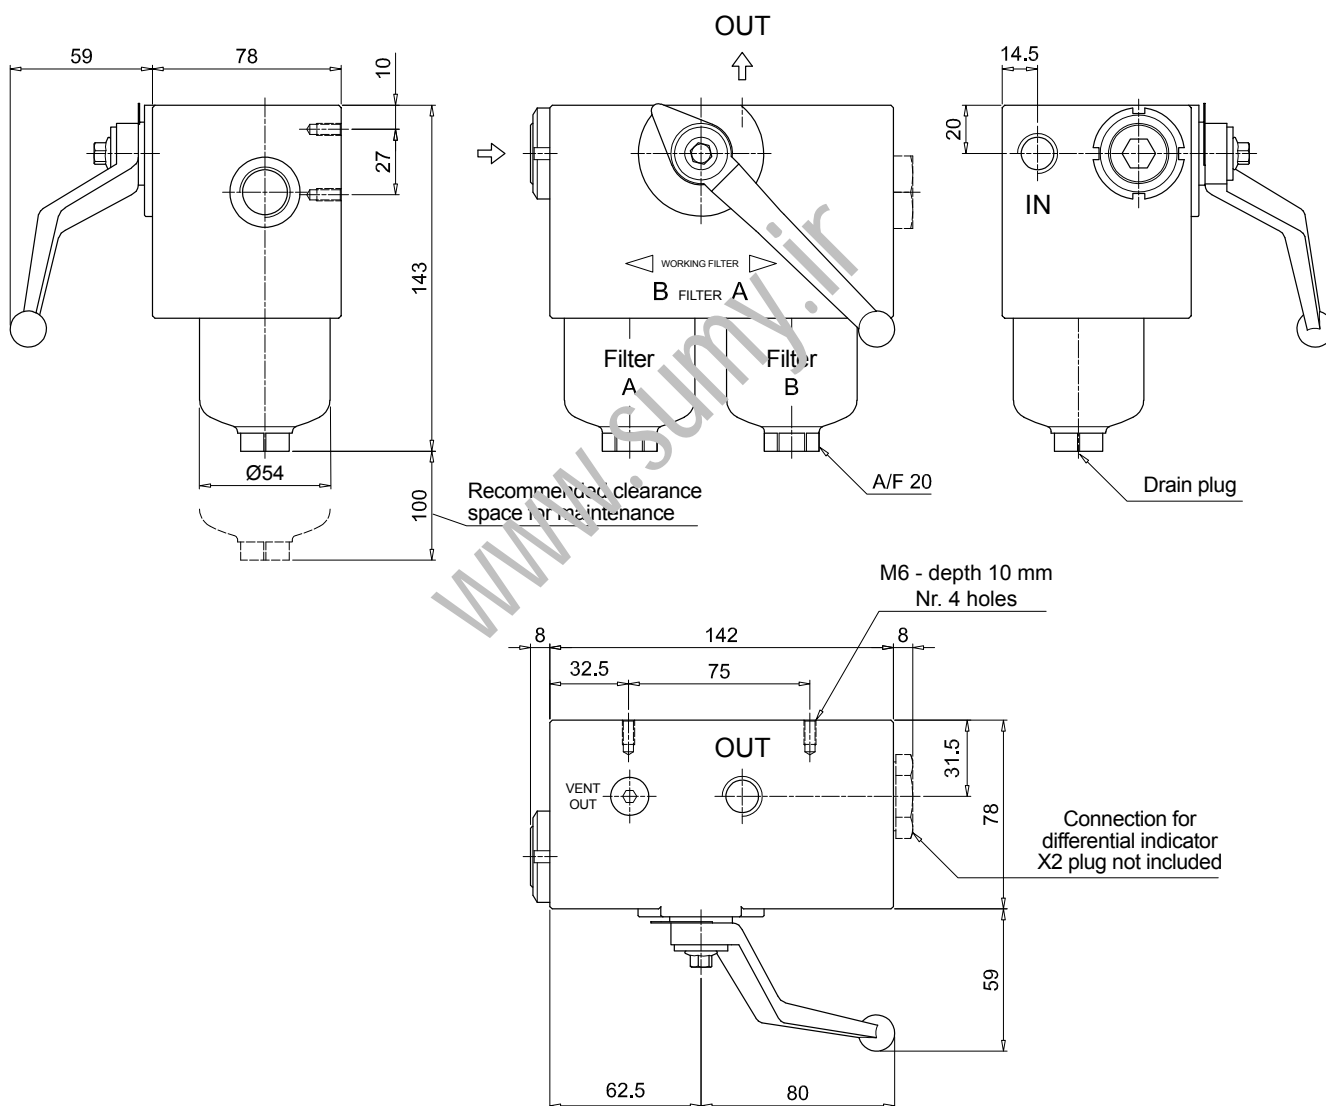



[www.sumy.ir](http://www.sumy.ir)

## Designation & Ordering code

### COMPLETE FILTER

|   |  |  |  |  |                     |  |                               |  |  |
|---|--|--|--|--|---------------------|--|-------------------------------|--|--|
| <b>Series and size</b><br><b>FZD051</b>   | Configuration example: <b>FZD051</b>   <b>3</b>   <b>B</b>   <b>A</b>   <b>G3</b>   <b>A03</b>   <b>U</b>   <b>P01</b> |  |  |  |                     |  |                               |  |  |
| <b>Length</b><br>2   3   4   5  |  |  |  |  |                     |  |                               |  |  |
| <b>Valves</b><br><b>S</b> Without bypass<br><b>B</b> With bypass 6 bar  |  |  |  |  |                     |  |                               |  |  |
| <b>Seals</b><br><b>A</b> NBR<br><b>V</b> FPM  |  |  |  |  |                     |  |                               |  |  |
| <b>Connections</b><br><b>G1</b> G 3/4"<br><b>G2</b> 3/4" NPT<br><b>G3</b> G 1/2"<br><b>G4</b> 1/2" NPT<br><b>G5</b> SAE 8 - 3/4" - 16 UNF<br><b>G6</b> SAE 12 - 1 1/16" - 12 UN |  |  |  |  |                     |  |                               |  |  |
| <b>Filtration rating (filter media)</b>   |  |  |  |  |                     |  |                               |  |  |
| <b>A03</b> Inorganic microfiber   | 3 µm   |  |  |  |                     |  |                               |  |  |
| <b>A06</b> Inorganic microfiber   | 6 µm   |  |  |  |                     |  |                               |  |  |
| <b>A10</b> Inorganic microfiber   | 10 µm  |  |  |  |                     |  |                               |  |  |
| <b>A16</b> Inorganic microfiber   | 16 µm  |  |  |  |                     |  |                               |  |  |
| <b>A25</b> Inorganic microfiber   | 25 µm  |  |  |  |                     |  |                               |  |  |
|   |  |  | <b>Valves</b>                                    |  |                     |  | <b>Execution</b>              |  |  |
|   |  |  | <b>R</b> 20 bar                                  |  | <b>S</b>   <b>B</b> |  | <b>P01</b> MP Filtri standard |  |  |
|   |  |  | <b>S</b> 210 bar                                 |  | •                   |  | <b>Pxx</b> Customized         |  |  |
|   |  |  | <b>U</b> 210 bar, stainless steel filter element |  | • •                 |  |                               |  |  |

### FILTER ELEMENT


|  |  |  |  |  |                               |  |
|--|--|--|--|--|-------------------------------|--|
| <b>Element series and size</b><br><b>HP050</b> | Configuration example: <b>HP050</b>   <b>3</b>   <b>A03</b>   <b>A</b>   <b>U</b>   <b>P01</b> |  |  |  |                               |  |
| <b>Element length</b><br>2   3   4   5         |  |  |  |  |                               |  |
| <b>Filtration rating (filter media)</b>        |  |  |  |  |                               |  |
| <b>A03</b> Inorganic microfiber                | 3 µm   |  |  |  |                               |  |
| <b>A06</b> Inorganic microfiber                | 6 µm   |  |  |  |                               |  |
| <b>A10</b> Inorganic microfiber                | 10 µm  |  |  |  |                               |  |
| <b>A16</b> Inorganic microfiber                | 16 µm  |  |  |  |                               |  |
| <b>A25</b> Inorganic microfiber                | 25 µm  |  |  |  |                               |  |
|  |  |  | <b>Seals</b>                                     |  | <b>Execution</b>              |  |
|  |  |  | <b>A</b> NBR                                     |  | <b>P01</b> MP Filtri standard |  |
|  |  |  | <b>V</b> FPM                                     |  | <b>Pxx</b> Customized         |  |
|  |  |  | <b>R</b> 20 bar                                  |  |                               |  |
|  |  |  | <b>S</b> 210 bar                                 |  |                               |  |
|  |  |  | <b>U</b> 210 bar, stainless steel filter element |  |                               |  |

### ACCESSORIES

|   |      |  |      |
|---|------|--|------|
| <b>Differential indicators</b>                              | page |  | page |
| <b>DEH</b> Hazardous area electronic differential indicator | 642  | <b>DVX</b> Visual differential indicator | 643  |
| <b>DEX</b> Electrical differential indicator                | 643  | <b>DVY</b> Visual differential indicator | 644  |
| <b>DLX</b> Electrical / visual differential indicator       | 643  |  |      |
| <b>Additional features</b>                                  | page |  |      |
| <b>X2</b> Plug  | 644  |  |      |



| FZD051        |          |         |        |
|---------------|----------|---------|--------|
| Filter length | H [mm]   |         |        |
| 2             | 253      |         |        |
| 3             | 295      |         |        |
| 4             | 343      |         |        |
| 5             | 465      |         |        |
| Connections   | R        |         |        |
| G1            | M6       |         |        |
| G2            | 1/4" UNC |         |        |
| G3            | M6       |         |        |
| G4-G5-G6      | 1/4" UNC |         |        |
| Valves        | L [mm]   | L1 [mm] | M [mm] |
| S             | 168      | 138     | 84     |
| B             | 182.5    | 152.5   | 98.5   |

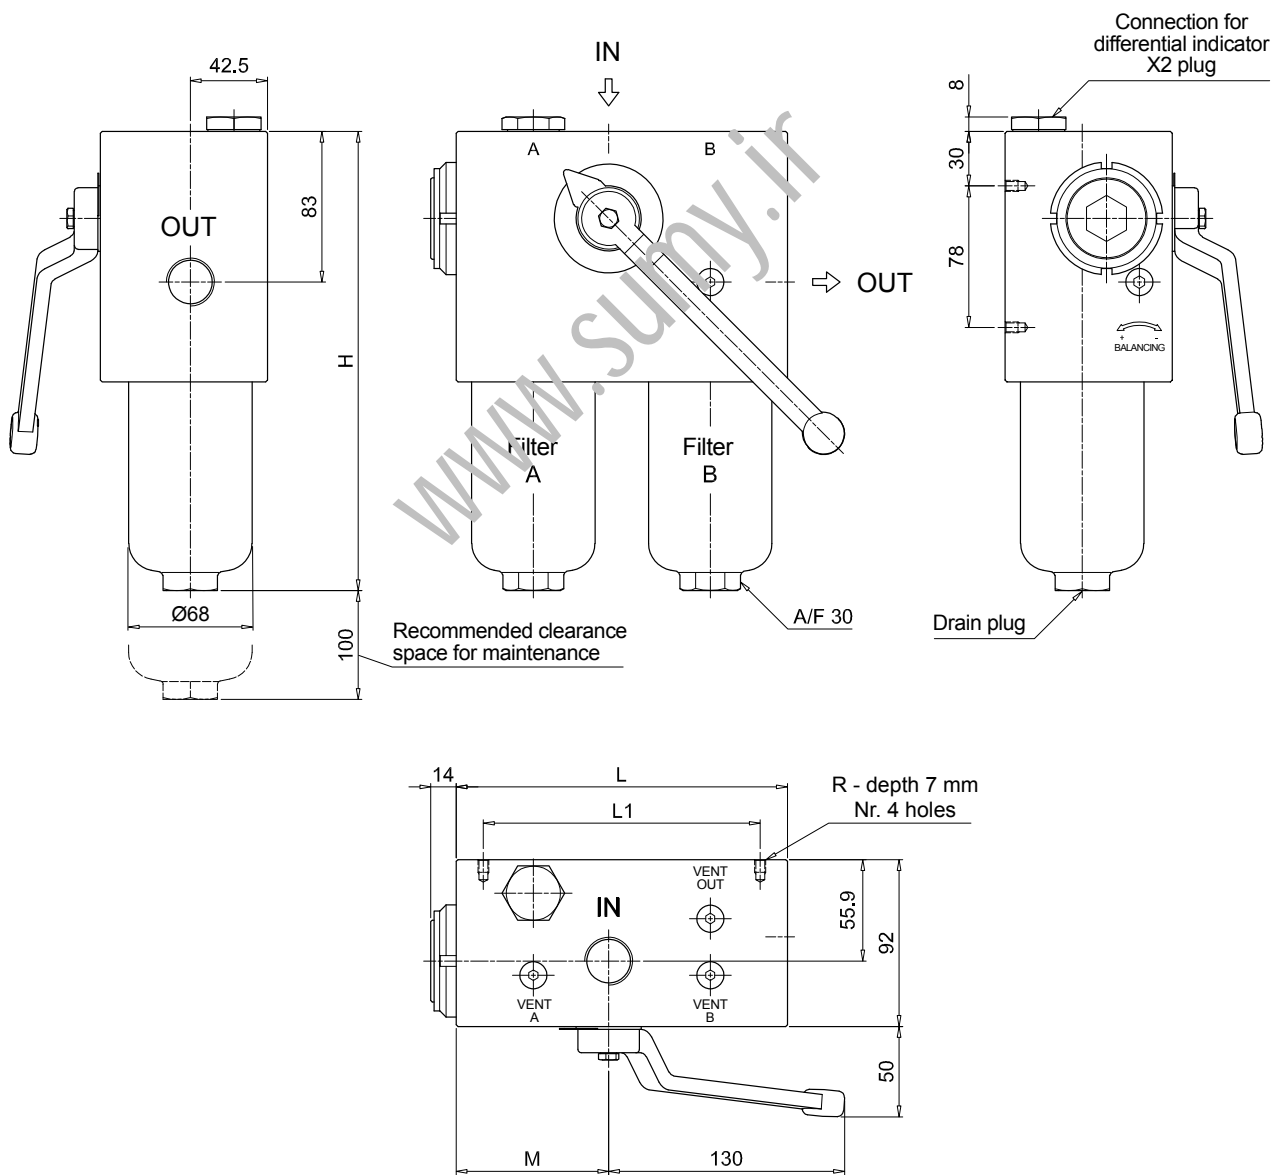


# FZD SPARE PARTS

Order number for spare parts

FZD 010

FZD 021 - FZD 051

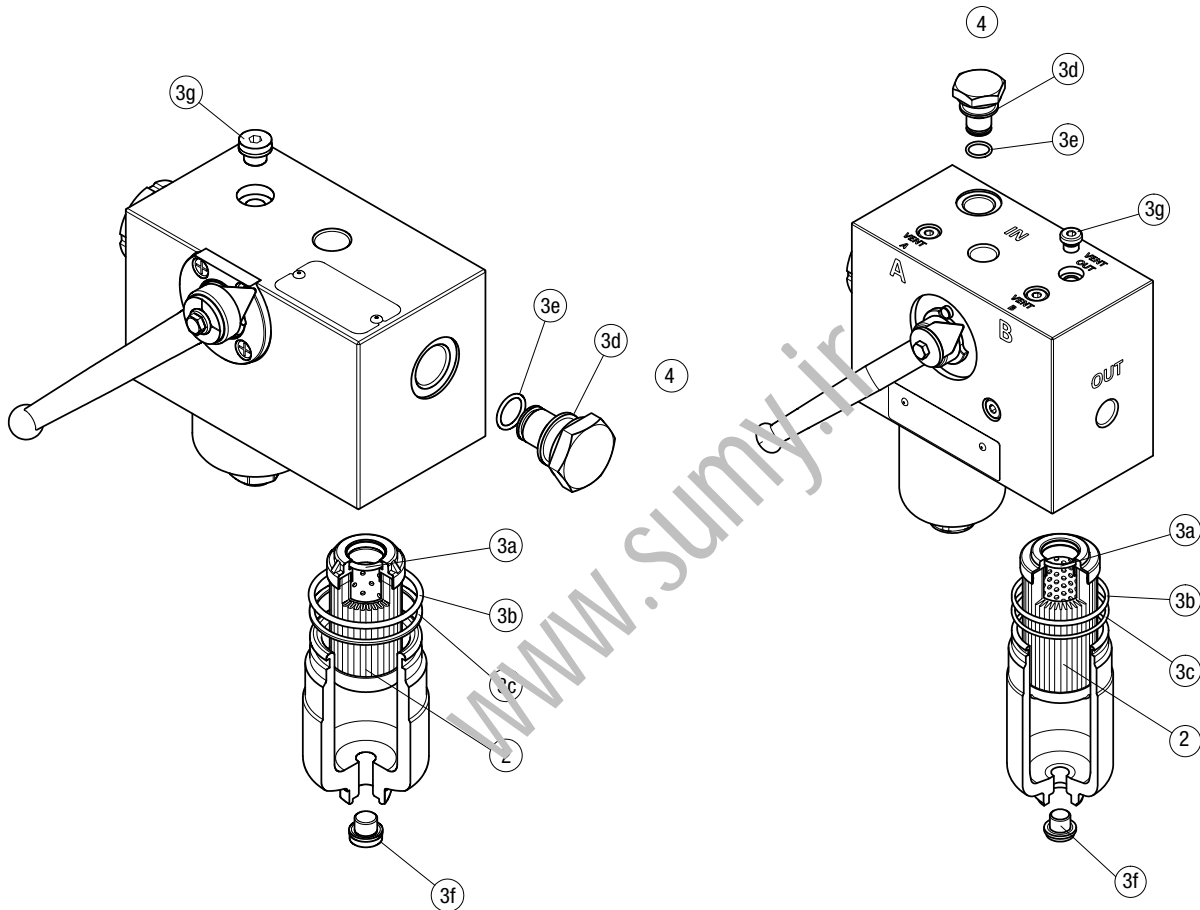

| Item:          | Q.ty: 1 pc.     | Q.ty: 1 pc.          |          | Q.ty: 1 pc.               |     |
|----------------|-----------------|----------------------|----------|---------------------------|-----|
| Filter series  | Filter element  | Seal Kit code number |          | Indicator connection plug |     |
| FZD 010        | See order table | NBR                  | FPM      | NBR                       | FPM |
|                |                 | 02050613             | 02050655 |                           |     |
| <b>FZD 021</b> |                 | 02050796             | 02050797 | X2H                       | X2V |
| <b>FZD 051</b> |                 | 02050800             | 02050801 |                           |     |

# Clogging indicators

## Differential indicators

### Introduction

Filter elements are efficient only if their Dirt Holding Capacity is fully exploited. This is achieved by using filter housings equipped with clogging indicators.

These devices trip when the clogging of the filter element causes an increase in pressure drop across the filter element.

The indicator is set to alarm before the element becomes fully clogged.

MP Filtri can supply indicators of the following designs:


- Vacuum switches and gauges
- Pressure switches and gauges
- Differential pressure indicators

These type of devices can be provided with a visual, electrical or both signals.

### Suitable indicator types

#### DIFFERENTIAL INDICATORS

Differential indicators are used on the Pressure line to check the efficiency of the filter element. They measure the pressure upstream and downstream of the filter element (differential pressure). Standard items are produced with special connection G 1/2" size. Also available in Stainless Steel models.


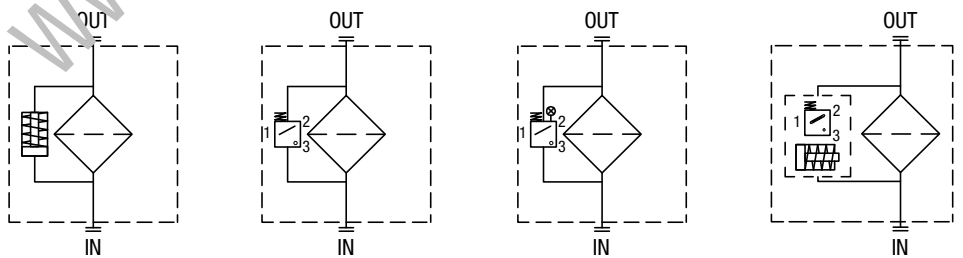



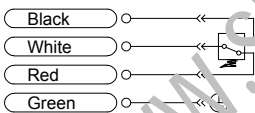
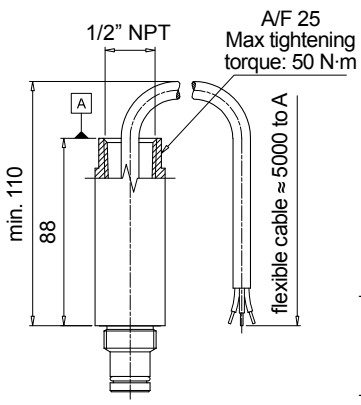

### Quick reference guide




| Filter series   | Visual indicator       | Electrical indicator | Electrical / Visual indicator | Hazardous area electronic indicator <span style="background-color: yellow; border: 1px solid black; padding: 2px;">NEW</span>                |
|---|------------------------|----------------------|-------------------------------|--|
| With bypass valve<br>FZH 010 - 011 - 039<br>FZP 039 - 136<br>FZX 011<br>FZB 039<br>FZM 039<br>FZD 051     | DVX50xP01<br>DVY50xP01 | DEX50xA50P01         | DLX50xA51P01<br>DLX50xA52P01  | DEH50xA48P01<br>DEH50xA49P01<br>DEH50xA70P01<br>DEH70xA48P01<br>DEH70xA49P01<br>DEH70xA70P01<br>DEH95xA48P01<br>DEH95xA49P01<br>DEH95xA70P01 |
| Without bypass valve<br>FZH 010 - 011 - 039<br>FZP 039 - 136<br>FZB 039<br>FZM 039<br>FZD 010 - 021 - 051 | DVX70xP01<br>DVY70xP01 | DEX70xA50P01         | DLX70xA51P01<br>DLX70xA52P01  | DEH50xA48P01<br>DEH50xA49P01<br>DEH50xA70P01<br>DEH70xA48P01<br>DEH70xA49P01<br>DEH70xA70P01<br>DEH95xA48P01<br>DEH95xA49P01<br>DEH95xA70P01 |

# DIFFERENTIAL INDICATORS

## Dimensions
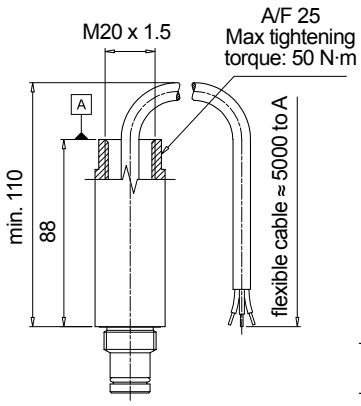
| DEH*48  |                    | Hydraulic symbol  | Materials   |
|---|--------------------|---|---|
| <b>Hazardous Area</b><br><b>Electronic Differential Indicator</b>                 |                    |   |   |
| Settings  | Ordering code      |   |   |
| 5.0 bar ±10%  | DE H 50 x A 48 P01 | <b>Electrical symbol</b><br> | <b>Technical data</b><br>- Max working pressure: 420 bar<br>- Proof pressure: 630 bar<br>- Burst pressure: 1260 bar<br>- Working temperature: From -60 °C to +125 °C<br>- Compatibility with fluids: Mineral oils, Synthetic fluids<br>HFA, HFB, HFC according to ISO 2943<br>- Protection class: EX ia IIC T4/T6: Intrinsically safe<br>- Temperature class: T4 (135 °C) and T6 (85 °C)<br>- Degree of protection: IP 66/67/68 according to EN 60529<br>- Connection type: Three-core cable, fitting M20x1.5<br>- Contact type: SPCO/SPDT (Hermetically sealed - Volt-free contacts) |
| 7.0 bar ±10%  | DE H 70 x A 48 P01 |   |   |
|  |                    |                              | <b>Electrical data</b><br>- Resistive Load: 830 mA / 24 Vdc - 180 mA / 110 Vac<br>- Electrical Ratings: U <sub>i</sub> = 30 Vdc<br>I <sub>i</sub> = 250 mA<br>P <sub>i</sub> = 1.3 W  |
|   |                    | - Certification / Approvals: ATEX, IECEx, EAC TR CU, INMETRO<br>- Certification included as standard          |   |



| DEH*49   |                    | Hydraulic symbol  | Materials  |
|--|--------------------|---|--|
| <b>Hazardous Area</b><br><b>Electronic Differential Indicator</b>  |                    |   |  |
| Settings   | Ordering code      |   |  |
| 5.0 bar ±10%   | DE H 50 x A 49 P01 | <b>Electrical symbol</b><br>   | <b>Technical data</b><br>- Max working pressure: 420 bar<br>- Proof pressure: 630 bar<br>- Burst pressure: 1260 bar<br>- Working temperature: From -60 °C to +120 °C :<br>ATEX, IECEx, EAC TR CU, INMETRO<br>From -60 °C to +105 °C : UL/CSA<br>- Compatibility with fluids: Mineral oils, Synthetic fluids<br>HFA, HFB, HFC according to ISO 2943<br>- Protection class: Ex d IIC T4/T6: Flameproof<br>- Temperature class: T4 (135 °C) and T6 (85 °C)<br>- Degree of protection: IP 66/67/68 according to EN 60529<br>- Connection type: Four-core cable, fitting 1/2" NPT<br>- Contact type: SPCO/SPDT (Hermetically sealed - Volt-free contacts) |
| 7.0 bar ±10%   | DE H 70 x A 49 P01 |   |  |
|  |                    |    | <b>Electrical data</b><br>- Resistive Load: 830 mA / 24 Vdc - 180 mA / 110 Vac<br>- Max voltage: 150 Vac/dc<br>- Power: 20 W   |
|  |                    | - Certification / Approvals: ATEX, IECEx, EAC TR CU, INMETRO, UL/CSA Class I Division 1 Groups A-D, UL/CSA Class II Division 1 Groups E-G<br>- Certification included as standard |  |

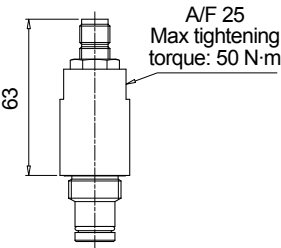
| DEH*70  |                    | Hydraulic symbol  | Materials  |
|---|--------------------|---|--|
| <b>Hazardous Area</b><br><b>Electronic Differential Indicator</b>                   |                    |   |  |
| Settings  | Ordering code      |   |  |
| 5.0 bar ±10%  | DE H 50 x A 70 P01 | <b>Electrical symbol</b><br> | <b>Technical data</b><br>- Max working pressure: 420 bar<br>- Proof pressure: 630 bar<br>- Burst pressure: 1260 bar<br>- Working temperature: From -60 °C to +80 °C<br>- Compatibility with fluids: Mineral oils, Synthetic fluids<br>HFA, HFB, HFC according to ISO 2943<br>- Protection class: EX ia IIC T6: Intrinsically safe<br>- Temperature class: T6 (85 °C)<br>- Degree of protection: IP 66/67 according to EN 60529<br>- Connection type: IEC 61076-2-101 D (M12)<br>- Contact type: SPCO/SPDT (Hermetically sealed - Volt-free contacts) |
| 7.0 bar ±10%  | DE H 70 x A 70 P01 |   |  |
|  |                    |                              | <b>Electrical data</b><br>- Resistive Load: 830 mA / 24 Vdc - 180 mA / 110 Vdc<br>- Electrical Ratings: U <sub>i</sub> = 30 Vdc<br>I <sub>i</sub> = 250 mA<br>P <sub>i</sub> = 1.3 W   |
|   |                    | - Certification / Approvals: ATEX, IECEx, EAC TR CU, INMETRO<br>- Certification included as standard            |  |



# DIFFERENTIAL INDICATORS

## Dimensions
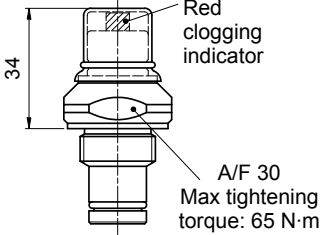
| DVY   |                      | Hydraulic symbol  | Materials  |
|---|----------------------|---|--|
| <b>Visual Differential Indicator</b>  |                      |   |  |
| <b>Settings</b>   | <b>Ordering code</b> |  | <b>Materials</b><br>- Body: AISI 316L<br>- Internal parts: AISI 316L - Nylon<br>- Contacts: Silver<br>- Seal: HNBR - MFQ<br><br><b>Technical data</b><br>- Reset: Manual reset<br>- Max working pressure: 420 bar<br>- Proof pressure: 630 bar<br>- Burst pressure: 1260 bar<br>- Working temperature: From -25 °C to +110 °C<br>- Compatibility with fluids: Mineral oils, Synthetic fluids<br>HFA, HFB, HFC according to ISO 2943<br>- Degree protection: IP65 according to EN 60529 |
| 5.0 bar ±10%  | DV Y 50 x P01        |   |  |
| 7.0 bar ±10%  | DV Y 70 x P01        |   |  |
| 9.5 bar ±10%  | DV Y 95 x P01        |   |  |
|  |                      |   |  |
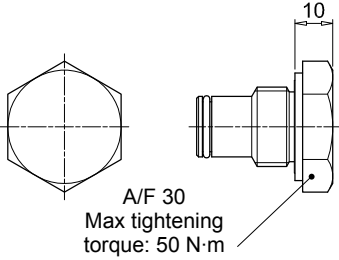
| X2                    |                      | Material  |
|-----------------------|----------------------|---|
| <b>Indicator plug</b> |                      |   |
| <b>Seal</b>           | <b>Ordering code</b> |   |
| HNBR                  | X2 H                 |  |
| MFQ                   | X2 F                 |   |

### DESIGNATION & ORDERING CODE - DIFFERENTIAL INDICATORS

| Series   |
|--|
| <b>DE</b> Electrical differential indicator          |
| <b>DL</b> Electrical / Visual differential indicator |
| <b>DV</b> Visual differential indicator              |

|                          |    |   |    |   |   |    |     |
|--------------------------|----|---|----|---|---|----|-----|
| Configuration example 1: | DE | H | 50 | F | A | 48 | P01 |
| Configuration example 2: | DL | X | 50 | H | A | 51 | P01 |
| Configuration example 3: | DV | Y | 70 | V |   |    | P01 |

| Type                    | DE | DL | DV |
|-------------------------|----|----|----|
| <b>H</b> Hazardous area | •  |    |    |
| <b>X</b> Standard type  | •  | •  | •  |
| <b>Y</b> Optional type  |    |    | •  |

| Pressure setting  | DEH | DEX | DL | DV |
|-------------------|-----|-----|----|----|
| <b>50</b> 5.0 bar | •   | •   | •  | •  |
| <b>70</b> 7.0 bar | •   | •   | •  | •  |
| <b>95</b> 9.5 bar |     | •   | •  | •  |

| Seals         | DEH | DEX | DL | DV |
|---------------|-----|-----|----|----|
| <b>H</b> HNBR |     | •   | •  | •  |
| <b>V</b> FPM  | •   | •   | •  | •  |
| <b>F</b> MFQ  | •   |     |    |    |

| Thermostat       | DEH | DEX | DL | DV |
|------------------|-----|-----|----|----|
| <b>A</b> Without | •   | •   | •  |    |

| Electrical connections  | DEH | DEX | DL | DV |
|---|-----|-----|----|----|
| <b>48</b> Connection via three-core cable - fitting M20x1.5             | •   |     |    |    |
| <b>49</b> Connection via four-core cable - fitting 1/2" NPT             | •   |     |    |    |
| <b>50</b> Connection EN 175301-803                                      |     | •   |    |    |
| <b>51</b> Connection EN 175301-803, transparent base with lamps 24 Vdc  |     |     | •  |    |
| <b>52</b> Connection EN 175301-803, transparent base with lamps 110 Vac |     |     | •  |    |
| <b>70</b> Connection IEC 61076-2-101 D (M12)                            | •   |     |    |    |

| Option                        |
|-------------------------------|
| <b>P01</b> MP Filtri standard |
| <b>Pxx</b> Customized         |

### DESIGNATION & ORDERING CODE - DIFFERENTIAL INDICATOR PLUG

| Series                   |
|--------------------------|
| <b>X2</b> Indicator plug |

|                       |    |   |
|-----------------------|----|---|
| Configuration example | X2 | H |
|-----------------------|----|---|

| Seals         |
|---------------|
| <b>H</b> HNBR |
| <b>V</b> FPM  |
| <b>F</b> MFQ  |

**Clogging indicators are devices that check the life time of the filter elements. They measure the pressure drop through the filter element directly connected to the filter housing.**

**These devices trip when the clogging of the filter element causes a pressure drop increasing across the filter element.**

**Filter elements are efficient only if their Dirt Holding Capacity is fully exploited.**

**This is achieved by using filter housings equipped with clogging indicators.**

**The indicator is set to alarm before the element becomes fully clogged.**

**MP Filtri can supply indicators of the following designs:**

- Vacuum switches and gauges
- Pressure switches and gauges
- Differential pressure indicators

**These type of devices can be provided with a visual, electrical or both signals.**

**The electronic differential pressure clogging indicator is also available.**

**It provides both analogical 4-20 mA output and digital warning (75% of clogging) and alarm (clogging) outputs.**



# Clogging Indicators



# Clogging indicators



## Suitable indicator types


### VACUUM INDICATORS

Vacuum indicators are used on the Suction line to check the efficiency of the filter element.

They measure the pressure downstream of the filter element.

Standard items are produced with R 1/4" EN 10226 connection.

Available products with R 1/8" EN 10226 to be fitted on MPS series.

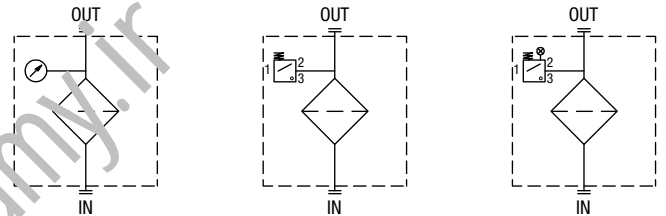


### BAROMETRIC INDICATORS

Pressure indicators are used on the Return line to check the efficiency of the filter element.

They measure the pressure upstream of the filter element.

Standard items are produced with R 1/8" EN 10226 connection.

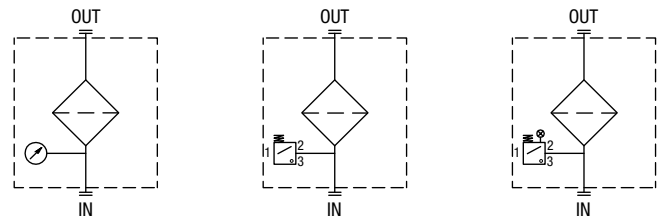


### DIFFERENTIAL INDICATORS

Differential indicators are used on the Pressure line to check the efficiency of the filter element.


They measure the pressure upstream and downstream of the filter element (differential pressure).

Standard items are produced with special connection G 1/2" size.

Also available in Stainless Steel models.

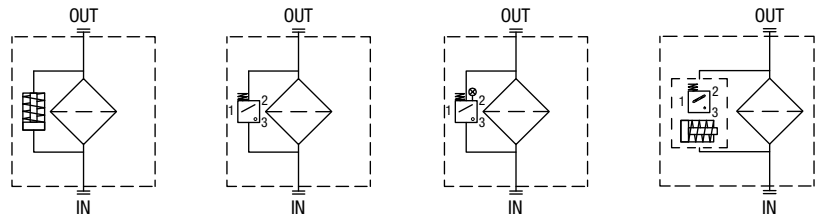

| Filter family                                 | Filter series  | Electrical indicator   | Electrical / Visual indicator  | Electronic indicator   | Visual indicator                               |
|---|--|--|--|--|--|
| SUCTION FILTERS                               | ELIXIR®<br>SFEX060-080-110-160   | VEB21AA50P01   | VLB21AA51P01<br>VLB21AA52P01<br>VLB21AA53P01<br>VLB21AA71P01   |  | VVB16P01<br>VVS16P01                           |
|   | SF2 250 - 350<br>SF2 500 - 501 - 503 - 504 - 505<br>SF2 510 - 535 - 540  | VEA21AA50P01   | VLA21AA51P01<br>VLA21AA52P01<br>VLA21AA53P01<br>VLA21AA71P01   |  | VVA16P01<br>VVR16P01                           |
| RETURN FILTERS                                | With bypass valve<br>ELIXIR®<br>RFEX060-080-110-160  | BEA15HA50P01<br>BEM15HA41P01   | BLA15HA51P01<br>BLA15HA52P01<br>BLA15HA53P01<br>BLA15HA71P01   |  | BVA14P01<br>BVR14P01<br>BVP15HP01<br>BVQ15HP01 |
|   | Without bypass valve<br>ELIXIR®<br>RFEX060-080-110-160   | BEA20HA50P01<br>BEM20HA41P01   | BLA20HA51P01<br>BLA20HA52P01<br>BLA20HA53P01<br>BLA20HA71P01   |  | BVA25P01<br>BVR25P01<br>BVP20HP01<br>BVQ20HP01 |
|   | With bypass valve<br>MPFX-MPTX-MPF-MPT - bypass 1.75 bar<br>MPH - bypass 1.75 bar<br>RF2250 - RF2350 - bypass 1.75 bar     | BEA15HA50P01<br>BEM15HA41P01   | BLA15HA51P01<br>BLA15HA52P01<br>BLA15HA53P01<br>BLA15HA71P01   |  | BVA14P01<br>BVR14P01<br>BVP15HP01<br>BVQ15HP01 |
|   | With bypass valve<br>MPFX-MPTX-MPF-MPT - bypass 3 bar<br>MPH - bypass 2.5 bar<br>FRI 255<br>RF2250 - RF2350 - bypass 3 bar | BEA20HA50P01<br>BEM20HA41P01   | BLA20HA51P01<br>BLA20HA52P01<br>BLA20HA53P01<br>BLA20HA71P01   |  | BVA25P01<br>BVR25P01<br>BVP20HP01<br>BVQ20HP01 |
| MPLX<br>FRI 025 - 040 - 100 - 250 - 630 - 850 | DEA20xA50P01<br>DEM20xA10P01<br>DLE120xA20P01<br>DEM20xA30P01<br>DEM20xA35P01  | DLA20xA51P01<br>DLA20xA52P01<br>DLA20xA71P01<br>DLE20xA50P01<br>DLE20xF50P01 | DTA20xF70P01   | DVA20xP01<br>DVM20xP01                                       |  |
| RETURN / SUCTION FILTERS                      | Suction line<br>MRSX 116 - 165 - 166   | VEB21AA50P01   | VLB21AA51P01<br>VLB21AA52P01<br>VLB21AA53P01<br>VLB21AA71P01   |  | VVB16P01<br>VVS16P01                           |
|   | Return line<br>MRSX 116 - 165 - 166<br>LMP 124 MULTIPORT   | BEA25HA50P01<br>BEM25HA41P01<br>BET25HF10P01<br>BET25HF30P01<br>BET25HF50P01 | BLA25HA51P01<br>BLA25HA52P01<br>BLA25HA53P01<br>BLA25HA71P01   |  | BVA25P01<br>BVR25P01<br>BVP20HP01<br>BVQ20HP01 |
| SPIN-ON FILTERS                               | Suction line<br>MPS 050 - 070 - 100 - 150<br>MPS 200 - 250 - 300 - 350   | VEB21AA50P01   | VLB21AA51P01<br>VLB21AA52P01<br>VLB21AA53P01<br>VLB21AA71P01   |  | VVB16P01<br>VVS16P01                           |
|   | Return line<br>MPS 050 - 070 - 100 - 150<br>MPS 200 - 250 - 300 - 350  | BEA15HA50P01<br>BEM15HA41P01   | BLA15HA51P01<br>BLA15HA52P01<br>BLA15HA53P01<br>BLA15HA71P01   |  | BVA14P01<br>BVR14P01<br>BVP20HP01<br>BVQ20HP01 |
|   | In-line<br>MPS 051 - 071 - 101 - 151<br>MPS 301 - 351<br>MSH 050 - 070 - 100 - 150   | DEA12xA50P01<br>DEM12xAxxP01   | DLA12xA51P01<br>DLA12xA52P01<br>DLA12xA71P01<br>DLE12xA50P01<br>DLE12xF50P01<br>DLE20xF50P01<br>DLE20xF50P01 | DTA12xA70P01<br>DTA12xF70P01<br>DTA20xA70P01<br>DTA20xF70P01 | DVA12xP01<br>DVM12xP01                         |

| Filter family                 | Filter series         | Electrical indicator  | Electrical / Visual indicator  | Electronic indicator  | Visual indicator   | Hazardous area electronic indicator  |  |  |
|-------------------------------|-----------------------|---|--|---|--|---|--|--|
| LOW & MEDIUM PRESSURE FILTERS | With bypass valve     | ELIXIR®<br>LFEX060-080-110-160  | DES25HA10P01<br>DES25HA30P01<br>DES25HA80P01   |   |  | DVS25HP01   |  |  |
|                               | Without bypass valve  | ELIXIR®<br>LFEX060-080-110-160  | DES40HA10P01<br>DES40HA30P01<br>DES40HA80P01   |   |  | DVS40HP01   |  |  |
|                               |                       | LMP 110 - 112 - 116 - 118 - 119 MULTIPORT<br>LMP 120 - 122 - 123 MULTIPORT<br>LMP 210 - 211 - LDP   |  |   |  | DVS25HP01<br>DVS40HP01  |  |  |
|                               | With bypass valve     | LMP 400 - 401 & 430 - 431<br>LMP 900 - 901<br>LMP 902 - 903<br>LMP 950 - 951<br>LMP 952 - 953 - 954<br>LMD 211 - 400 - 401 - 431 - 951 - LDD  | DEA20xA50P01<br>DEM20xAxxP01   | DLA20xA51P01<br>DLA20xA52P01<br>DLA20xA71P01<br>DLE20xA50P01<br>DLE20xF50P01      | DTA20xF70P01   | DVA20xP01<br>DVM20xP01  |  |  |
|                               | Without bypass valve  | LMP 110 - 112 - 116 - 118 - 119 MULTIPORT<br>LMP 120 - 122 - 123 MULTIPORT<br>LMP 210 - 211 - LDP<br>LMP 400 - 401 & 430 - 431<br>LMP 900 - 901<br>LMP 902 - 903<br>LMP 950 - 951<br>LMP 952 - 953 - 954<br>LMD 211 - 400 - 401 - 431 - 951 - LDD | DEA50xA50P01<br>DEM50xAxxP01   | DLA50xA51P01<br>DLA50xA52P01<br>DLA50xA71P01<br>DLE50xA50P01<br>DLE50xF50P01      | DTA50xF70P01   | DVA50xP01<br>DVM50xP01  |  |  |
|                               | HIGH PRESSURE FILTERS | With bypass valve   | FMP 039 - 065 - 135 - 320<br>FHP 010 - 011 - 065 - 135 - 350 - 500<br>FMM 050 - 150<br>FHA 051<br>FHM 006 - 007 - 010 - 050 - 065 - 135 - 320 - 500<br>FHB 050 - 065 - 135 - 320<br>FHF 325<br>FHD 021 - 051 - 326 - 333 | DEA50xA50P01<br>DEM50xAxxP01  | DLA50xA51P01<br>DLA50xA52P01<br>DLA50xA71P01<br>DLE50xA50P01<br>DLE50xF50P01   | DTA50xF70P01  | DVA50xP01<br>DVM50xP01                           | DEH50xA48P01<br>DEH50xA49P01<br>DEH50xA70P01<br>DEH70xA48P01<br>DEH70xA49P01<br>DEH70xA70P01 |
|                               |                       | Without bypass valve  | FMP 039 - 065 - 135 - 320<br>FHP 010 - 011 - 065 - 135 - 350 - 500<br>FMM 050 - 150<br>FHA 051<br>FHM 006 - 007 - 010 - 050 - 065 - 135 - 320 - 500<br>FHB 050 - 065 - 135 - 320<br>FHF 325<br>FHD 021 - 051 - 326 - 333 | DEA70xA50P01<br>DEM70xAxxP01<br>DEA95xA50P01<br>DEM95xAxxP01                      | DLA70xA51P01<br>DLA70xA52P01<br>DLA70xA71P01<br>DLE70xA50P01<br>DLE70xF50P01<br>DLA95xA51P01<br>DLA95xA52P01<br>DLE95xA50P01<br>DLE95xF50P01 | DTA70xF70P01<br>DTA95xF70P01  | DVA70xP01<br>DVM70xP01<br>DVA95xP01<br>DVM95xP01 | DEH50xA48P01<br>DEH50xA49P01<br>DEH50xA70P01<br>DEH70xA48P01<br>DEH70xA49P01<br>DEH70xA70P01 |
|                               |                       | With bypass valve   | FZH 010 - 011 - 039<br>FZP 039 - 136<br>FZX 011<br>FZB 039<br>FZM 039<br>FZD 051   | DEX50xA50P01  | DLX50xA51P01<br>DLX50xA52P01   |   | DVX50xP01<br>DVS50xP01                           | DEH50xA48P01<br>DEH50xA49P01<br>DEH50xA70P01<br>DEH70xA48P01<br>DEH70xA49P01<br>DEH70xA70P01 |
|                               |                       |   | Without bypass valve   | FZH 010 - 011 - 039<br>FZP 039 - 136<br>FZB 039<br>FZM 039<br>FZD 010 - 021 - 051 | DEX70xA50P01<br>DEX95xA50P01   | DLX70xA51P01<br>DLX70xA52P01<br>DLX95xA51P01  |  | DVX70xP01<br>DVS70xP01<br>DVS95xP01  |

www.sumy.ir

www.sumy.ir

www.sumy.ir

www.sumy.ir



www.sumy.ir

www.sumy.ir

All data, details and words contained in this publication are provided for information purposes only.  
MP Filtri reserves the right to make modifications to the models and versions of the described products at any time  
for both technical and / or commercial reasons.

The colors and the pictures of the products are purely indicative.  
Any reproduction, partial or total, of this document is strictly forbidden.  
All rights are strictly reserved.



## WORLDWIDE NETWORK

### HEADQUARTERS

**MP Filtri S.p.A.**  
Pessano con Bornago  
Milano  
Italy  
[sales@mpfiltri.com](mailto:sales@mpfiltri.com)

### BRANCH OFFICES

**ITALFILTRI LLC**  
Moscow  
Russia  
[mpfiltrirussia@yahoo.com](mailto:mpfiltrirussia@yahoo.com)

**MP Filtri Canada Inc.**  
Concord, Ontario  
Canada  
[sales@mpfiltricanada.com](mailto:sales@mpfiltricanada.com)

**MP Filtri France SAS**  
Lyon  
AURA  
France  
[sales@mpfiltrifrance.com](mailto:sales@mpfiltrifrance.com)

**MP Filtri Germany GmbH**  
St. Ingbert  
Germany  
[sales@mpfiltri.de](mailto:sales@mpfiltri.de)

**MP Filtri India Pvt. Ltd.**  
Bangalore  
India  
[sales@mpfiltri.co.in](mailto:sales@mpfiltri.co.in)

**MP Filtri (Shanghai) Co., Ltd.**  
Shanghai  
P.R. China  
[sales@mpfiltrishanghai.com](mailto:sales@mpfiltrishanghai.com)

**MP Filtri SEA PTE Ltd.**  
Singapore  
[sales-sea@mpfiltri.com](mailto:sales-sea@mpfiltri.com)

**MP Filtri U.K. Ltd.**  
Bourton on the Water  
Gloucestershire  
United Kingdom  
[sales@mpfiltri.co.uk](mailto:sales@mpfiltri.co.uk)

**MP Filtri U.S.A. Inc.**  
Quakertown, PA  
U.S.A.  
[sales@mpfiltriusa.com](mailto:sales@mpfiltriusa.com)

**PASSION TO PERFORM**



[mpfiltri.com](http://mpfiltri.com)