
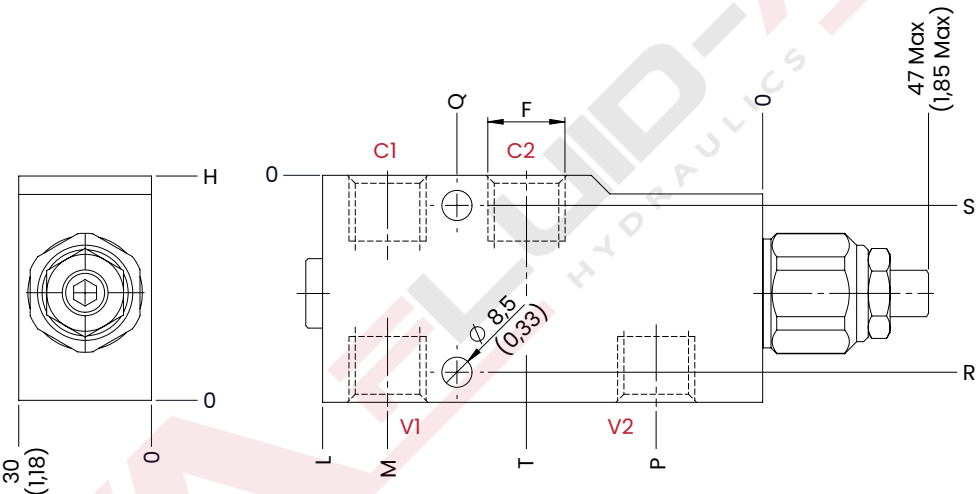


SINGLE COUNTERBALANCE VALVES FOR OPEN CENTER

BSAY counterbalance valves (Gas thread) are used to keep a load locked, the built-in relief valve protects the system from overpressure in the cylinder by draining the oil.

HYDRAULIC CIRCUIT





TECHNICAL CHARACTERISTICS

F	H	L	M	P	Q	R	S	T
1/4 BSPP	50 [1,97]	95 [3,74]	82 [3,22]	23 [0,90]	66 [2,28]	43 [1,69]	7 [0,27]	50 [1,97]
3/8 BSPP								
1/2 BSPP	60 [2,36]	100 [3,93]	85 [3,34]	21 [0,82]	67,5 [2,65]	50 [1,96]	10 [0,39]	49 [1,93]

Steel body (on request stainless steel AISI 316L body)

PERFORMANCES

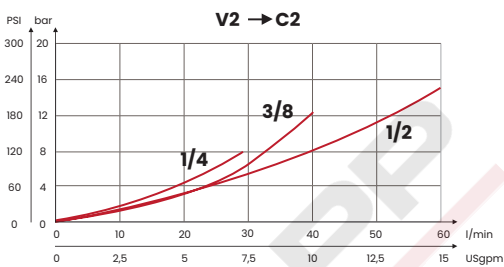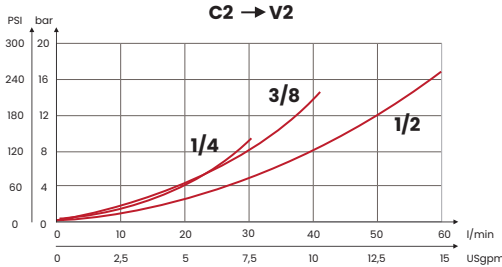

OPTIONAL TAMPER PROOF CAP M10



CODE
62200021

ORDERING CODE

CODE	TYPE	F ports	MAX FLOW l/min [usgpm]	MAX PRESSURE bar [PSI]	STANDARD SETTING bar [PSI]	RANGE SPRING bar [PSI]	INCREASE TO TURN bar [PSI]	PILOT RATIO	WEIGHT kg [lb]	
FA1013	BSA1B21YA	1/4 BSPP	30 [7,9]	350 [5075]	210 [3045]	30/210 [435/3045]	80 [1160]	1:4,25 On request 1:8,1	1,05 [2,3]	
FA1014	BSA1B35YA				350 [5075]	60/350 [870/5075]	135 [1960]			
FA1015	BSA2B21YA	3/8 BSPP	40 [10,6]		210 [3045]	30/210 [435/3045]	80 [1160]		1 [2,2]	
FA1016	BSA2B35YA				350 [5075]	60/350 [870/5075]	135 [1960]			
FA1017	BSA3B21YA	1/2 BSPP	60 [15,9]		210 [3045]	30/210 [435/3045]	80 [1160]		1,2 [2,65]	
FA1018	BSA3B35YA				350 [5075]	60/350 [870/5075]	135 [1960]			
Standard setting 350 bar [5075 PSI] to 5 l/m [1,32 USgpm]					Standard setting 210 bar [3045 PSI] to 5 l/m [1,32 USgpm]					