
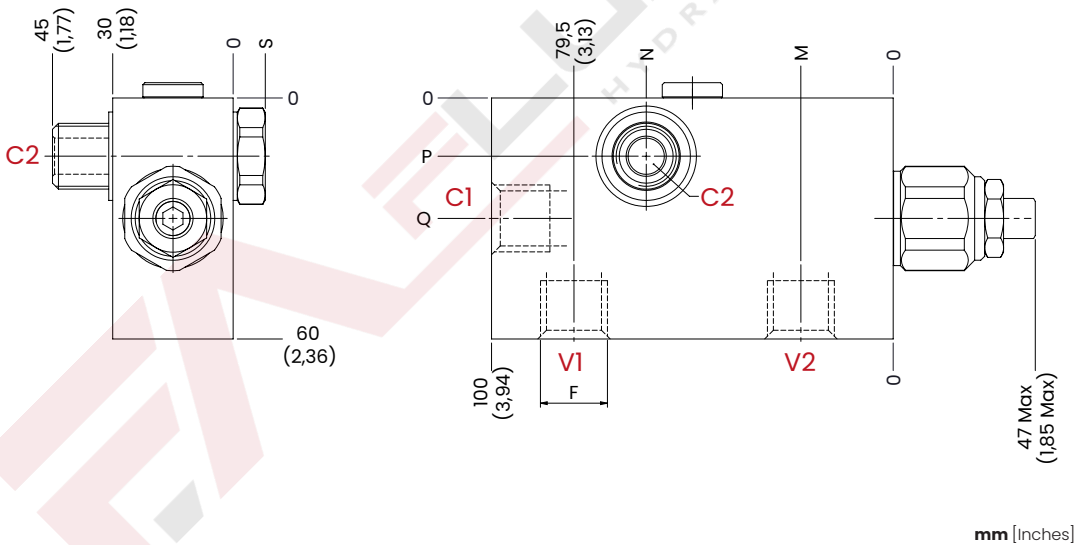


BSB COUNTERBALANCE BSPP

BOLT FITTING SINGLE COUNTERBALANCE VALVES FOR OPEN CENTER

BSB counterbalance valves (Gas thread) are used to keep a load locked, the built-in relief valve protects the system from overpressure in the cylinder by draining the oil, bolt fitting version.



HYDRAULIC CIRCUIT




TECHNICAL CHARACTERISTICS

F	N	M	P	Q	S
1/2 BSPP	63,5 [2,5]	21 [0,82]	15 [0,59]	32 [1,26]	10,5 [0,41]
Steel body (on request aluminium body)					

PERFORMANCES

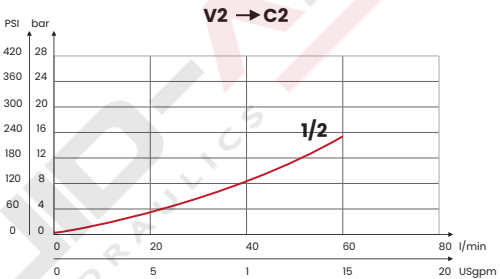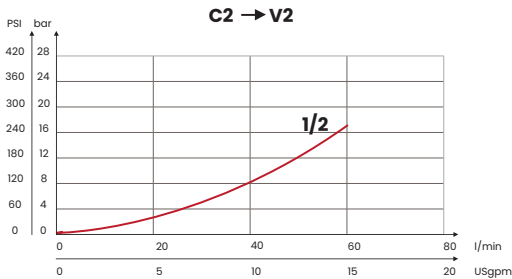

OPTIONAL TAMPER PROOF CAP M10



ORDERING CODE

CODE	TYPE	F ports	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	STANDARD SETTING bar [PSI]	RANGE SPRING bar [PSI]	INCREASE TO TURN bar [PSI]	PILOT RATIO	WEIGHT kg [lb]
FA1073	BSB3B21	1/2 BSPP	60 [15,9]	350 [5075]	210 [3045]	30/210 [435/3045]	80 [1160]	1:4,25	1,36 [3]
FA1074	BSB3B35				350 [5075]	60/350 [870/5075]	135 [1960]	On request 1:8,1	
Standard setting 350 bar [5075 PSI] to 5 l/m [1,32 USgpm]					Standard setting 210 bar [3045 PSI] to 5 l/m [1,32 USgpm]				