



SINGLE COUNTERBALANCE VALVES FOR CLOSED CENTER

BSC counterbalance valves (Gas thread) are used to keep a load locked, the built-in relief valve protects the system from overpressure in the cylinder by draining the oil.

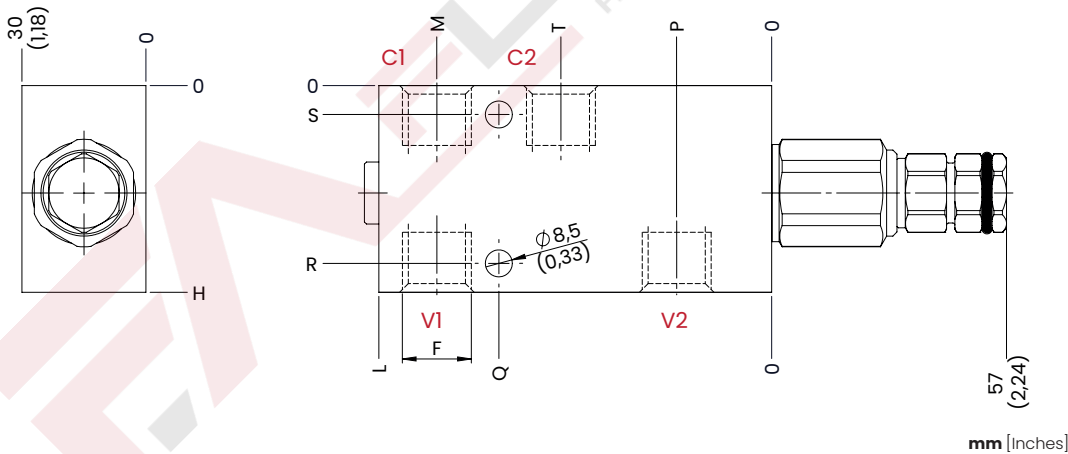

HYDRAULIC CIRCUIT




TECHNICAL CHARACTERISTICS

mm [Inches]

F	H	L	M	P	Q	R	S	T
1/4 BSPP	50 [1,97]	95 [3,74]	82 [3,22]	23 [0,91]	66 [2,60]	43 [1,70]	7 [0,28]	50 [1,97]
3/8 BSPP								
1/2 BSPP	60 [2,36]	100 [3,94]	85 [3,34]	21 [0,83]	67,5 [2,66]	50 [1,97]	10 [0,39]	49 [1,93]
Steel body (on request aluminium body - stainless steel AISI 316L body)								

PERFORMANCES

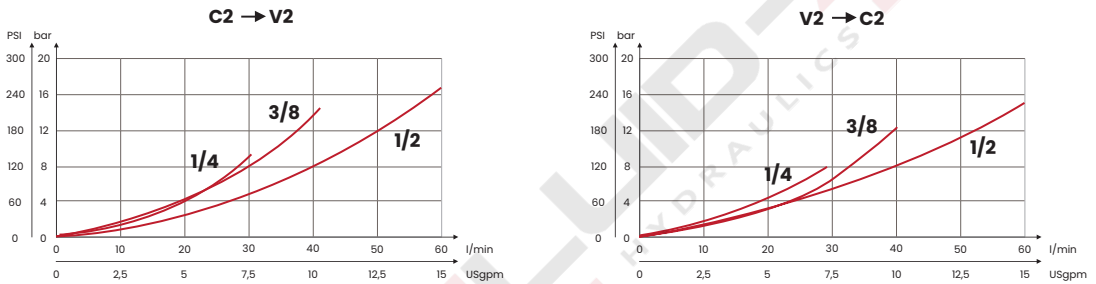

ORDERING CODE

CODE	TYPE	F ports	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	STANDARD SETTING bar [PSI]	RANGE SPRING bar [PSI]	INCREASE TO TURN bar [PSI]	PILOT RATIO	WEIGHT kg [lb]
FA1019	BSC1B21	1/4 BSPP	30 [7,9]	350 [5075]	210 [3045]	30/210 [435/3045]	80 [1160]	1:4,25 On request 1:8,1	1,15 [2,53]
FA1020	BSC1B35				350 [5075]	60/350 [870/5075]	135 [1960]		
FA1021	BSC2B21	3/8 BSPP	40 [10,6]		210 [3045]	30/210 [435/3045]	80 [1160]		1,10 [2,42]
FA1022	BSC2B35				350 [5075]	60/350 [870/5075]	135 [1960]		
FA1023	BSC3B21	1/2 BSPP	60 [15,9]		210 [3045]	30/210 [435/3045]	80 [1160]		1,28 [2,84]
FA1024	BSC3B35				350 [5075]	60/350 [870/5075]	135 [1960]		
Standard setting 350 bar [5075 PSI] to 5 l/m [1,32 USgpm]					Standard setting 210 bar [3045 PSI] to 5 l/m [1,32 USgpm]				

UPDATE: Jan. 2025 (v.07)