


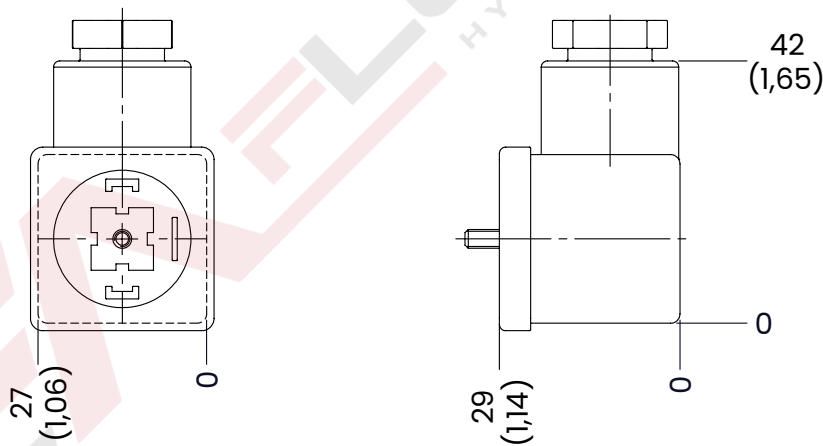

mm [Inches]

ORDERING CODE

CODE	TYPE	NOMINAL CURRENT	MAX OPERATING CURRENT	CONTACT RESISTANCE	MAX CONDUCTORS CROSS-SECTION	CONTACT HOLDER	GAND SIZE OPTIONS
CNS	CNS	10 A	16 A	≤ 4m Ohm	1,5 mm²	PA (+G)	PgII

CABLE DIAMETER	PROTECTION CLASS	ISULATION CLASS	SEALING MATERIAL	OPERATING TEMPERATURE	WEIGHT kg lb
6-8 mm	IP 65 EN 60529	VDE 0110-1/89	NBR	-40° +90°	0,020 [0,044]