



CU2 SAE 8/2 - 40 l/min - 350 bar

UNIDIRECTIONAL FLOW CONTROL VALVES

The one-way flow control valves allow regulation in one direction and free passage in the opposite direction.




HYDRAULIC CIRCUIT

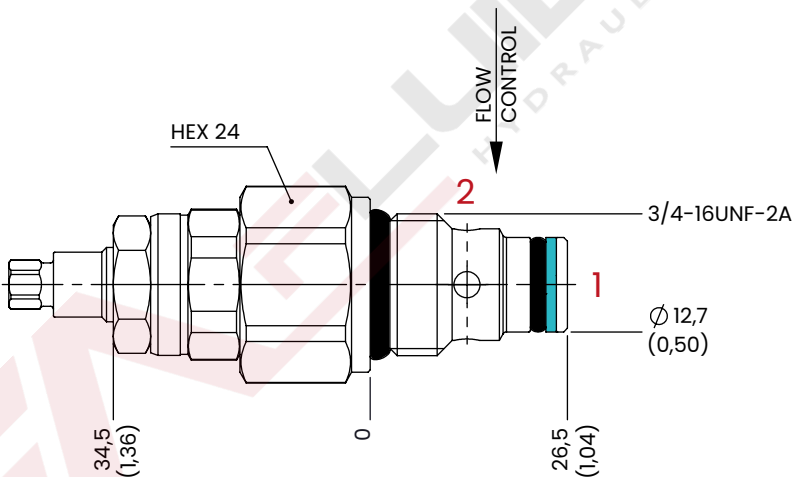


mm [Inches]

PERFORMANCES

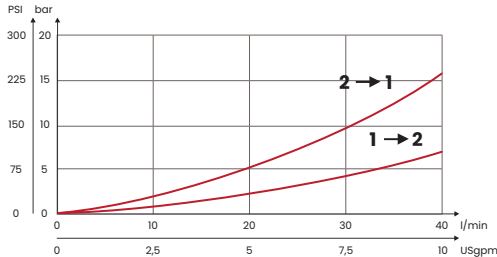

OPTIONAL HANDKNOB



CODE
KIT123

ORDERING CODE

CODE	TYPE	CAVITY	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	TIGHTENING TORQUE Nm [lbt ft]	WEIGHT kg [lb]
FA7022	CU2C	SAE8/2 3/4-16UNF-2B See cavity paragraph p.348	40 [10,6]	350 [5075]	30 [22]	0,13 [0,30]

