


D3H HIGH PRESSURE FLOW DIVERTERS

3 WAYS FLOW DIVERTERS

The 3 ways steel flow diverters are used when it is necessary to divert the oil flow.



HYDRAULIC CIRCUIT


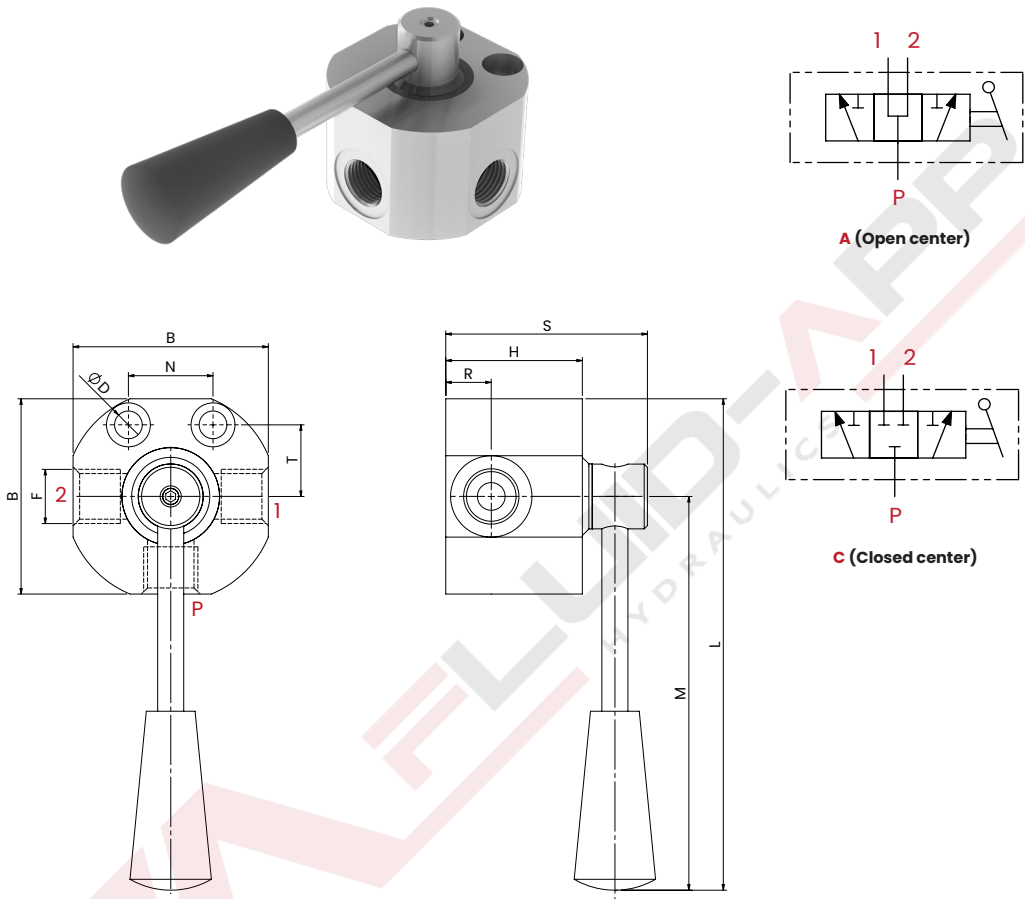


TECHNICAL CHARACTERISTICS

mm [Inches]

F	B	H	L	Ø D	M	N	R	S	T
1/4 BSPP	60 [2,36]	42 [1,65]	150 [5,90]	8,5 [0,33]	120 [4,72]	26 [1,02]	14 [0,55]	62 [2,44]	22 [0,86]
3/8 BSPP									
1/2 BSPP	65 [2,56]	45 [1,77]	152,5 [6]			32 [1,26]	16 [0,63]	65 [2,56]	
3/4 BSPP	80 [3,15]	54 [2,12]	160 [6,30]	10,5 [0,41]			23 [0,90]	75 [2,95]	26 [1,02]

PERFORMANCES

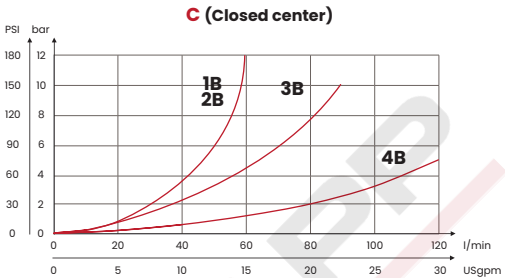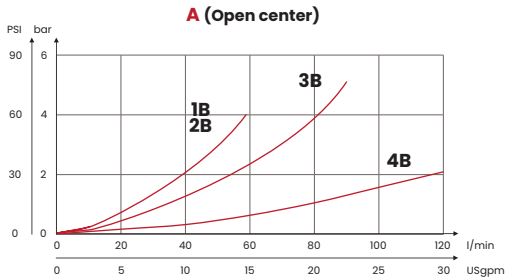

ORDERING CODE

CODE	TYPE	F	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	WEIGHT kg [lbt]
FA9103	D3HA1B	1/4 BSPP	60 [15,8]	500 [7250]	0,95 [2,09]
FA9104	D3HA2B	3/8 BSPP			
FA9105	D3HA3B	1/2 BSPP	90 [23,8]		1,25 [2,75]
FA9106	D3HA4B	3/4 BSPP	120 [31,7]		2,14 [4,71]
FA9107	D3HC1B	1/4 BSPP	60 [15,8]		0,95 [2,09]
FA9108	D3HC2B	3/8 BSPP			
FA9109	D3HC3B	1/2 BSPP	90 [23,8]		1,25 [2,75]
FA9110	D3HC4B	3/4 BSPP	120 [31,7]		2,14 [4,71]

UPDATE: May 2024 (v.01)

