



DC2 SAE 8/2 - 12 l/min - 250 bar



FIXED FLOW CONTROL VALVES - PRESSURE COMPENSATED

The DC2 compensated fixed flow control valves are used to keep the descent speed of a load constant, regardless of the operating pressure and the value of the load.

HYDRAULIC CIRCUIT

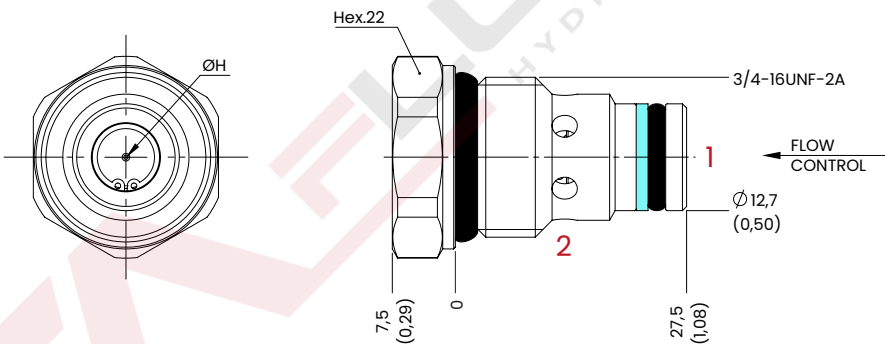

mm [inches]

ORDERING CODE

CODE	TYPE	CAVITY	CONTROLLED FLOW AT 100 bar ± 10% l/min [USgpm]	Ø H mm [inches]	MAX PRESSURE bar [PSI]	TIGHTENING TORQUE Nm [lbt ft]	WEIGHT kg [lb]
FA7046	DC201	SAE8/2 3/4-16UNF- 2B See cavity paragraph p.348	1 [0,26]	1 [0,04]	250 [3625]	30 [22]	0,06 [0,13]
FA7047	DC202		2 [0,53]	1,2 [0,05]			
FA7048	DC203		3 [0,79]	1,5 [0,06]			
FA7049	DC204		4 [1,06]	1,7 [0,07]			
FA7050	DC205		5 [1,32]	1,9 [0,07]			
FA7051	DC206		6 [1,58]	2,1 [0,08]			
FA7052	DC207		7 [1,85]	2,3 [0,09]			
FA7053	DC208		8 [2,1]	2,4 [0,09]			
FA7054	DC209		9 [2,38]	2,7 [0,11]			
FA7055	DC210		10 [2,64]	2,8 [0,11]			
FA7056	DC211		11 [2,90]	3,1 [0,12]			
FA7057	DC212		12 [3,17]	3,3 [0,13]			

