

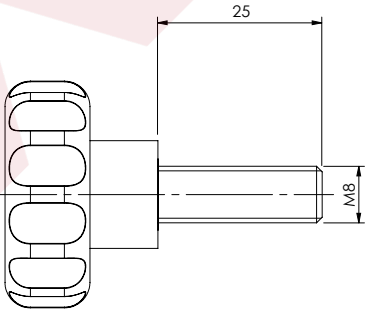


DR2 SAE 8/2 - 35 l/min - 350 bar

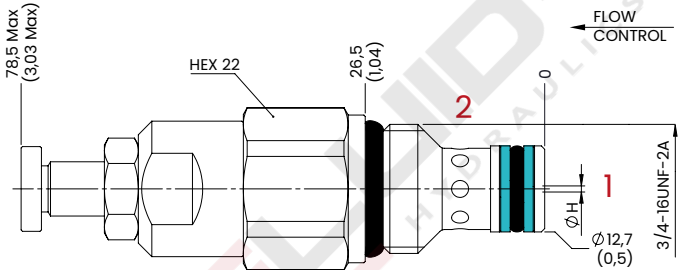


ADJUSTABLE FLOW CONTROL VALVES - PRESSURE COMPENSATED  
Adjustable compensated flow control valve, used to keep the speed constant, regardless of the working pressure.

HYDRAULIC CIRCUIT




OPTIONAL  
HANDKNOB CODE  
62200012



OPTIONAL  
NUT CODE  
63300025  
M8

mm [inches]

PERFORMANCES

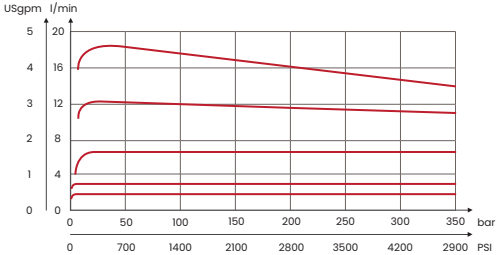

ORDERING CODE

| CODE   | TYPE  | CAVITY                                                               | MAX FLOW<br>CONTROLLED FLOW AT 100<br>bar ± 10%<br>l/min [USgpm] | Ø H<br>mm [Inches] | MAX PRESSURE<br>bar [PSI] | TIGHTENING<br>TORQUE<br>Nm [lbt ft] | WEIGHT<br>kg [lb] |
|--------|-------|----------------------------------------------------------------------|------------------------------------------------------------------|--------------------|---------------------------|-------------------------------------|-------------------|
| FA7028 | DR2C1 | SAE 8/2<br>3/4-<br>16UNF-2B<br><br>See cavity<br>paragraph<br>p. 348 | 0,6-2,2 [0,16-0,58]                                              | 0,9 [0,03]         | 350 [5075]                | 30 [22]                             | 0,12 [0,26]       |
| FA7029 | DR2C2 |                                                                      | 0,8-3 [0,21-0,79]                                                | 1 [0,04]           |                           |                                     |                   |
| FA7030 | DR2C3 |                                                                      | 1,3-5,1 [0,34-1,35]                                              | 1,3 [0,05]         |                           |                                     |                   |
| FA7031 | DR2C4 |                                                                      | 1,9-6,8 [0,5-1,8]                                                | 1,5 [0,06]         |                           |                                     |                   |
| FA7032 | DR2C5 |                                                                      | 2,6-9,1 [0,69-2,4]                                               | 1,7 [0,07]         |                           |                                     |                   |
| FA7033 | DR2C6 |                                                                      | 4-14,4 [1,06-3,08]                                               | 2,2 [0,09]         |                           |                                     |                   |
| FA7034 | DR2C7 |                                                                      | 7,2-24 [1,9-6,34]                                                | 2,8 [0,11]         |                           |                                     |                   |
| FA7066 | DR2C8 |                                                                      | 10-35 [2,64-9,25]                                                | 3,5 [0,14]         |                           |                                     |                   |

