



E2F28

SAE8/2 - 22 l/min - 250 bar


SOLENOID VALVE 2 WAYS 2 POSITIONS - POPPET DIRECT OPERATED



HYDRAULIC CIRCUIT

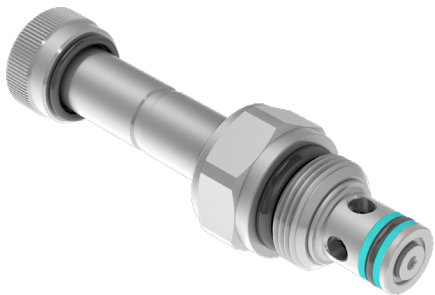

PERFORMANCES

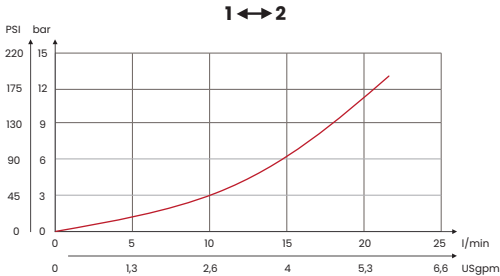

Tests carried out with solenoids at their working temperature, with a supply voltage 10% below the nominal value.

ELECTRIC

TYPE VOLTAGE	INSULATION INDEX	NOMINAL VOLTAGE	POWER AT 20C°	POWER AT 20C°	COIL CODE
DC	H	+/- 10%	22W	100% with temperature -20 C° + 40 C°	C22
*For temperature or special conditions contact our sales department					

ORDERING CODE

CODE	TYPE	VERSIONS	CAVITY	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	CH 24 TIGHTENING TORQUE Nm [lbt ft]	TIGHTENING TORQUE NUT Nm [lbt ft]	WEIGHT kg [lb]
FA8001	E2F28E	Normally closed Push in "E"	SAE8/2 3/4- 16UNF-2B See cavity paragraph p. 354	22 [5,8]	250 [3625]	30 [22]	2 [1,5]	0,12 [0,26]
FA8040	E2F28S	Normally closed Screw in "S"						
FA8039	E2F28P	Normally closed Push "P"						
Optional, coils C22 and connectors CNS								

