


E2L20

SAE8/2 - 30 l/min - 300 bar


SOLENOID VALVE 2 WAYS 2 POSITIONS - POPPET PILOT OPERATED



HYDRAULIC CIRCUIT

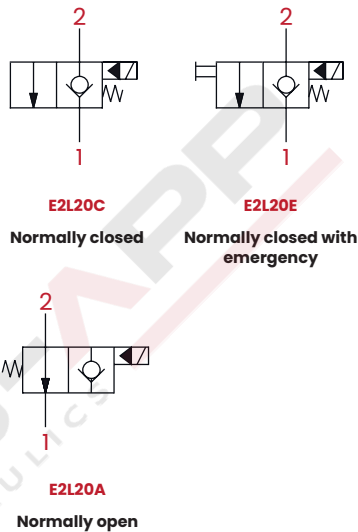

PERFORMANCES

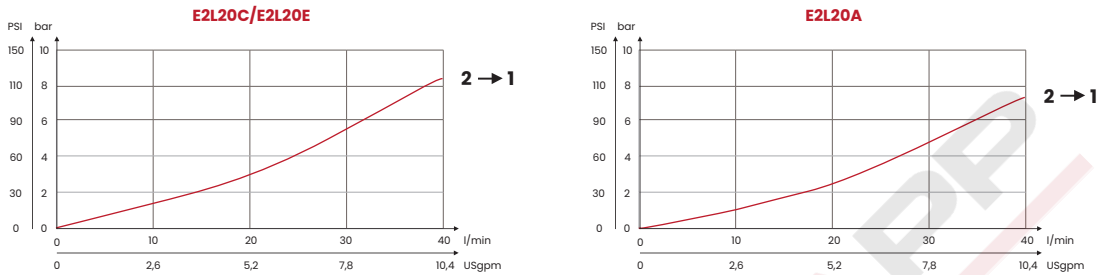

Tests carried out with solenoids at their working temperature, with a supply voltage 10% below the nominal value.

ELECTRIC

TYPE VOLTAGE	INSULATION INDEX	NOMINAL VOLTAGE	POWER AT 20C°	POWER AT 20C°	COIL CODE
DC	H	+/- 10%	22W	100% with temperature -20 C° + 40 C°	C22

*For temperature or special conditions contact our sales department

ORDERING CODE

CODE	TYPE	VERSIONS	CAVITY	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	CH 24 TIGHTENING TORQUE Nm [lbt ft]	TIGHTENING TORQUE NUT Nm [lbt ft]	WEIGHT kg [lb]
FA8005	E2L20C	Normally closed	SAE8/2 3/4-16UNF-2B See cavity paragraph p. 354	30 [7,9]	300 [4350]	30 [22]	2 [1,5]	0,12 [0,27]
FA8006	E2L20E	Normally closed + emergency						
FA8007	E2L20A	Normally open						

Optional, coils C22 and connectors CNS

