


E2S22 SAE8/2 - 40 l/min - 300 bar


SOLENOID VALVE 2 WAYS 2 POSITIONS - POPPET PILOT OPERATED



HYDRAULIC CIRCUIT

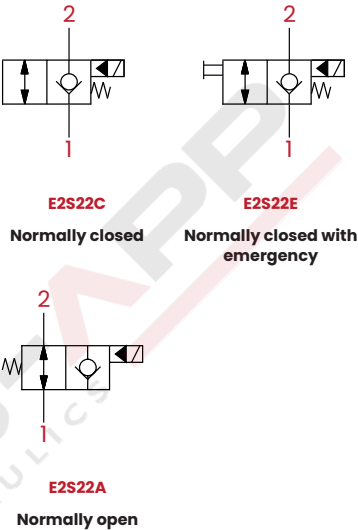

PERFORMANCES

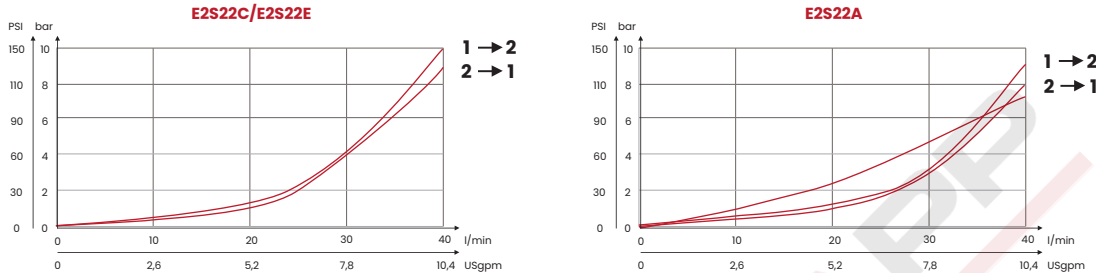



Tests carried out with solenoids at their working temperature, with a supply voltage 10% below the nominal value.

ELECTRIC

TYPE VOLTAGE	INSULATION INDEX	NOMINAL VOLTAGE	POWER AT 20C°	POWER AT 20C°	COIL CODE
DC	H	+/- 10%	22W	100% with temperature -20 C° + 40 C°	C22
*For temperature or special conditions contact our sales department					

ORDERING CODE

CODE	TYPE	VERSIONS	CAVITY	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	CH 24 TIGHTENING TORQUE Nm [lbt ft]	TIGHTENING TORQUE NUT Nm [lbt ft]	WEIGHT kg [lb]
FA8008	E2S22C	Normally closed	SAE8/2 3/4- 16UNF-2B See cavity paragraph p. 354	40 [10,6]	350 [5076]	30 [22]	2 [1,5]	0,16 [0,36]
FA8009	E2S22E	Normally closed + emergency						
FA8010	E2S22A	Normally open						
Optional, coils C22 and connectors CNS								

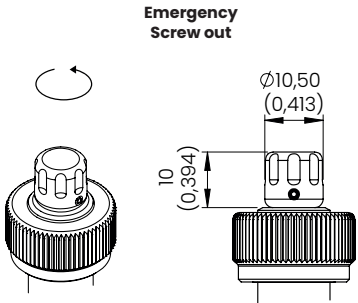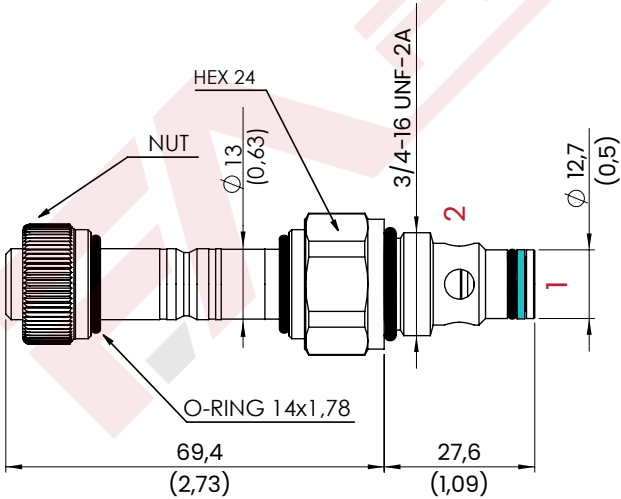

mm [Inches]

