



E3S24 SAE10/2 - 70 l/min - 350 bar


SOLENOID VALVE 2 WAYS 2 POSITIONS - POPPET PILOT OPERATED

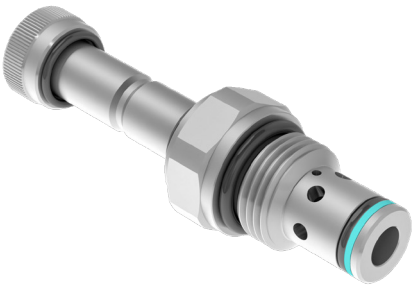

HYDRAULIC CIRCUIT

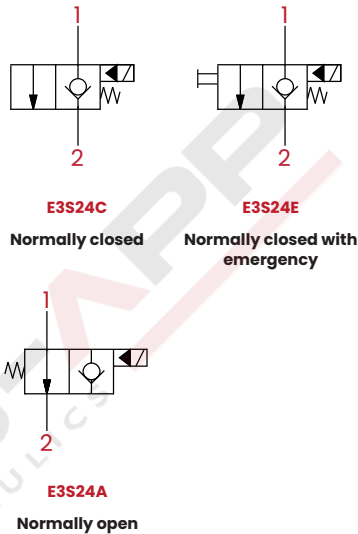

PERFORMANCES

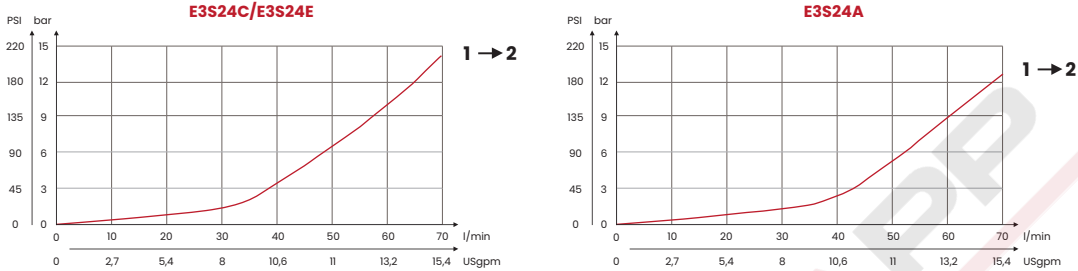

Tests carried out with solenoids at their working temperature, with a supply voltage 10% below the nominal value.

ELECTRIC



TYPE VOLTAGE	INSULATION INDEX	NOMINAL VOLTAGE	POWER AT 20C°	POWER AT 20C°	COIL CODE
DC	H	+/- 10%	22W	100% with temperature -20 C° + 40 C°	C22

*For temperature or special conditions contact our sales department

ORDERING CODE

CODE	TYPE	VERSIONS	CAVITY	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	CH 24 TIGHTENING TORQUE Nm [lbt ft]	TIGHTENING TORQUE NUT Nm [lbt ft]	WEIGHT kg [lb]
FA8030	E3S24C	Normally closed	SAE10/2 7/8- 14UNF-2B See cavity paragraph p. 354	70 [18,7]	350 [5076]	40 [29,5]	2 [1,5]	0,19 [0,42]
FA8031	E3S24E	Normally closed + emergency						
FA8032	E3S24A	Normally open						

Optional, coils C22 and connectors CNS

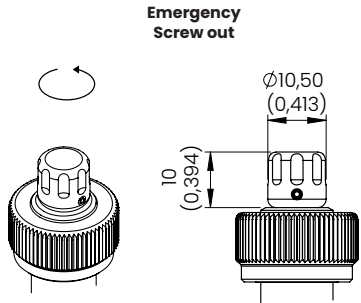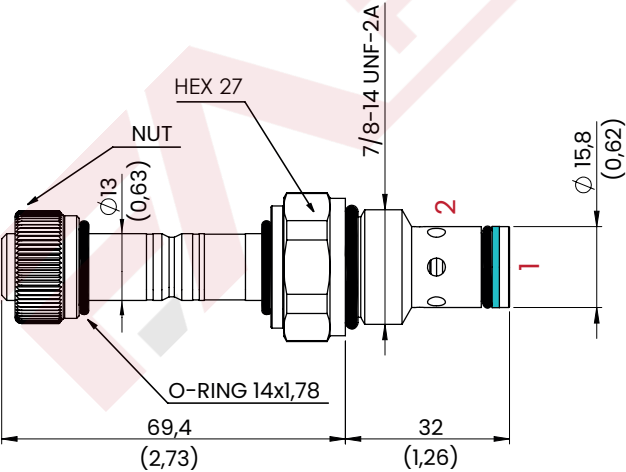

mm [Inches]