



E6S31 SAE8/3 - 12 l/min - 210 bar


SOLENOID VALVE 3 WAYS 2 POSITIONS - DIRECT ACTING POOL TYPE

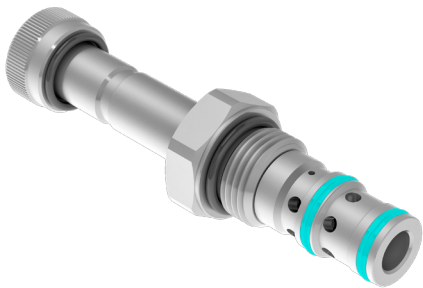

HYDRAULIC CIRCUIT



PERFORMANCES

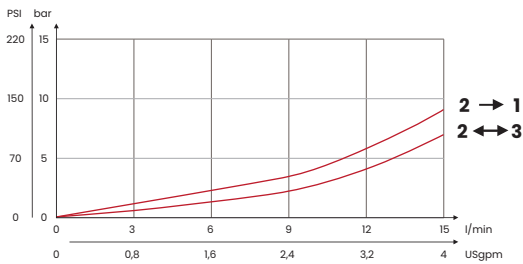

Tests carried out with solenoids at their working temperature, with a supply voltage 10% below the nominal value.

ELECTRIC



TYPE VOLTAGE	INSULATION INDEX	NOMINAL VOLTAGE	POWER AT 20C°	POWER AT 20C°	COIL CODE
DC	H	+/- 10%	22W	100% with temperature -20 C° + 40 C°	C22

*For temperature or special conditions contact our sales department

ORDERING CODE

CODE	TYPE	VERSIONS	CAVITY	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	CH 24 TIGHTENING TORQUE Nm [lbf ft]	TIGHTENING TORQUE NUT Nm [lbf ft]	WEIGHT kg [lb]
FA8022	E6S31A	Standard	SAE8/3 3/4- 16UNF-2B	12 [3,2]	210 [3045]	30 [22]	2 [1,5]	0,15 [0,33]
FA8023	E6S31E	With emergency	See cavity paragraph p.355					

Optional, coils C22 and connectors CNS

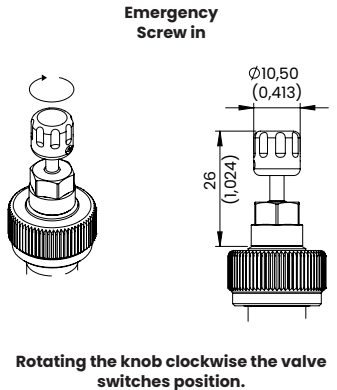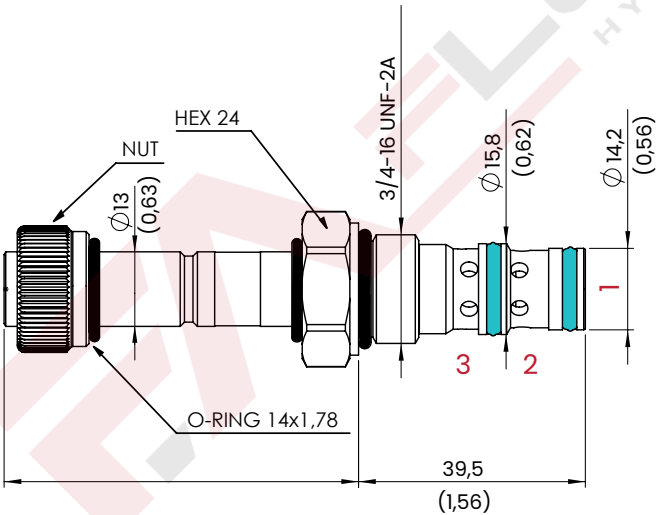

mm [Inches]

