



M30

M20 X 1,5 - 50 l/min - 350 bar

DIRECT ACTING RELIEF VALVES - GUIDED VERSION


The purpose of the M30 pressure relief valves is to protect the hydraulic system from malfunctions or failures caused by excessively high pressures in the circuit.

HYDRAULIC CIRCUIT

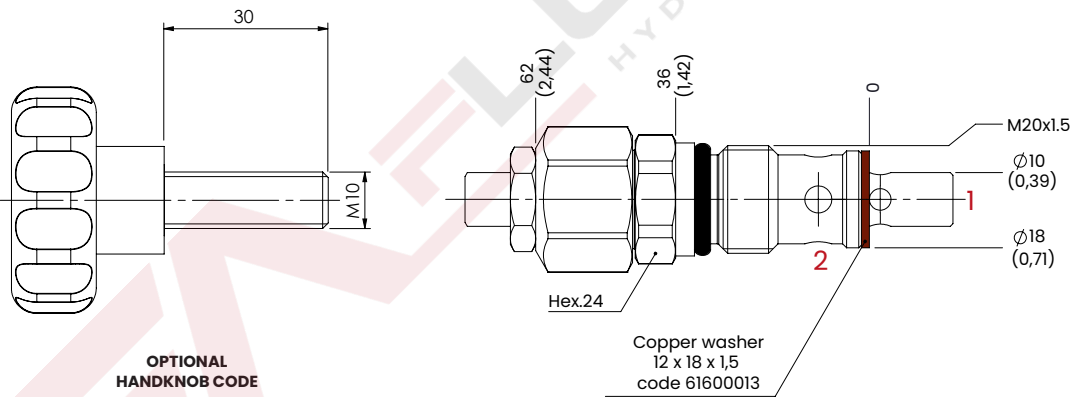

mm [inches]

PERFORMANCES

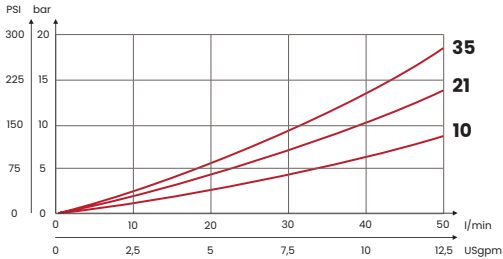

OPTIONAL TAMPER PROOF CAP M10



CODE
62200021

ORDERING CODE

CODE	TYPE	CAVITY	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	RAGE SPRING bar [PSI]	INCREASE TO TURN bar [PSI]	M20X1,5 TIGHTENING TORQUE Nm [lbt ft]	WEIGHT kg [lb]
FA7041	M30C10	FC002 M20X1,5 See cavity paragraph p. 352	50 [13,3]	350 [5075]	10/50 [145/725]	15 [220]	30 [22]	0,16 [0,35]
FA7042	M30C21				30/210 [210/3045]	70 [1015]		
FA7043	M30C35				70/350 [1015/5075]	100 [1450]		

UPDATE: May 2025 (v.06)