



M40 M20 X 1,5 - 50 l/min - 350 bar

DIRECT ACTING RELIEF VALVES - GUIDED VERSION


The purpose of the M40 pressure relief valves is to protect the hydraulic system from malfunctions or failures caused by excessively high pressures in the circuit.




HYDRAULIC CIRCUIT

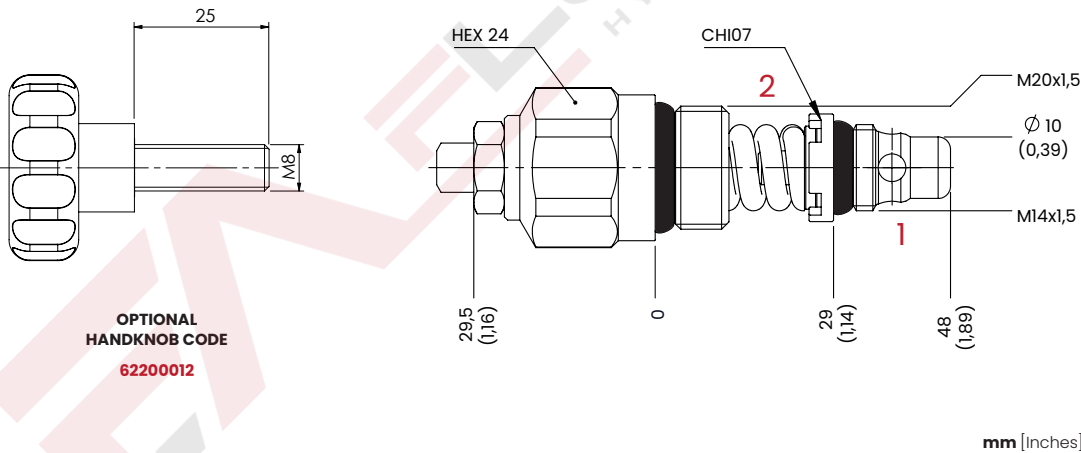

PERFORMANCES

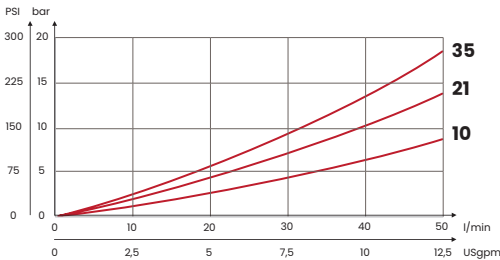

OPTIONAL TOOL



OPTIONAL TAMPER PROOF CAP M8



CODE
62200020

ORDERING CODE

CODE	TYPE	CAVITY	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	RAGE SPRING bar [PSI]	INCREASE TO TURN bar [PSI]	M14X1,5 TIGHTENING TORQUE Nm [lbt ft]	M20X1,5 TIGHTENING TORQUE Nm [lbt ft]	WEIGHT kg [lb]
FA7009	M40C10	FC003 M20X1,5	50 [13,3]	350 [5075]	10/70 [145/1015]	13 [189]	10 [7]	40 [30]	0,13 [0,29]
FA7010	M40C21	See cavity paragraph p.353			30/210 [435/3045]	50 [725]			
FA7011	M40C35				70/350 [1015/5075]	90 [1305]			

UPDATE: Jan. 2025 (v.07)