
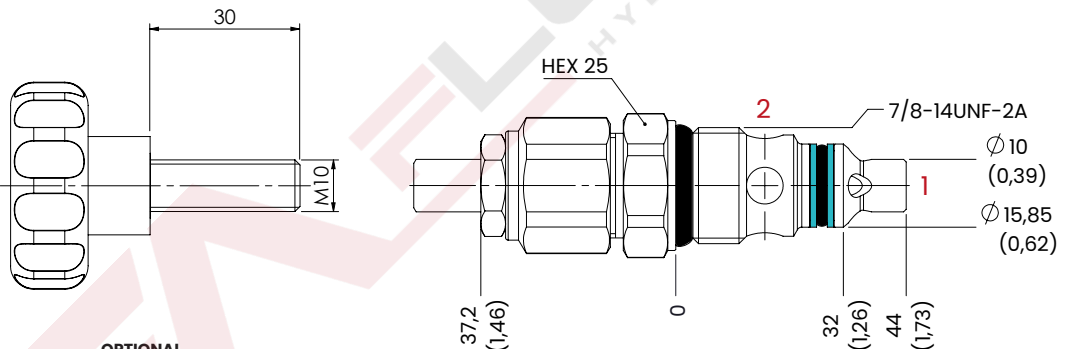


M42 SAE 10/2 - 50 l/min - 350 bar

DIRECT ACTING RELIEF VALVES - GUIDED VERSION

The purpose of the M42 pressure relief valves is to protect the hydraulic system from malfunctions or failures caused by excessively high pressures in the circuit.

HYDRAULIC CIRCUIT




OPTIONAL
HANDKNOB CODE

62200010

mm [inches]

PERFORMANCES

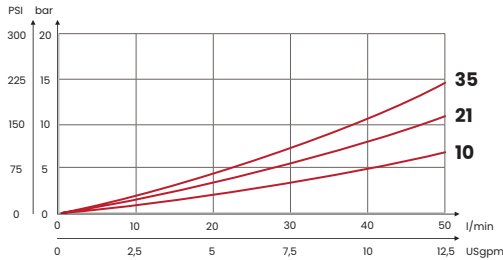

OPTIONAL TAMPER PROOF CAP M10



CODE

62200021

ORDERING CODE

CODE	TYPE	CAVITY	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	RAGE SPRING bar [PSI]	INCREASE TO TURN bar [PSI]	TIGHTENING TORQUE Nm [lbt ft]	WEIGHT kg [lb]
FA7012	M42C10	SAE10/2 7/8-14UN- F-2B See cavity paragraph p. 348	50 [13,5]	350 [5075]	10/70 [145/1015]	15 [220]	40 [30]	0,18 [0,37]
FA7013	M42C21				30/210 [435/3045]	70 [1015]		
FA7014	M42C35				70/350 [1015/5075]	100 [1450]		

UPDATE Jan. 2025 (v.08)