



M80

M24 X 1,5 - 80 l/min - 350 bar

DIRECT ACTING RELIEF VALVES - GUIDED VERSION

The purpose of the M80 pressure relief valves is to protect the hydraulic system from malfunctions or failures caused by excessively high pressures in the circuit.

HYDRAULIC CIRCUIT

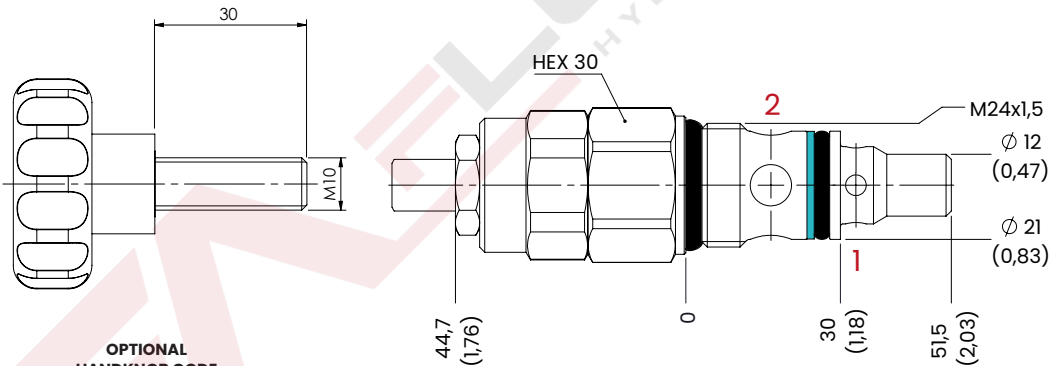


OPTIONAL
HANDKNOB CODE

62200010

mm [inches]

PERFORMANCES

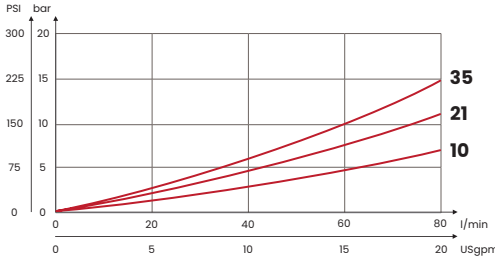

OPTIONAL TAMPER PROOF CAP M10



CODE

62200021

ORDERING CODE

CODE	TYPE	CAVITY	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	RAGE SPRING bar [PSI]	INCREASE TO TURN bar [PSI]	TIGHTENING TORQUE Nm [lbt ft]	WEIGHT kg [lb]
FA7015	M80C10	FC005 M24X1,5 See cavity paragraph p. 355	80 [21,1]	350 [5075]	10/100 [145/1450]	25 [362]	60 [44]	0,25 [0,55]
FA7016	M80C25				20/250 [290/3625]	85 [1247]		
FA7017	M80C35				50/350 [725/5075]	90 [1305]		

UPDATE: Jan. 2025 (v.07)