



RELIEF VALVES 120 l/min
The purpose of the M161 differentiated pressure relief valve is to protect the hydraulic system from malfunctions or failures caused by excessively high pressures in the circuit.

HYDRAULIC CIRCUIT



PERFORMANCES

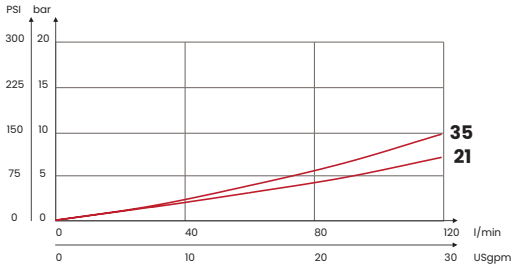


OPTIONAL TAMPER PROOF CAP M10





CODE
62200021

ORDERING CODE

CODE	TYPE	F ports	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	RANGE SPRING bar [PSI]	WEIGHT kg [lb]
FA6140	M1615SC21	SAE16 [1-5/16-12UN]	120 [32]	350 [5075]	20/210 [290/3045]	2,7 [6]
FA6141	M1615SC35				50/350 [725/5075]	
Steel body						

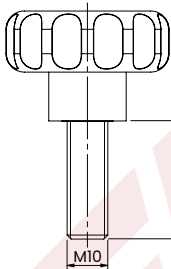

OPTIONAL
HANDKNOB CODE
62200010

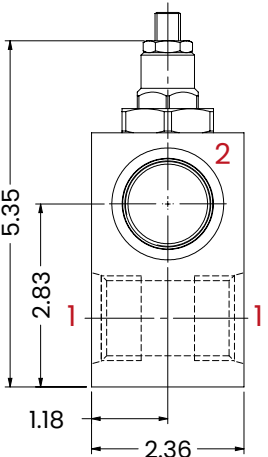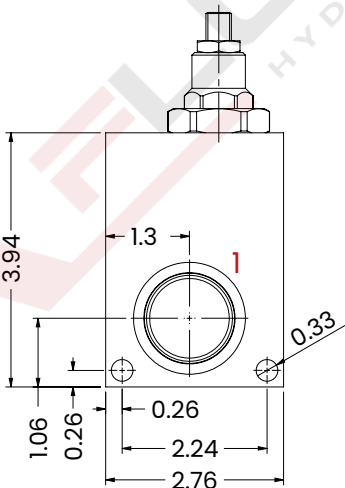

Inches