

M20S RELIEF VALVES - 40 l/min SAE






RELIEF VALVES 40 l/min

The purpose of the M20S pressure relief valve is to protect the hydraulic system from malfunctions or failures caused by excessively high pressures in the circuit.




HYDRAULIC CIRCUIT

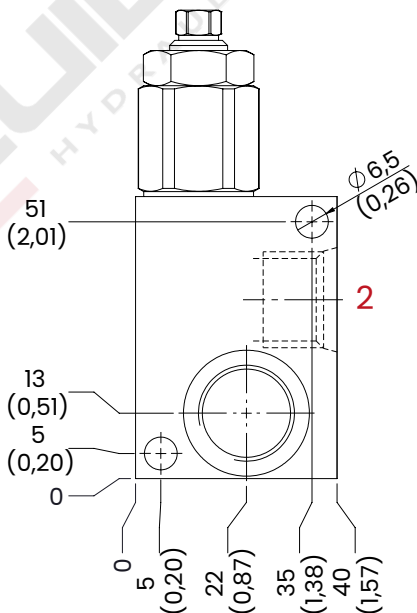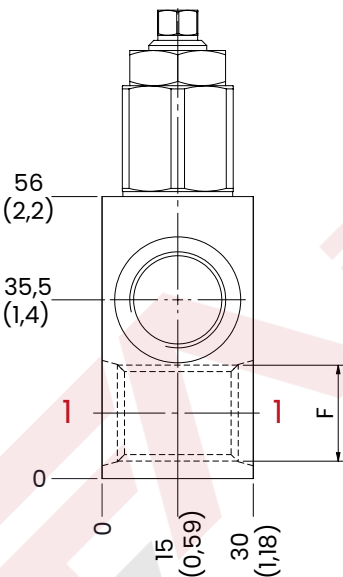

mm [Inches]

PERFORMANCES

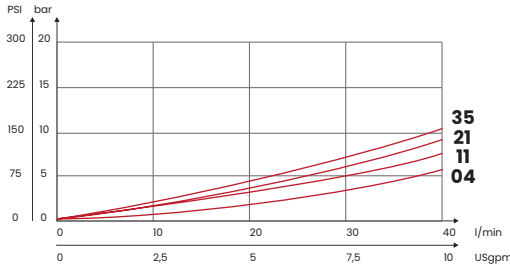

OPTIONAL TAMPER PROOF CAP



CODE
KIT137

OPTIONAL HANDKNOB



CODE
KIT132

ORDERING CODE

CODE	TYPE	F ports	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	RANGE SPRING bar [PSI]	INCREASE TO TURN bar [PSI]	WEIGHT kg [lb]
FA6088	M201SC04	SAE6 [9/16-18 UNF]	40 [10,5]	350 [5075]	10/60 [145/870]	12 [174]	0,47 [1,03]
FA6089	M201SC11				40/110 [580/1595]	40 [580]	
FA6090	M201SC21				80/250 [1160/3625]	70 [1015]	
FA6091	M201SC35				120/350 [1740/5075]	130 [1885]	
FA6092	M202SC04	SAE8 [3/4-16 UNF]			10/60 [145/870]	12 [174]	
FA6093	M202SC11				40/110 [580/1595]	40 [580]	
FA6094	M202SC21				80/250 [1160/3625]	70 [1015]	
FA6095	M202SC35				120/350 [1740/5075]	130 [1885]	
Steel body (on request aluminium body)							

