



M40S RELIEF VALVES - 60 l/min SAE



RELIEF VALVES 60 l/min

The purpose of the M40S pressure relief valve is to protect the hydraulic system from malfunctions or failures caused by excessively high pressures in the circuit.

HYDRAULIC CIRCUIT

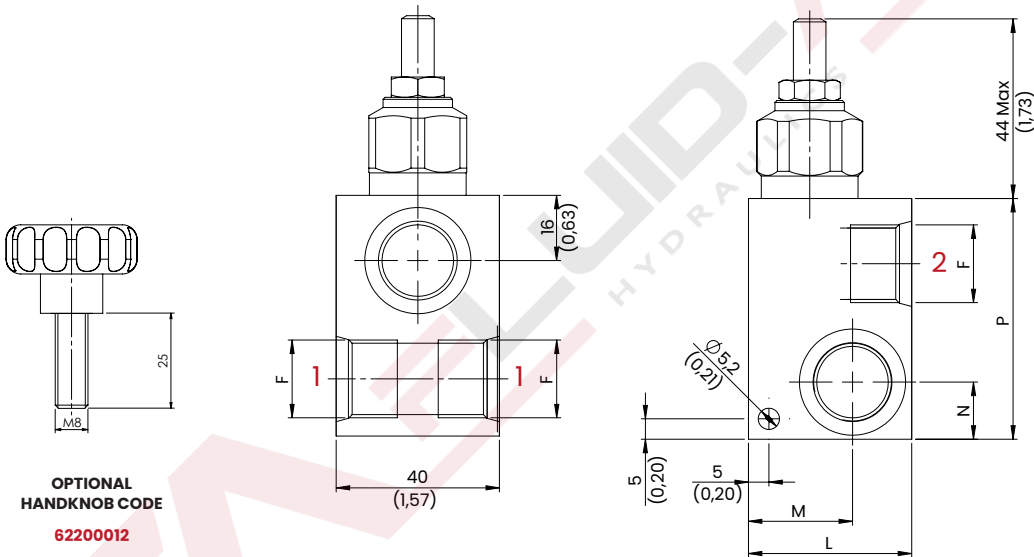


OPTIONAL
HANDKNOB CODE
62200012

TECHNICAL CHARACTERISTICS

F	L	M	N	P
SAE8 [3/4-16 UNF]	40 [1,57]	25,5 [1]	14 [0,55]	59 [2,32]
SAE10 [7/8-16 UNF]	45 [1,77]	29,5 [1,16]	15 [0,59]	60 [2,36]
Steel body (on request aluminum body)				

PERFORMANCES

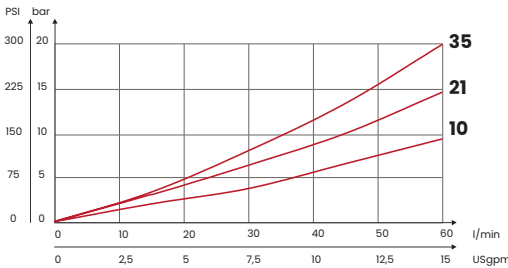

OPTIONAL TAMPER PROOF CAP M8



CODE
62200020

ORDERING CODE

CODE	TYPE	F ports	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	RANGE SPRING bar [PSI]	INCREASE TO TURN bar [PSI]	WEIGHT kg [lb]
FA6082	M402SC10	SAE8 [3/4-16 UNF]	60 [15,8]	350 [5075]	10/70 [145/1015]	13 [189]	0,6 [1,32]
FA6083	M402SC21				30/210 [295/3045]	50 [725]	
FA6084	M402SC35				70/350 [1015/5075]	90 [1305]	
FA6085	M403SC10	SAE10 [7/8-16 UNF]			10/70 [145/1015]	13 [189]	0,70 [1,54]
FA6086	M403SC21				30/210 [295/3045]	50 [725]	
FA6087	M403SC35				70/350 [1015/5075]	90 [1305]	