

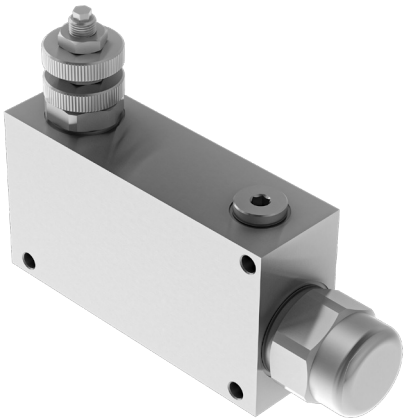


3 WAYS FLOW CONTROL VALVES - PRESSURE COMPENSATED WITH EXCEEDING FLOW TO PRESSURE

The 3-way flow control valves allow the regulation and constant maintenance of the flow regardless of the load, by means of an internal compensation system, in the RCP version the excess flow it is under pressure available for a second use.

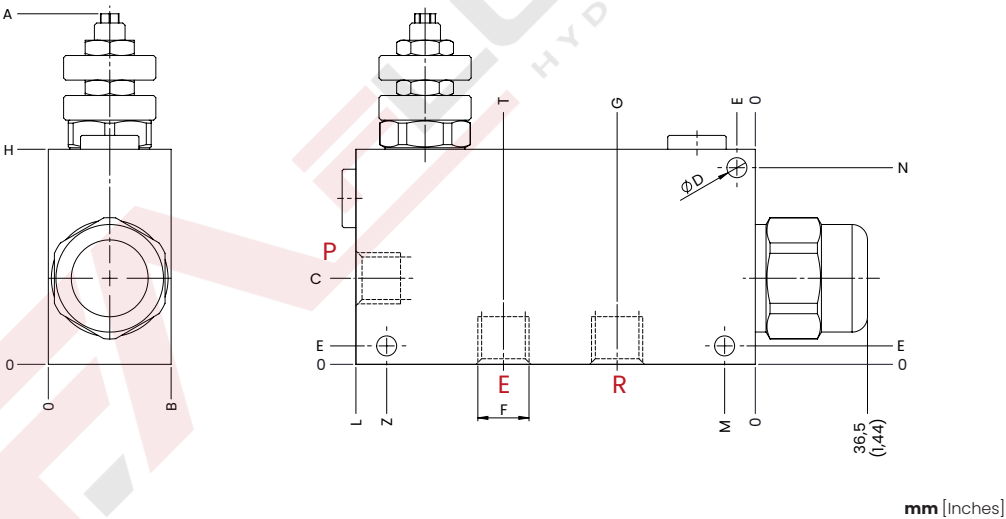

HYDRAULIC CIRCUIT




TECHNICAL CHARACTERISTICS

mm [Inches]

F	B	H	L	ØD	N	C	E	T	G	Z	A	M
3/8 BSPP	40 [1,57]	70 [2,76]	130 [5,11]	6,5 [0,26]	64 [2,52]	28 [1,10]	6 [0,24]	82 [3,23]	45 [1,77]	120 [4,72]	114 [4,49]	10 [0,39]
1/2 BSPP												
3/4 BSPP	50 [1,97]	90 [3,54]	155 [6,10]	9,5 [0,37]	80 [3,15]	35 [1,38]	10 [0,39]	98 [3,86]	54 [2,13]	145 [5,71]	135 [5,32]	/
Aluminium body												

PERFORMANCES

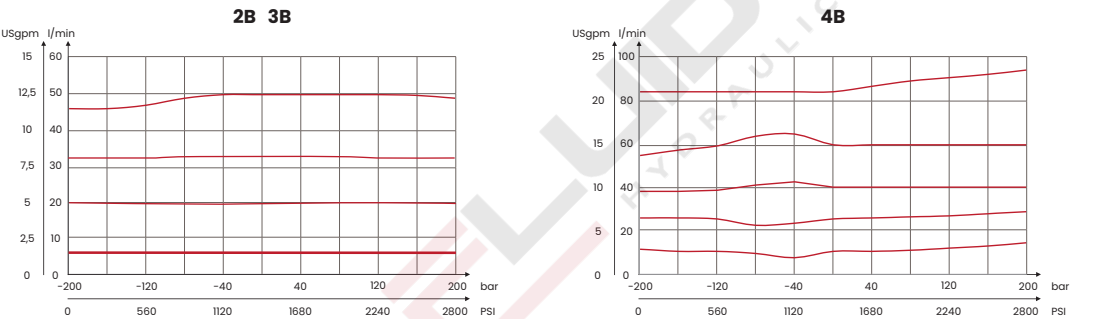

ORDERING CODE

CODE	TYPE	F ports	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	WEIGHT kg [lb]
FA4057	RCP2B	3/8 BSPP	50 [13,3] with 30 [7,9] in R	210 [3050]	1,3 [2,87]
FA4058	RCP3B	1/2 BSPP	90 [23,8] with 50 [13,3] in R		1,25 [2,76]
FA4059	RCP4B	3/4 BSPP	150 [39,6] with 90 [23,8] in R		2,5 [5,51]

UPDATE: May 2024 (v.06)