



FAST OPENING VALVES

Open-close valves with perfect seal.

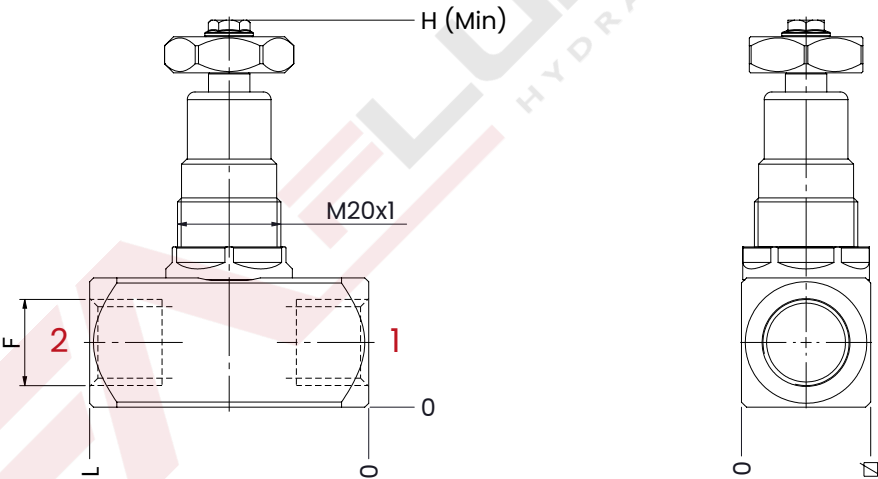

HYDRAULIC CIRCUIT



mm [Inches]


TECHNICAL CHARACTERISTICS

mm [Inches]

F	L	H	Ø	OPTIONAL RING NUT
1/8 BSPP	54 [2,13]	74 [2,91]	25 [0,98]	63500014 M20 x 1
1/4 BSPP				
3/8 BSPP				
1/2 BSPP	58 [2,28]	79 [3,11]	30 [1,18]	
Steel body				

PERFORMANCES

OPTIONAL RING NUT

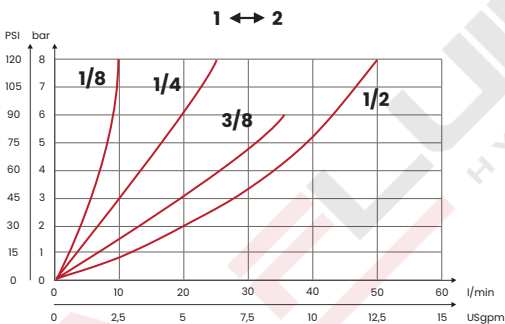

ORDERING CODE

CODE	TYPE	F ports	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	WEIGHT kg [lb]
FA4228	SBR0B	1/8 BSPP	10 [2,6]	400 [5800]	0,3 [0,66]
FA4229	SBR1B	1/4 BSPP	25 [6,6]		0,28 [0,6]
FA4230	SBR2B	3/8 BSPP	35 [9,3]		
FA4231	SBR3B	1/2 BSPP	50 [13,2]		0,45 [1]

UPDATE: Nov. 2025 (v.01)