



UNIDIRECTIONAL FLOW CONTROL VALVES

The unidirectional flow control valves SUA allow the free passage of the oil in one direction and regulate it in the opposite direction.

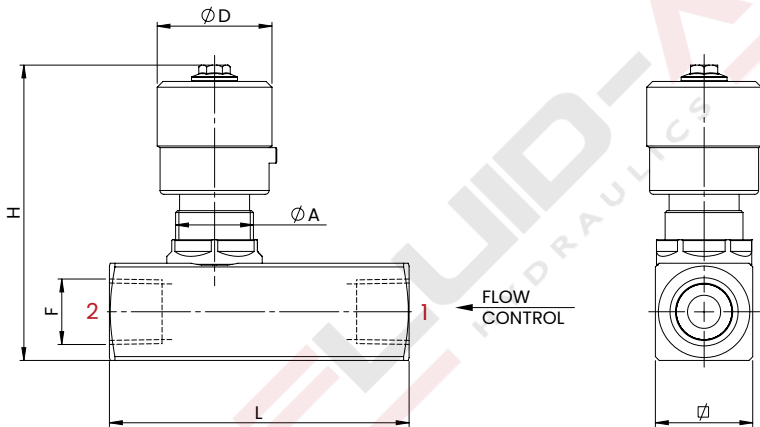

HYDRAULIC CIRCUIT







TECHNICAL CHARACTERISTICS

mm [Inches]

F	L	H	Ø	Ø D	A	OPTIONAL RING NUT
1/4 NPTF	67 [2,63]	76 [2,99]	25 [0,98]	30 [1,18]	M20 x 1	63500014
3/8 NPTF	77 [3,03]					
1/2 NPTF	86 [3,38]	81 [3,19]	30 [1,18]	38 [1,5]	M35 x 1,5	63500012
3/4 NPTF	112,5 [4,43]	110 [4,33]	40 [1,57]			
1 NPTF	141 [5,55]	114 [4,49]	45 [1,77]	50 [1,96]	M45 x 1,5	63500013
1-1/4 NPTF	155 [6,10]	137 [5,39]	55 [2,16]			
1-1/2 NPTF	168 [6,61]	147 [5,78]	65 [2,56]			
Steel body (on request stainless steel AISI 316L body)						

PERFORMANCES

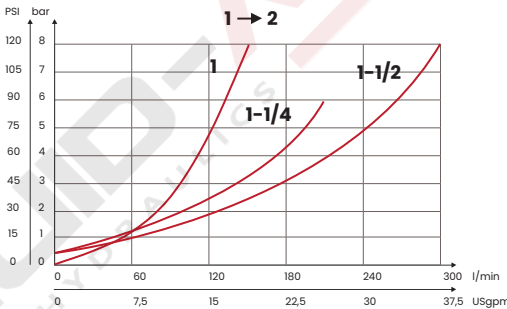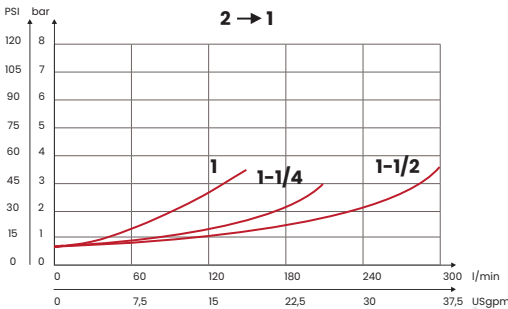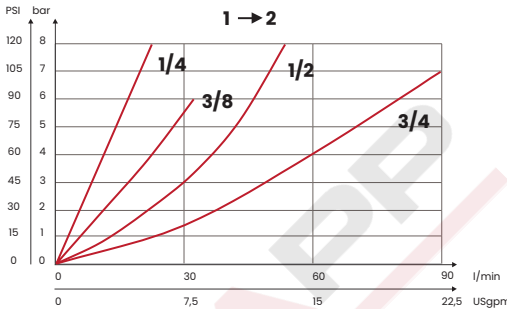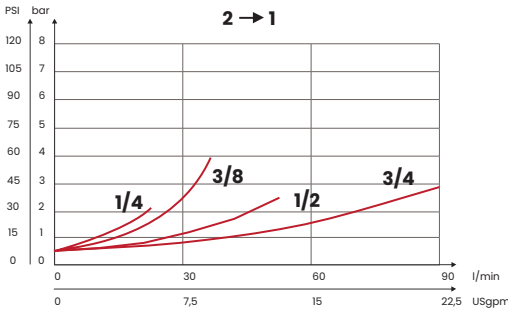

OPTIONAL RING NUT



ORDERING CODE

CODE	TYPE	F ports	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	WEIGHT kg [lb]
FA4154	SUA1NYA	1/4 NPTF	25 [6,6]	400 [5800]	0,4 [0,88]
FA4094	SUA2N	3/8 NPTF	35 [9,3]		0,6 [1,32]
FA4095	SUA3N	1/2 NPTF	50 [13,2]		
FA4096	SUA4N	3/4 NPTF	90 [23,8]		1,45 [3,2]
FA4097	SUA5N	1 NPTF	150 [39,6]	350 [5075]	2 [4,4]
FA4098	SUA6N	1-1/4 NPTF	200 [52,8]		3 [6,6]
FA4099	SUA7N	1-1/2 NPTF	300 [79,2]		4,5 [10]

UPDATE: Dec. 2025 (v.03)