


SUD FLOW CONTROL - LOCK NUT NPTF



UNIDIRECTIONAL FLOW CONTROL VALVES

The unidirectional flow control valves SUD allow the free passage of the oil in one direction and regulate it in the opposite direction.

HYDRAULIC CIRCUIT




TECHNICAL CHARACTERISTICS

mm [Inches]

F	L	H	Ø	OPTIONAL RING NUT
1/4 NPTF	67 [2,63]	72 [2,83]	25 [0,98]	63500014 M20 x 1
3/8 NPTF	77 [3,03]			
1/2 NPTF	86 [3,38]	77 [3,03]	30 [1,18]	
Steel body				

PERFORMANCES


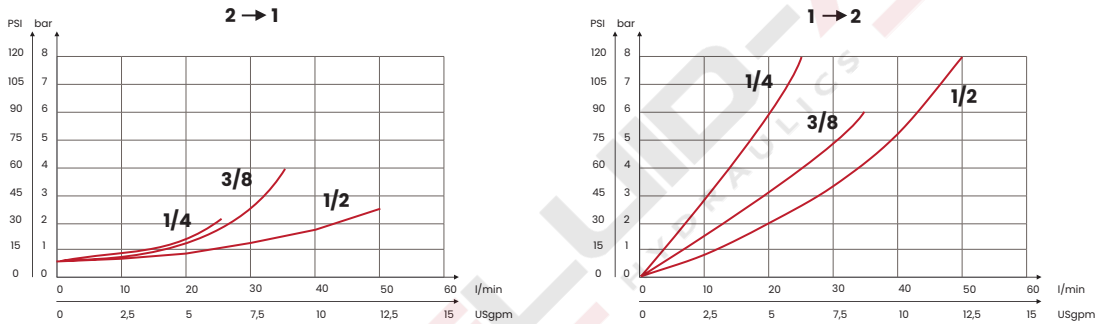


OPTIONAL RING NUT



ORDERING CODE

CODE	TYPE	F ports	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	WEIGHT kg [lb]
FA4134	SUD1N	1/4 NPTF	25 [6,6]	400 [5800]	0,37 [0,44]
FA4135	SUD2N	3/8 NPTF	35 [9,3]		
FA4136	SUD3N	1/2 NPTF	50 [13,2]		0,55 [1,21]

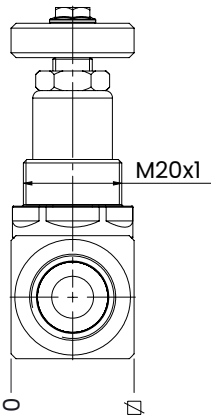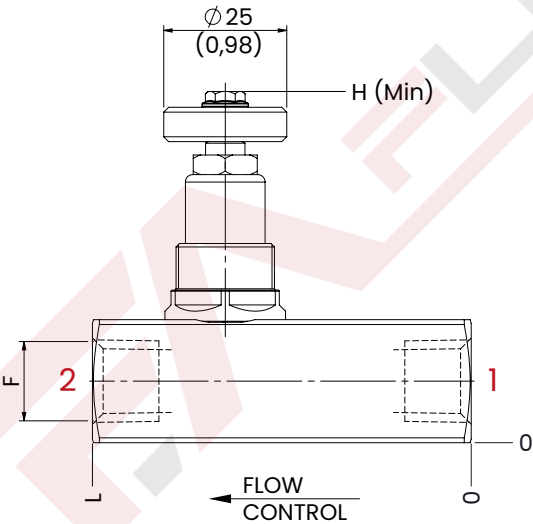

mm [Inches]

