




SUD **FLOW CONTROL - LOCK NUT** SAE



UNIDIRECTIONAL FLOW CONTROL VALVES

The unidirectional flow control valves SUD allow the free passage of the oil in one direction and regulate it in the opposite direction.

HYDRAULIC CIRCUIT

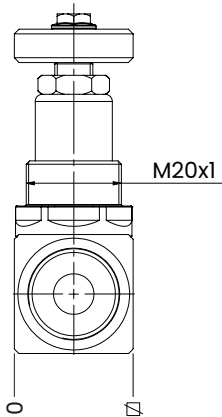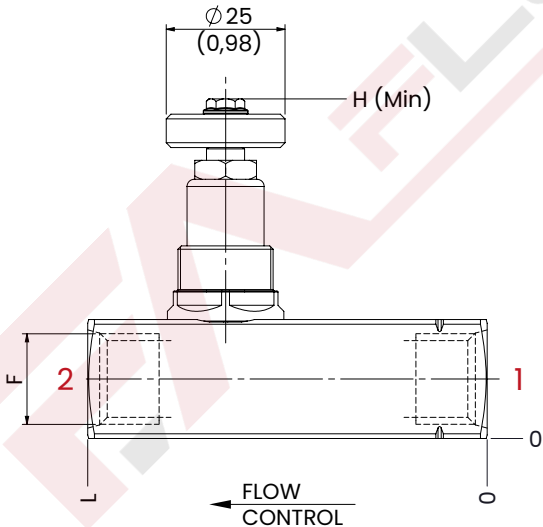


mm [Inches]

TECHNICAL CHARACTERISTICS

mm [Inches]

F	L	H	∅	OPTIONAL RING NUT
SAE 6 [9/16-18 UNF]	70,5 [2,77]	72 [2,83]	25 [0,98]	63500014 M20 x 1
SAE 8 [3/4-16 UNF]	84 [3,3]			
Steel body				

PERFORMANCES

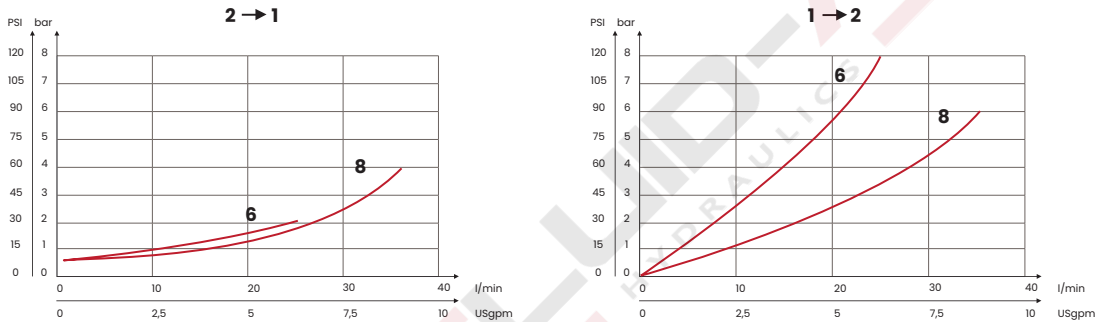

OPTIONAL RING NUT



ORDERING CODE

CODE	TYPE	F ports	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	WEIGHT kg [lb]
FA4138	SUD1S	SAE 6 [9/16-18 UNF]	25 [6,6]	400 [5800]	0,37 [0,44]
FA4139	SUD2S	SAE 8 [3/4-16 UNF]	35 [9,3]		