
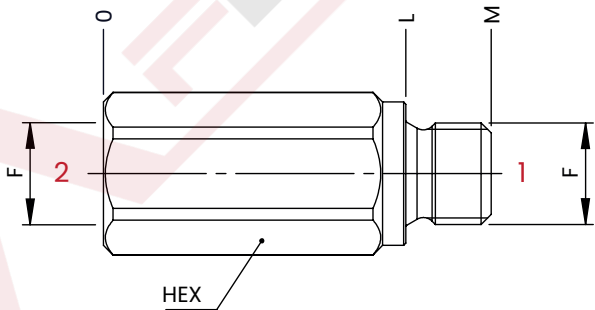


UTC CHECK VALVES BSPP

CHECK VALVES

The UTC (Gas thread) check valves allow the full flow of oil in one direction and stop the flow in the opposite direction. The applications where these valves can be used are many, agricultural machinery or industrial installations.

HYDRAULIC CIRCUIT



mm [Inches]


TECHNICAL CHARACTERISTICS

mm [Inches]

F	L	M	HEX
3/8 BSPP	50 [1,97]	63 [2,48]	24

On request
• Calibration hole

PERFORMANCES

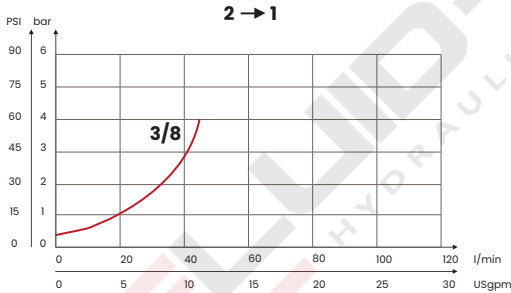

ORDERING CODE

CODE	TYPE	F ports	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	CRACKING PRESSURE bar [PSI]	WEIGHT kg [lb]
FA3125	UTC2B05	3/8 BSPP	45 [12]	400 [5800]	Poppet type 0,5 Standard [7,3] On request 3 [43,5] 4,5 [65] 6 [87]	0,18 [0,40]

UPDATE: Aug. 2025 (v.04)