
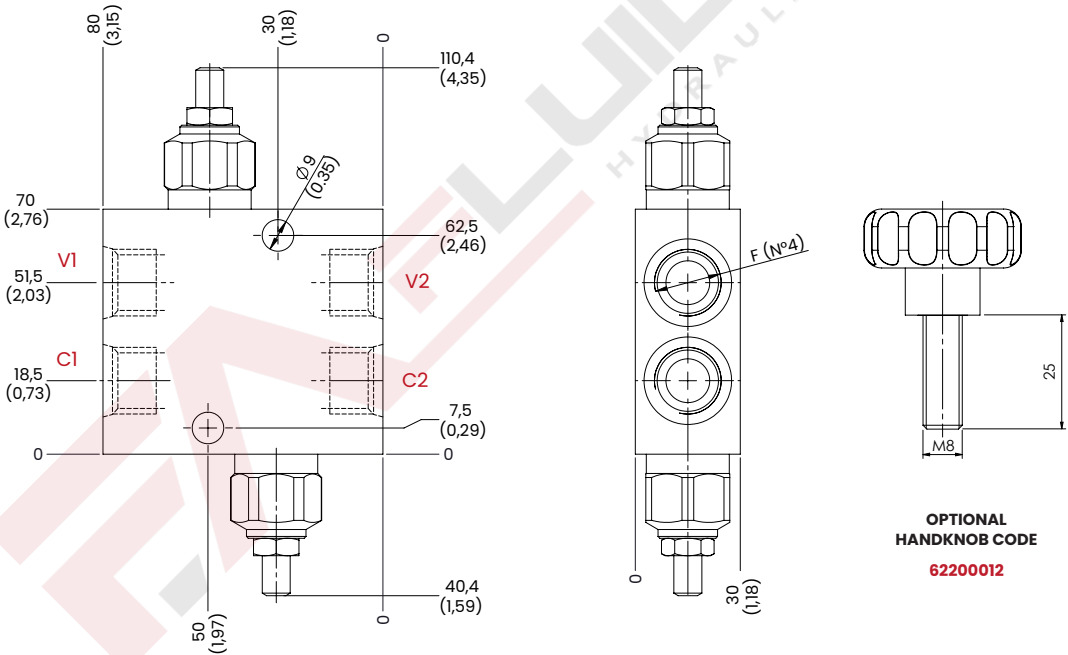




DOUBLE CROSS RELIEF VALVES 50 L
VAA valves with steel manifold and two pressure relief valves, they control the pressure on both connection lines.

HYDRAULIC CIRCUIT

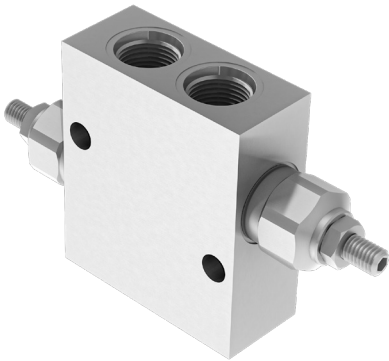

mm [Inches]

PERFORMANCES

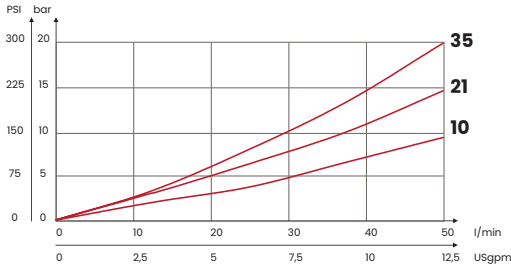

OPTIONAL TAMPER PROOF CAP M8



CODE
62200020

ORDERING CODE

CODE	TYPE	F ports	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	RANGE SPRING bar [PSI]	INCREASE TO TURN bar [PSI]	WEIGHT kg [lb]
FA6128	VAA2SC10	SAE8 [3/4-16 UNF]	40 [10,6]	350 [5075]	10/70 [145/1015]	13 [189]	1,22 [2,68]
FA6129	VAA2SC21				30/210 [435/3045]	50 [725]	
FA6130	VAA2SC35				70/350 [1015/5075]	90 [1305]	
FA6131	VAA3SC10	SAE 10 [7/8-14 UNF]	50 [13,2]		10/70 [145/1015]	13 [189]	1,16 [2,55]
FA6132	VAA3SC21				30/210 [435/3045]	50 [725]	
FA6133	VAA3SC35				70/350 [1015/5075]	90 [1305]	
Steel body (on request aluminum body)							