

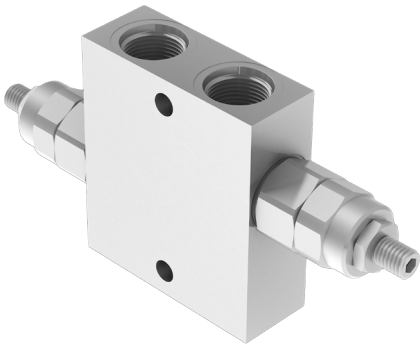



DOUBLE CROSS RELIEF VALVES 80 L

VAA valves with steel manifold and two pressure relief valves, they control the pressure on both connection lines.

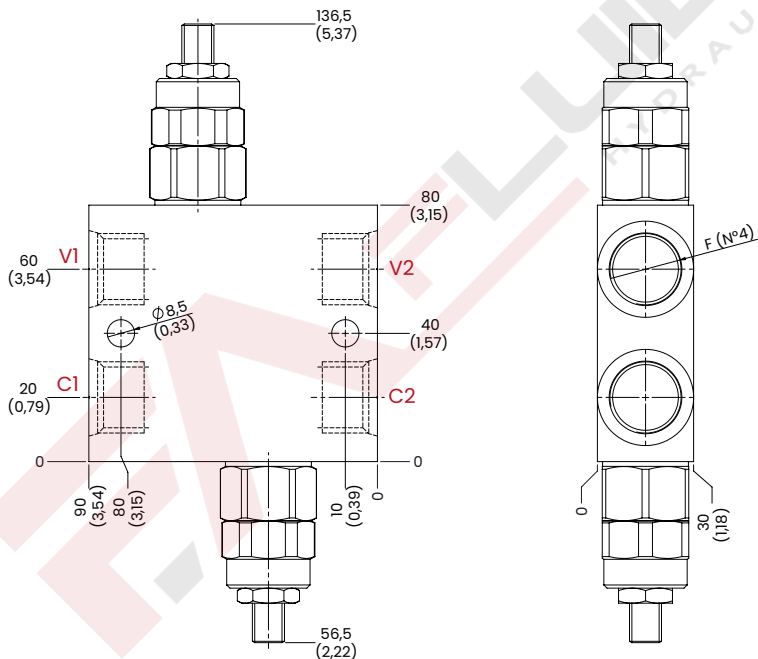


HYDRAULIC CIRCUIT



OPTIONAL
HANDKNOB CODE
62200010

mm [Inches]

PERFORMANCES

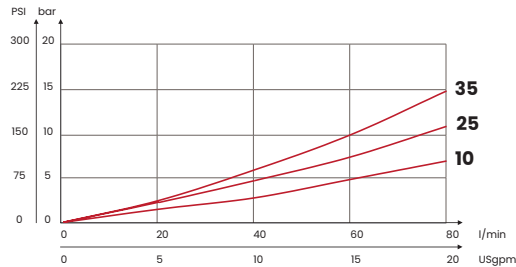

OPTIONAL TAMPER PROOF CAP M8



CODE
62200021

ORDERING CODE

CODE	TYPE	F ports	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	RANGE SPRING bar [PSI]	INCREASE TO TURN bar [PSI]	WEIGHT kg [lb]
FA6134	VAA3SC10H	SAE 10 [7/8-14 UNF]	80 [21,1]	350 [5075]	10/100 [145/1450]	25 [362]	1,70 [3,8]
FA6135	VAA3SC25H				20/250 [290/3625]	85 [1247]	
FA6136	VAA3SC35H				50/350 [725/5075]	90 [1305]	

Steel body (on request aluminum body)