

VBC M22X1,5 - 60 l/min - 350 bar

SINGLE ACTING PILOT CHECK VALVES




VBC check valves are used to lock a single acting actuator in position, ensuring the blocking of the load.



HYDRAULIC CIRCUIT



PERFORMANCES

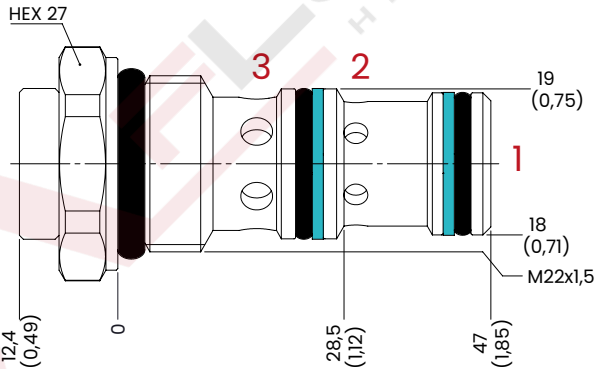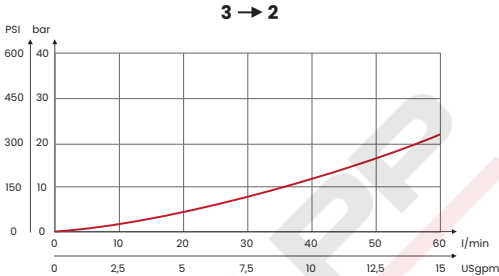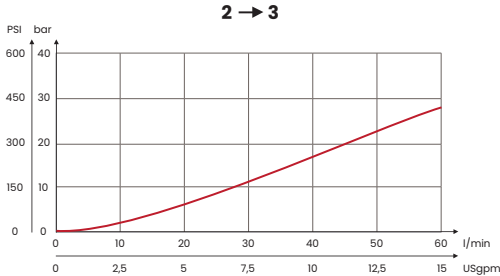

ORDERING CODE

CODE	TYPE	CAVITY	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	CRACKING PRESSURE STANDARD bar [PSI]	TIGHTENING TORQUE Nm [lbt ft]	PILOT RATIO	WEIGHT kg [lb]
FA7036	VBC2250	FC004 M22X1,5 See cavity paragraph p. 354	60 [15,8]	350 [5075]	5 [72]	40 [30]	1:2,5	0,12 [0,26]

mm [Inches]