



VBR CHECK VALVES BSPP

DOUBLE ACTING PILOT OPERATED CHECK VALVES, BOLT FITTING

VBR pilot operated check valves are used to lock a double acting actuator in position in both directions, ensuring the load is locked, bolt fitting version.




HYDRAULIC CIRCUIT

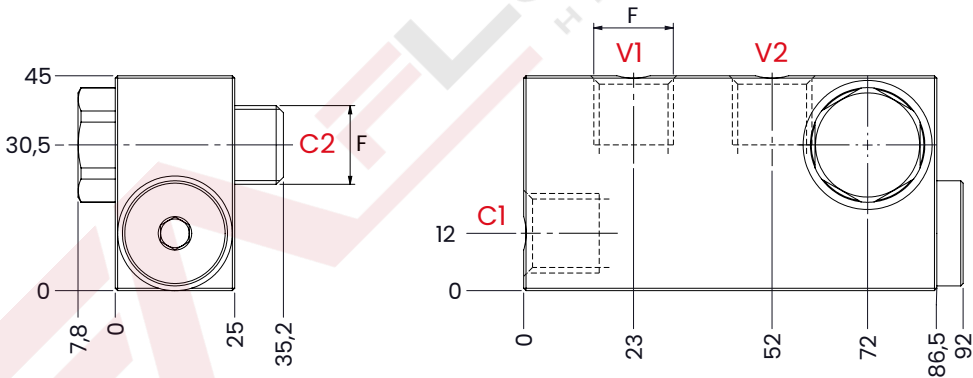

mm [Inches]

PERFORMANCES

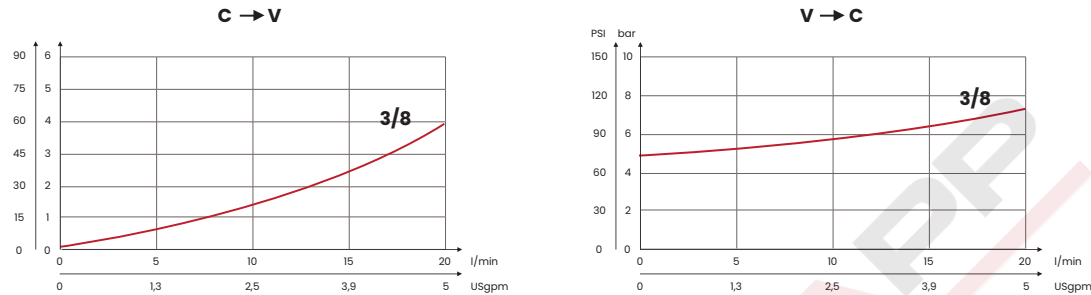

ORDERING CODE

CODE	TYPE	F ports	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	PILOT RATIO	CRACKING PRESSURE bar [PSI]	WEIGHT kg [lb]
FA5061	VBR2B	3/8 BSPP	20 [5,3]	350 [5075]	1:5	4,5 [65]	0,6 [1,32]
Steel body							