
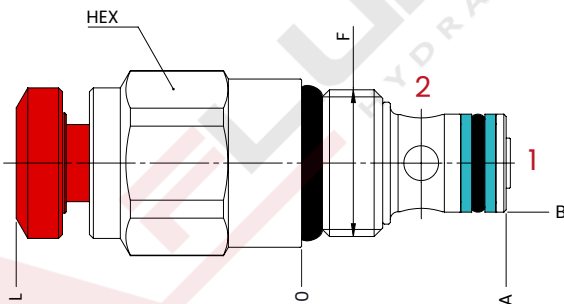



VM2 SAE 8/2 - 30 l/min - 350 bar

EMERGENCY VALVES

The bidirectional valves, with direct action VM2 normally closed 2 ways 2 positions, allow manual intervention, the opening is obtained by manually pushing the rear button, removing the hand automatically the valve closes.

HYDRAULIC CIRCUIT

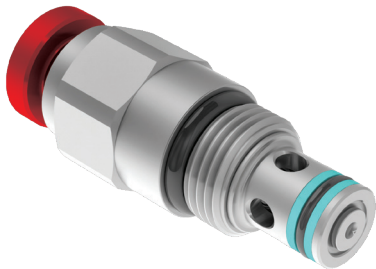


TECHNICAL CHARACTERISTICS


mm [Inches]

F	L	A	B	HEX
SAE8/2	37 [1,48]	26,5 [1,04]	12,7 [0,50]	22
M20X1,5	34 [1,34]	25 [0,98]	15 [0,59]	24

PERFORMANCES

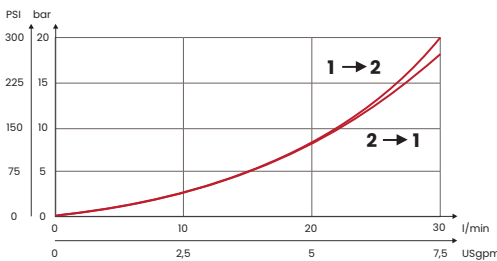

EFFORT OPERATING AT THE END OF THE KNOB

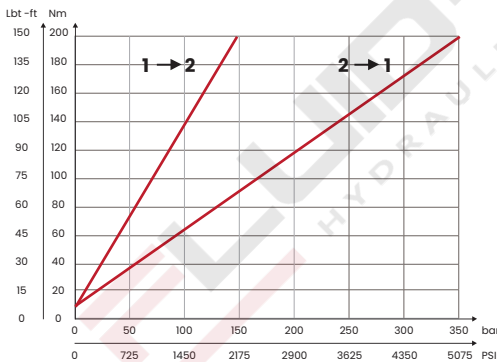

ORDERING CODE

CODE	TYPE	CAVITY	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	TIGHTENING TORQUE Nm [lbt ft]	WEIGHT kg [lb]
FA7026	VM2	SAE8/2 3/4-16UNF See cavity paragraph p. 354	30 [7,9]	350 [5075]	30 [22]	0,12 [0,26]
FA7067	VM20M	FC003 M20X1,5 See cavity paragraph p. 358				