

VSP MANUAL CHECK VALVES BSPP - LEFT




SINGLE ACTING PILOT CHECK VALVES WITH MANUAL SHUT-OFF




VSP pilot check valves are mainly used to lock a single acting cylinder in position, they are made in left and right hand versions.



HYDRAULIC CIRCUIT



PERFORMANCES

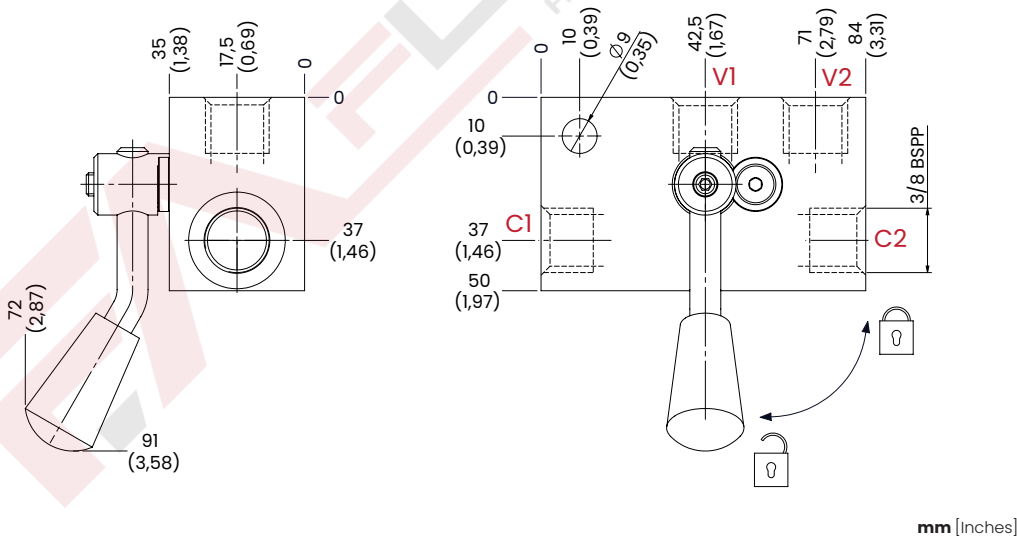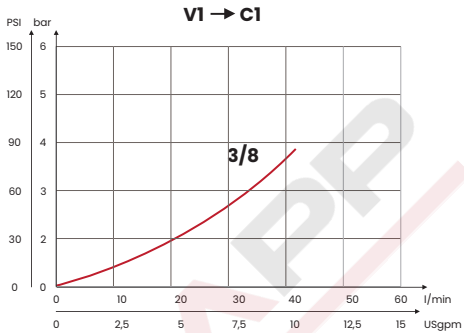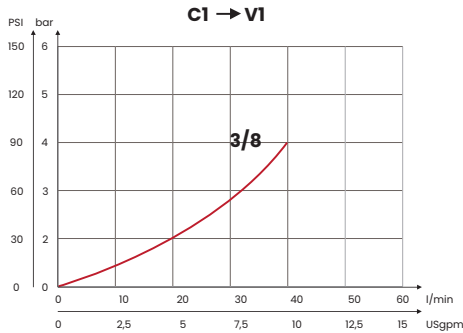

ORDERING CODE

CODE	TYPE	F ports	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	PILOT RATIO	CRACKING PRESSURE bar [PSI]	WEIGHT kg [lb]
FA5016	VSP2BSX	3/8 BSPP	40 [10,52]	350 [5075]	1:4,20	4,5 [65]	1,08 [2,38]
Steel body (on request aluminium body)							

