




DOUBLE CROSS RELIEF VALVES

VAA valves with steel manifold and two pressure relief valves, they control the pressure on both connection lines.

HYDRAULIC CIRCUIT

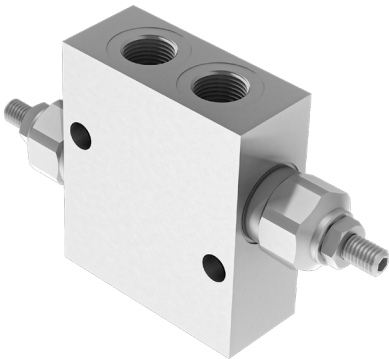




PERFORMANCES

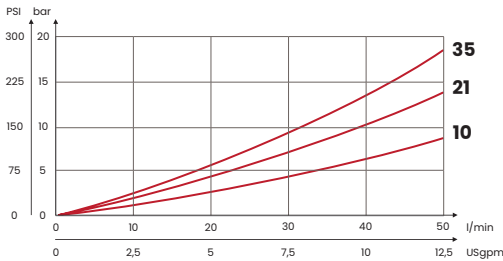

TAMPER PROOF CAP M8



CODE
62200020

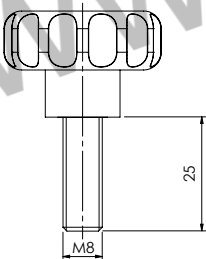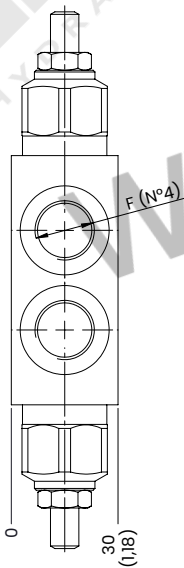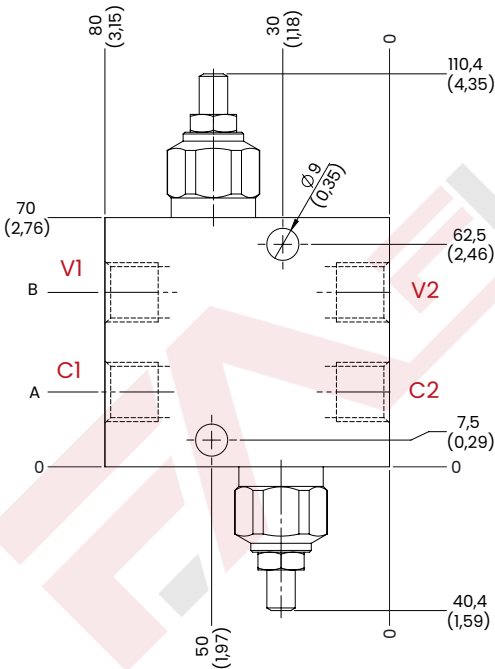

HANDKNOB CODE
62200012

mm [Inches]

ORDERING CODE

CODE	TYPE	F ports	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	RANGE SPRING bar [PSI]	INCREASE TO TURN bar [PSI]	A	B	WEIGHT kg [lb]
FA6039	VAA2BC10	3/8 BSPP	40 [10,6]	350 [5075]	10/70 [145/1015]	13 [189]	21 [0,82]	49 [1,93]	1,22 [2,68]
FA6040	VAA2BC21				30/210 [435/3045]	33 [479]			
FA6041	VAA2BC35				70/350 [1015/5075]	90 [1305]			
FA6042	VAA3BC10	1/2 BSPP	50 [13,2]		10/70 [145/1015]	13 [189]	18,5 [0,73]	51,5 [2,03]	1,16 [2,55]
FA6043	VAA3BC21				30/210 [435/3045]	33 [479]			
FA6044	VAA3BC35				70/350 [1015/5075]	90 [1305]			
Steel body									

Steel body